

---

**mlrun**

***Release UNKNOWN***

**Iguazio**

**Apr 01, 2024**



## MLRUN BASICS

<b>1</b>	<b>Using MLRun</b>	<b>1</b>
<b>2</b>	<b>MLOps development workflow</b>	<b>7</b>
<b>3</b>	<b>Tutorials and Examples</b>	<b>11</b>
<b>4</b>	<b>Installation and setup guide</b>	<b>125</b>
<b>5</b>	<b>Projects and automation</b>	<b>159</b>
<b>6</b>	<b>Functions</b>	<b>189</b>
<b>7</b>	<b>Data and artifacts</b>	<b>247</b>
<b>8</b>	<b>Feature store</b>	<b>263</b>
<b>9</b>	<b>Batch runs and workflows</b>	<b>323</b>
<b>10</b>	<b>Real-time serving pipelines (graphs)</b>	<b>347</b>
<b>11</b>	<b>Model monitoring</b>	<b>385</b>
<b>12</b>	<b>Ingest and process data</b>	<b>387</b>
<b>13</b>	<b>Develop and train models</b>	<b>401</b>
<b>14</b>	<b>Deploy models and applications</b>	<b>433</b>
<b>15</b>	<b>Monitor and alert</b>	<b>453</b>
<b>16</b>	<b>CI/CD automation with Git</b>	<b>467</b>
<b>17</b>	<b>API index</b>	<b>489</b>
<b>18</b>	<b>API by module</b>	<b>491</b>
<b>19</b>	<b>Command-Line Interface</b>	<b>793</b>
<b>20</b>	<b>Glossary</b>	<b>803</b>
<b>21</b>	<b>Change log</b>	<b>807</b>
	<b>Python Module Index</b>	<b>841</b>



## USING MLRUN

MLRun is an open MLOps platform for quickly building and managing continuous ML applications across their life-cycle. MLRun integrates into your development and CI/CD environment and automates the delivery of production data, ML pipelines, and online applications. MLRun significantly reduces engineering efforts, time to production, and computation resources. With MLRun, you can choose any IDE on your local machine or on the cloud. MLRun breaks the silos between data, ML, software, and DevOps/MLOps teams, enabling collaboration and fast continuous improvements.

Get started with MLRun [Tutorials and examples](#), [Installation and setup guide](#),

This page explains how MLRun addresses the [MLOps tasks](#), and presents the [MLRun core components](#).

See the supported data stores, development tools, services, platforms, etc., supported by MLRun's open architecture in [MLRun ecosystem](#).

### 1.1 MLOps tasks

Project management and CI/CD automation      Ingest and process data      Develop and train  
models      Deploy models and apps      Monitor and alert      The **MLOps development workflow** section describes the different tasks and stages in detail. MLRun can be used to automate and orchestrate all the different tasks or just specific tasks (and integrate them with what you have already deployed).

#### 1.1.1 Project management and CI/CD automation

In MLRun the assets, metadata, and services (data, functions, jobs, artifacts, models, secrets, etc.) are organized into projects. Projects can be imported/exported as a whole, mapped to git repositories or IDE projects (in PyCharm, VSCode, etc.), which enables versioning, collaboration, and CI/CD. Project access can be restricted to a set of users and roles. [more...](#)

**Docs:** [Projects and automation CI/CD integration](#) **Tutorials:** [Quick start Automated ML pipeline](#) **Videos:** [Quick start](#)

### 1.1.2 Ingest and process data

MLRun provides abstract interfaces to various offline and online **data sources**, supports batch or realtime data processing at scale, data lineage and versioning, structured and unstructured data, and more. In addition, the MLRun **Feature store** automates the collection, transformation, storage, catalog, serving, and monitoring of data features across the ML lifecycle and enables feature reuse and sharing. [more...](#)

**Docs:** [Ingest and process data](#) [Feature store](#) [Data and artifacts](#) **Tutorials:** [Quick start](#) [Feature store](#)

### 1.1.3 Develop and train models

MLRun allows you to easily build ML pipelines that take data from various sources or the Feature Store and process it, train models at scale with multiple parameters, test models, track each experiment, and register, version and deploy models, etc. MLRun provides scalable built-in or custom model training services that integrate with any framework and can work with 3rd party training/auto-ML services. You can also bring your own pre-trained model and use it in the pipeline. [more...](#)

**Docs:** [Develop and train models](#) [Model training and tracking](#) [Batch runs and workflows](#) **Tutorials:** [Train, compare, and register models](#) [Automated ML pipeline](#) **Videos:** [Train and compare models](#)

### 1.1.4 Deploy models and applications

MLRun rapidly deploys and manages production-grade real-time or batch application pipelines using elastic and resilient serverless functions. MLRun addresses the entire ML application: intercepting application/user requests, running data processing tasks, inferencing using one or more models, driving actions, and integrating with the application logic. [more...](#)

**Docs:** [Deploy models and applications](#) [Realtime pipelines](#) [Batch inference](#) **Tutorials:** [Realtime serving](#) [Batch inference](#) [Advanced pipeline](#) **Videos:** [Serve pre-trained models](#)

### 1.1.5 Monitor and alert

Observability is built into the different MLRun objects (data, functions, jobs, models, pipelines, etc.), eliminating the need for complex integrations and code instrumentation. With MLRun, you can observe the application/model resource usage and model behavior (drift, performance, etc.), define custom app metrics, and trigger alerts or retraining jobs. [more...](#)

**Docs:** [Monitor and alert](#) [Model monitoring overview](#) **Tutorials:** [Model monitoring and drift detection](#)

## 1.2 MLRun core components

MLRun includes the following major components:

Project management & automation (SDK, API, etc.)	Serverless functions
Data & artifacts	Feature store
pipelines	Batch runs & workflows
Monitoring	Real-time

**Project management:** A service (API, SDK, DB, UI) that manages the different project assets (data, functions, jobs, workflows, secrets, etc.) and provides central control and metadata layer.

**Serverless functions:** An automatically deployed software package with one or more methods and runtime-specific attributes (such as image, libraries, command, arguments, resources, etc.).

**Data and artifacts:** Glueless connectivity to various data sources, metadata management, catalog, and versioning for structured/unstructured artifacts.

**Feature store:** Automatically collects, prepares, catalogs, and serves production data features for development (offline) and real-time (online) deployment using minimal engineering effort.

**Batch Runs and workflows:** Execute one or more functions with specific parameters and collect, track, and compare all their results and artifacts.

**Real-time serving pipeline:** Rapid deployment of scalable data and ML pipelines using real-time serverless technology, including API handling, data preparation/enrichment, model serving, ensembles, driving and measuring actions, etc.

**Real-time monitoring:** Monitors data, models, resources, and production components and provides a feedback loop for exploring production data, identifying drift, alerting on anomalies or data quality issues, triggering retraining jobs, measuring business impact, etc.

### 1.2.1 MLRun architecture

MLRun started as a community effort to map the different components in the ML project lifecycle, provide a common metadata layer, and automate the operationalization process (a.k.a MLOps).

Instead of a siloed, complex, and manual process, MLRun enables production pipeline design using a modular strategy, where the different parts contribute to a continuous, automated, and far simpler path from research and development to scalable production pipelines without refactoring code, adding glue logic, or spending significant efforts on data and ML engineering.

MLRun uses **Serverless Function** technology: write the code once, using your preferred development environment and simple "local" semantics, and then run it as-is on different platforms and at scale. MLRun automates the build process, execution, data movement, scaling, versioning, parameterization, output tracking, CI/CD integration, deployment to production, monitoring, and more.

Those easily developed data or ML "functions" can then be published or loaded from a hub and used later to form offline or real-time production pipelines with minimal engineering efforts.

### MLRun deployment

MLRun has two main components, the service and the client (SDK):


- The MLRun service runs over Kubernetes (can also be deployed using local Docker for demo and test purposes). It can orchestrate and integrate with other open source frameworks, as shown in the following diagram.
- The MLRun client SDK is installed in your development environment and interacts with the service using REST API calls.

### MLRun: an integrated and open approach

Data preparation, model development, model and application delivery, and end to end monitoring are tightly connected: they cannot be managed in silos. This is where MLRun MLOps orchestration comes in. ML, data, and DevOps/MLOps teams collaborate using the same set of tools, practices, APIs, metadata, and version control.

MLRun provides an open architecture that supports your existing development tools, services, and practices through an open API/SDK and pluggable architecture.

MLRun simplifies & accelerates the time to production !

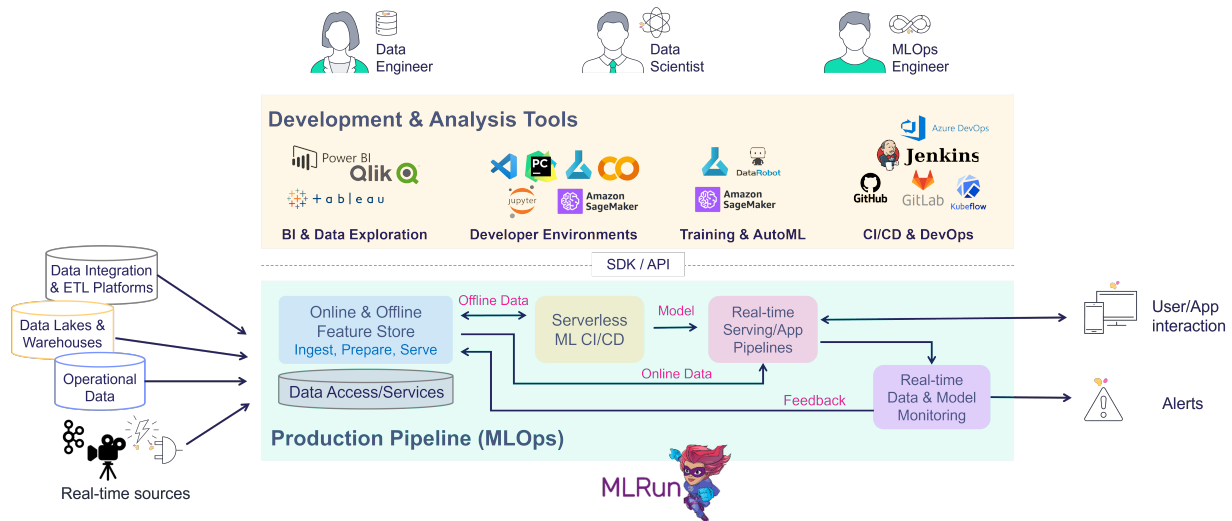

While each component in MLRun is independent, the integration provides much greater value and simplicity. For example:

- The training jobs obtain features from the feature store and update the feature store with metadata, which will be used in the serving or monitoring.
- The real-time pipeline enriches incoming events with features stored in the feature store. It can also use feature metadata (policies, statistics, schema, etc.) to impute missing data or validate data quality.
- The monitoring layer collects real-time inputs and outputs from the real-time pipeline and compares them with the features data/metadata from the feature store or model metadata generated by the training layer. Then, it writes all the fresh production data back to the feature store so it can be used for various tasks such as data analysis, model retraining (on fresh data), and model improvements.

When one of the components detailed above is updated, it immediately impacts the feature generation, the model serving pipeline, and the monitoring. MLRun applies versioning to each component, as well as versioning and rolling upgrades across components.

## 1.2.2 MLRun ecosystem

This section lists the data stores, development tools, services, platforms, etc., supported by MLRun's open ecosystem.

### Data stores

- Object (S3, GS, az)
- Files, NFS
- Pandas/Spark DF
- BigQuery
- Snowflake
- Databricks
- Redis
- Iguazio V3IO object/key-value

- SQL sources

### Event sources

- HTTP
- Cron
- Kafka
- Iguazio V3IO streams

### Execution frameworks

- Nuclio
- Spark
- Dask
- Horovod/MPI
- K8s Jobs

### Dev environments

- PyCharm
- VSCode
- Jupyter
- Colab
- AzureML
- SageMaker
- Codespaces
- Others (set with environment variables)

### Machine learning frameworks

- SKLearn
- XGBoost
- LGBM
- TF / Keras
- PyTorch
- ONNX
- Custom

## **Platforms**

- Kubernetes
  - AWS EKS
  - Azure AKS
  - GKE
  - VMWare
- Local (e.g., Kubernetes engine on Docker Desktop)
- Docker
  - Linux/KVM
  - NVIDIA DGX

## **CI/CD**

- Jenkins
- Github Actions
- Gitlab CI/CD
- KFP

## **Browser**

MLRun runs on Chrome and Firefox.

## MLOPS DEVELOPMENT WORKFLOW

ML applications require you to implement the following stages in a scalable and reproducible way:

1. *Ingest and process data*
2. *Develop and train models*
3. *Deploy models and applications*
4. *Monitor and alert*

MLRun automates the MLOps work. It simplifies & accelerates the time to production


### 2.1 Ingest and process data

There is no ML without data. Before everything else, ML teams need access to historical and/or online data from multiple sources, and they must catalog and organize the data in a way that allows for simple and fast analysis (for example, by storing data in columnar data structures, such as Parquet).

In most cases, the raw data cannot be used as-is for machine learning algorithms for various reasons such as:

- The data is low quality (missing fields, null values, etc.) and requires cleaning and imputing.
- The data needs to be converted to numerical or categorical values which can be processed by algorithms.
- The data is unstructured in text, json, image, or audio formats, and needs to be converted to tabular or vector formats.
- The data needs to be grouped or aggregated to make it meaningful.
- The data is encoded or requires joins with reference information.
- The ML process starts with manual exploratory data analysis and feature engineering on small data extractions. In order to bring accurate models into production, ML teams must work on larger datasets and automate the process of collecting and preparing the data.

Furthermore, batch collection and preparation methodologies such as ETL, SQL queries, and batch analytics don't work well for operational or real-time pipelines. As a result, ML teams often build separate data pipelines which use stream processing, NoSQL, and containerized micro- services. 80% of data today is unstructured, so an essential part of building operational data pipelines is to convert unstructured textual, audio, and visual data into machine learning- or deep learning-friendly data organization.

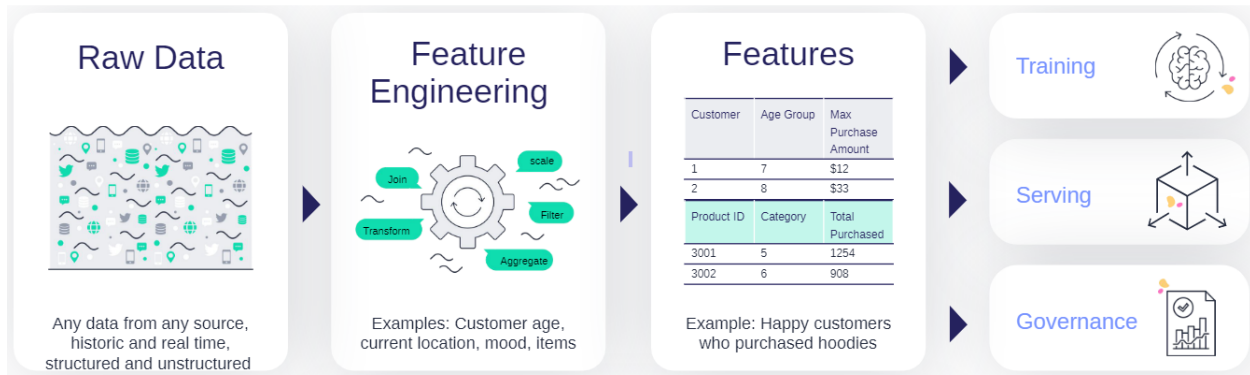


MLOps solutions should incorporate a **feature store** that defines the data collection and transformations just once for both batch and real-time scenarios, processes features automatically without manual involvement, and serves the features from a shared catalog to training, serving, and data governance applications. Feature stores must also extend beyond traditional analytics and enable advanced transformations on unstructured data and complex layouts.

## 2.2 Develop and train models

Whether it's deep learning or machine learning, MLRun allows you to train your models at scale and capture all the relevant metadata for experiments tracking and lineage.

With MLOps, ML teams build machine learning pipelines that automatically collect and prepare data, select optimal features, run training using different parameter sets or algorithms, evaluate models, and run various model and system tests. All the executions, along with their data, metadata, code and results must be versioned and logged, providing quick results visualization, to compare them with past results and understand which data was used to produce each model.

Pipelines can be more complex—for example, when ML teams need to develop a combination of models, or use Deep Learning or NLP.

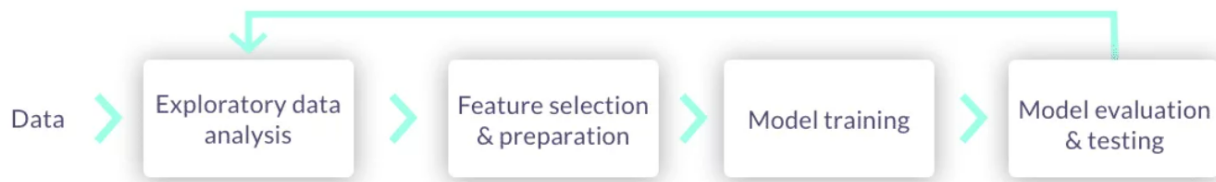

ML pipelines can be triggered manually, or preferably triggered automatically when:

- The code, packages or parameters change
- The input data or feature engineering logic changes
- Concept drift is detected, and the model needs to be re-trained with fresh data

ML pipelines:

- Are built using micro-services (containers or serverless functions), usually over Kubernetes.
- Have all their inputs (code, package dependencies, data, parameters) and the outputs (logs, metrics, data/features, artifacts, models) tracked for every step in the pipeline, in order to reproduce and/or explain the experiment results.
- Use versioning for all the data and artifacts used throughout the pipeline.

- Store code and configuration in versioned Git repositories.
- Use Continuous Integration (CI) techniques to automate the pipeline initiation, test automation, and for the review and approval process.

Pipelines should be executed over scalable services or functions, which can span elastically over multiple servers or containers. This way, jobs complete faster, and computation resources are freed up once they complete, saving significant costs.

The resulting models are stored in a versioned model repository along with metadata, performance metrics, required parameters, statistical information, etc. Models can be loaded later into batch or real-time serving micro-services or functions.

## 2.3 Deploy models and applications


With MLRun, in addition to a batch inference, you can deploy a robust and scalable *real-time pipeline* for more complex and online scenarios. MLRun uses Nuclio, an open source serverless framework for creating real-time pipelines for *model deployment*.

Once an ML model has been built, it needs to be integrated with real-world data and the business application or front-end services. The entire application, or parts thereof, need to be deployed without disrupting the service. Deployment can be extremely challenging if the ML components aren't treated as an integral part of the application or production pipeline.

Production pipelines usually consist of:

- Real-time data collection, validation, and feature engineering logic
- One or more model serving services
- API services and/or application integration logic
- Data and model monitoring services
- Resource monitoring and alerting services
- Event, telemetry, and data/features logging services

The different services are interdependent. For example, if the inputs to a model change, the feature engineering logic must be upgraded along with the model serving and model monitoring services. These dependencies require online production pipelines (graphs) to reflect these changes.

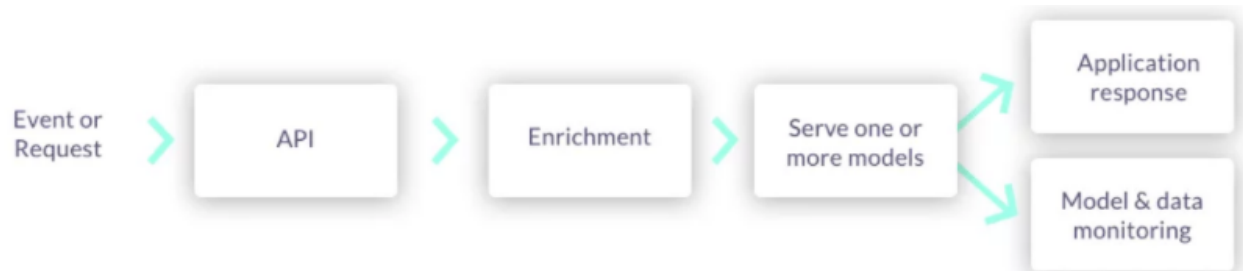

Production pipelines can be more complex when using unstructured data, deep learning, NLP or model ensembles, so having flexible mechanisms to build and wire up the pipeline graphs is critical.

Production pipelines are usually interconnected with fast streaming or messaging protocols, so they should be elastic to address traffic and demand fluctuations, and they should allow non-disruptive upgrades to one or more elements of the pipeline. These requirements are best addressed with fast serverless technologies.

Production pipeline development and deployment flow:

1. Develop production components:
  - API services and application integration logic
  - Feature collection, validation, and transformation
  - Model serving graphs
2. Test online pipelines with simulated data
3. Deploy online pipelines to production
4. Monitor models and data and detect drift
5. Retrain models and re-engineer data when needed
6. Upgrade pipeline components (non-disruptively) when needed

## 2.4 Monitor and alert

Once the model is deployed, use MLRun to track the [operational statistics](#) as well as [identify drift](#). When drift is identified, MLRun can trigger the training pipeline to train a new model.

AI services and applications are becoming an essential part of any business. This trend brings with it liabilities, which drive further complexity. ML teams need to add data, code and experiment tracking, monitor data to detect quality problems, and [monitor models](#) to detect concept drift and improve model accuracy through the use of AutoML techniques and ensembles, and so on.

Nothing lasts forever, not even carefully constructed models that have been trained using mountains of well-labeled data. ML teams need to react quickly to adapt to constantly changing patterns in real-world data. Monitoring machine learning models is a core component of MLOps to keep deployed models current and predicting with the utmost accuracy, and to ensure they deliver value long-term.

## TUTORIALS AND EXAMPLES

The following tutorials provide a hands-on introduction to using MLRun to implement a data science workflow and automate machine-learning operations (MLOps).

- [Quick-start Tutorial](#)
- [Targeted Tutorials](#)
- [End to End Demos](#)

Make sure you start with the Quick start tutorial to understand the basics [Introduction to MLRun - Use serverless functions to train and deploy models](#)

### 3.1 Quick start tutorial

#### Introduction to MLRun - Use serverless functions to train and deploy models

This notebook provides a quick overview of developing and deploying machine learning applications using the [MLRun](#) MLOps orchestration framework.

Tutorial steps:

- *Install MLRun*
- *Define the MLRun project and ML functions*
- *Run the data processing function and log artifacts*
- *Use the MLRun built-in Function Hub functions for training*
- *Build, test, and deploy model serving functions*

#### 3.1.1 Install MLRun

MLRun has a backend service that can run locally or over Kubernetes (preferred). See the instructions for installing it [locally using Docker](#) or [over Kubernetes Cluster](#). Alternatively, you can use Iguazio's [managed MLRun service](#).

**Before you start, make sure the MLRun client package is installed and configured properly:**

This notebook uses sklearn and numpy. If it is not installed in your environment run `!pip install scikit-learn~=1.4 numpy~=1.26`.

```
# Install MLRun and sklearn, run this only once (restart the notebook after the install !  
↪ !!)  
%pip install mlrun scikit-learn~=1.4 numpy~=1.26
```

Restart the notebook kernel after the pip installation.

```
import mlrun
```

## Configure the client environment

MLRun client connects to the local or remote MLRun service/cluster using a REST API. To configure the service address, credentials, and default settings, you use the `mlrun.set_environment()` method, or environment variables, (see details in [Set up your client environment](#).)

You can skip this step when using MLRun Jupyter notebooks or Iguazio's managed notebooks.

### 3.1.2 Define MLRun project and ML functions

**MLRun Project** is a container for all your work on a particular activity or application. Projects host functions, workflow, artifacts, secrets, and more. Projects have access control and can be accessed by one or more users. They are usually associated with a GIT and interact with CI/CD frameworks for automation. See the [MLRun Projects documentation](#).

#### Create a new project

```
project = mlrun.get_or_create_project("quick-tutorial", "./", user_project=True)
```

```
> 2022-09-20 13:19:49,414 [info] loaded project quick-tutorial from MLRun DB
```

[MLRun serverless functions](#) specify the source code, base image, extra package requirements, runtime engine kind (batch job, real-time serving, spark, dask, etc.), and desired resources (cpu, gpu, mem, storage, ...). The runtime engines (local, job, Nuclio, Spark, etc.) automatically transform the function code and spec into fully managed and elastic services that run over Kubernetes. Function source code can come from a single file (.py, .ipynb, etc.) or a full archive (git, zip, tar). MLRun can execute an entire file/notebook or specific function classes/handlers.

---

#### Note

The `@mlrun.handler` is a decorator that logs the returning values to MLRun as configured. This example uses the default settings so that it logs a dataset (`pd.DataFrame`) and a string value by getting the returned objects types. In addition to logging outputs, the decorator can parse incoming inputs to the required type. For more info, see the [mlrun.handler](#) documentation.

---

#### Function code

Run the following cell to generate the data prep file (or copy it manually):

```
%%writefile data-prep.py  
  
import pandas as pd
```

(continues on next page)

(continued from previous page)

```

from sklearn.datasets import load_breast_cancer

import mlrun

@mlrun.handler(outputs=["dataset", "label_column"])
def breast_cancer_generator():
    """
    A function which generates the breast cancer dataset
    """
    breast_cancer = load_breast_cancer()
    breast_cancer_dataset = pd.DataFrame(
        data=breast_cancer.data, columns=breast_cancer.feature_names
    )
    breast_cancer_labels = pd.DataFrame(data=breast_cancer.target, columns=["label"])
    breast_cancer_dataset = pd.concat(
        [breast_cancer_dataset, breast_cancer_labels], axis=1
    )

    return breast_cancer_dataset, "label"

```

Overwriting data-prep.py

Create a serverless function object from the code above, and register it in the project

```

data_gen_fn = project.set_function(
    "data-prep.py",
    name="data-prep",
    kind="job",
    image="mlrun/mlrun",
    handler="breast_cancer_generator",
)
project.save() # save the project with the latest config

```

&lt;mlrun.projects.project.MlrunProject at 0x7ff72063d460&gt;

### 3.1.3 Run your data processing function and log artifacts

Functions are executed (using the CLI or SDK **run** command) with an optional **handler**, various **params**, **inputs**, and resource requirements. This generates a **run** object that can be tracked through the CLI, UI, and SDK. Multiple functions can be executed and tracked as part of a multi-stage pipeline (workflow).

#### Note

When a function has additional package requirements, or needs to include the content of a source archive, you must first build the function using the `project.build_function()` method.

The local flag indicates if the function is executed **locally** or "teleported" and executed in the **Kubernetes cluster**. The execution progress and results can be viewed in the UI (see hyperlinks below).

**Run using the SDK**

```
gen_data_run = project.run_function("data-prep", local=True)
```

```
> 2022-09-20 13:22:59,351 [info] starting run data-prep-breast_cancer_generator_
↳ uid=1ea3533192364dbc8898ce328988d0a3 DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2022-09-20 13:22:59,693 [info] run executed, status=completed
```

**Print the run state and outputs**

```
gen_data_run.state()
```

```
'completed'
```

```
gen_data_run.outputs
```

```
{'label_column': 'label',
 'dataset': 'store://artifacts/quick-tutorial-iguazio/data-prep-breast_cancer_generator_
↳ dataset:1ea3533192364dbc8898ce328988d0a3'}
```

**Print the output dataset artifact (DataItem object) as dataframe**

```
gen_data_run.artifact("dataset").as_df().head()
```

```
   mean radius  mean texture  mean perimeter  mean area  mean smoothness  \
0         17.99         10.38         122.80        1001.0         0.11840
1         20.57         17.77         132.90        1326.0         0.08474
2         19.69         21.25         130.00        1203.0         0.10960
3         11.42         20.38          77.58         386.1         0.14250
4         20.29         14.34         135.10        1297.0         0.10030

   mean compactness  mean concavity  mean concave points  mean symmetry  \
0         0.27760         0.3001         0.14710         0.2419
1         0.07864         0.0869         0.07017         0.1812
2         0.15990         0.1974         0.12790         0.2069
3         0.28390         0.2414         0.10520         0.2597
4         0.13280         0.1980         0.10430         0.1809

   mean fractal dimension  ...  worst texture  worst perimeter  worst area  \
0         0.07871  ...         17.33         184.60        2019.0
1         0.05667  ...         23.41         158.80        1956.0
2         0.05999  ...         25.53         152.50        1709.0
3         0.09744  ...         26.50          98.87         567.7
4         0.05883  ...         16.67         152.20        1575.0
```

(continues on next page)

(continued from previous page)

	worst smoothness	worst compactness	worst concavity	worst concave points \
0	0.1622	0.6656	0.7119	0.2654
1	0.1238	0.1866	0.2416	0.1860
2	0.1444	0.4245	0.4504	0.2430
3	0.2098	0.8663	0.6869	0.2575
4	0.1374	0.2050	0.4000	0.1625

	worst symmetry	worst fractal dimension	label
0	0.4601	0.11890	0
1	0.2750	0.08902	0
2	0.3613	0.08758	0
3	0.6638	0.17300	0
4	0.2364	0.07678	0

[5 rows x 31 columns]

### 3.1.4 Train a model using an MLRun built-in Function Hub

MLRun provides a **Function Hub** that hosts a set of pre-implemented and validated ML, DL, and data processing functions.

You can import the auto-trainer hub function that can: train an ML model using a variety of ML frameworks; generate various metrics and charts; and log the model along with its metadata into the MLRun model registry.

```
# Import the function
trainer = mlrun.import_function("hub://auto_trainer")
```

See the auto\_trainer function usage instructions in [the Function Hub](#) or by typing `trainer.doc()`

**Run the function on the cluster (if there is)**

```
trainer_run = project.run_function(
    trainer,
    inputs={"dataset": gen_data_run.outputs["dataset"]},
    params={
        "model_class": "sklearn.ensemble.RandomForestClassifier",
        "train_test_split_size": 0.2,
        "label_columns": "label",
        "model_name": "cancer",
    },
    handler="train",
)
```

```
> 2022-09-20 13:23:14,811 [info] starting run auto-trainer-train_
↳ uid=84057e1510174611a5d2de0671ee803e DB=http://mlrun-api:8080
> 2022-09-20 13:23:14,970 [info] Job is running in the background, pod: auto-trainer-
↳ train-dzjwz
Matplotlib created a temporary config/cache directory at /tmp/matplotlib-3pzdch1o_
↳ because the default path (/..config/matplotlib) is not a writable directory; it is_
```

(continues on next page)

(continued from previous page)

```

↪ highly recommended to set the MPLCONFIGDIR environment variable to a writable_
↪ directory, in particular to speed up the import of Matplotlib and to better support_
↪ multiprocessing.
> 2022-09-20 13:23:20,953 [info] Sample set not given, using the whole training set as_
↪ the sample set
> 2022-09-20 13:23:21,143 [info] training 'cancer'
> 2022-09-20 13:23:22,561 [info] run executed, status=completed
final state: completed


```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2022-09-20 13:23:24,216 [info] run executed, status=completed
```

### View the job progress results and the selected run in the MLRun UI

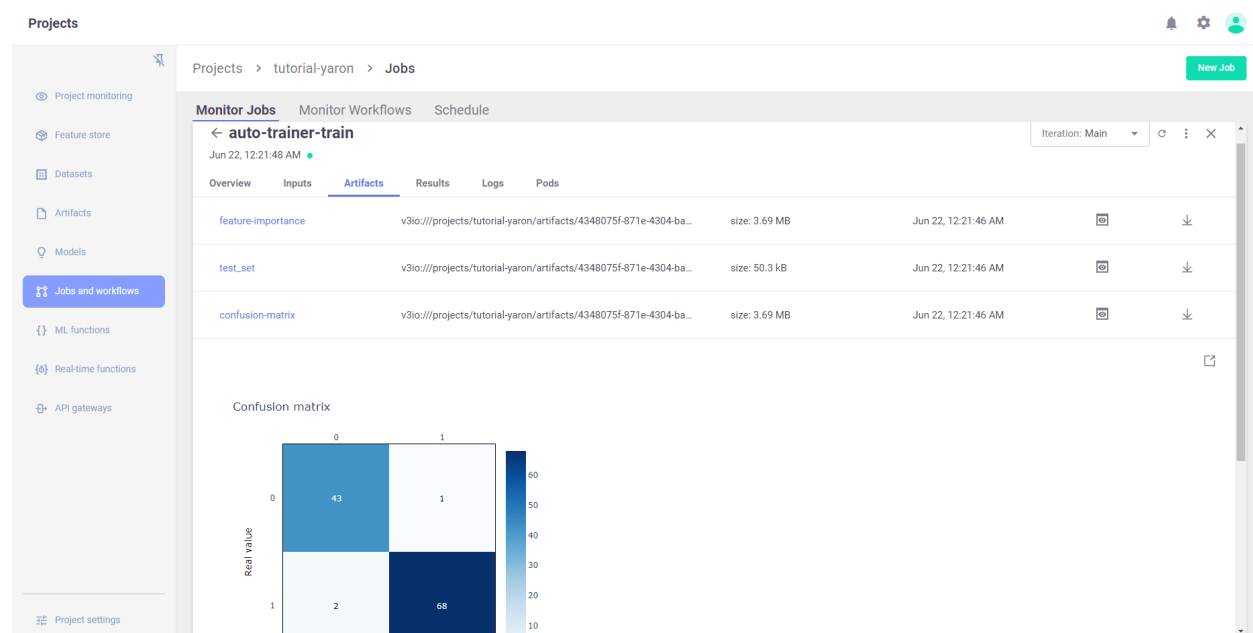

### Results (metrics) and artifacts are generated and tracked automatically by MLRun

```
trainer_run.outputs
```

```

{'accuracy': 0.956140350877193,
 'f1_score': 0.967741935483871,
 'precision_score': 0.9615384615384616,
 'recall_score': 0.974025974025974,
 'feature-importance': 'v3io:///projects/quick-tutorial-iguazio/artifacts/auto-trainer-
↪ train/0/feature-importance.html',
 'test_set': 'store://artifacts/quick-tutorial-iguazio/auto-trainer-train_test_

```

(continues on next page)

(continued from previous page)

```

↪set:84057e1510174611a5d2de0671ee803e',
'confusion-matrix': 'v3io:///projects/quick-tutorial-iguazio/artifacts/auto-trainer-
↪train/0/confusion-matrix.html',
'roc-curves': 'v3io:///projects/quick-tutorial-iguazio/artifacts/auto-trainer-train/0/
↪roc-curves.html',
'calibration-curve': 'v3io:///projects/quick-tutorial-iguazio/artifacts/auto-trainer-
↪train/0/calibration-curve.html',
'model': 'store://artifacts/quick-tutorial-iguazio/
↪cancer:84057e1510174611a5d2de0671ee803e'}

```

```

# Display HTML output artifacts
trainer_run.artifact("confusion-matrix").show()

```

```
<IPython.core.display.HTML object>
```

### 3.1.5 Build, test, and deploy the model serving functions

MLRun serving can produce managed, real-time, serverless, pipelines composed of various data processing and ML tasks. The pipelines use the Nuclio real-time serverless engine, which can be deployed anywhere. For more details and examples, see [MLRun serving graphs](#).

#### Create a model serving function

```

serving_fn = mlrun.new_function(
    "serving",
    image="mlrun/mlrun",
    kind="serving",
    requirements=["scikit-learn~=1.3.0"],
)

```

#### Add a model

The basic serving topology supports a router with multiple child models attached to it. The `function.add_model()` method allows you to add models and specify the `name`, `model_path` (to a model file, dir, or artifact), and the serving class (built-in or user defined).

```

serving_fn.add_model(
    "cancer-classifier",
    model_path=trainer_run.outputs["model"],
    class_name="mlrun.frameworks.sklearn.SklearnModelServer",
)

```

```
<mlrun.serving.states.TaskStep at 0x7ff6dalac190>
```

```

# Plot the serving graph topology
serving_fn.spec.graph.plot(rankdir="LR")

```

```
<graphviz.graphs.Digraph at 0x7ff6dalacaf0>
```

#### Simulating the model server locally

```
# Create a mock (simulator of the real-time function)
server = serving_fn.to_mock_server()
```

```
> 2022-09-20 13:24:24,867 [warning] run command, file or code were not specified
> 2022-09-20 13:24:25,240 [info] model cancer-classifier was loaded
> 2022-09-20 13:24:25,241 [info] Loaded ['cancer-classifier']
```

### Test the mock model server endpoint

- List the served models

```
server.test("/v2/models/", method="GET")
```

```
{'models': ['cancer-classifier']}
```

- Infer using test data

```
my_data = {
  "inputs": [
    [
      1.371e01,
      2.083e01,
      9.020e01,
      5.779e02,
      1.189e-01,
      1.645e-01,
      9.366e-02,
      5.985e-02,
      2.196e-01,
      7.451e-02,
      5.835e-01,
      1.377e00,
      3.856e00,
      5.096e01,
      8.805e-03,
      3.029e-02,
      2.488e-02,
      1.448e-02,
      1.486e-02,
      5.412e-03,
      1.706e01,
      2.814e01,
      1.106e02,
      8.970e02,
      1.654e-01,
      3.682e-01,
      2.678e-01,
      1.556e-01,
      3.196e-01,
      1.151e-01,
    ]
  ]
}
```

(continues on next page)

(continued from previous page)

```
server.test("/v2/models/cancer-classifier/infer", body=my_data)
```

```
X does not have valid feature names, but RandomForestClassifier was fitted with feature_
↪names
```

```
{'id': '27d3f10a36ce465f841d3e19ca404889',
 'model_name': 'cancer-classifier',
 'outputs': [0]}
```

- Read the model name, ver and schema (input and output features)

### Deploy a real-time serving function (over Kubernetes or Docker)

This section requires Nuclio to be installed (over k8s or Docker).

Use the `mlrun deploy_function()` method to build and deploy a Nuclio serving function from your serving-function code. You can deploy the function object (`serving_fn`) or reference pre-registered project functions.

```
project.deploy_function(serving_fn)
```

```
> 2022-09-20 13:24:34,823 [info] Starting remote function deploy
2022-09-20 13:24:35 (info) Deploying function
2022-09-20 13:24:35 (info) Building
2022-09-20 13:24:35 (info) Staging files and preparing base images
2022-09-20 13:24:35 (info) Building processor image
2022-09-20 13:25:35 (info) Build complete
2022-09-20 13:26:05 (info) Function deploy complete
> 2022-09-20 13:26:06,030 [info] successfully deployed function: {'internal_invocation_
↪urls': ['nuclio-quick-tutorial-iguazio-serving.default-tenant.svc.cluster.local:8080'],
↪ 'external_invocation_urls': ['quick-tutorial-iguazio-serving-quick-tutorial-iguazio.
↪default-tenant.app.alex-edge.lab.iguazeng.com/']}
```

```
DeployStatus(state=ready, outputs={'endpoint': 'http://quick-tutorial-iguazio-serving-
↪quick-tutorial-iguazio.default-tenant.app.alex-edge.lab.iguazeng.com/', 'name':
↪'quick-tutorial-iguazio-serving'})
```

- Test the live endpoint

```
serving_fn.invoke("/v2/models/cancer-classifier/infer", body=my_data)
```

```
> 2022-09-20 13:26:06,094 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-quick-tutorial-iguazio-serving.default-tenant.svc.cluster.local:8080/v2/models/
↪cancer-classifier/infer'}
```

```
{'id': '2533b72a-6d94-4c51-b960-02a2deaf84b6',
 'model_name': 'cancer-classifier',
 'outputs': [0]}
```

### 3.1.6 Done!

Congratulation! You've completed Part 1 of the MLRun getting-started tutorial. Proceed to **Part 2: Train, Track, Compare, and Register Models** to learn how to train an ML model.

## 3.2 Train, compare, and register models

This notebook provides a quick overview of training ML models using MLRun MLOps orchestration framework.

Make sure you reviewed the basics in MLRun [Quick Start Tutorial](#).

Tutorial steps:

- *Define an MLRun project and a training functions*
- *Run the function, log the artifacts and model*
- *Hyper-parameter tuning and model/experiment comparison*
- *Build and test the model serving functions*

### 3.2.1 MLRun installation and configuration

Before running this notebook make sure mlrun and sklearn packages are installed (pip install mlrun scikit-learn~=1.3) and that you have configured the access to the MLRun service.

```
# Install MLRun if not installed, run this only once (restart the notebook after the
↪install !!!)
%pip install mlrun
```

### 3.2.2 Define MLRun project and a training functions

You should create, load, or use (get) an MLRun project that holds all your functions and assets.

#### Get or create a new project

The `get_or_create_project()` method tries to load the project from MLRun DB. If the project does not exist, it creates a new one.

```
import mlrun

project = mlrun.get_or_create_project("tutorial", context="./", user_project=True)
```

```
> 2022-09-20 13:55:10,543 [info] loaded project tutorial from None or context and saved
↪in MLRun DB
```

#### Add (auto) MLOps to your training function

Training functions generate models and various model statistics. You'll want to store the models along with all the relevant data, metadata, and measurements. MLRun can apply all the MLOps functionality automatically ("Auto-MLOps") by simply using the framework-specific `apply_mlrun()` method.

This is the line to add to your code, as shown in the training function below.

```
apply_mlrun(model=model, model_name="my_model", x_test=x_test, y_test=y_test)
```

`apply_mlrun()` manages the training process and automatically logs all the framework-specific model object, details, data, metadata, and metrics. It accepts the model object and various optional parameters. When specifying the `x_test` and `y_test` data it generates various plots and calculations to evaluate the model. Metadata and parameters are automatically recorded (from MLRun context object) and therefore don't need to be specified.

### Function code

Run the following cell to generate the `trainer.py` file (or copy it manually):

```
%%writefile trainer.py

import pandas as pd

from sklearn import ensemble
from sklearn.model_selection import train_test_split

import mlrun
from mlrun.frameworks.sklearn import apply_mlrun

@mlrun.handler()
def train(
    dataset: pd.DataFrame,
    label_column: str = "label",
    n_estimators: int = 100,
    learning_rate: float = 0.1,
    max_depth: int = 3,
    model_name: str = "cancer_classifier",
):
    # Initialize the x & y data
    x = dataset.drop(label_column, axis=1)
    y = dataset[label_column]

    # Train/Test split the dataset
    x_train, x_test, y_train, y_test = train_test_split(
        x, y, test_size=0.2, random_state=42
    )

    # Pick an ideal ML model
    model = ensemble.GradientBoostingClassifier(
        n_estimators=n_estimators, learning_rate=learning_rate, max_depth=max_depth
    )

    # ----- The only line you need to add for MLOps -----
    ↪ ---
    # Wraps the model with MLOps (test set is provided for analysis & accuracy_
    ↪ measurements)
    apply_mlrun(model=model, model_name=model_name, x_test=x_test, y_test=y_test)
    # -----
    ↪ ---

    # Train the model
```

(continues on next page)

(continued from previous page)

```
model.fit(x_train, y_train)
```

Overwriting trainer.py

Create a serverless function object from the code above, and register it in the project

```
trainer = project.set_function(
    "trainer.py", name="trainer", kind="job", image="mlrun/mlrun", handler="train"
)
```

### 3.2.3 Run the training function and log the artifacts and model

Create a dataset for training

```
import pandas as pd
from sklearn.datasets import load_breast_cancer

breast_cancer = load_breast_cancer()
breast_cancer_dataset = pd.DataFrame(
    data=breast_cancer.data, columns=breast_cancer.feature_names
)
breast_cancer_labels = pd.DataFrame(data=breast_cancer.target, columns=["label"])
breast_cancer_dataset = pd.concat([breast_cancer_dataset, breast_cancer_labels], axis=1)

breast_cancer_dataset.to_csv("cancer-dataset.csv", index=False)
```

Run the function (locally) using the generated dataset

```
trainer_run = project.run_function(
    "trainer",
    inputs={"dataset": "cancer-dataset.csv"},
    params={"n_estimators": 100, "learning_rate": 1e-1, "max_depth": 3},
    local=True,
)
```

```
> 2022-09-20 13:56:57,630 [info] starting run trainer-train_
uid=b3f1bc3379324767bee22f44942b96e4 DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2022-09-20 13:56:59,356 [info] run executed, status=completed
```

View the auto generated results and artifacts

```
trainer_run.outputs
```

```
{'accuracy': 0.956140350877193,
 'f1_score': 0.965034965034965,
 'precision_score': 0.9583333333333334,
 'recall_score': 0.971830985915493,
 'feature-importance': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/
↪feature-importance.html',
 'test_set': 'store://artifacts/tutorial-iguazio/trainer-train_test_
↪set:b3f1bc3379324767bee22f44942b96e4',
 'confusion-matrix': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/
↪confusion-matrix.html',
 'roc-curves': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/roc-curves.
↪html',
 'calibration-curve': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/
↪calibration-curve.html',
 'model': 'store://artifacts/tutorial-iguazio/cancer_
↪classifier:b3f1bc3379324767bee22f44942b96e4'}
```

```
trainer_run.artifact("feature-importance").show()
```

```
<IPython.core.display.HTML object>
```

**Export model files + metadata into a zip** (requires MLRun 1.1.0 and later)

You can `export()` the model package (files + metadata) into a zip, and load it on a remote system/cluster by running `model = project.import_artifact(key, path)`.

```
trainer_run.artifact("model").meta.export("model.zip")
```

### 3.2.4 Hyper-parameter tuning and model/experiment comparison

Run a `GridSearch` with a couple of parameters, and select the best run with respect to the `max` accuracy. (For more details, see MLRun [Hyper-Param](#) and [Iterative jobs](#).)

For basic usage you can run the hyperparameters tuning job by using the arguments:

- `hyperparams` for the hyperparameters options and values of choice.
- `selector` for specifying how to select the best model.

#### Running a remote function

To run the hyper-param task over the cluster you need the input data to be available for the job, using object storage or the MLRun versioned artifact store.

The following line logs (and uploads) the dataframe as a project artifact:

```
dataset_artifact = project.log_dataset(
    "cancer-dataset", df=breast_cancer_dataset, index=False
)
```

Run the function over the remote Kubernetes cluster (local is not set):

```
hp_tuning_run = project.run_function(
    "trainer",
    inputs={"dataset": dataset_artifact.uri},
    hyperparams={
        "n_estimators": [10, 100, 1000],
        "learning_rate": [1e-1, 1e-3],
        "max_depth": [2, 8],
    },
    selector="max.accuracy",
)
```

```
> 2022-09-20 13:57:28,217 [info] starting run trainer-train_
↳ uid=b7696b221a174f66979be01138797f19 DB=http://mlrun-api:8080
> 2022-09-20 13:57:28,365 [info] Job is running in the background, pod: trainer-train-
↳ xfzfp
Matplotlib created a temporary config/cache directory at /tmp/matplotlib-zuih5pkq_
↳ because the default path (/..config/matplotlib) is not a writable directory; it is_
↳ highly recommended to set the MPLCONFIGDIR environment variable to a writable_
↳ directory, in particular to speed up the import of Matplotlib and to better support_
↳ multiprocessing.
> 2022-09-20 13:58:07,356 [info] best iteration=3, used criteria max.accuracy
> 2022-09-20 13:58:07,750 [info] run executed, status=completed
final state: completed
```

<IPython.core.display.HTML object>

<IPython.core.display.HTML object>

> 2022-09-20 13:58:13,925 [info] run executed, status=completed

### View Hyper-param results and the selected run in the MLRun UI

Projects > breast-cancer-admin > Jobs New Job

Monitor Jobs Monitor Workflows Schedule


< trainer-train

Apr 29, 01:01:04 AM

Overview Inputs Artifacts Results Logs Pods

Iter	State	N_estimators	Learning_rate	Max_depth	Accuracy	F1_score	Precision_score	Recall_score
1	completed	10	0.10	2	0.96	0.97	0.96	0.97
2	completed	100	0.10	2	0.96	0.97	0.96	0.97
3	completed	1000	0.10	2	0.96	0.97	0.96	0.99
4	completed	10	0.00	2	0.62	0.77	0.62	1
5	completed	100	0.00	2	0.62	0.77	0.62	1
6	completed	1000	0.00	2	0.96	0.97	0.96	0.97

### Interactive Parallel Coordinates Plot

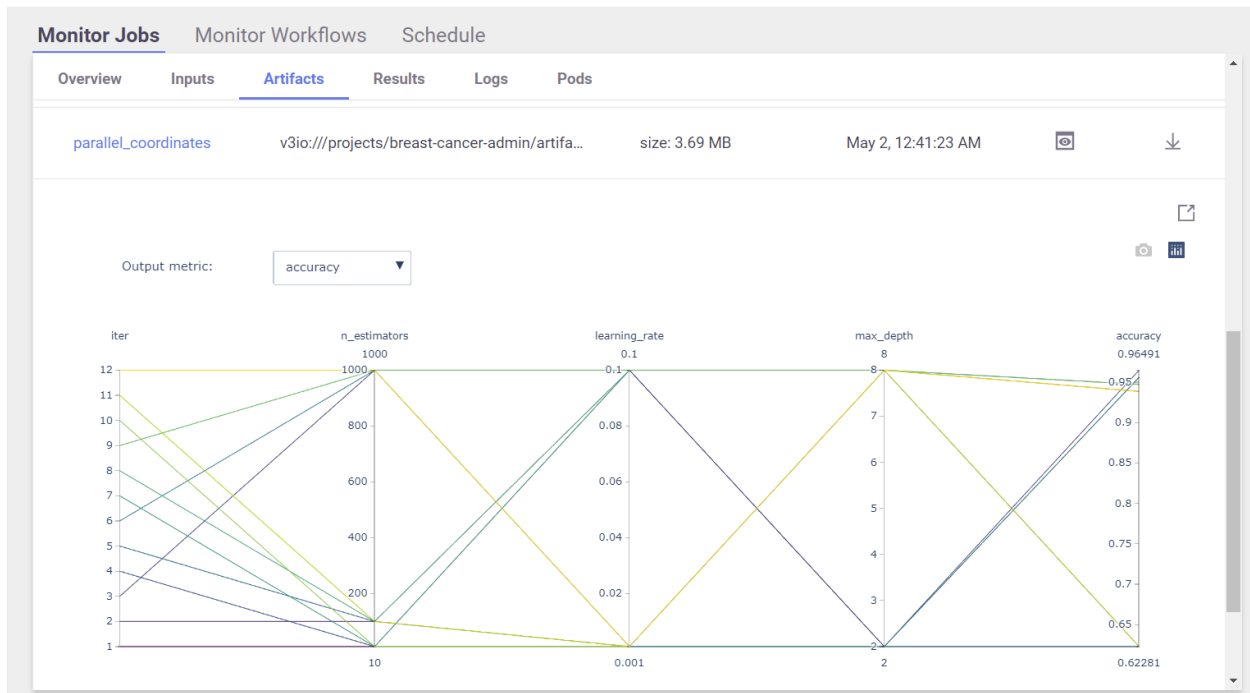

List the generated models and compare the different runs

hp\_tuning\_run.outputs

```
{'best_iteration': 3,
 'accuracy': 0.9649122807017544,
 'f1_score': 0.9722222222222222,
 'precision_score': 0.958904109589041,
 'recall_score': 0.9859154929577465,
 'feature-importance': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/3/
↪feature-importance.html',
 'test_set': 'store://artifacts/tutorial-iguazio/trainer-train_test_
↪set:b7696b221a174f66979be01138797f19',
 'confusion-matrix': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/3/
↪confusion-matrix.html',
 'roc-curves': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/3/roc-curves.
↪html',
 'calibration-curve': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/3/
↪calibration-curve.html',
 'model': 'store://artifacts/tutorial-iguazio/cancer_
↪classifier:b7696b221a174f66979be01138797f19',
 'iteration_results': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/
↪iteration_results.csv',
 'parallel_coordinates': 'v3io:///projects/tutorial-iguazio/artifacts/trainer-train/0/
↪parallel_coordinates.html'}
```

```
# List the models in the project (can apply filters)
models = project.list_models()
for model in models:
    print(f"uri: {model.uri}, metrics: {model.metrics}")
```

```

uri: store://models/tutorial-iguazio/cancer_classifier
→#0:b3f1bc3379324767bee22f44942b96e4, metrics: {'accuracy': 0.956140350877193, 'f1_score': 0.965034965034965, 'precision_score': 0.9583333333333334, 'recall_score': 0.971830985915493}
uri: store://models/tutorial-iguazio/cancer_classifier
→#1:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.956140350877193, 'f1_score': 0.965034965034965, 'precision_score': 0.9583333333333334, 'recall_score': 0.971830985915493}
uri: store://models/tutorial-iguazio/cancer_classifier
→#2:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.956140350877193, 'f1_score': 0.965034965034965, 'precision_score': 0.9583333333333334, 'recall_score': 0.971830985915493}
uri: store://models/tutorial-iguazio/cancer_classifier
→#3:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.9649122807017544, 'f1_score': 0.9722222222222222, 'precision_score': 0.958904109589041, 'recall_score': 0.9859154929577465}
uri: store://models/tutorial-iguazio/cancer_classifier
→#4:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.6228070175438597, 'f1_score': 0.7675675675675676, 'precision_score': 0.6228070175438597, 'recall_score': 1.0}
uri: store://models/tutorial-iguazio/cancer_classifier
→#5:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.6228070175438597, 'f1_score': 0.7675675675675676, 'precision_score': 0.6228070175438597, 'recall_score': 1.0}
uri: store://models/tutorial-iguazio/cancer_classifier
→#6:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.956140350877193, 'f1_score': 0.965034965034965, 'precision_score': 0.9583333333333334, 'recall_score': 0.971830985915493}
uri: store://models/tutorial-iguazio/cancer_classifier
→#7:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.9385964912280702, 'f1_score': 0.951048951048951, 'precision_score': 0.9444444444444444, 'recall_score': 0.9577464788732394}
uri: store://models/tutorial-iguazio/cancer_classifier
→#8:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.9473684210526315, 'f1_score': 0.9577464788732394, 'precision_score': 0.9577464788732394, 'recall_score': 0.9577464788732394}
uri: store://models/tutorial-iguazio/cancer_classifier
→#9:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.9473684210526315, 'f1_score': 0.9577464788732394, 'precision_score': 0.9577464788732394, 'recall_score': 0.9577464788732394}
uri: store://models/tutorial-iguazio/cancer_classifier
→#10:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.6228070175438597, 'f1_score': 0.7675675675675676, 'precision_score': 0.6228070175438597, 'recall_score': 1.0}
uri: store://models/tutorial-iguazio/cancer_classifier
→#11:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.6228070175438597, 'f1_score': 0.7675675675675676, 'precision_score': 0.6228070175438597, 'recall_score': 1.0}
uri: store://models/tutorial-iguazio/cancer_classifier
→#12:b7696b221a174f66979be01138797f19, metrics: {'accuracy': 0.9385964912280702, 'f1_score': 0.951048951048951, 'precision_score': 0.9444444444444444, 'recall_score': 0.9577464788732394}

```

```

# To view the full model object use:
# print(models[0].to_yaml())

```

```
# Compare the runs (generate interactive parallel coordinates plot and a table)
project.list_runs(name="trainer-train", iter=True).compare()
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

### 3.2.5 Build and test the model serving functions

MLRun serving can produce managed, real-time, serverless, pipelines composed of various data processing and ML tasks. The pipelines use the Nuclio real-time serverless engine, which can be deployed anywhere. For more details and examples, see the [MLRun Serving Graphs](#).

Create a model serving function from your [code](#), and ([view it here](#))

```
serving_fn = mlrun.new_function("serving", image="mlrun/mlrun", kind="serving")
serving_fn.add_model(
    "cancer-classifier",
    model_path=hp_tuning_run.outputs["model"],
    class_name="mlrun.frameworks.sklearn.SklearnModelServer",
)
```

```
<mlrun.serving.states.TaskStep at 0x7feb1f55faf0>
```

```
# Create a mock (simulator of the real-time function)
server = serving_fn.to_mock_server()
```

```
my_data = {
    "inputs": [
        [
            1.371e01,
            2.083e01,
            9.020e01,
            5.779e02,
            1.189e-01,
            1.645e-01,
            9.366e-02,
            5.985e-02,
            2.196e-01,
            7.451e-02,
            5.835e-01,
            1.377e00,
            3.856e00,
            5.096e01,
            8.805e-03,
            3.029e-02,
            2.488e-02,
            1.448e-02,
            1.486e-02,
```

(continues on next page)

(continued from previous page)

```

        5.412e-03,
        1.706e01,
        2.814e01,
        1.106e02,
        8.970e02,
        1.654e-01,
        3.682e-01,
        2.678e-01,
        1.556e-01,
        3.196e-01,
        1.151e-01,
    ]
]
}
server.test("/v2/models/cancer-classifier/infer", body=my_data)

```

```

> 2022-09-20 14:12:35,714 [warning] run command, file or code were not specified
> 2022-09-20 14:12:35,859 [info] model cancer-classifier was loaded
> 2022-09-20 14:12:35,860 [info] Loaded ['cancer-classifier']

```

```

/conda/envs/mlrun-extended/lib/python3.8/site-packages/sklearn/base.py:450: UserWarning:
X does not have valid feature names, but GradientBoostingClassifier was fitted with
↪ feature names

```

```

{'id': 'd9aee47cad042ebbd9474ec0179a446',
 'model_name': 'cancer-classifier',
 'outputs': [0]}

```

### 3.2.6 Done!

Congratulation! You've completed Part 2 of the MLRun getting-started tutorial. Proceed to **Part 3: Model serving** to learn how to deploy and serve your model using a serverless function.

## 3.3 Serving pre-trained ML/DL models

This notebook demonstrate how to serve standard ML/DL models using **MLRun Serving**.

Make sure you went over the basics in MLRun **Quick Start Tutorial**.

MLRun serving can produce managed real-time serverless pipelines from various tasks, including MLRun models or standard model files. The pipelines use the Nuclio real-time serverless engine, which can be deployed anywhere. **Nuclio** is a high-performance open-source "serverless" framework that's focused on data, I/O, and compute-intensive workloads.

MLRun serving supports advanced real-time data processing and model serving pipelines. For more details and examples, see the **MLRun serving pipelines** documentation.

Tutorial steps:

- *Using pre-built MLRun serving classes and images*

- *Create and test the serving function*
- *Deploy the serving function*
- *Build a custom serving class*
- *Building advanced model serving graph*

### 3.3.1 MLRun installation and configuration

Before running this notebook make sure the mlrun package is installed (`pip install mlrun`) and that you have configured the access to MLRun service.

```
# Install MLRun if not installed, run this only once. Restart the notebook after the
↪install!
%pip install mlrun
```

#### Get or create a new project

You should create, load or use (get) an [MLRun Project](#). The `get_or_create_project()` method tries to load the project from the MLRun DB. If the project does not exist, it creates a new one.

```
import mlrun

project = mlrun.get_or_create_project("tutorial", context="./", user_project=True)
```

### 3.3.2 Using pre-built MLRun serving classes

MLRun contains built-in serving functionality for the major ML/DL frameworks (Scikit-Learn, TensorFlow.Keras, ONNX, XGBoost, LightGBM, and PyTorch).

The following table specifies, for each framework, the corresponding MLRun `ModelServer` serving class and its dependencies:

framework	serving class	dependencies
SciKit-Learn	<code>mlrun.frameworks.sklearn.SklearnModelServer</code>	<code>scikit-learn</code>
TensorFlow.Keras	<code>mlrun.frameworks.tf_keras.TFKerasModelServer</code>	<code>tensorflow</code>
ONNX	<code>mlrun.frameworks.onnx.ONNXModelServer</code>	<code>onnxruntime</code>
XGBoost	<code>mlrun.frameworks.xgboost.XGBoostModelServer</code>	<code>xgboost</code>
LightGBM	<code>mlrun.frameworks.lgbm.LGBMModelServer</code>	<code>lightgbm</code>
PyTorch	<code>mlrun.frameworks.pytorch.PyTorchModelServer</code>	<code>torch</code>

For GPU support use the `mlrun/mlrun-gpu` image (adding GPU drivers and support).

#### Example using SKlearn and TF Keras models

See how to specify the parameters in the following two examples. These use standard pre-trained models (using the iris dataset) stored in MLRun samples repository. (You can use your own models instead.)

```
models_dir = mlrun.get_sample_path("models/serving/")

# We choose the correct model to avoid pickle warnings
import sys
```

(continues on next page)

(continued from previous page)

```

suffix = (
    mlrun.__version__.split("-")[0].replace(".", "_")
    if sys.version_info[1] > 7
    else "3.7"
)

framework = "sklearn" # change to 'keras' to try the 2nd option
kwargs = {}
if framework == "sklearn":
    serving_class = "mlrun.frameworks.sklearn.SklearnModelServer"
    model_path = models_dir + f"sklearn-{suffix}.pkl"
    image = "mlrun/mlrun"
    requirements = []
else:
    serving_class = "mlrun.frameworks.tf_keras.TFKerasModelServer"
    model_path = models_dir + "keras.h5"
    image = "mlrun/mlrun" # or mlrun/mlrun-gpu when using GPUs
    kwargs["labels"] = {"model-format": "h5"}
    requirements = ["tensorflow"]

```

## Log the model

The model and its metadata are first registered in MLRun's **Model Registry**. Use the `log_model()` method to specify the model files and metadata (metrics, schema, parameters, etc.).

```
model_object = project.log_model(f"{framework}-model", model_file=model_path, **kwargs)
```

### 3.3.3 Create and test the serving function

Create a new **serving** function, specify its name and the correct image (with your desired framework).

If you want to add specific packages to the base image, specify the `requirements` attribute, example:

```

serving_fn = mlrun.new_function("serving", image=image, kind="serving",
    requirements=["tensorflow==2.8.1"])

```

The following example uses a basic topology of a model router and adds a single model behind it. (You can add multiple models to the same function.)

```

serving_fn = mlrun.new_function("serving", image=image, kind="serving", requirements={})
serving_fn.add_model(
    framework, model_path=model_object.uri, class_name=serving_class, to_list=True
)

# Plot the serving topology input -> router -> model
serving_fn.plot(rankdir="LR")

```

```
<graphviz.graphs.Digraph at 0x7f839aafc4c0>
```

**Simulate the model server locally (using the mock\_server)**

```
# Create a mock server that represents the serving pipeline
server = serving_fn.to_mock_server()
```

**Test the mock model server endpoint**

- List the served models

```
server.test("/v2/models/", method="GET")
```

```
{'models': ['sklearn']}
```

- Infer using test data

```
sample = {
    "inputs": [
        {
            "sepal_length_cm": {0: 5.2, 1: 6.4},
            "sepal_width_cm": {0: 2.7, 1: 3.1},
            "petal_length_cm": {0: 3.9, 1: 5.5},
            "petal_width_cm": {0: 1.4, 1: 1.8},
        }
    ]
}
server.test(path=f"/v2/models/{framework}/infer", body=sample)
```

```
X does not have valid feature names, but RandomForestClassifier was fitted with feature_
↪ names
```

```
{'id': '826608653e95452b9ac48fcc1ab8c47',
 'model_name': 'sklearn',
 'outputs': [0, 2]}
```

See more API options and parameters in [Model serving API](#).

### 3.3.4 Deploy the serving function

Deploy the serving function and use `invoke` to test it with the provided sample.

```
project.deploy_function(serving_fn)
```

```
> 2023-03-13 08:33:34,552 [info] Starting remote function deploy
2023-03-13 08:33:34 (info) Deploying function
2023-03-13 08:33:34 (info) Building
2023-03-13 08:33:34 (info) Staging files and preparing base images
2023-03-13 08:33:34 (info) Building processor image
2023-03-13 08:34:29 (info) Build complete
```

(continues on next page)

(continued from previous page)

```

2023-03-13 08:34:39 (info) Function deploy complete
> 2023-03-13 08:34:45,922 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-tutorial-yonis-serving.default-tenant.svc.cluster.local:8080'],
↪ 'external_invocation_urls': ['tutorial-yonis-serving-tutorial-yonis.default-tenant.app.
↪ vmdev30.lab.iguazeng.com/']}

```

```

DeployStatus(state=ready, outputs={'endpoint': 'http://tutorial-yonis-serving-tutorial-
↪ yonis.default-tenant.app.vmdev30.lab.iguazeng.com/', 'name': 'tutorial-yonis-serving'})

```

```

serving_fn.invoke(path=f"/v2/models/{framework}/infer", body=sample)

```

```

> 2023-03-13 08:34:46,009 [info] invoking function: {'method': 'POST', 'path': 'http://
↪ nuclio-tutorial-yonis-serving.default-tenant.svc.cluster.local:8080/v2/models/sklearn/
↪ infer'}

```

```

{'id': 'b699f7e6-2d3b-4fa4-9534-fa6b9fa3f423',
 'model_name': 'sklearn',
 'outputs': [0, 2]}

```

### 3.3.5 Build a custom serving class

Model serving classes implement the full model serving functionality, which include loading models, pre- and post-processing, prediction, explainability, and model monitoring.

Model serving classes must inherit from `mlrun.serving.V2ModelServer`, and at the minimum implement the `load()` (download the model file(s) and load the model into memory) and `predict()` (accept request payload and return prediction/inference results) methods.

For more detailed information on custom serving classes, see [Build your own model serving class](#).

The following code demonstrates a minimal scikit-learn (a.k.a. sklearn) serving-class implementation:

```

from cloudpickle import load
import numpy as np
from typing import List
import mlrun

class ClassifierModel(mlrun.serving.V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model('.pkl')
        self.model = load(open(model_file, 'rb'))

    def predict(self, body: dict) -> List:
        """Generate model predictions from sample."""
        feats = np.asarray(body['inputs'])
        result: np.ndarray = self.model.predict(feats)
        return result.tolist()

```

In order to create a function that incorporates the code of the new class (in `serving.py`) use `code_to_function`:

```
serving_fn = mlrun.code_to_function('serving', filename='serving.py', kind='serving',
↪ image='mlrun/mlrun')
serving_fn.add_model('my_model', model_path=model_file, class_name='ClassifierModel')
```

### 3.3.6 Build an advanced model serving graph

MLRun graphs enable building and running DAGs (directed acyclic graphs). Graphs are composed of individual steps. The first graph element accepts an Event object, transforms/processes the event and passes the result to the next step in the graph, and so on. The final result can be written out to a destination (file, DB, stream, etc.) or returned back to the caller (one of the graph steps can be marked with `.respond()`).

The serving graphs can be composed of [pre-defined graph steps](#), block-type elements (model servers, routers, ensembles, data readers and writers, data engineering tasks, validators, etc.), [custom steps](#), or from native python classes/functions. A graph can have data processing steps, model ensembles, model servers, post-processing, etc. Graphs can auto-scale and span multiple function containers (connected through streaming protocols).

See the [Advanced Model Serving Graph Notebook Example](#).

### 3.3.7 Done!

Congratulations! You've completed Part 3 of the MLRun getting-started tutorial. Proceed to **Part 4: ML Pipeline** to learn how to create an automated pipeline for your project.

## 3.4 Projects and automated ML pipeline

This notebook demonstrates how to work with projects, source control (git), and automating the ML pipeline.

Make sure you went over the basics in MLRun [Quick Start Tutorial](#).

MLRun Project is a container for all your work on a particular activity: all the associated code, [functions](#), [jobs](#), [workflows](#), data, models, and [artifacts](#). Projects can be mapped to git repositories to enable versioning, collaboration, and CI/CD.

You can create project definitions using the SDK or a yaml file and store those in the MLRun DB, a file, or an archive. Once the project is loaded you can run jobs/workflows that refer to any project element by name, allowing separation between configuration and code. See [load projects](#) for details.

Projects contain [workflows](#) that execute the registered functions in a sequence/graph (DAG), and that can reference project parameters, secrets and artifacts by name. MLRun currently supports two workflow engines, `local` (for simple tasks) and [Kubeflow Pipelines](#) (for more complex/advanced tasks). MLRun also supports a real-time workflow engine (see [online serving pipelines \(graphs\)](#)).

An ML Engineer can gather the different functions created by the data engineer and data scientist and create this automated pipeline.

Tutorial steps:

- *Set up the project and functions*
- *Work with GIT and archives*
- *Build and run automated ML pipelines and CI/CD*
- *Test the deployed model endpoint*

### 3.4.1 MLRun installation and configuration

Before running this notebook make sure the mlrun package is installed (`pip install mlrun`) and that you have configured the access to MLRun service.

```
# Install MLRun if not installed, run this only once (restart the notebook after the
↪install !!!)
%pip install mlrun
```

### 3.4.2 Set up the project and functions

#### Get or create a project

There are three ways to create/load **MLRun projects**:

- `mlrun.projects.new_project()` — Create a new MLRun project and optionally load it from a yaml/zip/git template.
- `mlrun.projects.load_project()` — Load a project from a context directory or remote git/zip/tar archive.
- `mlrun.projects.get_or_create_project()` — Load a project from the MLRun DB if it exists, or from a specified context/archive.

Projects refer to a context directory that holds all the project code and configuration. Its default value is `"/"`, which is the directory the MLRun client runs from. The context dir is usually mapped to a git repository and/or to an IDE (PyCharm, VSCode, etc.) project.

```
import mlrun

project = mlrun.get_or_create_project("tutorial", context="/", user_project=True)
```

```
> 2022-09-20 14:59:47,322 [info] loaded project tutorial from MLRun DB
```

#### Register project functions

To run workflows, you must save the definitions for the functions in the project so that function objects are initialized automatically when you load a project or when running a project version in automated CI/CD workflows. In addition, you might want to set/register other project attributes such as global parameters, secrets, and data.

Functions are registered using the `set_function()` command, where you can specify the code, requirements, image, etc. Functions can be created from a single code/notebook file or have access to the entire project context directory. (By adding the `with_repo=True` flag, it guarantees that the project context is cloned into the function runtime environment).

Function registration examples:

```
# Example: register a notebook file as a function
project.set_function('mybn.ipynb', name='test-function', image='mlrun/mlrun',
↪handler='run_test')

# Define a job (batch) function that uses code/libs from the project repo
```

(continues on next page)

(continued from previous page)

```
project.set_function(
    name="myjob", handler="my_module.job_handler",
    image="mlrun/mlrun", kind="job", with_repo=True,
)
```

**Function code**

Run the following cell to generate the data prep file (or copy it manually):

```
%%writefile data-prep.py

import pandas as pd
from sklearn.datasets import load_breast_cancer

import mlrun

@mlrun.handler(outputs=["dataset", "label_column"])
def breast_cancer_generator():
    """
    A function that generates the breast cancer dataset
    """
    breast_cancer = load_breast_cancer()
    breast_cancer_dataset = pd.DataFrame(
        data=breast_cancer.data, columns=breast_cancer.feature_names
    )
    breast_cancer_labels = pd.DataFrame(data=breast_cancer.target, columns=["label"])
    breast_cancer_dataset = pd.concat(
        [breast_cancer_dataset, breast_cancer_labels], axis=1
    )

    return breast_cancer_dataset, "label"
```

Overwriting data-prep.py

**Register the function above in the project**

```
project.set_function(
    "data-prep.py",
    name="data-prep",
    kind="job",
    image="mlrun/mlrun",
    handler="breast_cancer_generator",
)
```

```
<mlrun.runtimes.kubejob.KubejobRuntime at 0x7fd96c30a0a0>
```

**Register additional project objects and metadata**

You can define other objects (workflows, artifacts, secrets) and parameters in the project and use them in your functions, for example:

```

# Register a simple named artifact in the project (to be used in workflows)
data_url = 'https://s3.wasabisys.com/iguazio/data/iris/iris.data.raw.csv'
project.set_artifact('data', target_path=data_url)

# Add a multi-stage workflow (./workflow.py) to the project with the name 'main' and
↪ save the project
project.set_workflow('main', "./workflow.py")

# Read env vars from dict or file and set as project secrets
project.set_secrets({"SECRET1": "value"})
project.set_secrets(file_path="secrets.env")

project.spec.params = {"x": 5}

```

### Save the project

```

# Save the project in the db (and into the project.yaml file)
project.save()

```

```
<mlrun.projects.project.MlrunProject at 0x7fd96c2fdb50>
```

When you save the project it stores the project definitions in the `project.yaml`. This allows reconstructing the project in a remote cluster or a CI/CD system.

See the generated project file: [project.yaml](#).

## 3.4.3 Work with GIT and archives

### Push the project code/metadata into an archive

Use standard git commands to push the current project tree into a git archive. Make sure you `.save()` the project before pushing it.

```

git remote add origin <server>
git commit -m "Commit message"
git push origin master

```

Alternatively, you can use MLRun SDK calls:

- `project.create_remote(git_uri, branch=branch)` — to register the remote Git path
- `project.push()` — save the project state and commit/push updates to the remote git repo

You can also save the project content and metadata into a local or remote `.zip` archive, for example:

```

project.export("../archive1.zip")
project.export("s3://my-bucket/archive1.zip")
project.export(f"v3io://projects/{project.name}/archive1.zip")

```

## Load a project from local/remote archive

The project metadata and context (code and configuration) can be loaded and initialized using the `load_project()` method. When `url` (of the `git/zip/tar`) is specified, it clones a remote repo into the local context dir.

```
# Load the project and run the 'main' workflow
project = load_project(context=".", name="myproj", url="git://github.com/mlrun/project-
→archive.git")
project.run("main", arguments={'data': data_url})
```

Projects can also be loaded and executed using the CLI:

```
mlrun project -n myproj -u "git://github.com/mlrun/project-archive.git" .
mlrun project -r main -w -a data=<data-url> .
```

```
# load the project in the current context dir
project = mlrun.load_project(".")
```

## 3.4.4 Build and run automated ML pipelines and CI/CD

A pipeline is created by running an MLRun **"workflow"**. The following code defines a workflow and writes it to a file in your local directory, with the file name `workflow.py`. The workflow describes a directed acyclic graph (DAG) which is executed using the local, remote, or kubeflow engines.

See [running a multi-stage workflow](#). The defined pipeline includes the following steps:

- Generate/prepare the data (`ingest`).
- Train and the model (`train`).
- Deploy the model as a real-time serverless function (`serving`).

---

### Note

A pipeline can also include continuous build integration and deployment (CI/CD) steps, such as building container images and deploying models.

---

```
%%writefile './workflow.py'

from kfp import dsl
import mlrun

# Create a Kubeflow Pipelines pipeline
@dsl.pipeline(name="breast-cancer-demo")
def pipeline(model_name="cancer-classifier"):
    # Run the ingestion function with the new image and params
    ingest = mlrun.run_function(
        "data-prep",
        name="get-data",
        outputs=["dataset"],
    )
```

(continues on next page)

(continued from previous page)

```

# Train a model using the auto_trainer hub function
train = mlrun.run_function(
    "hub://auto_trainer",
    inputs={"dataset": ingest.outputs["dataset"]},
    params = {
        "model_class": "sklearn.ensemble.RandomForestClassifier",
        "train_test_split_size": 0.2,
        "label_columns": "label",
        "model_name": model_name,
    },
    handler='train',
    outputs=["model"],
)

# Deploy the trained model as a serverless function
serving_fn = mlrun.new_function("serving", image="mlrun/mlrun", kind="serving")
serving_fn.with_code(body=" ")
mlrun.deploy_function(
    serving_fn,
    models=[
        {
            "key": model_name,
            "model_path": train.outputs["model"],
            "class_name": 'mlrun.frameworks.sklearn.SklearnModelServer',
        }
    ],
)

```

Writing ./workflow.py

**Run the workflow**

```

# Run the workflow
run_id = project.run(
    workflow_path="./workflow.py",
    arguments={"model_name": "cancer-classifier"},
    watch=True,
)

```

&lt;IPython.core.display.HTML object&gt;

&lt;graphviz.graphs.Digraph at 0x7fd96f32d1c0&gt;

&lt;IPython.core.display.HTML object&gt;

**View the pipeline in MLRun UI**

The screenshot shows the MLRun web interface. On the left, a workflow diagram consists of three steps: 'get-data', 'trainer', and 'deploy-serving', connected by arrows. On the right, a detailed view of the 'get-data' step is shown. The step was executed on Apr 5, 11:33:15 PM. The parameters are: format: pq. The function is: gen-breast-cancer@33aedaf6c9e72d9c148229ecc6361d32e2de483f. The results are: label\_column: label. The labels include: v3io\_user: admin, owner: admin, workflow: 7f690d1e-1899-413d-b331-0a4ec54a4a7f, mlrun/runner-pod: breast-cancer-demo-v8crd-203778030, kind: job, mlrun/client\_version: 1.0.0-rc14, host: get-data-qnb8g. The log level is info. The output path is: v3io:///projects/breast-cancer-admin/artifacts/7f690d1e-1899-413d-b331-0a4ec54a4a7f. The total iterations are N/A.

### Run workflows using the CLI

With MLRun you can use a single command to load the code from local dir or remote archive (Git, zip, ...) and execute a pipeline. This can be very useful for integration with CI/CD frameworks and practices. See [CI/CD integration](#) for more details.

The following command loads the project from the current dir (.) and executes the workflow with an argument, for running on k8s.

```
mlrun project -r ./workflow.py -w -a model_name=classifier2 .
```

### 3.4.5 Test the deployed model endpoint

Now that your model is deployed using the pipeline, you can invoke it as usual:

```
serving_fn = project.get_function("serving")
```

```
# Create a mock (simulator of the real-time function)
my_data = {
    "inputs": [
        1.371e01,
        2.083e01,
        9.020e01,
        5.779e02,
        1.189e-01,
        1.645e-01,
        9.366e-02,
        5.985e-02,
```

(continues on next page)

(continued from previous page)

```

2.196e-01,
7.451e-02,
5.835e-01,
1.377e00,
3.856e00,
5.096e01,
8.805e-03,
3.029e-02,
2.488e-02,
1.448e-02,
1.486e-02,
5.412e-03,
1.706e01,
2.814e01,
1.106e02,
8.970e02,
1.654e-01,
3.682e-01,
2.678e-01,
1.556e-01,
3.196e-01,
1.151e-01,
    ]
  ]
}
serving_fn.invoke("/v2/models/cancer-classifier/infer", body=my_data)

```

```

> 2022-09-20 15:09:02,664 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-tutorial-iguazio-serving.default-tenant.svc.cluster.local:8080/v2/models/cancer-
↪classifier/infer'}

```

```

{'id': '7ecaf987-bd79-470e-b930-19959808b678',
 'model_name': 'cancer-classifier',
 'outputs': [0]}

```

### 3.4.6 Done!

Congratulations! You’ve completed Part 4 of the MLRun getting-started tutorial. To continue, proceed to [Part 5 Model monitoring and drift detection](#).

You might also want to explore the following demos:

- For an example of distributed training pipeline using TensorFlow, Keras, and PyTorch, see the [mask detection demo](#).
- To learn more about deploying live endpoints and concept drift, see the [network-operations \(NetOps\) demo](#).
- To learn about using the feature store to process raw transactions and events in real-time and respond and block transactions before they occur, see the [Fraud prevention demo](#).
- For an example of a pipeline that summarizes and extracts keywords from a news article URL, see the [News article summarization and keyword extraction via NLP](#).

## 3.5 Model monitoring and drift detection

This tutorial illustrates leveraging the model monitoring capabilities of MLRun to deploy a model to a live endpoint and calculate data drift.

Make sure you have reviewed the basics in MLRun [Quick Start Tutorial](#).

Tutorial steps:

- *Create an MLRun project*
- *Log a model with a given framework and training set*
- *Import and deploy serving function*
- *Simulate production traffic*
- *View drift calculations and status*
- *View detailed drift dashboards*

### 3.5.1 MLRun installation and configuration

Before running this notebook make sure mlrun is installed and that you have configured the access to the MLRun service.

```
# Install MLRun if not installed, run this only once (restart the notebook after the
↪install !!!)
%pip install mlrun tqdm ipywidgets
```

### 3.5.2 Set up the project

First, import the dependencies and create an [MLRun project](#). This contains all of the models, functions, datasets, etc.:

```
import os

import mlrun
import pandas as pd
```

```
project = mlrun.get_or_create_project(name="tutorial", context="./", user_project=True)
```

```
> 2023-03-12 17:02:37,120 [info] loaded project tutorial from MLRun DB
```

---

#### Note

This tutorial does not focus on training a model. Instead, it starts with a trained model and its corresponding training dataset.

---

Next, log the following model file and dataset to deploy and calculate data drift. The model is a [AdaBoostClassifier](#) from sklearn, and the dataset is in csv format.

```
# We choose the correct model to avoid pickle warnings
import sys

suffix = (
    mlrun.__version__.split("-")[0].replace(".", "_")
    if sys.version_info[1] > 7
    else "3.7"
)

model_path = mlrun.get_sample_path(f"models/model-monitoring/model-{suffix}.pkl")
training_set_path = mlrun.get_sample_path("data/model-monitoring/iris_dataset.csv")
```

### 3.5.3 Log the model with training data

Log the model using MLRun experiment tracking. This is usually done in a training pipeline, but you can also bring in your pre-trained models from other sources. See [Working with data and model artifacts](#) and [Automated experiment tracking](#) for more information.

```
model_name = "RandomForestClassifier"
```

```
model_artifact = project.log_model(
    key=model_name,
    model_file=model_path,
    framework="sklearn",
    training_set=pd.read_csv(training_set_path),
    label_column="label",
)
```

```
# the model artifact unique URI
model_artifact.uri
```

```
'store://models/tutorial-yonis/RandomForestClassifier#0:9e8859ee-dc11-4874-a4f7-
→ebdce46a5a82'
```

### 3.5.4 Import and deploy the serving function

Import the `model server` function from the [MLRun Function Hub](#). Additionally, mount the filesystem, add the model that was logged via experiment tracking, and enable drift detection.

The core line here is `serving_fn.set_tracking()` that creates the required infrastructure behind the scenes to perform drift detection. See the [Model monitoring overview](#) for more info on what is deployed.

```
# Import the serving function from the Function Hub and mount filesystem
serving_fn = mlrun.import_function("hub://v2_model_server", new_name="serving")

# Add the model to the serving function's routing spec
serving_fn.add_model(model_name, model_path=model_artifact.uri)
```

(continues on next page)

(continued from previous page)

```
# Enable model monitoring
serving_fn.set_tracking()
```

### Deploy the serving function with drift detection

Deploy the serving function with drift detection enabled with a single line of code:

```
mlrun.deploy_function(serving_fn)
```

```
> 2023-03-12 17:02:38,651 [info] Starting remote function deploy
2023-03-12 17:02:40 (info) Deploying function
2023-03-12 17:02:40 (info) Building
2023-03-12 17:02:40 (info) Staging files and preparing base images
2023-03-12 17:02:40 (info) Building processor image
2023-03-12 17:03:40 (info) Build complete
2023-03-12 17:03:51 (info) Function deploy complete
> 2023-03-12 17:03:52,969 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-tutorial-yonis-serving.default-tenant.svc.cluster.local:8080'],
↪ 'external_invocation_urls': ['tutorial-yonis-serving-tutorial-yonis.default-tenant.app.
↪ vmdev30.lab.iguazeng.com/']}
```


```
DeployStatus(state=ready, outputs={'endpoint': 'http://tutorial-yonis-serving-tutorial-
↪ yonis.default-tenant.app.vmdev30.lab.iguazeng.com/', 'name': 'tutorial-yonis-serving'})
```

### 3.5.5 View deployed resources

At this point, you should see the newly deployed model server, as well as a `model-monitoring-stream`, and a scheduled job (in yellow). The `model-monitoring-stream` collects, processes, and saves the incoming requests to the model server. The scheduled job does the actual calculation (by default every hour).

#### Note

You will not see `model-monitoring-batch` jobs listed until they actually run (by default every hour).

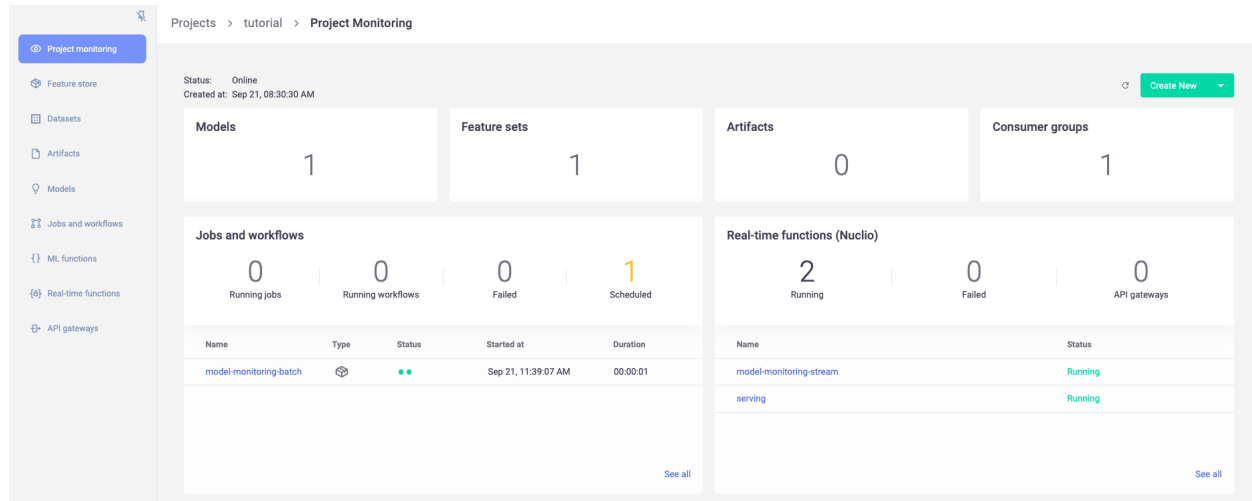

### 3.5.6 Simulate production traffic

Next, use the following code to simulate incoming production data using elements from the training set. Because the data is coming from the same training set you logged, you should not expect any data drift.

#### Note

By default, the drift calculation starts via the scheduled hourly batch job after receiving 10,000 incoming requests.

```
import json
import logging
from random import choice

from tqdm.notebook import tqdm

# Suppress print messages
logging.getLogger(name="mlrun").setLevel(logging.WARNING)

# Get training set as list
iris_data = (
    pd.read_csv(training_set_path).drop("label", axis=1).to_dict(orient="split")["data"]
)

# Simulate traffic using random elements from training set
for i in tqdm(range(12_000)):
    data_point = choice(iris_data)
    serving_fn.invoke(
        f"v2/models/{model_name}/infer", json.dumps({"inputs": [data_point]})
    )

# Resume normal logging
logging.getLogger(name="mlrun").setLevel(logging.INFO)
```

0%| | 0/12000 [00:00<?, ?it/s]

### 3.5.7 View drift calculations and status

Once data drift has been calculated, you can view it in the MLRun UI. This includes a high-level overview of the model status:

Project monitoring

Feature store

Datasets

Artifacts

Models

Jobs and workflows

Projects > tutorial > Models

Models

Model Endpoints (2/2)

Real-Time Pipelines

Labels: key1, key2=value,...

Sort By: Function

Name	Function	Version	Class	Labels	Uptime	Last prediction	Average latency	Error count	Drift
RandomForestClassifier	serving	latest	ClassifierModel		Sep 21, 11:34:43 AM	Sep 21, 11:35:00 AM	33.80ms	-	<div></div>

A more detailed view on model information and overall drift metrics:

Project monitoring

Feature store

Datasets

Artifacts

Models

Jobs and workflows

ML functions

Real-time functions

API gateways

Projects > tutorial > Models

Models

Model Endpoints (Beta)

Real-Time Pipelines

Labels: key1,key2=value,...

Sort By: Function

Name

RandomForestClassifier

RandomForestClassifier

RandomForestClassifier

latest

Overview

Features Analysis

General

UID

fedfe7b02412519d5b3958dd4293540ba07784e2

Model class

ClassifierModel

Model artifact

store://models/tutorial/RandomForestClassifier#0:latest

Function URI

tutorial/serving

Last prediction

Sep 21, 11:35:00 AM

Error count

-

Accuracy

-

Stream path

v3io:///users/pipelines/tutorial/model-endpoints/stream

Drift

Mean TVD

0.08

Mean Hellinger

0.08

Mean KLD

0.05

As well as a view for feature-level distributions and drift metrics:

Project monitoring

Feature store

Datasets

Artifacts

Models

Jobs and workflows

ML functions

Real-time functions

API gateways

Projects > tutorial > Models

Models

Model Endpoints (Beta)

Real-Time Pipelines

Labels: key1,key2=value,...

Sort By: Function

Name

RandomForestClassifier

RandomForestClassifier

RandomForestClassifier

latest


Overview

Features Analysis


Feature	Mean		Std		Min		Max		TVD	Hellinger	KLD	Histogram	
	Expected	Actual	Expected	Actual	Expected	Actual	Expected	Actual				Expected	Actual
sepal.Length_cm	5.84	5.8	0.83	0.84	4.3	4.3	7.9	7.9	0.1	0.1	0.09		
sepal.width_cm	3.06	3.07	0.44	0.44	2	2	4.4	4.4	0.07	0.07	0.04		
petal.Length_cm	3.76	3.65	1.77	1.82	1	1	6.9	6.9	0.09	0.09	0.07		
petal.width_cm	1.2	1.15	0.76	0.78	0.1	0.1	2.5	2.5	0.07	0.07	0.05		
label	1	0.97	0.82	0.84	0	0	2	2	0.04	0.04	0.01		

### 3.5.8 View detailed drift dashboards

Finally, there are also more detailed Grafana dashboards that show additional information on each model in the project:  
For more information on accessing these dashboards, see [Model monitoring using Grafana dashboards](#).

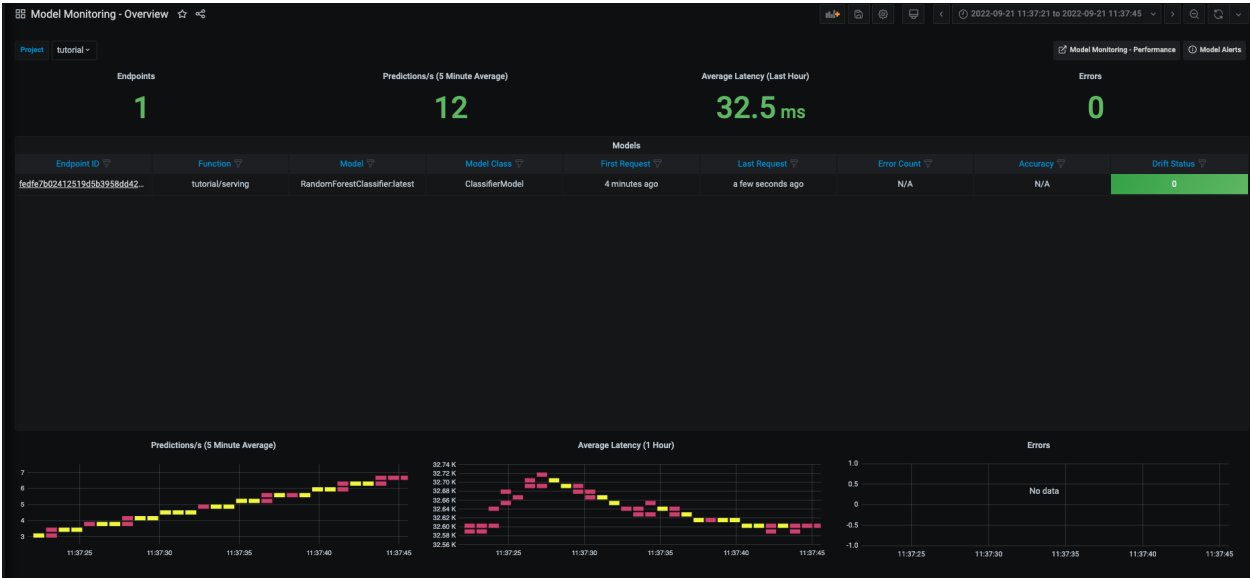

Graphs of individual features over time:

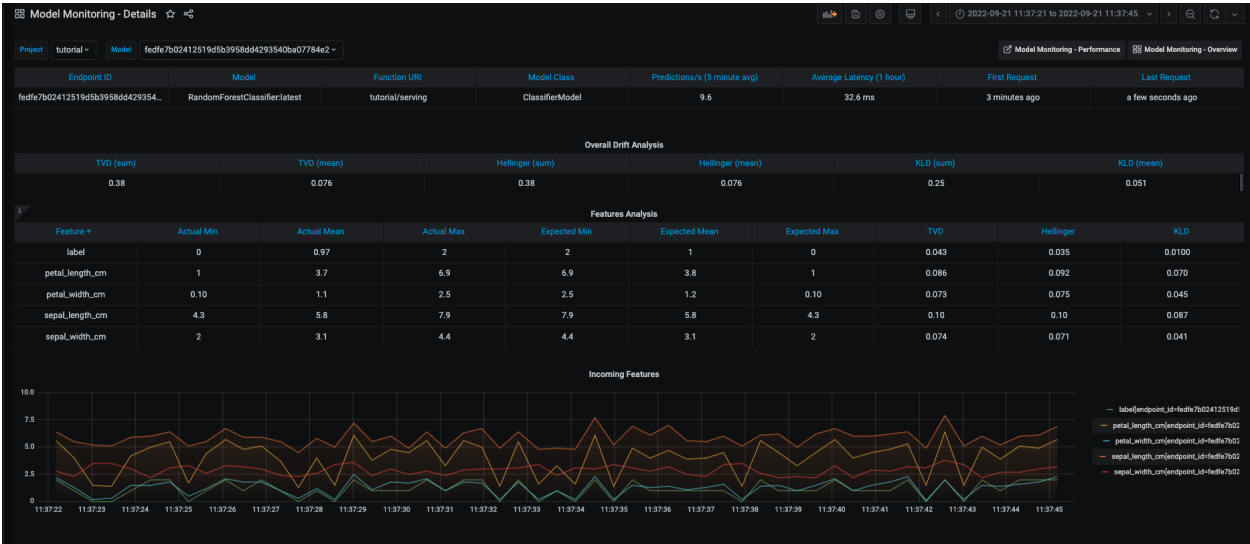

As well as drift and operational metrics over time:



## 3.6 Add MLOps to existing code

This tutorial showcases how easy it is to apply MLRun on your existing code. With only 7 lines of code, you get:

- Experiment tracking — Track every single run of your experiment to learn what yielded the best results.
- Automatic Logging — Log datasets, metrics results and plots with one line of code. MLRun takes care for all the rest.
- Parameterization — Enable running your code with different parameters, run hyperparameters tuning and get the most out of your code.
- Resource management — Control the amount of resources available for your experiment.

Use this [kaggle code](#) by [Sylas](#) as an example, part of the competition [New York City Taxi Fare Prediction](#).

Tutorial steps:

- *Get the data*
- *Code review*
- *Run the script with MLRun*
- *Review outputs*

### 3.6.1 Get the data

You can download the original data from [kaggle](#). However, since the original data is 5.7GB in size, this demo uses sampled data. Since this demo uses MLRun's `DataItem` to pass the datasets, the sampled data is downloaded automatically. However, if you want to look at the data, you can download it: [training set](#), and [testing set](#).

### 3.6.2 Code review

Use the original code with the **minimum** changes required to apply MLRun to it. The code itself is straightforward:

1. Read the training data and perform feature engineering on it to preprocess it for training.
2. Train a LightGBM regression model using LightGBM's `train` function.
3. Read the testing data and save the contest expected submission file.

You can [Download the script.py file](#)[\[Download here\]](#), or copy / paste it from here:

#### Show code

```
import gc

import lightgbm as lgbm
import numpy as np
import pandas as pd
from sklearn.model_selection import train_test_split

# [MLRun] Import MLRun:
import mlrun
from mlrun.frameworks.lgbm import apply_mlrun

# [MLRun] Get MLRun's context:
context = mlrun.get_or_create_ctx("apply-mlrun-tutorial")

# [MLRun] Reading train data from context instead of local file:
train_df = context.get_input("train_set", "./train.csv").as_df()
# train_df = pd.read_csv('./train.csv')

# Drop rows with null values
train_df = train_df.dropna(how="any", axis="rows")

def clean_df(df):
    return df[
        (df.fare_amount > 0)
        & (df.fare_amount <= 500)
        &
        # (df.passenger_count >= 0) & (df.passenger_count <= 8) &
        (
            (df.pickup_longitude != 0)
            & (df.pickup_latitude != 0)
            & (df.dropoff_longitude != 0)
            & (df.dropoff_latitude != 0)
        )
    ]

train_df = clean_df(train_df)
```

(continues on next page)

(continued from previous page)

```

# To Compute Haversine distance
def sphere_dist(pickup_lat, pickup_lon, dropoff_lat, dropoff_lon):
    """
    Return distance along great radius between pickup and drop-off coordinates.
    """
    # Define earth radius (km)
    R_earth = 6371
    # Convert degrees to radians
    pickup_lat, pickup_lon, dropoff_lat, dropoff_lon = map(
        np.radians, [pickup_lat, pickup_lon, dropoff_lat, dropoff_lon]
    )
    # Compute distances along lat, lon dimensions
    dlat = dropoff_lat - pickup_lat
    dlon = dropoff_lon - pickup_lon

    # Compute haversine distance
    a = (
        np.sin(dlat / 2.0) ** 2
        + np.cos(pickup_lat) * np.cos(dropoff_lat) * np.sin(dlon / 2.0) ** 2
    )
    return 2 * R_earth * np.arcsin(np.sqrt(a))

def sphere_dist_bear(pickup_lat, pickup_lon, dropoff_lat, dropoff_lon):
    """
    Return distance along great radius between pickup and drop-off coordinates.
    """
    # Convert degrees to radians
    pickup_lat, pickup_lon, dropoff_lat, dropoff_lon = map(
        np.radians, [pickup_lat, pickup_lon, dropoff_lat, dropoff_lon]
    )
    # Compute distances along lat, lon dimensions
    dlon = pickup_lon - dropoff_lon

    # Compute bearing distance
    a = np.arctan2(
        np.sin(dlon * np.cos(dropoff_lat)),
        np.cos(pickup_lat) * np.sin(dropoff_lat)
        - np.sin(pickup_lat) * np.cos(dropoff_lat) * np.cos(dlon),
    )
    return a

def radian_conv(degree):
    """
    Return radian.
    """
    return np.radians(degree)

def add_airport_dist(dataset):
    """

```

(continues on next page)

(continued from previous page)

```

Return minimum distance from pickup or drop-off coordinates to each airport.
JFK: John F. Kennedy International Airport
EWR: Newark Liberty International Airport
LGA: LaGuardia Airport
SOL: Statue of Liberty
NYC: Newyork Central
"""
jfk_coord = (40.639722, -73.778889)
ewr_coord = (40.6925, -74.168611)
lga_coord = (40.77725, -73.872611)
sol_coord = (40.6892, -74.0445) # Statue of Liberty
nyc_coord = (40.7141667, -74.0063889)

pickup_lat = dataset["pickup_latitude"]
dropoff_lat = dataset["dropoff_latitude"]
pickup_lon = dataset["pickup_longitude"]
dropoff_lon = dataset["dropoff_longitude"]

pickup_jfk = sphere_dist(pickup_lat, pickup_lon, jfk_coord[0], jfk_coord[1])
dropoff_jfk = sphere_dist(jfk_coord[0], jfk_coord[1], dropoff_lat, dropoff_lon)
pickup_ewr = sphere_dist(pickup_lat, pickup_lon, ewr_coord[0], ewr_coord[1])
dropoff_ewr = sphere_dist(ewr_coord[0], ewr_coord[1], dropoff_lat, dropoff_lon)
pickup_lga = sphere_dist(pickup_lat, pickup_lon, lga_coord[0], lga_coord[1])
dropoff_lga = sphere_dist(lga_coord[0], lga_coord[1], dropoff_lat, dropoff_lon)
pickup_sol = sphere_dist(pickup_lat, pickup_lon, sol_coord[0], sol_coord[1])
dropoff_sol = sphere_dist(sol_coord[0], sol_coord[1], dropoff_lat, dropoff_lon)
pickup_nyc = sphere_dist(pickup_lat, pickup_lon, nyc_coord[0], nyc_coord[1])
dropoff_nyc = sphere_dist(nyc_coord[0], nyc_coord[1], dropoff_lat, dropoff_lon)

dataset["jfk_dist"] = pickup_jfk + dropoff_jfk
dataset["ewr_dist"] = pickup_ewr + dropoff_ewr
dataset["lga_dist"] = pickup_lga + dropoff_lga
dataset["sol_dist"] = pickup_sol + dropoff_sol
dataset["nyc_dist"] = pickup_nyc + dropoff_nyc

return dataset

```

```

def add_datetime_info(dataset):
    # Convert to datetime format
    dataset["pickup_datetime"] = pd.to_datetime(
        dataset["pickup_datetime"], format="%Y-%m-%d %H:%M:%S UTC"
    )

    dataset["hour"] = dataset.pickup_datetime.dt.hour
    dataset["day"] = dataset.pickup_datetime.dt.day
    dataset["month"] = dataset.pickup_datetime.dt.month
    dataset["weekday"] = dataset.pickup_datetime.dt.weekday
    dataset["year"] = dataset.pickup_datetime.dt.year

    return dataset

```

(continues on next page)

(continued from previous page)

```

train_df = add_datetime_info(train_df)
train_df = add_airport_dist(train_df)
train_df["distance"] = sphere_dist(
    train_df["pickup_latitude"],
    train_df["pickup_longitude"],
    train_df["dropoff_latitude"],
    train_df["dropoff_longitude"],
)

train_df["bearing"] = sphere_dist_bear(
    train_df["pickup_latitude"],
    train_df["pickup_longitude"],
    train_df["dropoff_latitude"],
    train_df["dropoff_longitude"],
)

train_df["pickup_latitude"] = radian_conv(train_df["pickup_latitude"])
train_df["pickup_longitude"] = radian_conv(train_df["pickup_longitude"])
train_df["dropoff_latitude"] = radian_conv(train_df["dropoff_latitude"])
train_df["dropoff_longitude"] = radian_conv(train_df["dropoff_longitude"])

train_df.drop(columns=["key", "pickup_datetime"], inplace=True)

y = train_df["fare_amount"]
train_df = train_df.drop(columns=["fare_amount"])

print(train_df.head())

x_train, x_test, y_train, y_test = train_test_split(
    train_df, y, random_state=123, test_size=0.10
)

del train_df
del y
gc.collect()

params = {
    "boosting_type": "gbdt",
    "objective": "regression",
    "nthread": 4,
    "num_leaves": 31,
    "learning_rate": 0.05,
    "max_depth": -1,
    "subsample": 0.8,
    "bagging_fraction": 1,
    "max_bin": 5000,
    "bagging_freq": 20,
    "colsample_bytree": 0.6,
    "metric": "rmse",
    "min_split_gain": 0.5,

```

(continues on next page)

(continued from previous page)

```

    "min_child_weight": 1,
    "min_child_samples": 10,
    "scale_pos_weight": 1,
    "zero_as_missing": True,
    "seed": 0,
    # "categorical_feature": "name:year,month,day,weekday",
}

train_set = lgbm.Dataset(x_train, y_train)
valid_set = lgbm.Dataset(x_test, y_test)

# [MLRun] Apply MLRun on the LightGBM module:
apply_mlrun(context=context)

model = lgbm.train(
    params,
    num_boost_round=10000,
    train_set=train_set,
    valid_sets=[valid_set],
    callbacks=[lgbm.early_stopping(stopping_rounds=500)],
)

del x_train
del y_train
del x_test
del y_test
gc.collect()

# [MLRun] Reading test data from context instead of local file:
test_df = context.get_input("test_set", "./test.csv").as_df()
# test_df = pd.read_csv('./test.csv')
print(test_df.head())
test_df = add_datetime_info(test_df)
test_df = add_airport_dist(test_df)
test_df["distance"] = sphere_dist(
    test_df["pickup_latitude"],
    test_df["pickup_longitude"],
    test_df["dropoff_latitude"],
    test_df["dropoff_longitude"],
)

test_df["bearing"] = sphere_dist_bear(
    test_df["pickup_latitude"],
    test_df["pickup_longitude"],
    test_df["dropoff_latitude"],
    test_df["dropoff_longitude"],
)

test_df["pickup_latitude"] = radian_conv(test_df["pickup_latitude"])
test_df["pickup_longitude"] = radian_conv(test_df["pickup_longitude"])
test_df["dropoff_latitude"] = radian_conv(test_df["dropoff_latitude"])
test_df["dropoff_longitude"] = radian_conv(test_df["dropoff_longitude"])

```

(continues on next page)

(continued from previous page)

```

test_key = test_df["key"]
test_df = test_df.drop(columns=["key", "pickup_datetime"])

# Predict from test set
prediction = model.predict(test_df, num_iteration=model.best_iteration)
submission = pd.DataFrame({"key": test_key, "fare_amount": prediction})

# [MLRun] Log the submission instead of saving it locally:
context.log_dataset(key="taxi_fare_submission", df=submission, format="csv")
# submission.to_csv('taxi_fare_submission.csv', index=False)

```

This demo focuses on reviewing the changes / additions made to the original code so that you can apply MLRun on top of it. **Seven lines of code are added / replaced** as you can see in the sections below:

## Initialization

### Imports

On lines 9-10, add 2 imports:

- `mlrun` — Import MLRun of course.
- `apply_mlrun` — Use the `apply_mlrun` function from MLRun's frameworks, a sub-package for common ML/DL frameworks integrations with MLRun.

```

import mlrun
from mlrun.frameworks.lgbm import apply_mlrun

```

### MLRun context

To get parameters and inputs into the code, you need to get MLRun's context. Use the function `get_or_create_ctx`.

Line 13:

```
context = mlrun.get_or_create_ctx("apply-mlrun-tutorial")
```

### Get Training Set

In the original code the training set was read from a local file. Now you want to get it from the user who runs the code. Use the context to get the "training\_set" input by using the `get_input` method. To maintain the original logic, include the default path for when the training set was not provided by the user.

Line 16:

```

train_df = context.get_input("train_set", "./train.csv").as_df()
# Instead of: `train_df = pd.read_csv('./train.csv')`

```

## Apply MLRun

Now use the `apply_mlrun` function from MLRun's LightGBM framework integration. MLRun automatically wraps the LightGBM module and enables automatic logging and evaluation.

Line 209:

```
apply_mlrun(context=context)
```

## Logging the dataset

Similar to the way you got the training set, you get the test dataset as an input from the MLRun content.

Line 226:

```
test_df = context.get_input("test_set", "./test.csv").as_df()
# Instead of: `test_df = pd.read_csv('./test.csv')`
```

## Save the submission

Finally, instead of saving the result locally, log the submission to MLRun.

Line 258:

```
context.log_dataset(key="taxi_fare_submission", df=submission, format="csv")
# Instead of: `submission.to_csv('taxi_fare_submission.csv', index=False)`
```

## 3.6.3 Run the script with MLRun

Now you can run the script and see MLRun in action.

```
import mlrun
```

## Create a project

Create a project using the function `get_or_create_project`. To read more about MLRun projects, see [Projects](#).

```
project = mlrun.get_or_create_project(
    name="apply-mlrun-tutorial", context="./", user_project=True
)
```

```
> 2022-08-09 18:21:26,785 [info] loaded project apply-mlrun-tutorial from MLRun DB
```

## Create a function

Create an MLRun function using the function `code_to_function`. To read more about MLRun functions, see [Functions](#).

```
script_function = mlrun.code_to_function(
    filename="./src/script.py",
    name="apply-mlrun-tutorial-function",
    kind="job",
    image="mlrun/mlrun",
    requirements=["lightgbm"],
)
script_function.deploy()
```

## Run the function

Now you can run the function, providing it with the inputs you want. Use the datasets links to send them to the function. MLRun downloads and reads them into `pd.DataFrame` automatically.

```
script_run = script_function.run(
    inputs={
        "train_set": "https://s3.us-east-1.wasabisys.com/iguazio/data/nyc-taxi/train.csv",
        "test_set": "https://s3.us-east-1.wasabisys.com/iguazio/data/nyc-taxi/test.csv",
    },
)
```

```
> 2022-08-09 18:21:26,851 [info] starting run apply-mlrun-tutorial-function_
uid=8d82ef16a15d4151a16060c13b133170 DB=http://mlrun-api:8080
> 2022-08-09 18:21:27,017 [info] handler was not provided running main (./script.py)
> 2022-08-09 18:21:39,330 [info] logging run results to: http://mlrun-api:8080
  pickup_longitude pickup_latitude ... distance bearing
0      -1.288826      0.710721 ...  1.030764 -2.918897
1      -1.291824      0.710546 ...  8.450134 -0.375217
2      -1.291242      0.711418 ...  1.389525  2.599961
3      -1.291319      0.710927 ...  2.799270  0.133905
4      -1.290987      0.711536 ...  1.999157 -0.502703

[5 rows x 17 columns]
[LightGBM] [Warning] bagging_fraction is set=1, subsample=0.8 will be ignored. Current_
value: bagging_fraction=1
[LightGBM] [Warning] Met categorical feature which contains sparse values. Consider_
renumbering to consecutive integers started from zero
[LightGBM] [Warning] bagging_fraction is set=1, subsample=0.8 will be ignored. Current_
value: bagging_fraction=1
[LightGBM] [Warning] Auto-choosing col-wise multi-threading, the overhead of testing was_
0.008352 seconds.
You can set `force_col_wise=true` to remove the overhead.
[LightGBM] [Info] Total Bins 55092
[LightGBM] [Info] Number of data points in the train set: 194071, number of used_
features: 17
[LightGBM] [Warning] bagging_fraction is set=1, subsample=0.8 will be ignored. Current_
```

(continues on next page)

(continued from previous page)

```
↪value: bagging_fraction=1
[LightGBM] [Info] Start training from score 11.335573
      key ... passenger_count
0  2015-01-27 13:08:24.00000002 ...      1
1  2015-01-27 13:08:24.00000003 ...      1
2  2011-10-08 11:53:44.00000002 ...      1
3  2012-12-01 21:12:12.00000002 ...      1
4  2012-12-01 21:12:12.00000003 ...      1

[5 rows x 7 columns]
```

```
<IPython.core.display.HTML object>
```

```
> 2022-08-09 18:22:02,987 [info] run executed, status=completed
```

### 3.6.4 Review outputs

To view the outputs yielded by the MLRun automatic logging and evaluation, call the `outputs` property on the run object:

```
script_run.outputs
```

```
{'valid_0_rmse': 3.905279481685527,
 'valid_0_rmse_plot': 'v3io:///projects/apply-mlrun-tutorial-guyl/artifacts/apply-mlrun-
↪tutorial-function/0/valid_0_rmse_plot.html',
 'valid_0-feature-importance': 'v3io:///projects/apply-mlrun-tutorial-guyl/artifacts/
↪apply-mlrun-tutorial-function/0/valid_0-feature-importance.html',
 'valid_0': 'store://artifacts/apply-mlrun-tutorial-guyl/apply-mlrun-tutorial-function_
↪valid_0:8d82ef16a15d4151a16060c13b133170',
 'model': 'store://artifacts/apply-mlrun-tutorial-guyl/
↪model:8d82ef16a15d4151a16060c13b133170',
 'taxi_fare_submission': 'store://artifacts/apply-mlrun-tutorial-guyl/apply-mlrun-
↪tutorial-function_taxi_fare_submission:8d82ef16a15d4151a16060c13b133170'}
```

MLRun **automatically detects all the metrics calculated** and collects the data along with the training. Here there was one validation set named `valid_0` and the RMSE metric was calculated on it. You can see the RMSE values per iteration plot and the final score including the features importance plot.

You can explore the different artifacts by calling the artifact function like this:

```
script_run.artifact("valid_0_rmse_plot").show()
```

```
<IPython.core.display.HTML object>
```

```
script_run.artifact("valid_0-feature-importance").show()
```

```
<IPython.core.display.HTML object>
```

And of course, you can also see the submission that was logged:

```
script_run.artifact("taxi_fare_submission").show()
```

		key	fare_amount
0	2015-01-27 13:08:24.000000	2	10.281408
1	2015-01-27 13:08:24.000000	3	11.019641
2	2011-10-08 11:53:44.000000	2	4.898061
3	2012-12-01 21:12:12.000000	2	7.758042
4	2012-12-01 21:12:12.000000	3	15.298775
...		...	...
9909	2015-05-10 12:37:51.000000	2	9.117569
9910	2015-01-12 17:05:51.000000	1	10.850885
9911	2015-04-19 20:44:15.000000	1	55.048856
9912	2015-01-31 01:05:19.000000	5	20.110280
9913	2015-01-18 14:06:23.000000	6	7.081041

```
[9914 rows x 2 columns]
```

## 3.7 Batch inference and drift detection

This tutorial leverages a function from the [MLRun Function Hub](#) to perform [batch inference](#) using a logged model and a new prediction dataset. The function also calculates data drift by comparing the new prediction dataset with the original training set.

Make sure you have reviewed the basics in MLRun [Quick Start Tutorial](#).

Tutorial steps:

- *Set up a project*
- *View the data*
- *Log the model with training data*
- *Import and run the batch inference function*
- *Predictions and drift status*
- *Examining the drift results in the dashboard*
- *Next steps*

### 3.7.1 MLRun installation and configuration

Before running this notebook make sure mlrun is installed and that you have configured the access to the MLRun service.

```
# Install MLRun if not installed, run this only once (restart the notebook after the
↪install !!!)
%pip install mlrun
```

### 3.7.2 Set up a project

First, import the dependencies and create an [MLRun project](#). The project contains all of your models, functions, datasets, etc.:

```
import mlrun
import pandas as pd
```

```
project = mlrun.get_or_create_project("tutorial", context="./", user_project=True)
```

```
> 2023-09-14 11:28:28,749 [info] Loading project from path: {'project_name': 'tutorial',
→ 'path': './'}
> 2023-09-14 11:28:44,183 [info] Project loaded successfully: {'project_name': 'tutorial
→ ', 'path': './', 'stored_in_db': True}
```

#### Note

This tutorial does not focus on training a model. Instead, it starts with a trained model and its corresponding training and prediction dataset.

You'll use the following model files and datasets to perform the batch prediction. The model is a [DecisionTreeClassifier](#) from sklearn and the datasets are in parquet format.

*# We choose the correct model to avoid pickle warnings*

```
import sys
```

```
suffix = (
    mlrun.__version__.split("-")[0].replace(".", "_")
    if sys.version_info[1] > 7
    else "3.7"
)
```

```
model_path = mlrun.get_sample_path(f"models/batch-predict/model-{suffix}.pkl")
training_set_path = mlrun.get_sample_path("data/batch-predict/training_set.parquet")
prediction_set_path = mlrun.get_sample_path("data/batch-predict/prediction_set.parquet")
```

### 3.7.3 View the data

The training data has 20 numerical features and a binary (0,1) label:

```
pd.read_parquet(training_set_path).head()
```

	feature_0	feature_1	feature_2	feature_3	feature_4	feature_5	\
0	0.572754	0.171079	0.403080	0.955429	0.272039	0.360277	
1	0.623733	-0.149823	-1.410537	-0.729388	-1.996337	-1.213348	
2	0.814168	-0.221412	0.020822	1.066718	-0.573164	0.067838	
3	1.062279	-0.966309	0.341471	-0.737059	1.460671	0.367851	
4	0.195755	0.576332	-0.260496	0.841489	0.398269	-0.717972	

(continues on next page)

(continued from previous page)

	feature_6	feature_7	feature_8	feature_9	...	feature_11	feature_12	\
0	-0.995429	0.437239	0.991556	0.010004	...	0.112194	-0.319256	
1	1.461307	1.187854	-1.790926	-0.981600	...	0.428653	-0.503820	
2	0.923045	0.338146	0.981413	1.481757	...	-1.052559	-0.241873	
3	-0.435336	0.445308	-0.655663	-0.196220	...	0.641017	0.099059	
4	0.810550	-1.058326	0.368610	0.606007	...	0.195267	0.876144	

	feature_13	feature_14	feature_15	feature_16	feature_17	feature_18	\
0	-0.392631	-0.290766	1.265054	1.037082	-1.200076	0.820992	
1	-0.798035	2.038105	-3.080463	0.408561	1.647116	-0.838553	
2	-1.232272	-0.010758	0.806800	0.661162	0.589018	0.522137	
3	1.902592	-1.024929	0.030703	-0.198751	-0.342009	-1.286865	
4	0.151615	0.094867	0.627353	-0.389023	0.662846	-0.857000	

	feature_19	label
0	0.834868	0
1	0.680983	1
2	-0.924624	0
3	-1.118373	1
4	1.091218	1

[5 rows x 21 columns]

The prediction data has 20 numerical features, but no label - this is what you will predict:

```
pd.read_parquet(prediction_set_path).head()
```

	feature_0	feature_1	feature_2	feature_3	feature_4	feature_5	\
0	-2.059506	-1.314291	2.721516	-2.132869	-0.693963	0.376643	
1	-1.190382	0.891571	3.726070	0.673870	-0.252565	-0.729156	
2	-0.996384	-0.099537	3.421476	0.162771	-1.143458	-1.026791	
3	-0.289976	-1.680019	3.126478	-0.704451	-1.149112	1.174962	
4	-0.294866	1.044919	2.924139	0.814049	-1.455054	-0.270432	

	feature_6	feature_7	feature_8	feature_9	feature_10	feature_11	\
0	3.017790	3.876329	-1.294736	0.030773	0.401491	2.775699	
1	2.646563	4.782729	0.318952	-0.781567	1.473632	1.101721	
2	2.114702	2.517553	-0.154620	-0.465423	-1.723025	1.729386	
3	2.860341	3.753661	-0.326119	2.128411	-0.508000	2.328688	
4	3.380195	2.339669	1.029101	-1.171018	-1.459395	1.283565	

	feature_12	feature_13	feature_14	feature_15	feature_16	feature_17	\
0	2.361580	0.173441	0.879510	1.141007	4.608280	-0.518388	
1	3.723400	-0.466867	-0.056224	3.344701	0.194332	0.463992	
2	2.820340	-1.041428	-0.331871	2.909172	2.138613	-0.046252	
3	3.397321	-0.932060	-1.442370	2.058517	3.881936	2.090635	
4	0.677006	-2.147444	-0.494150	3.222041	6.219348	-1.914110	

	feature_18	feature_19
0	0.129690	2.794967
1	0.292268	4.665876
2	-0.732631	4.716266

(continues on next page)

(continued from previous page)

3	-0.045832	4.197315
4	0.317786	4.143443

### 3.7.4 Log the model with training data

Next, log the model using MLRun experiment tracking. This is usually done in a training pipeline, but you can also bring in your pre-trained models from other sources. See [Working with data and model artifacts](#) and [Automated experiment tracking](#) for more information.

In this example, you are logging a training set with the model for future comparison, however you can also directly pass in your training set to the batch prediction function.

```
model_artifact = project.log_model(
    key="model",
    model_file=model_path,
    framework="sklearn",
    training_set=pd.read_parquet(training_set_path),
    label_column="label",
)
```

```
# the model artifact unique URI
model_artifact.uri
```

```
'store://models/tutorial-iguazio/model#0:3ba91513-7dae-45b2-b118-d2197ade55a3'
```

### 3.7.5 Import and run the batch inference function

Next, import the `batch inference` function from the [MLRun Function Hub](#):

```
fn = mlrun.import_function("hub://batch_inference_v2")
```

#### Run batch inference

Finally, perform the batch prediction by passing in your model and datasets. In addition, you can trigger the drift analysis batch job on the provided dataset by passing `"trigger_monitoring_job": True`.

If you do perform drift analysis, a new model endpoint record is generated. Model endpoint is a unique MLRun entity that includes statistics and important details about your model and function. You can perform the drift analysis on an existing model endpoint, but you need to make sure that you don't mix unrelated datasets that could affect the final drift analysis process. In general, it's recommended to perform the drift analysis on a new model endpoint to avoid possible analysis conflicts.

See the corresponding [batch inference example notebook](#) for an exhaustive list of other parameters that are supported:

```
run = project.run_function(
    fn,
```

(continues on next page)

(continued from previous page)

```

inputs={
  "dataset": prediction_set_path,
},
params={
  "model_path": model_artifact.uri,
  "perform_drift_analysis": True,
  "trigger_monitoring_job": True,
},
)

```

```

> 2023-09-14 11:34:23,114 [info] Storing function: {'name': 'batch-inference-v2-infer',
→ 'uid': 'bfe783edea46c98d3508418deae6c2', 'db': 'http://mlrun-api:8080'}
> 2023-09-14 11:34:23,809 [info] Job is running in the background, pod: batch-inference-
→ v2-infer-xx8zv
> 2023-09-14 11:34:27,850 [info] Loading model...
> 2023-09-14 11:34:28,573 [info] Loading data...
> 2023-09-14 11:34:30,136 [info] Calculating prediction...
> 2023-09-14 11:34:30,139 [info] Logging result set (x | prediction)...
> 2023-09-14 11:34:30,431 [info] Performing drift analysis...
> 2023-09-14 11:34:32,308 [info] Storing function: {'name': 'model-monitoring-batch',
→ 'uid': '33b8a8e07b0542d08ac6f81f6d97f240', 'db': 'http://mlrun-api:8080'}
> 2023-09-14 11:34:32,555 [info] Job is running in the background, pod: model-monitoring-
→ batch-lm7gd
> 2023-09-14 11:34:48,049 [info] Initializing BatchProcessor: {'project': 'tutorial-
→ iguazio'}
divide by zero encountered in log
> 2023-09-14 11:34:48,465 [info] Drift result: {'drift_result': defaultdict(<class 'dict
→ >', {'feature_13': {'tvd': 0.03959999999999999, 'hellinger': 0.04519449310948248, 'kld
→ ': 0.013240526944533322}, 'tvd_sum': 5.6988, 'tvd_mean': 0.2713714285714286,
→ 'hellinger_sum': 6.916628739424696, 'hellinger_mean': 0.3293632733059379, 'kld_sum': 1
→ 39.76276059167618, 'kld_mean': 1.8934647900798178, 'feature_16': {'tvd': 0.
→ 6359999999999999, 'hellinger': 0.8003245177804857, 'kld': 4.682651890289595}, 'feature_
→ 12': {'tvd': 0.599, 'hellinger': 0.807957523155725, 'kld': 4.574238261717538},
→ 'feature_0': {'tvd': 0.022600000000000002, 'hellinger': 0.033573681953213544, 'kld': 0.
→ 007454628335938183}, 'label': {'tvd': 0.0456, 'hellinger': 0.032273432278649546, 'kld
→ ': 0.00833405069284858}, 'feature_7': {'tvd': 0.6646, 'hellinger': 0.7949812589747411,
→ 'kld': 4.94920993092669}, 'feature_17': {'tvd': 0.032800000000000001, 'hellinger': 0.
→ 038955714991485355, 'kld': 0.009013894995753259}, 'feature_18': {'tvd': 0.
→ 042400000000000001, 'hellinger': 0.046474652187650754, 'kld': 0.015894237456896394},
→ 'feature_3': {'tvd': 0.038400000000000001, 'hellinger': 0.04913963802969945, 'kld': 0.
→ 017331946342858503}, 'feature_4': {'tvd': 0.03859999999999999, 'hellinger': 0.
→ 04691128230500036, 'kld': 0.016210210229378626}, 'feature_5': {'tvd': 0.
→ 0496000000000000005, 'hellinger': 0.05408439667580992, 'kld': 0.017044292121321365},
→ 'feature_10': {'tvd': 0.040399999999999985, 'hellinger': 0.04473407115759961, 'kld': 0.
→ 016107595511326803}, 'feature_2': {'tvd': 0.6882, 'hellinger': 0.7900559843329186, 'kld
→ ': 5.214389130958726}, 'feature_9': {'tvd': 0.042800000000000005, 'hellinger': 0.
→ 04656727009349971, 'kld': 0.01261823423079203}, 'feature_6': {'tvd': 0.
→ 659800000000000002, 'hellinger': 0.7926084404395208, 'kld': 4.680064555912078}, 'feature_
→ 8': {'tvd': 0.038400000000000004, 'hellinger': 0.039720263747100804, 'kld': 0.
→ 009435438488007906}, 'feature_14': {'tvd': 0.038, 'hellinger': 0.05472944756352956,
→ 'kld': 0.022306296862012256}, 'feature_1': {'tvd': 0.0434, 'hellinger': 0.
→ 046301454033261864, 'kld': 0.014581581489297469}, 'feature_11': {'tvd': 0.

```

(continues on next page)

(continued from previous page)

```

↪ 6384000000000001, 'hellinger': 0.8058863402254881, 'kld': 4.800461353025042}, 'feature_
↪ 19': {'tvd': 0.7812000000000001, 'hellinger': 0.7993397396310429, 'kld': 6.
↪ 966803905103182}, 'feature_15': {'tvd': 0.5189999999999999, 'hellinger': 0.
↪ 746815136758792, 'kld': 3.715368630042354}}})
> 2023-09-14 11:34:48,465 [info] Drift status: {'endpoint_id':
↪ '66112327e1633e85ceba587c58fa0e56833bf311', 'drift_status': 'NO_DRIFT', 'drift_measure
↪ ': 0.3003673509386833}
> 2023-09-14 11:34:48,473 [info] Generate a new V3IO KV schema file: {'kv_table_path':
↪ 'pipelines/tutorial-iguazio/model-endpoints/endpoints/'}
> 2023-09-14 11:34:48,494 [warning] Could not write drift measures to TSDB: {'err':
↪ Error("cannot call API - write error: backend Write failed: failed to create adapter:
↪ No TSDB schema file found at 'v3io-webapi:8081/users/pipelines/tutorial-iguazio/model-
↪ endpoints/events/'."), 'tsdb_path': 'pipelines/tutorial-iguazio/model-endpoints/events/
↪ ', 'endpoint': '66112327e1633e85ceba587c58fa0e56833bf311'}
> 2023-09-14 11:34:48,494 [info] Done updating drift measures: {'endpoint_id':
↪ '66112327e1633e85ceba587c58fa0e56833bf311'}
> 2023-09-14 11:34:48,601 [info] Run execution finished: {'status': 'completed', 'name':
↪ 'model-monitoring-batch'}
> 2023-09-14 11:34:48,700 [info] To track results use the CLI: {'info_cmd': 'mlrun get
↪ run 33b8a8e07b0542d08ac6f81f6d97f240 -p tutorial-iguazio', 'logs_cmd': 'mlrun logs
↪ 33b8a8e07b0542d08ac6f81f6d97f240 -p tutorial-iguazio'}
> 2023-09-14 11:34:48,700 [info] Or click for UI: {'ui_url': 'https://dashboard.default-
↪ tenant.app.dev63.lab.iguazeng.com/mlprojects/tutorial-iguazio/jobs/monitor/
↪ 33b8a8e07b0542d08ac6f81f6d97f240/overview'}
> 2023-09-14 11:34:48,701 [info] Run execution finished: {'status': 'completed', 'name':
↪ 'model-monitoring-batch'}
> 2023-09-14 11:34:50,772 [info] Run execution finished: {'status': 'completed', 'name':
↪ 'batch-inference-v2-infer'}

```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```

> 2023-09-14 11:34:52,077 [info] Run execution finished: {'status': 'completed', 'name':
↪ 'batch-inference-v2-infer'}

```

### 3.7.6 Predictions and drift status

These are the batch predictions on the prediction set from the model:

```
run.artifact("prediction").as_df().head()
```

	feature_0	feature_1	feature_2	feature_3	feature_4	feature_5	\
0	-2.059506	-1.314291	2.721516	-2.132869	-0.693963	0.376643	
1	-1.190382	0.891571	3.726070	0.673870	-0.252565	-0.729156	
2	-0.996384	-0.099537	3.421476	0.162771	-1.143458	-1.026791	

(continues on next page)

(continued from previous page)

```

3  -0.289976  -1.680019   3.126478  -0.704451  -1.149112   1.174962
4  -0.294866   1.044919   2.924139   0.814049  -1.455054  -0.270432

  feature_6  feature_7  feature_8  feature_9  ...  feature_11  feature_12  \
0   3.017790   3.876329  -1.294736   0.030773  ...   2.775699   2.361580
1   2.646563   4.782729   0.318952  -0.781567  ...   1.101721   3.723400
2   2.114702   2.517553  -0.154620  -0.465423  ...   1.729386   2.820340
3   2.860341   3.753661  -0.326119   2.128411  ...   2.328688   3.397321
4   3.380195   2.339669   1.029101  -1.171018  ...   1.283565   0.677006


  feature_13  feature_14  feature_15  feature_16  feature_17  feature_18  \
0   0.173441   0.879510   1.141007   4.608280  -0.518388   0.129690
1  -0.466867  -0.056224   3.344701   0.194332   0.463992   0.292268
2  -1.041428  -0.331871   2.909172   2.138613  -0.046252  -0.732631
3  -0.932060  -1.442370   2.058517   3.881936   2.090635  -0.045832
4  -2.147444  -0.494150   3.222041   6.219348  -1.914110   0.317786

  feature_19  label
0   2.794967     0
1   4.665876     1
2   4.716266     0
3   4.197315     0
4   4.143443     1

[5 rows x 21 columns]
```

There is also a drift table plot that compares the drift between the training data and prediction data per feature:

```
run.artifact("drift_table_plot").show()
```

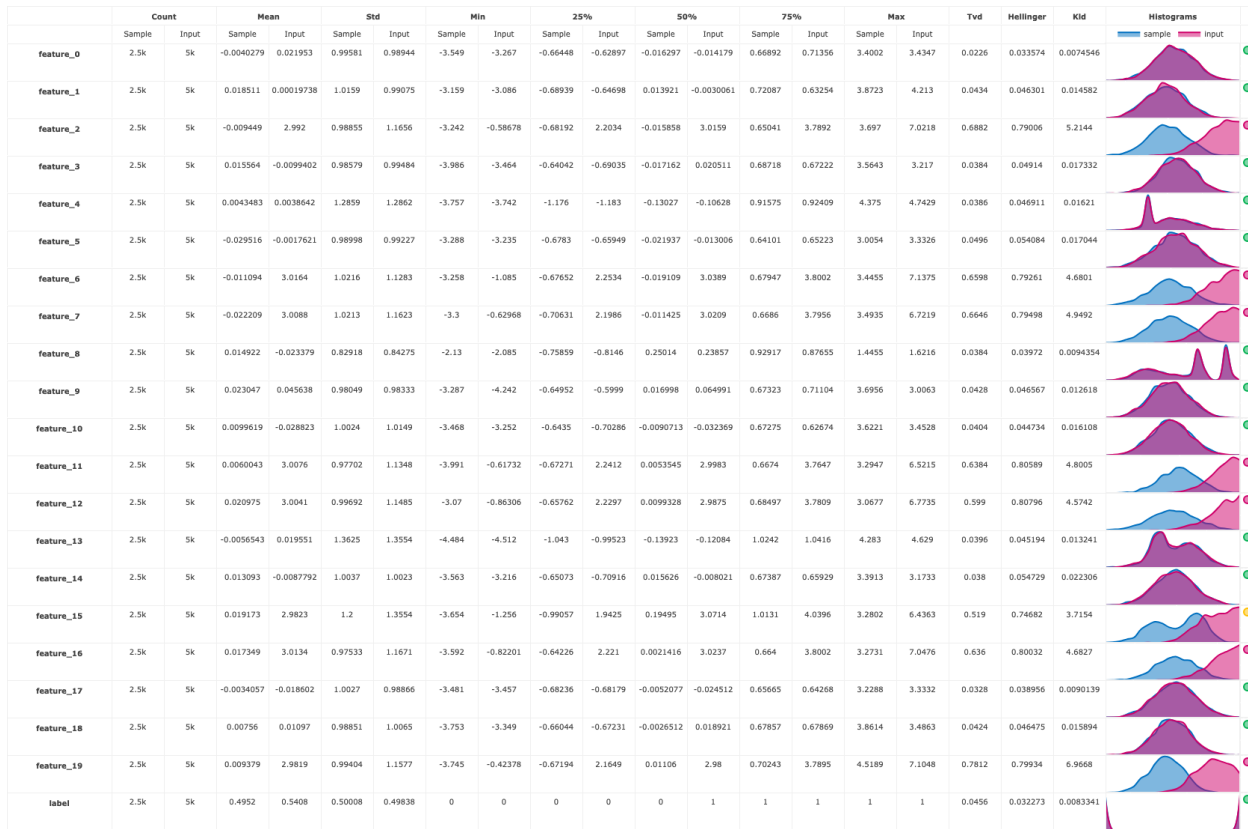

Finally, you also get a numerical drift metric and boolean flag denoting whether or not data drift is detected:

```
run.status.results
```

```
{'batch_id': '08683420069e1a367216aa745f02ef9f73a87f595a333571b417c6ac',
'drift_status': False,
'drift_metric': 0.3003673509386833}
```

```
# Data/concept drift per feature
import json
```

```
json.loads(run.artifact("features_drift_results").get())
```

```
{'feature_13': 0.04239724655474124,
'feature_16': 0.7181622588902428,
'feature_12': 0.7034787615778625,
'feature_0': 0.028086840976606773,
'label': 0.03893671613932477,
'feature_7': 0.7297906294873706,
'feature_17': 0.03587785749574268,
'feature_18': 0.04443732609382538,
'feature_3': 0.043769819014849734,
'feature_4': 0.042755641152500176,
'feature_5': 0.05184219833790496,
'feature_10': 0.042567035578799796,
'feature_2': 0.7391279921664593,
```

(continues on next page)

(continued from previous page)

```
'feature_9': 0.04468363504674985,
'feature_6': 0.7262042202197605,
'feature_8': 0.039060131873550404,
'feature_14': 0.046364723781764774,
'feature_1': 0.04485072701663093,
'feature_11': 0.7221431701127441,
'feature_19': 0.7902698698155215,
'feature_15': 0.6329075683793959}
```

### 3.7.7 Examining the drift results in the dashboard

This section reviews the main charts and statistics that can be found on the platform dashboard. See [Model monitoring overview](#) to learn more about the available model monitoring features and how to use them.

Before analyzing the results in the visual dashboards, run another batch infer job, but this time with a lower drift threshold, to get a drifted result. The drift decision rule is the value per-feature mean of the [Total Variance Distance \(TVD\)](#) and [Hellinger distance](#) scores. By default, the threshold is 0.7 but you can modify it through the batch infer process. As seen above, the drift result in this case was ~0.3. Reduce the threshold value to 0.2 in the following run to generate the drifted result:

```
run = project.run_function(
    fn,
    inputs={
        "dataset": prediction_set_path,
    },
    params={
        "model_path": model_artifact.uri,
        "perform_drift_analysis": True,
        "trigger_monitoring_job": True,
        "model_endpoint_name": "drifted-model-endpoint",
        "model_endpoint_drift_threshold": 0.2,
        "model_endpoint_possible_drift_threshold": 0.1,
    },
)
```

```
> 2023-09-14 14:00:21,477 [info] Storing function: {'name': 'batch-inference-v2-infer',
↪ 'uid': '02af70631bbe4d7aaec58cbef4bf725d', 'db': 'http://mlrun-api:8080'}
> 2023-09-14 14:00:21,796 [info] Job is running in the background, pod: batch-inference-
↪ v2-infer-vthxf
> 2023-09-14 14:00:45,833 [info] Loading model...
> 2023-09-14 14:00:46,530 [info] Loading data...
> 2023-09-14 14:00:55,812 [info] Calculating prediction...
> 2023-09-14 14:00:55,816 [info] Logging result set (x | prediction)...
> 2023-09-14 14:00:56,120 [info] Performing drift analysis...
> 2023-09-14 14:00:57,897 [info] Storing function: {'name': 'model-monitoring-batch',
↪ 'uid': '7e3fa8d0dd12430d8b1934fdf76b6720', 'db': 'http://mlrun-api:8080'}
> 2023-09-14 14:00:58,138 [info] Job is running in the background, pod: model-monitoring-
↪ batch-6hcb8
> 2023-09-14 14:01:13,295 [info] Initializing BatchProcessor: {'project': 'tutorial-
↪ iguazio'}
```

(continues on next page)

(continued from previous page)

```

divide by zero encountered in log
> 2023-09-14 14:01:13,741 [info] Drift result: {'drift_result': defaultdict(<class 'dict
→ '>', {'feature_8': {'tvd': 0.038400000000000004, 'hellinger': 0.039720263747100804, 'kld
→ ': 0.009435438488007906}, 'tvd_sum': 5.6988, 'tvd_mean': 0.2713714285714286,
→ 'hellinger_sum': 6.916628739424697, 'hellinger_mean': 0.32936327330593795, 'kld_sum': 3
→ 39.76276059167616, 'kld_mean': 1.8934647900798172, 'label': {'tvd': 0.0456, 'hellinger
→ ': 0.032273432278649546, 'kld': 0.00833405069284858}, 'feature_14': {'tvd': 0.038,
→ 'hellinger': 0.05472944756352956, 'kld': 0.022306296862012256}, 'feature_1': {'tvd': 0.
→ 0434, 'hellinger': 0.046301454033261864, 'kld': 0.014581581489297469}, 'feature_0': {
→ 'tvd': 0.022600000000000002, 'hellinger': 0.033573681953213544, 'kld': 0.
→ 007454628335938183}, 'feature_2': {'tvd': 0.6882, 'hellinger': 0.7900559843329186, 'kld
→ ': 5.214389130958726}, 'feature_15': {'tvd': 0.5189999999999999, 'hellinger': 0.
→ 746815136758792, 'kld': 3.715368630042354}, 'feature_17': {'tvd': 0.032800000000000001,
→ 'hellinger': 0.038955714991485355, 'kld': 0.009013894995753259}, 'feature_12': {'tvd': 0.
→ 0.599, 'hellinger': 0.807957523155725, 'kld': 4.574238261717538}, 'feature_11': {'tvd
→ ': 0.638400000000000001, 'hellinger': 0.8058863402254881, 'kld': 4.800461353025042},
→ 'feature_18': {'tvd': 0.042400000000000001, 'hellinger': 0.046474652187650754, 'kld': 0.
→ 015894237456896394}, 'feature_9': {'tvd': 0.042800000000000005, 'hellinger': 0.
→ 04656727009349971, 'kld': 0.01261823423079203}, 'feature_10': {'tvd': 0.
→ 040399999999999985, 'hellinger': 0.04473407115759961, 'kld': 0.016107595511326803},
→ 'feature_16': {'tvd': 0.6359999999999999, 'hellinger': 0.8003245177804857, 'kld': 4.
→ 682651890289595}, 'feature_5': {'tvd': 0.049600000000000005, 'hellinger': 0.
→ 05408439667580992, 'kld': 0.017044292121321365}, 'feature_13': {'tvd': 0.
→ 03959999999999999, 'hellinger': 0.04519449310948248, 'kld': 0.013240526944533322},
→ 'feature_4': {'tvd': 0.03859999999999999, 'hellinger': 0.04691128230500036, 'kld': 0.
→ 016210210229378626}, 'feature_19': {'tvd': 0.78120000000000001, 'hellinger': 0.
→ 7993397396310429, 'kld': 6.966803905103182}, 'feature_3': {'tvd': 0.038400000000000001,
→ 'hellinger': 0.04913963802969945, 'kld': 0.017331946342858503}, 'feature_7': {'tvd': 0.
→ 6646, 'hellinger': 0.7949812589747411, 'kld': 4.94920993092669}, 'feature_6': {'tvd': 0.
→ 0.65980000000000002, 'hellinger': 0.7926084404395208, 'kld': 4.680064555912078}}}]
> 2023-09-14 14:01:13,741 [info] Drift status: {'endpoint_id':
→ '4a68274cf8a733c9ea3c4497a9fe24cf623e378f', 'drift_status': 'DRIFT_DETECTED', 'drift_
→ measure': 0.3003673509386833}
> 2023-09-14 14:01:13,791 [warning] Could not write drift measures to TSDB: {'err': 1
→ Error("cannot call API - write error: backend Write failed: failed to create adapter: 1
→ No TSDB schema file found at 'v3io-webapi:8081/users/pipelines/tutorial-iguazio/model-
→ endpoints/events/'."), 'tsdb_path': 'pipelines/tutorial-iguazio/model-endpoints/events/
→ ', 'endpoint': '4a68274cf8a733c9ea3c4497a9fe24cf623e378f'}
> 2023-09-14 14:01:13,792 [info] Done updating drift measures: {'endpoint_id':
→ '4a68274cf8a733c9ea3c4497a9fe24cf623e378f'}
> 2023-09-14 14:01:13,889 [info] Run execution finished: {'status': 'completed', 'name':
→ 'model-monitoring-batch'}
> 2023-09-14 14:01:14,265 [info] To track results use the CLI: {'info_cmd': 'mlrun get_
→ run 7e3fa8d0dd12430d8b1934fdf76b6720 -p tutorial-iguazio', 'logs_cmd': 'mlrun logs_
→ 7e3fa8d0dd12430d8b1934fdf76b6720 -p tutorial-iguazio'}
> 2023-09-14 14:01:14,265 [info] Or click for UI: {'ui_url': 'https://dashboard.default-
→ tenant.app.dev63.lab.iguazeng.com/mlprojects/tutorial-iguazio/jobs/monitor/
→ 7e3fa8d0dd12430d8b1934fdf76b6720/overview'}
> 2023-09-14 14:01:14,265 [info] Run execution finished: {'status': 'completed', 'name':
→ 'model-monitoring-batch'}
> 2023-09-14 14:01:16,296 [info] Run execution finished: {'status': 'completed', 'name':
→ 'batch-inference-v2-infer'}

```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-09-14 14:01:20,495 [info] Run execution finished: {'status': 'completed', 'name':  
↪ 'batch-inference-v2-infer'}
```


Now you can observe the drift result:

```
run.status.results
```

```
{'batch_id': '7e505020685f41b05b2fa191977a085c8d47e89cfef145d1626c0284',  
'drift_status': True,  
'drift_metric': 0.3003673509386833}
```

## Model Endpoints

In the Projects page > [Model endpoint summary list](#), you can see the new two model endpoints, including their drift status:

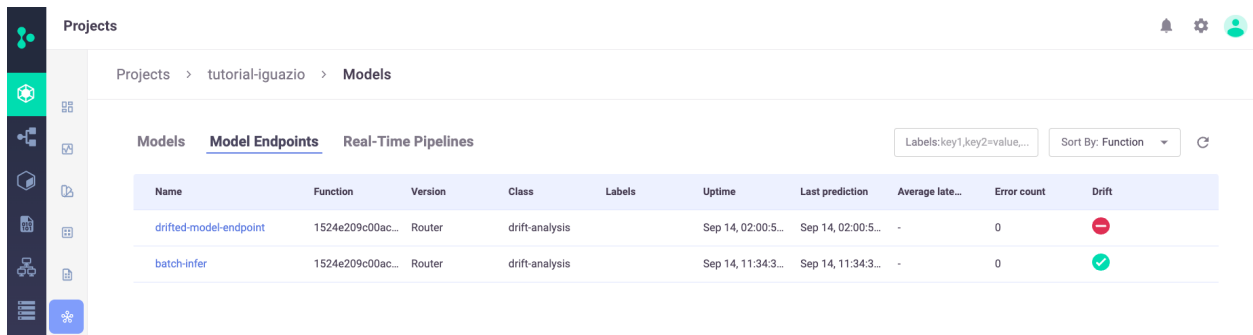

Name	Function	Version	Class	Labels	Uptime	Last prediction	Average late...	Error count	Drift
<a href="#">drifted-model-endpoint</a>	1524e209c00ac...	Router	drift-analysis		Sep 14, 02:00:5...	Sep 14, 02:00:5...	-	0	🔴
<a href="#">batch-infer</a>	1524e209c00ac...	Router	drift-analysis		Sep 14, 11:34:3...	Sep 14, 11:34:3...	-	0	🟢

You can zoom into one of the model endpoints to get an [overview](#) about the selected endpoint, including the calculated statistical drift metrics:

Projects > tutorial-iguazio > Models

Models **Model Endpoints** Real-Time Pipelines

Labels: key1,key2=value,... Sort By: Function

**Name**

- drifted-model-endpoint
- batch-infer**

**batch-infer** 66112327e1633e85ceba587c58fa0e56833bf311

**Overview** Features Analysis

**General**

UID	66112327e1633e85ceba587c58fa0e56833bf311
Model class	drift-analysis
Model artifact	store://models/tutorial-iguazio/model#0.3ba91513-7da...
Function URI	tutorial-iguazio/1524e209c00ac4d36c5318753bb4b07c...
Function Tag	latest
Feature set	store://feature-sets/tutorial-iguazio/monitoring-1524e20...
Last prediction	Sep 14, 11:34:30 AM
Error count	0

**Drift**

Mean TVD	0.27
Mean Hellinger	0.33
Mean KLD	1.89

Press **Features Analysis** to see details of the drift analysis in a table format with each feature in the selected model on its own line, including the predicted label:

Projects > tutorial-iguazio > Models

Models **Model Endpoints** Real-Time Pipelines

Labels: key1,key2=value,... Sort By: Function

**Name**

- drifted-model-endpoint
- batch-infer**

**batch-infer** 66112327e1633e85ceba587c58fa0e56833bf311

**Overview** **Features Analysis**

Feature	Mean		Std		Min		Max		TVD	Hellinger	KLD	Histogram	
	Expected	Actual	Expected	Actual	Expected	Actual	Expected	Actual				Expected	Actual
feature_0	0	0.02	1	0.99	-3.55	-3.27	3.4	3.43	0.02	0.03	0.01		
feature_1	0.02	0	1.02	0.99	-3.16	-3.09	3.87	4.21	0.04	0.05	0.01		
feature_2	-0.01	2.99	0.99	1.17	-3.24	-0.59	3.7	7.02	0.69	0.79	5.21		
feature_3	0.02	-0.01	0.99	0.99	-3.99	-3.46	3.56	3.22	0.04	0.05	0.02		
feature_4	0	0	1.29	1.29	-3.76	-3.74	4.37	4.74	0.04	0.05	0.02		
feature_5	-0.03	0	0.99	0.99	-3.29	-3.23	3.01	3.33	0.05	0.05	0.02		
feature_6	-0.01	3.02	1.02	1.13	-3.26	-1.08	3.45	7.14	0.66	0.79	4.68		

### 3.7.8 Next steps

In a production setting, you probably want to incorporate this as part of a larger pipeline or application.

For example, if you use this function for the prediction capabilities, you can pass the prediction output as the input to another pipeline step, store it in an external location like S3, or send to an application or user.

If you use this function for the drift detection capabilities, you can use the `drift_status` and `drift_metrics` outputs to automate further pipeline steps, send a notification, or kick off a re-training pipeline.

## 3.8 Feature store example (stocks)

This notebook demonstrates the following:

- Generate features and feature-sets
- Build complex transformations and ingest to offline and real-time data stores
- Fetch feature vectors for training
- Save feature vectors for re-use in real-time pipelines
- Access features and their statistics in real-time

---

### Note

By default, this demo works with the online feature store, which is currently not part of the Open Source MLRun default deployment.

---

### In this section

- *Get started*
- *Create sample data for demo*
- *Define, infer and ingest feature sets*
- *Get an offline feature vector for training*
- *Initialize an online feature service and use it for real-time inference*

### 3.8.1 Get started

Install the latest MLRun package and restart the notebook.

Setting up the environment and project:

```
import mlrun
```

```
mlrun.get_or_create_project("stocks", "./")
```

```
> 2023-02-05 11:43:17,605 [info] Created and saved project stocks: {'from_template': 'None', 'overwrite': False, 'context': './', 'save': True}
> 2023-02-05 11:43:17,607 [info] created project stocks and saved in MLRun DB
```

```
<mlrun.projects.project.MlrunProject at 0x7f689811ea10>
```

### 3.8.2 Create sample data for demo

```
import pandas as pd

quotes = pd.DataFrame(
    {
        "time": [
            pd.Timestamp("2016-05-25 13:30:00.023"),
            pd.Timestamp("2016-05-25 13:30:00.023"),
            pd.Timestamp("2016-05-25 13:30:00.030"),
            pd.Timestamp("2016-05-25 13:30:00.041"),
            pd.Timestamp("2016-05-25 13:30:00.048"),
            pd.Timestamp("2016-05-25 13:30:00.049"),
            pd.Timestamp("2016-05-25 13:30:00.072"),
            pd.Timestamp("2016-05-25 13:30:00.075"),
        ],
        "ticker": ["GOOG", "MSFT", "MSFT", "MSFT", "GOOG", "AAPL", "GOOG", "MSFT"],
        "bid": [720.50, 51.95, 51.97, 51.99, 720.50, 97.99, 720.50, 52.01],
        "ask": [720.93, 51.96, 51.98, 52.00, 720.93, 98.01, 720.88, 52.03],
    }
)

trades = pd.DataFrame(
    {
        "time": [
            pd.Timestamp("2016-05-25 13:30:00.023"),
            pd.Timestamp("2016-05-25 13:30:00.038"),
            pd.Timestamp("2016-05-25 13:30:00.048"),
            pd.Timestamp("2016-05-25 13:30:00.048"),
            pd.Timestamp("2016-05-25 13:30:00.048"),
        ],
        "ticker": ["MSFT", "MSFT", "GOOG", "GOOG", "AAPL"],
        "price": [51.95, 51.95, 720.77, 720.92, 98.0],
        "quantity": [75, 155, 100, 100, 100],
    }
)

stocks = pd.DataFrame(
    {
        "ticker": ["MSFT", "GOOG", "AAPL"],
        "name": ["Microsoft Corporation", "Alphabet Inc", "Apple Inc"],
        "exchange": ["NASDAQ", "NASDAQ", "NASDAQ"],
    }
)

import datetime

def move_date(df, col):
    max_date = df[col].max()
    now_date = datetime.datetime.now()
    delta = now_date - max_date
```

(continues on next page)

(continued from previous page)

```

df[col] = df[col] + delta
return df

quotes = move_date(quotes, "time")
trades = move_date(trades, "time")

```

### View the demo data

quotes

	time	ticker	bid	ask
0	2021-05-23 09:04:07.013574	GOOG	720.50	720.93
1	2021-05-23 09:04:07.013574	MSFT	51.95	51.96
2	2021-05-23 09:04:07.020574	MSFT	51.97	51.98
3	2021-05-23 09:04:07.031574	MSFT	51.99	52.00
4	2021-05-23 09:04:07.038574	GOOG	720.50	720.93
5	2021-05-23 09:04:07.039574	AAPL	97.99	98.01
6	2021-05-23 09:04:07.062574	GOOG	720.50	720.88
7	2021-05-23 09:04:07.065574	MSFT	52.01	52.03

trades

	time	ticker	price	quantity
0	2021-05-23 09:04:07.041766	MSFT	51.95	75
1	2021-05-23 09:04:07.056766	MSFT	51.95	155
2	2021-05-23 09:04:07.066766	GOOG	720.77	100
3	2021-05-23 09:04:07.066766	GOOG	720.92	100
4	2021-05-23 09:04:07.066766	AAPL	98.00	100

stocks

	ticker	name	exchange
0	MSFT	Microsoft Corporation	NASDAQ
1	GOOG	Alphabet Inc	NASDAQ
2	AAPL	Apple Inc	NASDAQ

### 3.8.3 Define, infer and ingest feature sets

```

import mlrun.feature_store as fstore
from mlrun.feature_store.steps import *
from mlrun.features import MinMaxValidator

```

### Build and ingest simple feature set (stocks)

```
# add feature set without time column (stock ticker metadata)
stocks_set = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
fstore.ingest(stocks_set, stocks, infer_options=fstore.InferOptions.default())
```

	name	exchange
ticker		
MSFT	Microsoft Corporation	NASDAQ
GOOG	Alphabet Inc	NASDAQ
AAPL	Apple Inc	NASDAQ

### Build an advanced feature set - with feature engineering pipeline

Define a feature set with custom data processing and time aggregation functions:

```
# create a new feature set
quotes_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")])
```

#### Define a custom pipeline step (python class)

```
class MyMap(MapClass):
    def __init__(self, multiplier=1, **kwargs):
        super().__init__(**kwargs)
        self._multiplier = multiplier

    def do(self, event):
        event["multi"] = event["bid"] * self._multiplier
        return event
```

### Build and show the transformation pipeline

Use storey stream processing classes along with library and custom classes:

```
quotes_set.graph.to("MyMap", multiplier=3).to(
    "storey.Extend", _fn="{ 'extra': event['bid'] * 77 }")
).to("storey.Filter", "filter", _fn="(event['bid'] > 51.92)").to(FeaturesetValidator())

quotes_set.add_aggregation("ask", ["sum", "max"], "1h", "10m", name="asks1")
quotes_set.add_aggregation("ask", ["sum", "max"], "5h", "10m", name="asks5")
quotes_set.add_aggregation("bid", ["min", "max"], "1h", "10m", name="bids")

# add feature validation policy
quotes_set["bid"] = fstore.Feature(validator=MinMaxValidator(min=52, severity="info"))

# add default target definitions and plot
quotes_set.set_targets()
quotes_set.plot(rankdir="LR", with_targets=True)
```

```
<graphviz.dot.Digraph at 0x7fa9a4154250>
```

### Test and show the pipeline results locally (allow to quickly develop and debug)

```
fstore.preview(
    quotes_set,
    quotes,
    entity_columns=["ticker"],
    timestamp_key="time",
    options=fstore.InferOptions.default(),
)
```

```
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.013574 args={
  ↳ 'min': 52, 'value': 51.95}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.020574 args={
  ↳ 'min': 52, 'value': 51.97}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.031574 args={
  ↳ 'min': 52, 'value': 51.99}
```

	asks1_sum_1h	asks1_max_1h	asks5_sum_5h	asks5_max_5h	bids_min_1h	\
ticker						
GOOG	720.93	720.93	720.93	720.93	720.50	
MSFT	51.96	51.96	51.96	51.96	51.95	
MSFT	103.94	51.98	103.94	51.98	51.95	
MSFT	155.94	52.00	155.94	52.00	51.95	
GOOG	1441.86	720.93	1441.86	720.93	720.50	
AAPL	98.01	98.01	98.01	98.01	97.99	
GOOG	2162.74	720.93	2162.74	720.93	720.50	
MSFT	207.97	52.03	207.97	52.03	51.95	

	bids_max_1h	time	bid	ask	multi	\
ticker						
GOOG	720.50	2021-05-23 09:04:07.013574	720.50	720.93	2161.50	
MSFT	51.95	2021-05-23 09:04:07.013574	51.95	51.96	155.85	
MSFT	51.97	2021-05-23 09:04:07.020574	51.97	51.98	155.91	
MSFT	51.99	2021-05-23 09:04:07.031574	51.99	52.00	155.97	
GOOG	720.50	2021-05-23 09:04:07.038574	720.50	720.93	2161.50	
AAPL	97.99	2021-05-23 09:04:07.039574	97.99	98.01	293.97	
GOOG	720.50	2021-05-23 09:04:07.062574	720.50	720.88	2161.50	
MSFT	52.01	2021-05-23 09:04:07.065574	52.01	52.03	156.03	

	extra
ticker	
GOOG	55478.50
MSFT	4000.15
MSFT	4001.69
MSFT	4003.23
GOOG	55478.50
AAPL	7545.23
GOOG	55478.50
MSFT	4004.77

```
# print the feature set object
print(quotes_set.to_yaml())
```

```

kind: FeatureSet
metadata:
  name: stock-quotes
spec:
  entities:
    - name: ticker
      value_type: str
  features:
    - name: asks1_sum_1h
      value_type: float
      aggregate: true
    - name: asks1_max_1h
      value_type: float
      aggregate: true
    - name: asks5_sum_5h
      value_type: float
      aggregate: true
    - name: asks5_max_5h
      value_type: float
      aggregate: true
    - name: bids_min_1h
      value_type: float
      aggregate: true
    - name: bids_max_1h
      value_type: float
      aggregate: true
    - name: bid
      value_type: float
      validator:
        kind: minmax
        severity: info
        min: 52
    - name: ask
      value_type: float
    - name: multi
      value_type: float
    - name: extra
      value_type: float
  partition_keys: []
  timestamp_key: time
  source:
    path: None
  targets:
    - name: parquet
      kind: parquet
    - name: nosql
      kind: nosql
  graph:
    states:
      MyMap:
        kind: task
        class_name: MyMap
        class_args:

```

(continues on next page)

(continued from previous page)

```

    multiplier: 3
storey.Extend:
  kind: task
  class_name: storey.Extend
  class_args:
    _fn: '({\'extra\': event[\'bid\'] * 77})'
  after:
    - MyMap
filter:
  kind: task
  class_name: storey.Filter
  class_args:
    _fn: (event[\'bid\'] > 51.92)
  after:
    - storey.Extend
FeaturesetValidator:
  kind: task
  class_name: mlrun.feature_store.steps.FeaturesetValidator
  class_args:
    featureset: .
    columns: null
  after:
    - filter
Aggregates:
  kind: task
  class_name: storey.AggregateByKey
  class_args:
    aggregates:
      - name: asks1
        column: ask
        operations:
          - sum
          - max
        windows:
          - 1h
        period: 10m
      - name: asks5
        column: ask
        operations:
          - sum
          - max
        windows:
          - 5h
        period: 10m
      - name: bids
        column: bid
        operations:
          - min
          - max
        windows:
          - 1h
        period: 10m

```

(continues on next page)

(continued from previous page)

```

      table: .
    after:
      - FeaturesetValidator
    output_path: v3io:///projects/{{run.project}}/artifacts
status:
  state: created
  stats:
    ticker:
      count: 8
      unique: 3
      top: MSFT
      freq: 4
    asks1_sum_1h:
      count: 8.0
      mean: 617.9187499999999
      min: 51.96
      max: 2162.74
      std: 784.8779804245735
    hist:
      - - 4
        - 1
        - 0
        - 0
        - 0
        - 0
        - 1
        - 0
        - 0
        - 0
        - 0
        - 0
        - 0
        - 1
        - 0
        - 0
        - 0
        - 0
        - 1
      - - 51.96
        - 157.499
        - 263.03799999999995
        - 368.57699999999994
        - 474.11599999999993
        - 579.655
        - 685.194
        - 790.733
        - 896.2719999999999
        - 1001.8109999999999
        - 1107.35
        - 1212.889
        - 1318.4279999999999

```

(continues on next page)

(continued from previous page)

```
- 1423.9669999999999
- 1529.5059999999999
- 1635.0449999999998
- 1740.5839999999998
- 1846.1229999999998
- 1951.6619999999998
- 2057.2009999999996
- 2162.74
asks1_max_1h:
count: 8.0
mean: 308.59625
min: 51.96
max: 720.93
std: 341.7989955655851
hist:
- - 4
  - 1
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 3
- - 51.96
  - 85.4085
  - 118.857
  - 152.3055
  - 185.754
  - 219.2025
  - 252.6509999999998
  - 286.0995
  - 319.5479999999994
  - 352.9964999999999
  - 386.4449999999994
  - 419.8934999999996
  - 453.3419999999999
  - 486.7904999999999
  - 520.2389999999999
  - 553.6875
  - 587.136
```

(continues on next page)

(continued from previous page)

```

- 620.5844999999999
- 654.0329999999999
- 687.4815
- 720.93
asks5_sum_5h:
count: 8.0
mean: 617.9187499999999
min: 51.96
max: 2162.74
std: 784.8779804245735
hist:
- - 4
  - 1
  - 0
  - 0
  - 0
  - 0
  - 1
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 1
  - 0
  - 0
  - 0
  - 0
  - 1
- - 51.96
  - 157.499
  - 263.03799999999995
  - 368.57699999999994
  - 474.11599999999993
  - 579.655
  - 685.194
  - 790.733
  - 896.2719999999999
  - 1001.8109999999999
  - 1107.35
  - 1212.889
  - 1318.4279999999999
  - 1423.9669999999999
  - 1529.5059999999999
  - 1635.0449999999998
  - 1740.5839999999998
  - 1846.1229999999998
  - 1951.6619999999998
  - 2057.2009999999996
  - 2162.74

```

(continues on next page)

(continued from previous page)

```
asks5_max_5h:
  count: 8.0
  mean: 308.59625
  min: 51.96
  max: 720.93
  std: 341.7989955655851
  hist:
    - - 4
      - 1
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 0
      - 3
    - - 51.96
      - 85.4085
      - 118.857
      - 152.3055
      - 185.754
      - 219.2025
      - 252.65099999999998
      - 286.0995
      - 319.54799999999994
      - 352.9964999999999
      - 386.44499999999994
      - 419.89349999999996
      - 453.3419999999999
      - 486.7904999999999
      - 520.2389999999999
      - 553.6875
      - 587.136
      - 620.5844999999999
      - 654.0329999999999
      - 687.4815
      - 720.93
  bids_min_1h:
    count: 8.0
    mean: 308.41125
    min: 51.95
```

(continues on next page)

(continued from previous page)

```

max: 720.5
std: 341.59667259325835
hist:
- - 4
  - 1
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 0
  - 3
- - 51.95
  - 85.3775
  - 118.80499999999999
  - 152.2325
  - 185.65999999999997
  - 219.08749999999998
  - 252.515
  - 285.94249999999994
  - 319.36999999999995
  - 352.79749999999996
  - 386.22499999999997
  - 419.65249999999999
  - 453.07999999999999
  - 486.50749999999994
  - 519.935
  - 553.3625
  - 586.79
  - 620.2175
  - 653.645
  - 687.0725
  - 720.5
bids_max_1h:
count: 8.0
mean: 308.42625
min: 51.95
max: 720.5
std: 341.58380276661245
hist:
- - 4

```

(continues on next page)

(continued from previous page)

```

- 1
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 3
- - 51.95
- 85.3775
- 118.80499999999999
- 152.2325
- 185.65999999999997
- 219.08749999999998
- 252.515
- 285.94249999999994
- 319.36999999999995
- 352.79749999999996
- 386.22499999999997
- 419.65249999999999
- 453.07999999999999
- 486.50749999999994
- 519.935
- 553.3625
- 586.79
- 620.2175
- 653.645
- 687.0725
- 720.5
time:
  count: 8
  mean: '2021-05-23 09:04:07.035699200'
  min: '2021-05-23 09:04:07.013574'
  max: '2021-05-23 09:04:07.065574'
bid:
  count: 8.0
  mean: 308.42625
  min: 51.95
  max: 720.5
  std: 341.58380276661245
  hist:

```

(continues on next page)

(continued from previous page)

```

- - 4
- - 1
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 0
- - 3
- - 51.95
- - 85.3775
- - 118.80499999999999
- - 152.2325
- - 185.65999999999997
- - 219.08749999999998
- - 252.515
- - 285.94249999999994
- - 319.36999999999995
- - 352.79749999999996
- - 386.22499999999997
- - 419.65249999999999
- - 453.07999999999999
- - 486.50749999999994
- - 519.935
- - 553.3625
- - 586.79
- - 620.2175
- - 653.645
- - 687.0725
- - 720.5
ask:
count: 8.0
mean: 308.59
min: 51.96
max: 720.93
std: 341.79037903369954
hist:
- - 4
- - 1
- - 0
- - 0

```

(continues on next page)

(continued from previous page)

```

- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 3
- - 51.96
- 85.4085
- 118.857
- 152.3055
- 185.754
- 219.2025
- 252.65099999999998
- 286.0995
- 319.54799999999994
- 352.99649999999999
- 386.44499999999994
- 419.89349999999996
- 453.34199999999999
- 486.79049999999999
- 520.23899999999999
- 553.6875
- 587.136
- 620.58449999999999
- 654.03299999999999
- 687.4815
- 720.93
multi:
count: 8.0
mean: 925.27875
min: 155.85000000000002
max: 2161.5
std: 1024.7514082998375
hist:
- - 4
- 1
- 0
- 0
- 0
- 0
- 0
- 0
- 0

```

(continues on next page)

(continued from previous page)

```

- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 3
- - 155.85000000000002
- 256.13250000000005
- 356.415
- 456.6975
- 556.98
- 657.2625
- 757.545
- 857.8275
- 958.11
- 1058.3925
- 1158.6750000000002
- 1258.9575
- 1359.2399999999998
- 1459.5225
- 1559.8049999999998
- 1660.0875
- 1760.37
- 1860.6525000000001
- 1960.935
- 2061.2175
- 2161.5
extra:
count: 8.0
mean: 23748.82125
min: 4000.15
max: 55478.5
std: 26301.95281302916
hist:
- - 4
- 1
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 0

```

(continues on next page)

(continued from previous page)

```
- 0
- 0
- 0
- 0
- 0
- 0
- 0
- 3
- - 4000.15
- 6574.0675
- 9147.985
- 11721.9025
- 14295.82
- 16869.7375
- 19443.655000000002
- 22017.572500000002
- 24591.49
- 27165.4075
- 29739.325
- 32313.2425
- 34887.16
- 37461.0775
- 40034.995
- 42608.9125
- 45182.83
- 47756.747500000005
- 50330.665
- 52904.582500000004
- 55478.5
preview:
- - asks1_sum_1h
- asks1_max_1h
- asks5_sum_5h
- asks5_max_5h
- bids_min_1h
- bids_max_1h
- time
- bid
- ask
- multi
- extra
- - 720.93
- 720.93
- 720.93
- 720.93
- 720.5
- 720.5
- 2021-05-23T09:04:07.013574
- 720.5
- 720.93
- 2161.5
- 55478.5
```

(continues on next page)

(continued from previous page)

```

- - 51.96
- 51.96
- 51.96
- 51.96
- 51.95
- 51.95
- 2021-05-23T09:04:07.013574
- 51.95
- 51.96
- 155.850000000000002
- 4000.15
- - 103.94
- 51.98
- 103.94
- 51.98
- 51.95
- 51.97
- 2021-05-23T09:04:07.020574
- 51.97
- 51.98
- 155.91
- 4001.69
- - 155.94
- 52.0
- 155.94
- 52.0
- 51.95
- 51.99
- 2021-05-23T09:04:07.031574
- 51.99
- 52.0
- 155.97
- 4003.23
- - 1441.86
- 720.93
- 1441.86
- 720.93
- 720.5
- 720.5
- 2021-05-23T09:04:07.038574
- 720.5
- 720.93
- 2161.5
- 55478.5
- - 98.01
- 98.01
- 98.01
- 98.01
- 97.99
- 97.99
- 2021-05-23T09:04:07.039574
- 97.99

```

(continues on next page)

(continued from previous page)

```

- 98.01
- 293.96999999999997
- 7545.23
- - 2162.74
- 720.93
- 2162.74
- 720.93
- 720.5
- 720.5
- 2021-05-23T09:04:07.062574
- 720.5
- 720.88
- 2161.5
- 55478.5
- - 207.97
- 52.03
- 207.97
- 52.03
- 51.95
- 52.01
- 2021-05-23T09:04:07.065574
- 52.01
- 52.03
- 156.03
- 4004.77

```

### Ingest data into offline and online stores

This writes to both targets (Parquet and NoSQL).

```

# save ingest data and print the FeatureSet spec
df = fstore.ingest(quotes_set, quotes)

```

```

info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.013574 args={
  ↳ 'min': 52, 'value': 51.95}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.020574 args={
  ↳ 'min': 52, 'value': 51.97}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.031574 args={
  ↳ 'min': 52, 'value': 51.99}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.013574 args={
  ↳ 'min': 52, 'value': 51.95}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.020574 args={
  ↳ 'min': 52, 'value': 51.97}
info! bid value is smaller than min, key=['MSFT'] time=2021-05-23 09:04:07.031574 args={
  ↳ 'min': 52, 'value': 51.99}

```

### 3.8.4 Get an offline feature vector for training

Example of combining features from 3 sources with time travel join of 3 tables with **time travel**.

Specify a set of features and request the feature vector offline result as a dataframe:

```
features = [
    "stock-quotes.multi",
    "stock-quotes.asks5_sum_5h as total_ask",
    "stock-quotes.bids_min_1h",
    "stock-quotes.bids_max_1h",
    "stocks.*",
]

vector = fstore.FeatureVector(
    "stocks-vec", features, description="stocks demo feature vector"
)
vector.save()
```

```
resp = fstore.get_offline_features(
    vector, entity_rows=trades, entity_timestamp_column="time"
)
resp.to_dataframe()
```

	price	quantity	multi	total_ask	bids_min_1h	bids_max_1h	\
0	51.95	75	155.97	155.94	51.95	51.99	
1	51.95	155	155.97	155.94	51.95	51.99	
2	720.77	100	2161.50	2162.74	720.50	720.50	
3	720.92	100	2161.50	2162.74	720.50	720.50	
4	98.00	100	293.97	98.01	97.99	97.99	

	name	exchange
0	Microsoft Corporation	NASDAQ
1	Microsoft Corporation	NASDAQ
2	Alphabet Inc	NASDAQ
3	Alphabet Inc	NASDAQ
4	Apple Inc	NASDAQ

### 3.8.5 Initialize an online feature service and use it for real-time inference

```
service = fstore.get_online_feature_service("stocks-vec")
```

Request feature vector statistics, can be used for imputing or validation

```
service.vector.get_stats_table()
```

	count	mean	min	max	std	\
multi	8.0	925.27875	155.85	2161.50	1024.751408	
total_ask	8.0	617.91875	51.96	2162.74	784.877980	
bids_min_1h	8.0	308.41125	51.95	720.50	341.596673	
bids_max_1h	8.0	308.42625	51.95	720.50	341.583803	
name	3.0	NaN	NaN	NaN	NaN	

(continues on next page)

(continued from previous page)

exchange	3.0	NaN	NaN	NaN	NaN	
					hist	unique \
multi	[[4, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...					NaN
total_ask	[[4, 1, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 1, 0, ...					NaN
bids_min_1h	[[4, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...					NaN
bids_max_1h	[[4, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...					NaN
name						NaN 3.0
exchange						NaN 1.0
		top	freq			
multi		NaN	NaN			
total_ask		NaN	NaN			
bids_min_1h		NaN	NaN			
bids_max_1h		NaN	NaN			
name	Alphabet Inc		1.0			
exchange	NASDAQ		3.0			

**Real-time feature vector request**

```
service.get([{"ticker": "GOOG"}, {"ticker": "MSFT"}])
```

```
[{'asks5_sum_5h': 2162.74,
  'bids_min_1h': 720.5,
  'bids_max_1h': 720.5,
  'multi': 2161.5,
  'name': 'Alphabet Inc',
  'exchange': 'NASDAQ',
  'total_ask': None},
 {'asks5_sum_5h': 207.97,
  'bids_min_1h': 51.95,
  'bids_max_1h': 52.01,
  'multi': 156.03,
  'name': 'Microsoft Corporation',
  'exchange': 'NASDAQ',
  'total_ask': None}]
```

```
service.get([{"ticker": "AAPL"}])
```

```
[{'asks5_sum_5h': 98.01,
  'bids_min_1h': 97.99,
  'bids_max_1h': 97.99,
  'multi': 293.97,
  'name': 'Apple Inc',
  'exchange': 'NASDAQ',
  'total_ask': None}]
```

```
service.close()
```

## 3.9 MLflow tracker

This tutorial demonstrates how to seamlessly integrate and transfer logs from MLflow to MLRun, creating a unified and powerful platform for your machine learning experiments.

You can combine MLflow and MLRun for a comprehensive solution for managing, tracking, and deploying machine learning models.

This notebook guides you through the process of:

1. Setting up the integration between MLflow and MLRun.
2. Extracting data, metrics, and artifacts from MLflow experiments.
3. Creating MLRun artifacts and projects to organize and manage the transferred data.
4. Leveraging MLRun's capabilities for model deployment and data processing.

By the end of this tutorial, you will have a understanding of how to establish a smooth flow of data between MLflow and MLRun.

### 3.9.1 MLRun installation and configuration

Before running this notebook make sure the mlrun package is installed (pip install mlrun) and that you have configured the access to MLRun service.

```
# Install MLRun and scikit-learn if not already installed. Run this only once. Restart.
→ the notebook after the install!
%pip install mlrun scikit-learn~=1.4 xgboost
```

### 3.9.2 Create an MLflow Xgboost function

The training.py contains just mlflow code, and does not have any dependence on MLRun.

```
%%writefile training.py

import mlflow
import mlflow.xgboost
import xgboost as xgb
from mlflow import log_metric
from sklearn import datasets
from sklearn.metrics import accuracy_score, log_loss
from sklearn.model_selection import train_test_split

def example_xgb_run():
    # Prepare, train, and test data
    iris = datasets.load_iris()
    X = iris.data
    y = iris.target
    X_train, X_test, y_train, y_test = train_test_split(
        X, y, test_size=0.2, random_state=42
    )

    # Enable auto logging
```

(continues on next page)

(continued from previous page)

```

mlflow.xgboost.autolog()

dtrain = xgb.DMatrix(X_train, label=y_train)
dtest = xgb.DMatrix(X_test, label=y_test)

with mlflow.start_run():
    # Train model
    params = {
        "objective": "multi:softprob",
        "num_class": 3,
        "learning_rate": 0.3,
        "eval_metric": "mlogloss",
        "colsample_bytree": 1.0,
        "subsample": 1.0,
        "seed": 42,
    }
    model = xgb.train(params, dtrain, evals=[(dtrain, "train")])

    # Evaluate model
    y_proba = model.predict(dtest)
    y_pred = y_proba.argmax(axis=1)
    loss = log_loss(y_test, y_proba)
    acc = accuracy_score(y_test, y_pred)

    # Log metrics by hand
    mlflow.log_metrics({"log_loss": loss, "accuracy": acc})

```

Overwriting training.py

### 3.9.3 Log the data from MLflow in MLRun

Change the MLRun configuration to use the tracker

```

import mlrun

mlrun.mlconf.external_platform_tracking.enabled = True

```

To run the tracking, set: `mlrun.mlconf.external_platform_tracking.mlflow.match_experiment_to_runtime` to `True`. This makes the MLRun run-id the same as the MLFlow experiment ID.

## Create the project and function

```
# Set the tracking
mlrun.mlconf.external_platform_tracking.mlflow.match_experiment_to_runtime = True

# Create a project for this demo:
project = mlrun.get_or_create_project(name="mlflow-tracking-example", context=".")

# Create a MLRun function using the example train file (all the functions must be
↳ located in it):
training_func = project.set_function(
    func="training.py",
    name="example-xgb-run",
    kind="job",
    image="mlrun/mlrun",
)
```

```
> 2023-12-06 09:01:32,156 [info] Project loaded successfully: {'project_name': 'mlflow-
↳ tracking-example'}
> 2023-12-06 09:01:32,164 [warning] Failed to add git metadata, ignore if path is not
↳ part of a git repo.: {'path': './', 'error': '/User/mlflow'}
```

## Run the function

After running the function, you can look at the UI and see that all metrics and parameters are logged in MLRun.

```
# Run the example code using mlrun
train_run = training_func.run(
    local=True,
    handler="example_xgb_run",
)
```

```
> 2023-12-06 09:02:10,520 [info] Storing function: {'name': 'example-xgb-run-example-xgb-
↳ run', 'uid': '4185accc906648a9a56f73d97829c1d0', 'db': 'http://mlrun-api:8080'}
> 2023-12-06 09:02:10,626 [warning] `mlconf.external_platform_tracking.mlflow.match_
↳ experiment_to_runtime` is set to True but the MLflow experiment name environment
↳ variable ('MLFLOW_EXPERIMENT_NAME') is set for using the name: 'example-xgb-run-
↳ example-xgb-run'. This name will be overridden with MLRun's runtime name as set in the
↳ MLRun configuration: 'example-xgb-run-example-xgb-run'.
[0]      train-mlogloss:0.74723
[1]      train-mlogloss:0.54060
[2]      train-mlogloss:0.40276
[3]      train-mlogloss:0.30789
[4]      train-mlogloss:0.24051
[5]      train-mlogloss:0.19086
[6]      train-mlogloss:0.15471
[7]      train-mlogloss:0.12807
[8]      train-mlogloss:0.10722
[9]      train-mlogloss:0.09053
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-12-06 09:02:19,281 [info] Run execution finished: {'status': 'completed', 'name':  
↪ 'example-xgb-run-example-xgb-run'}
```

### Examine the results


```
train_run.outputs
```

```
{'accuracy': 1.0,  
 'log_loss': 0.06621863381213823,  
 'train-mlogloss': 0.09053360810503364,  
 'feature_importance_weight_json': 'store://artifacts/mlflow-tracking-example/example-  
↪ xgb-run-example-xgb-run_feature_importance_weight_json:ad1fec0b0df04083b034e3839460b623  
↪ ',  
 'feature_importance_weight_png': 'store://artifacts/mlflow-tracking-example/example-xgb-  
↪ run-example-xgb-run_feature_importance_weight_png:ad1fec0b0df04083b034e3839460b623',  
 'model': 'store://artifacts/mlflow-tracking-example/example-xgb-run-example-xgb-run_  
↪ model:ad1fec0b0df04083b034e3839460b623'}
```

```
train_run.status.results
```

```
{'accuracy': 1.0,  
 'log_loss': 0.06621863381213823,  
 'train-mlogloss': 0.09053360810503364}
```

```
train_run.artifact("feature_importance_weight_png").show()
```

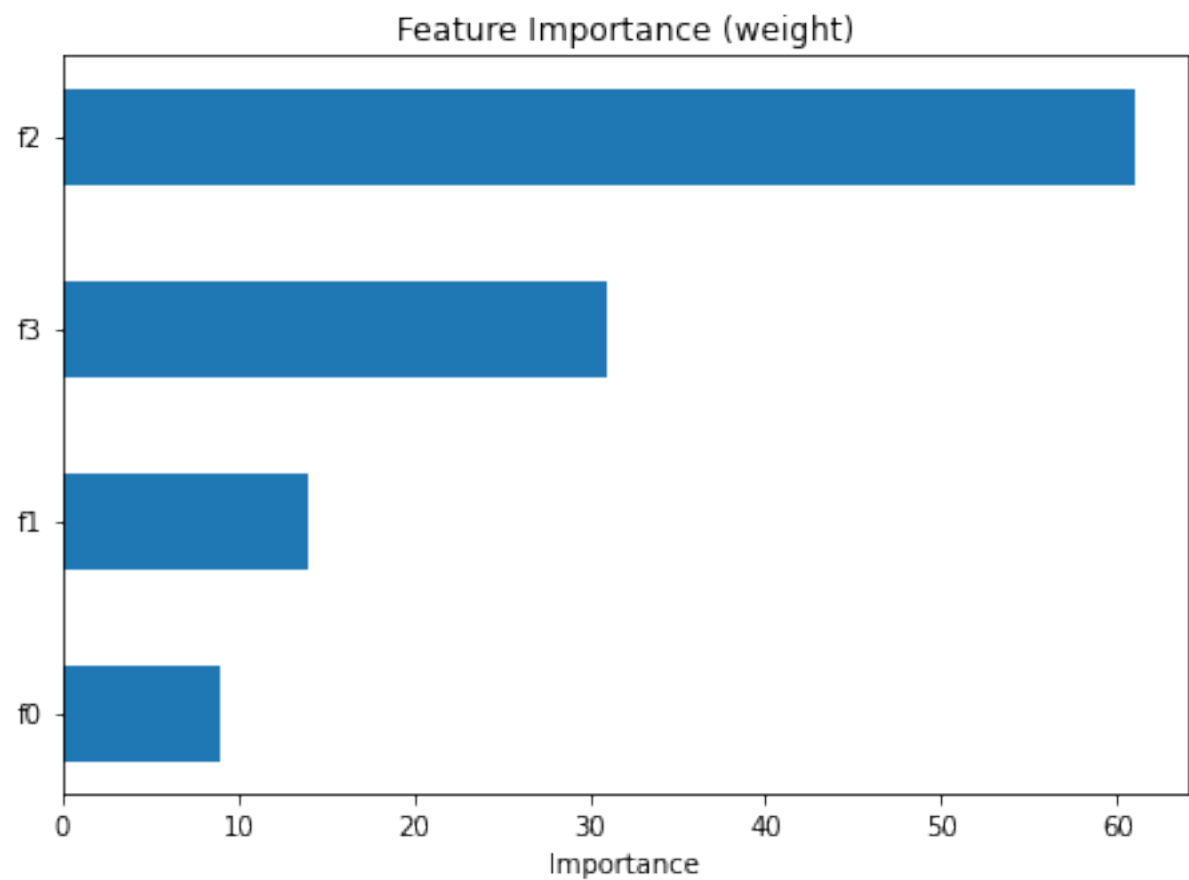

You can also examine the results using the UI

Look at collected artifacts:

← **example-xgb-run-example-xgb-run**

Nov 7, 03:21:19 PM

Overview Inputs **Artifacts** Results Logs

example-xgb-run-example-xgb-run_feature_imp...	v3io:///projects/mlflow-tracking-example/artifacts/example-xgb-run-example-xgb-run/0/feature_i...	size: 47 B
--	---	------------

```
{
  "f0": 9,
  "f1": 14,
  "f2": 61,
  "f3": 31
}
```

example-xgb-run-example-xgb-run_feature_imp...	v3io:///projects/mlflow-tracking-example/artifacts/example-xgb-run-example-xgb-run/0/feature_i...	size: 6.09 kB
--	---	---------------

example-xgb-run-example-xgb-run_model	v3io:///projects/mlflow-tracking-example/artifacts/example-xgb-run-example-xgb-run/0/model/	size: 16.1 kB
---------------------------------------	---	---------------

And at results:

← example-xgb-run-example-xgb-run

Dec 4, 04:27:58 PM

Overview Inputs Artifacts Results Logs

accuracy	1
log_loss	0.06621863381213823
train-mlogloss	0.09053360810503364

### 3.9.4 Use the function for model serving

#### Implement the load and predict functions

```
%%writefile serving.py

import zipfile
from typing import Any, Dict, List, Union

import mlflow
import numpy as np
import os
import mlrun
from mlrun.serving.v2_serving import V2ModelServer
import xgboost as xgb
import pandas as pd

class MLFlowModelServer(V2ModelServer):
    """
    The MLFlow tracker Model serving class inherits the V2ModelServer class, resulting
    ↪ in automatic
    initialization by the model server. It can run locally as part of a nuclio
    ↪ serverless function,
    or as part of a real-time pipeline.
    """

    def load(self):
        """
        loads a model that was logged by the MLFlow tracker model
        """
        # Unzip the model dir and then use mlflow's load function
        model_file, _ = self.get_model(".zip")
        model_path_unzip = model_file.replace(".zip", "")

        with zipfile.ZipFile(model_file, "r") as zip_ref:
            zip_ref.extractall(model_path_unzip)

        self.model = mlflow.pyfunc.load_model(model_path_unzip)

    def predict(self, request: Dict[str, Any]) -> list:
```

(continues on next page)

(continued from previous page)

```

"""
Infer the inputs through the model. The inferred data
is read from the "inputs" key of the request.

:param request: The request to the model using xgboost's predict.
                The input to the model is read from the "inputs" key.

:return: The model's prediction on the given input.
"""

# Get the inputs and set to accepted type:
inputs = pd.DataFrame(request["inputs"])

# Predict using the model's predict function:
predictions = self.model.predict(inputs)

# Return as list:
return predictions.tolist()

```

Overwriting serving.py

### Create the server and serving function

```

serving_func = project.set_function(
    func="serving.py",
    name="example-xgb-server",
    kind="serving",
    image="mlrun/mlrun",
)

```

```

> 2023-11-07 13:21:19,690 [warning] Failed to add git metadata, ignore if path is not
↳ part of a git repo.: {'path': './', 'error': '/User'}

```

```

# Add the model
serving_func.add_model(
    "mlflow_xgb_model",
    class_name="MLFlowModelServer",
    model_path=train_run.outputs["model"],
)

```

```

<mlrun.serving.states.TaskStep at 0x7f8450794d60>

```

```

# Create a mock server
server = serving_func.to_mock_server()

```

```

> 2023-11-07 13:21:19,833 [info] model mlflow_xgb_model was loaded
> 2023-11-07 13:21:19,834 [info] Loaded ['mlflow_xgb_model']

```

## Test the model

```
# An example taken randomly from the dataset that the model was trained on, each
x = [[5.1, 3.5, 1.4, 0.2]]
result = server.test("/v2/models/mlflow_xgb_model/predict", {"inputs": x})
```

```
# Look at the result, it shows the probability of the given example to be each of the
# irises featured in the dataset
result
```

```
{'id': '4188f3585d9d42b7b184324f713c9c26',
 'model_name': 'mlflow_xgb_model',
 'outputs': [[0.9505813121795654, 0.025876399129629135, 0.02354232780635357]]}
```

## 3.10 MLRun cheat sheet

### 3.10.1 Table of contents

- *MLRun setup*
- *MLRun projects*
  - *General workflow*
  - *Git integration*
  - *CI/CD integration*
  - *Secrets*
- *MLRun functions*
  - *Essential runtimes*
  - *Distributed runtimes*
  - *Resource management*
  - *Building docker images*
- *Multi-stage workflows (batch pipelines)*
- *Logging*
- *Experiment tracking*
- *Model Inferencing and serving*
- *Model monitoring and drift detection*
- *Sources and targets*
- *Feature store*
- *Real-time pipelines*
- *Hyperparameter tuning*

### 3.10.2 MLRun setup

Docs: [Set up your client environment](#), [Installation and setup guide](#)

#### MLRun server/client overview

MLRun has two main components, the service and the client (SDK+UI):

- MLRun service runs over Kubernetes (can also be deployed using local Docker for demo and test purposes) - see [installation documentation](#) for more information
- MLRun client SDK is installed in your development environment via pip and interacts with the service using REST API calls

#### Remote connection (laptop, CI/CD, etc.)

Docs: [Configure remote environment](#)

**Localhost:** Create a `mlrun.env` file for environment variables. `MLRUN_DBPATH` saves the URL endpoint of the MLRun APIs service endpoint. Since it is localhost, username and access\_key are not required:

```
mlrun config set -a http://localhost:8080
# MLRun DB
MLRUN_DBPATH=<URL endpoint of the MLRun APIs service endpoint; e.g., "https://mlrun-api.
↳default-tenant.app.mycluster.iguazio.com">
```

**Iguazio MLOps Platform** (not MLRun CE).

```
mlrun config set -a https://mlrun-api.default-tenant.app.xxx.iguazio-cd1.com -u joe -k
↳mykey -e
# this is another env file
V3IO_USERNAME=joe
V3IO_ACCESS_KEY=mykey
MLRUN_DBPATH=https://mlrun-api.default-tenant.app.xxx.iguazio-cd1.com
```

**Connect via MLRun Python SDK:**

```
# Use local service
mlrun.set_environment("http://localhost:8080", artifact_path=".")
# Use remote service
mlrun.set_environment("<remote-service-url>", access_key="xyz", username="joe")
```

### 3.10.3 MLRun projects

Docs: [Projects and automation](#)

## General workflow

Docs: [Create, save, and use projects](#)

```
# Create or load a project
project = mlrun.get_or_create_project(name="my-project", context=".")

# Add a function to the project
project.set_function(name='train_model', func='train_model.py', kind='job', image='mlrun/
↪mlrun')

# Add a workflow (pipeline) to the project
project.set_workflow(name='training_pipeline', workflow_path='straining_pipeline.py')

# Save the project and generate the project.yaml file
project.save()

# Run pipeline via project
project.run(name="training_pipeline", arguments={...})
```

## Git integration

Docs: [Create and use functions](#)

An MLRun project can be backed by a Git repo. Functions consume the repo and pull the code either: once when Docker image is built (production workflow); or at runtime (development workflow).

### Pull the repo code once (bake into Docker image)

```
project.set_source(source="git://github.com/mlrun/project-archive.git")

fn = project.set_function(
    name="myjob", handler="job_func.job_handler",
    image="mlrun/mlrun", kind="job", with_repo=True,
)

project.build_function(fn)
```

### Pull the repo code at runtime

```
project.set_source(source="git://github.com/mlrun/project-archive.git", pull_at_
↪runtime=True)

fn = project.set_function(
    name="nuclio", handler="nuclio_func:nuclio_handler",
    image="mlrun/mlrun", kind="nuclio", with_repo=True,
)
```

## CI/CD integration


### Overview

Docs: [CD/CD automation with Git](#), [Run pipelines with Github Actions](#), [GitLab](#)

Best practice for working with CI/CD is using [MLRun Projects](#) with a combination of the following:

- **Git:** Single source of truth for source code and deployments via infrastructure as code. Allows for collaboration between multiple developers. An MLRun project can (and should) be tied to a Git repo. One project maps to one Git repo.
- **CI/CD:** Main tool for orchestrating production deployments. The CI/CD system should be responsible for deploying latest code changes from Git onto the remote cluster via MLRun Python SDK or CLI.
- **Iguazio/MLRun:** Kubernetes-based compute environment for running data analytics, model training, or model deployment tasks. Additionally, the cluster is where all experiment tracking, job information, logs, and more, is located.

See [MLRun Projects](#) for more information on Git and CI/CD integration. In practice, this may look something like the

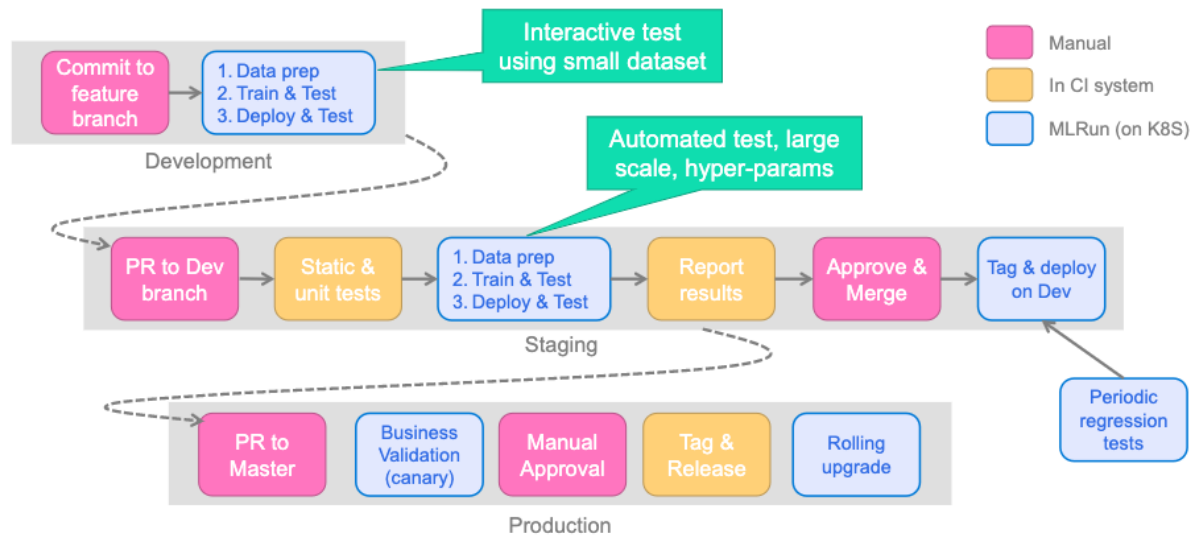

following:

### Example (GitHub Actions)

Full example: [MLRun project-demo](#)

```
name: mlrun-project-workflow
on: [issue_comment]

jobs:
  submit-project:
    if: github.event.issue.pull_request != null && startsWith(github.event.comment.body,
    ↪ '/run')
    runs-on: ubuntu-latest

    steps:
      - uses: actions/checkout@v3
```

(continues on next page)

(continued from previous page)

```

- name: Set up Python 3.9
uses: actions/setup-python@v4
with:
  python-version: '3.9'
  architecture: 'x64'

- name: Install mlrun
run: python -m pip install pip install mlrun
- name: Submit project
run: python -m mlrun project ./ --watch --run main ${CMD:5}
env:
  V3IO_USERNAME: ${ secrets.V3IO_USERNAME }
  V3IO_API: ${ secrets.V3IO_API }
  V3IO_ACCESS_KEY: ${ secrets.V3IO_ACCESS_KEY }
  MLRUN_DBPATH: ${ secrets.MLRUN_DBPATH }
  GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }
  SLACK_WEBHOOK: ${ secrets.SLACK_WEBHOOK }
  CMD: ${ github.event.comment.body }

```

## Secrets

Docs: [Working with secrets](#)

```

# Add secrets to the project
project.set_secrets(secrets={'AWS_KEY': '111222333'}, provider="kubernetes")

# Run the job with all secrets (automatically injects all project secrets for non-local_
↪ runtimes)
project.run_function(fn)

# Retrieve the secret within the job
context.get_secret("AWS_KEY")

```

## 3.10.4 MLRun functions

### Essential runtimes

Docs: [Kinds of functions \(runtimes\)](#)

### Job

```

# Job - run once to completion
job = project.set_function(name="my-job", func="my_job.py", kind="job", image="mlrun/
↪ mlrun", handler="handler")
project.run_function(job)

```

## Nuclio

```
# Nuclio - generic real-time function to do something when triggered
nuclio = project.set_function(name="my-nuclio", func="my_nuclio.py", kind="nuclio",
↪ image="mlrun/mlrun", handler="handler")
project.deploy_function(nuclio)
```

## Serving

```
# Serving - specialized Nuclio function specifically for model serving
serving = project.set_function(name="my-serving", func="my_serving.py", kind="serving",
↪ image="mlrun/mlrun", handler="handler")
serving.add_model(key="iris", model_path="https://s3.wasabisys.com/iguazio/models/iris/
↪ model.pkl", model_class="ClassifierModel")
project.deploy_function(serving)
```

## Distributed runtimes

Docs: [Kinds of functions \(runtimes\)](#)

## MPIJob (Horovod)

```
mpijob = mlrun.code_to_function(name="my-mpijob", filename="my_mpijob.py", kind="mpijob",
↪ image="mlrun/mlrun", handler="handler")
mpijob.spec.replicas = 3
mpijob.run()
```

## Dask

```
dask = mlrun.new_function(name="my-dask", kind="dask", image="mlrun/ml-base")
dask.spec.remote = True
dask.spec.replicas = 5
dask.spec.service_type = 'NodePort'
dask.with_worker_limits(mem="6G")
dask.with_scheduler_limits(mem="1G")
dask.spec.nthreads = 5
dask.apply(mlrun.mount_v3io())
dask.client
```

## Spark Operator

```
import os
read_csv_filepath = os.path.join(os.path.abspath('.'), 'spark_read_csv.py')

spark = mlrun.new_function(kind='spark', command=read_csv_filepath, name='sparkreadcsv')
spark.with_driver_limits(cpu="1300m")
spark.with_driver_requests(cpu=1, mem="512m")
spark.with_executor_limits(cpu="1400m")
spark.with_executor_requests(cpu=1, mem="512m")
spark.with_igz_spark()
spark.spec.replicas = 2

spark.deploy() # build image
spark.run(artifact_path='/User') # run spark job
```

## Resource management

Docs: [Managing job resources](#)

### Requests/limits (MEM/CPU/GPU)

```
# Requests - lower bound
fn.with_requests(mem="1G", cpu=1)

# Limits - upper bound
fn.with_limits(mem="2G", cpu=2, gpus=1)
```

## Scaling and auto-scaling

```
# Nuclio/serving scaling
fn.spec.replicas = 2
fn.spec.min_replicas = 1
fn.spec.max_replicas = 4
```

## Scale to zero

```
# Nuclio/serving scaling
fn.spec.min_replicas = 0 # zero value is mandatory for scale to zero
fn.spec.max_replicas = 2

# Scaling to zero in case of 30 minutes (idle-time duration)
fn.set_config(key="spec.scaleToZero.scaleResources",
              value=[{"metricName": "nuclio_processor_handled_events_total",
                      "windowSize" : "30m",      # default values are 1m, 2m, 5m, 10m, 30m
                      "threshold" : 0}])
```

## Mount persistent storage

```
# Mount Iguazio V3IO
fn.apply(mlrun.mount_v3io())

# Mount PVC
fn.apply(mlrun.platforms.mount_pvc(pvc_name="data-claim", volume_name="data", volume_
↳ mount_path="/data"))
```

## Pod priority

```
fn.with_priority_class(name="igz-workload-medium")
```

## Node selection

```
fn.with_node_selection(node_selector={"app.iguazio.com/lifecycle" : "non-preemptible"})
```

## Serving/Nuclio triggers

Docs: [Nuclio Triggers](#)

By default, Nuclio deploys a default HTTP trigger if the function doesn't have one. This is because users typically want to invoke functions through HTTP. However, we provide a way to disable the default HTTP trigger using: `function.disable_default_http_trigger()`

Also, you can explicitly enable the default HTTP trigger creation with: `function.enable_default_http_trigger()`

If you didn't set this parameter explicitly, the value is taken from [Nuclio platform configuration](#). Therefore, if you haven't disabled the default HTTP trigger, don't have a custom one, and are unable to invoke the function, we recommend checking the Nuclio platform configuration.

```
import nuclio
serve = mlrun.import_function('hub://v2_model_server')

# Set amount of workers
serve.with_http(workers=8, worker_timeout=10)

# V3IO stream trigger
serve.add_v3io_stream_trigger(stream_path='v3io:///projects/myproj/stream1', name='stream
↳ ', group='serving', seek_to='earliest', shards=1)

# Kafka stream trigger
serve.add_trigger(
    name="kafka",
    spec=nuclio.KafkaTrigger(brokers=["192.168.1.123:39092"], topics=["TOPIC"],
↳ partitions=4, consumer_group="serving", initial_offset="earliest")
)
```

(continues on next page)

(continued from previous page)

```
# Cron trigger
serve.add_trigger("cron_interval", spec=nuclio.CronTrigger(interval="10s"))
serve.add_trigger("cron_schedule", spec=nuclio.CronTrigger(schedule="@ 9 * * *"))
```

---

## Note

The worker uses separate worker scope. This means that each worker has a copy of the variables, and all changes are kept within the worker (change by worker x, do not affect worker y).

---

## Building Docker images

Docs: [Build function image](#), [Images and their usage in MLRun](#)

## Manually build image

```
project.set_function(
    "train_code.py", name="trainer", kind="job",
    image="mlrun/mlrun", handler="train_func", requirements=["pandas==1.3.5"]
)

project.build_function(
    "trainer",
    # Specify base image
    base_image="myrepo/base_image:latest",
    # Run arbitrary commands
    commands= [
        "pip install git+https://github.com/myusername/myrepo.git@mybranch",
        "mkdir -p /some/path && chmod 0777 /some/path",
    ]
)
```

## Automatically build image

```
project.set_function(
    "train_code.py", name="trainer", kind="job",
    image="mlrun/mlrun", handler="train_func", requirements=["pandas==1.3.5"]
)

# auto_build will trigger building the image before running,
# due to the additional requirements.
project.run_function("trainer", auto_build=True)
```

### 3.10.5 Multi-stage workflows (batch pipelines)

Docs: [Running a multi-stage workflow](#)

#### Write a workflow

```
# pipeline.py
from kfp import dsl
import mlrun
import nuclio

# Create a Kubeflow Pipelines pipeline
@dsl.pipeline(
    name="batch-pipeline",
    description="Example of batch pipeline for heart disease dataset"
)
def pipeline(source_url, label_column):

    # Get current project
    project = mlrun.get_current_project()

    # Ingest the data set
    ingest = mlrun.run_function(
        'get-data',
        handler='prep_data',
        inputs={'source_url': source_url},
        params={'label_column': label_column},
        outputs=["cleaned_data"]
    )

    # Train a model
    train = mlrun.run_function(
        "train",
        handler="train_model",
        inputs={"dataset": ingest.outputs["cleaned_data"]},
        params={"label_column": label_column},
        outputs=['model']
    )
```

#### Add workflow to project

```
# Functions within the workflow
project.set_function(name='get-data', func='get_data.py', kind='job', image='mlrun/mlrun
↪')
project.set_function(name='train', func='train.py', kind='job', image='mlrun/mlrun')

# Workflow
project.set_workflow(name='main', workflow_path='pipeline.py')

project.save()
```

## Run workflow

Python SDK

```
run_id = project.run(  
    name="main",  
    arguments={  
        "source_url" : "store://feature-vectors/heart-disease-classifier/heart-disease-  
↪vec:latest",  
        "label_column" : "target"  
    }  
)
```

CLI

```
mlrun project --run main \  
    --arguments source_url=store://feature-vectors/heart-disease-classifier/heart-  
↪disease-vec:latest \  
    --arguments label_column=target
```

## Schedule workflow

```
run_id = project.run(  
    name="main",  
    arguments={  
        "source_url" : "store://feature-vectors/heart-disease-classifier/heart-disease-  
↪vec:latest",  
        "label_column" : "target"  
    },  
    schedule="@ * * * * *"  
)
```

### 3.10.6 Logging

Docs: [MLRun execution context](#)

```
context.logger.debug(message="Debugging info")           # logging all (debug, info, ↪  
↪warning, error)  
context.logger.info(message="Something happened")         # logging info, warning and ↪  
↪error  
context.logger.warning(message="Something might go wrong") # logging warning and error  
context.logger.error(message="Something went wrong")      # logging only error
```

---

#### Note

The real-time (nuclio) function uses default logger level debug (logging all)

---

### 3.10.7 Experiment tracking

Docs: [MLRun execution context](#), [Automated experiment tracking](#), [Decorators and auto-logging](#)

#### Manual logging

```
context.log_result(key="accuracy", value=0.934)
context.log_model(key="model", model_file="model.pkl")
context.log_dataset(key="model", df=df, format="csv", index=False)
```

#### Track returning values using hints and returns

- Pass type hints into the inputs parameter of the run method. Inputs are automatically parsed to their hinted type. If type hints are not in code, they can be passed in the input keys. Hints use the structure: `key : type_hint`
- Pass log hints: how to log the returning values from a handler. The log hints are passed via the returns parameter in the run method. A log hint can be passed as a string or a dictionary.
- Use the returns argument to specify how to log a function's returned values.

```
def my_handler(df):
    ...
    return processed_df, result

log_with_returns_run = my_func.run(
    handler="my_handler",
    inputs={"df: pandas.DataFrame": DATA_PATH},
    returns=["processed_data", "sum"],
    local=True,
)
```

#### Automatic logging

```
# Auto logging for ML frameworks
from mlrun.frameworks.sklearn import apply_mlrun

apply_mlrun(model=model, model_name="my_model", x_test=X_test, y_test=y_test)
model.fit(X_train, y_train)

# MLRun decorator for input/output parsing
@mlrun.handler(labels={'framework': 'scikit-learn'},
               outputs=['prediction:dataset'],
               inputs={"train_data": pd.DataFrame,
                      "predict_input": pd.DataFrame})
def train_and_predict(train_data,
                      predict_input,
                      label_column='label'):

    x = train_data.drop(label_column, axis=1)
    y = train_data[label_column]
```

(continues on next page)

(continued from previous page)

```

clf = SVC()
clf.fit(x, y)

return list(clf.predict(predict_input))

```

### 3.10.8 Model inferencing and serving

Docs: [Deploy models and applications](#)

#### Real-time serving

Docs: [Using built-in model serving classes](#), [Build your own model serving class](#), [Model serving API](#)

```

serve = mlrun.import_function('hub://v2_model_server')
serve.add_model(key="iris", model_path="https://s3.wasabisys.com/iguazio/models/iris/
↪model.pkl")

# Deploy to local mock server (Development testing)
mock_server = serve.to_mock_server()

# Deploy to serverless function (Production K8s deployment)
addr = serve.deploy()

```

#### Batch inferencing

Docs: [Batch inference](#)

```

batch_inference = mlrun.import_function("hub://batch_inference")
batch_run = project.run_function(
    batch_inference,
    inputs={"dataset": prediction_set_path},
    params={"model": model_artifact.uri},
)

```

### 3.10.9 Model monitoring and drift detection

Docs: [Model monitoring overview](#), [Batch inference](#)

#### Real-time drift detection

```

# Log the model with training set
context.log_model("model", model_file="model.pkl", training_set=X_train)

# Enable tracking for the model server
serving_fn = import_function('hub://v2_model_server', project=project_name).apply(auto_
↪mount())
serving_fn.add_model("model", model_path="store://models/project-name/model:latest") #↵

```

(continues on next page)

(continued from previous page)

```

↪ Model path comes from experiment tracking DB
serving_fn.set_tracking()

# Deploy the model server
serving_fn.deploy()

```

### Batch drift detection

```

batch_inference = mlrun.import_function("hub://batch_inference")
batch_run = project.run_function(
    batch_inference,
    inputs={
        "dataset": prediction_set_path,
        "sample_set": training_set_path
    },
    params={
        "model": model_artifact.uri,
        "label_columns": "label",
        "perform_drift_analysis" : True
    }
)

```

### 3.10.10 Sources and targets

Abstract underlying storage to easily retrieve and store data from various sources

Docs: [Ingest data using the feature store](#)

#### Sources

Docs: [Sources](#)

```

from mlrun.datastore.sources import CSVSource, ParquetSource, BigQuerySource, KafkaSource

# CSV
csv_source = CSVSource(name="read", path="/User/getting_started/examples/demo.csv")
csv_df = csv_source.to_dataframe()

# Parquet
from pyspark.sql import SparkSession

session = SparkSession.builder.master("local").getOrCreate()
parquet_source = ParquetSource(name="read", path="v3io://users/admin/getting_started/
↪ examples/userdata1.parquet")
spark_df = parquet_source.to_spark_df(session=session)

# BigQuery
bq_source = BigQuerySource(name="read", table="the-psf.pypi.downloads20210328", gcp_
↪ project="my_project")

```

(continues on next page)

(continued from previous page)

```

bq_df = bq_source.to_dataframe()

# Kafka
kafka_source = KafkaSource(
    name="read",
    brokers='localhost:9092',
    topics='topic',
    group='serving',
    initial_offset='earliest'
)
kafka_source.add_nuclio_trigger(function=fn)

# Snowflake
snowflake_source = SnowflakeSource(
    name="read",
    query="select * from customer limit 1000000",
    url="<url>",
    user="<user>",
    password="<password>",
    database="SNOWFLAKE_SAMPLE_DATA",
    schema="TPCH_SF1",
    warehouse="compute_wh",
)
snowflake_df = snowflake_source.to_dataframe()

```

## Targets

Docs: [Targets](#), [Partitioning on Parquet target](#)

```

from mlrun.datastore.targets import CSVTarget, ParquetTarget

# CSV
csv_target = CSVTarget(name="write", path="/User/test.csv")
csv_target.write_dataframe(df=csv_df, key_column="id")

# Parquet
pq_target = ParquetTarget(
    name="write",
    path="/User/test.parquet",
    partitioned=True,
    partition_cols=["country"]
)
pq_target.write_dataframe(df=pq_df, key_column="id")

# Redis (see docs for writing online features)
redis_target = RedisNoSqlTarget(name="write", path="redis://1.2.3.4:6379")
redis_target.write_dataframe(df=redis_df)

# Kafka (see docs for writing online features)
kafka_target = KafkaTarget(
    name="write",

```

(continues on next page)

(continued from previous page)

```
bootstrap_servers='localhost:9092',
topic='topic',
)
redis_target.write_dataframe(df=kafka_df)
```


### 3.10.11 Feature store

Docs: [Feature Store](#), [Feature sets](#), [Feature set transformations](#), [Creating and using feature vectors](#), [Feature store end-to-end demo](#)

#### Definitions

Docs: [Feature store overview](#)

- **Feature Set:** A group of features that can be ingested together and stored in logical group (usually one-to-one with a dataset, stream, table, etc.)
- **Feature Vector:** A group of features from different Feature Sets

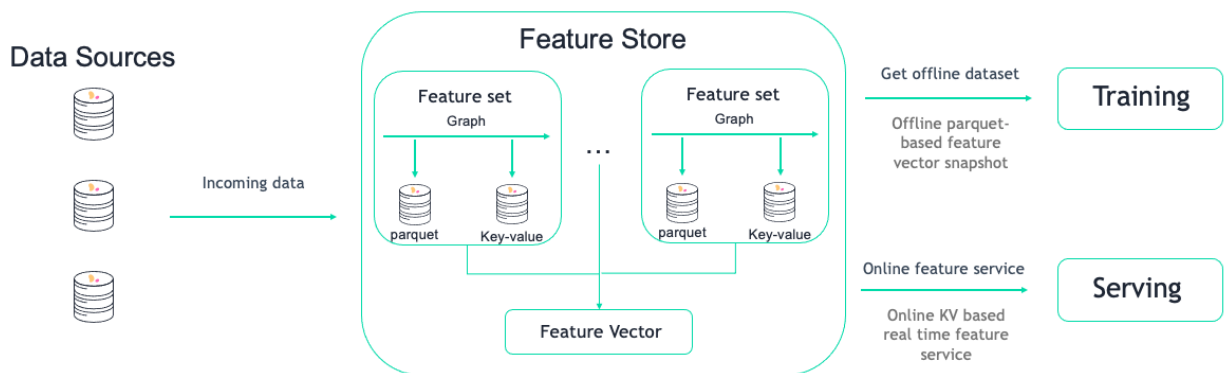

#### Engines

Docs: [Feature store overview](#), [Ingest features with Spark](#)

- **storey engine** (default) is designed for real-time data (e.g. individual records) that will be transformed using Python functions and classes.
- **pandas engine** is designed for batch data that can fit into memory that will be transformed using Pandas dataframes. Pandas is used for testing, and is not recommended for production deployments
- **spark engine** is designed for batch data.

## Feature sets

Docs: [Feature sets](#)

## Basic ingestion

Docs: [Ingest data using the feature store](#)

```
import mlrun.feature_store as fstore
from mlrun.datastore.sources import ParquetSource

categorical_fset = fstore.FeatureSet(
    name="heart-disease-categorical",
    entities=[fstore.Entity("patient_id")],
    description="Categorical columns for heart disease dataset"
)

categorical_fset.ingest(source=ParquetSource(path="./data/heart_disease_categorical.
↪parquet"))
```

## Feature set per engine

```
from mlrun.datastore.sources import DataFrameSource

# Storey engine
storey_set = fstore.FeatureSet(
    name="heart-disease-storey",
    entities=[fstore.Entity("patient_id")],
    description="Heart disease data via storey engine",
    engine="storey"
)
storey_set.ingest(source=DataFrameSource(df=data))

# Pandas engine
pandas_set = fstore.FeatureSet(
    name="heart-disease-pandas",
    entities=[fstore.Entity("patient_id")],
    description="Heart disease data via pandas engine",
    engine="pandas"
)
pandas_set.ingest(source=DataFrameSource(df=data))

# Spark engine
from pyspark.sql import SparkSession
spark = SparkSession.builder.appName("Spark function").getOrCreate()

spark_set = fstore.FeatureSet(
    name="heart-disease-spark",
    entities=[fstore.Entity("patient_id")],
    description="Heart disease data via spark engine",
```

(continues on next page)

(continued from previous page)

```

    engine="spark"
)
spark_set.ingest(source=CSVSource(path=v3io_data_path), spark_context=spark)

```

## Ingestion methods

Docs: [Ingest data locally](#), [Ingest data using an MLRun job](#), [Real-time ingestion](#), [Incremental ingestion](#), [Feature store end-to-end demo](#)

```

# Local
from mlrun.datastore.sources import CSVSource

fs=fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
df = fs.ingest(
    source=CSVSource("mycsv", path="stocks.csv")
)

# Job
from mlrun.datastore.sources import ParquetSource

fs = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
df = fs.ingest(
    source=ParquetSource("mypq", path="stocks.parquet")
    run_config=fstore.RunConfig(image='mlrun/mlrun')
)

# Real-Time
from mlrun.datastore.sources import HttpSource

fs = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
url, _ = fs.deploy_ingestion_service(
    source=HttpSource(key_field="ticker"),
    run_config=fstore.RunConfig(image='mlrun/mlrun', kind="serving")
)

# Incremental
cron_trigger = "* */1 * * *" # will run every hour
fs = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
fs.ingest(
    source=ParquetSource("mypq", path="stocks.parquet", time_field="time", schedule=cron_
↪ trigger),
    run_config=fstore.RunConfig(image='mlrun/mlrun')
)

```

## Aggregations

Docs: [add\\_aggregation\(\)](#), [Aggregations](#)

```
quotes_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")])
quotes_set.add_aggregation("bid", ["min", "max"], ["1h", "10m"])
```

## Built-in transformations

Docs: [storey.transformations](#), [Built-in transformations](#)

```
quotes_set.graph.to("storey.Filter", "filter", _fn="(event['bid'] > 50)")
```

## Custom transformations

Docs: [Custom transformations](#)

Define transformation

```
# Storey
class MyMapStorey(MapClass):
    def __init__(self, multiplier=1, **kwargs):
        super().__init__(**kwargs)
        self._multiplier = multiplier

    def do(self, event):
        event["multi"] = event["bid"] * self._multiplier
        return event

# Pandas
class MyMapPandas:
    def __init__(self, multiplier=1, **kwargs):
        self._multiplier = multiplier

    def do(self, df):
        df["multi"] = df["bid"] * self._multiplier
        return df

# Spark
class MyMapSpark:
    def __init__(self, multiplier=1, **kwargs):
        self._multiplier = multiplier

    def do(self, df):
        df = df.withColumn("multi", df["bid"] * self._multiplier)
        return df
```

Use in graph

```
quotes_set.graph.add_step("MyMapStorey", "multi", after="filter", multiplier=3)
```

## Feature vectors

Docs: [Feature vectors](#)

### Basic retrieval

```
import mlrun.feature_store as fstore
from mlrun.datastore.targets import ParquetTarget

fvec = fstore.FeatureVector(
    name="heart-disease-vector",
    features=["heart-disease-categorical.*", "heart-disease-continuous.*"],
    description="Heart disease dataset",
)
fvec.save()

# Offline features for training
df = fstore.get_offline_features("iguazio-academy/heart-disease-vector").to_dataframe()

# Materialize offline features to parquet
fstore.get_offline_features("iguazio-academy/heart-disease-vector",
    ↪target=ParquetTarget())

# Online features for serving
feature_service = fstore.get_online_feature_service(feature_vector="iguazio-academy/
    ↪heart-disease-vector")
feature_service.get(
    [
        {"patient_id": "e443544b-8d9e-4f6c-9623-e24b6139aae0"},
        {"patient_id": "8227d3df-16ab-4452-8ea5-99472362d982"}
    ]
)
```

### 3.10.12 Real-time pipelines

Docs: [Real-time serving pipelines](#), [Real-time pipeline use cases](#), [Graph concepts and state machine](#), [Model serving graph](#), [Writing custom steps](#)

#### Definitions

Graphs are composed of the following:

- Step: A step runs a function or class handler or a REST API call
- Router: A special type of step with routing logic and multiple child routes/models
- Queue: A queue or stream that accepts data from one or more source steps and publishes to one or more output steps

Graphs have two modes (topologies):

- Router topology (default): A minimal configuration with a single router and child tasks/routes
- Flow topology: A full graph/DAG

## Simple graph

Docs: [Real-time serving pipelines getting started](#)

Define Python file(s) to orchestrate

```
# graph.py
def inc(x):
    return x + 1

def mul(x):
    return x * 2

class WithState:
    def __init__(self, name, context, init_val=0):
        self.name = name
        self.context = context
        self.counter = init_val

    def do(self, x):
        self.counter += 1
        print(f"Echo: {self.name}, x: {x}, counter: {self.counter}")
        return x + self.counter
```


Define MLRun function and graph

```
import mlrun
fn = project.set_function(
    name="simple-graph", func="graph.py",
    kind="serving", image="mlrun/mlrun"
)
graph = fn.set_topology("flow")

# inc, mul, and WithState are all defined in graph.py
graph.to(name="+1", handler='inc')\
    .to(name="*2", handler='mul')\
    .to(name="(X+counter)", class_name='WithState').respond()

# Local testing
server = fn.to_mock_server()
server.test(body=5)

# K8s deployment
project.deploy_function(fn)
```




## Simple model serving router

Docs: [Example of a simple model serving router](#)

```
# load the sklearn model serving function and add models to it
fn = mlrun.import_function('hub://v2_model_server')
fn.add_model("model1", model_path="s3://...")
fn.add_model("model2", model_path="store://...")

# deploy the function to the cluster
project.deploy_function(fn)

# test the live model endpoint
fn.invoke('/v2/models/model1/infer', body={"inputs": [5]})
```

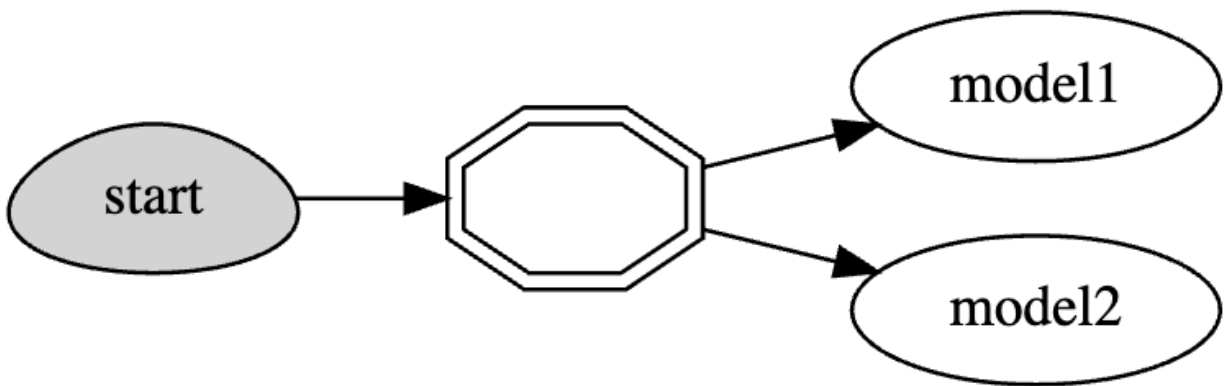

## Custom model serving class

Docs: [Model serving graph](#)

```
from cloudpickle import load
from typing import List
import numpy as np

import mlrun

class ClassifierModel(mlrun.serving.V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model(".pkl")
        self.model = load(open(model_file, "rb"))

    def predict(self, body: dict) -> List:
        """Generate model predictions from sample."""
        feats = np.asarray(body["inputs"])
        result: np.ndarray = self.model.predict(feats)
        return result.tolist()
```

## Advanced data processing and serving ensemble

Docs: [Advanced model serving graph - notebook example](#)

```
fn = project.set_function(
    name="advanced", func="demo.py",
    kind="serving", image="mlrun/mlrun"
)
graph = function.set_topology("flow", engine="async")

# use built-in storey class or our custom Echo class to create and link Task steps. Add
# an error
# handling step that runs only if the "Echo" step fails
graph.to("storey.Extend", name="enrich", _fn='({"tag": "something"})') \
    .to(class_name="Echo", name="pre-process", some_arg='abc').error_handler(name=
    'catcher', handler='handle_error', full_event=True)

# add an Ensemble router with two child models (routes), the "*" prefix marks it as
# router class
router = graph.add_step("*mlrun.serving.VotingEnsemble", name="ensemble", after="pre-
    process")
router.add_route("m1", class_name="ClassifierModel", model_path=path1)
router.add_route("m2", class_name="ClassifierModel", model_path=path2)

# add the final step (after the router), which handles post-processing and response to
# the client
graph.add_step(class_name="Echo", name="final", after="ensemble").respond()
```

### 3.10.13 Hyperparameter tuning

Docs: [Hyperparameter tuning optimization](#)

The following hyperparameter examples use this function:

```
# hp.py
def hyper_func(context, p1, p2):
    print(f"p1={p1}, p2={p2}, result={p1 * p2}")
    context.log_result("multiplier", p1 * p2)

# MLRun function in project
fn = project.set_function(
    name="hp",
    func="hp.py",
    image="mlrun/mlrun",
    kind="job",
    handler="hyper_func"
)
```

#### Note

The selector can be named any value that is logged - in this case multiplier

## Grid search (default)

Docs: [Grid Search](#)

Runs all parameter combinations

```
hp_tuning_run = project.run_function(
    "hp",
    hyperparams={"p1": [2,4,1], "p2": [10,20]},
    selector="max.multiplier"
)
```

## Random search

Docs: [Random Search](#)

Runs a random sample of parameter combinations

```
hp_tuning_run = project.run_function(
    "hp",
    hyperparams={"p1": [2, 4, 1], "p2": [10, 20]},
    selector="max.multiplier",
    hyper_param_options=mlrun.model.HyperParamOptions(
        strategy="random", max_iterations=5
    ),
)
```

## List search

Docs: [List Search](#)

Runs the first parameter from each list followed by the second from each list, etc. **All lists must be of equal size.**

```
hp_tuning_run = project.run_function(
    "hp",
    hyperparams={"p1": [2, 4, 1], "p2": [10, 20, 30]},
    selector="max.multiplier",
    hyper_param_options=mlrun.model.HyperParamOptions(strategy="list"),
)
```

## Parallel executors

Docs: [Parallel execution over containers](#)

## Dask

Docs: [Running the workers using Dask](#)

```
# Create Dask cluster
dask_cluster = mlrun.new_function("dask-cluster", kind="dask", image="mlrun/ml-base")
dask_cluster.apply(mlrun.mount_v3io()) # add volume mounts
dask_cluster.spec.service_type = "NodePort" # open interface to the dask UI dashboard
dask_cluster.spec.replicas = 2 # define two containers
uri = dask_cluster.save()

# Run parallel hyperparameter trials
hp_tuning_run_dask = project.run_function(
    "hp",
    hyperparams={"p1": [2, 4, 1], "p2": [10, 20, 30]},
    selector="max.multiplier",
    hyper_param_options=mlrun.model.HyperParamOptions(
        strategy="grid",
        parallel_runs=4,
        dask_cluster_uri=uri,
        teardown_dask=True,
    ),
)
```

## Nuclio

Docs: [Running the workers using Nuclio](#)

```
# Create nuclio:mlrun function
fn = project.set_function(
    name='hyper-tst2',
    func="hp.py",
    kind='nuclio:mlrun',
    image='mlrun/mlrun'
)
# (replicas * workers) must be equal to or greater than parallel_runs
fn.spec.replicas = 2
fn.with_http(workers=2)
fn.deploy()

# Run the parallel tasks over the function
hp_tuning_run_dask = project.run_function(
    "hyper-tst2",
    hyperparams={"p1": [2, 4, 1], "p2": [10, 20, 30]},
    selector="max.multiplier",
    hyper_param_options=mlrun.model.HyperParamOptions(
        strategy="grid",
        parallel_runs=4,
        max_errors=3
    ),
    handler="hyper_func"
)
```

## 3.11 Targeted tutorials

Each of the following tutorials is a dedicated Jupyter notebook. You can download them by clicking the download icon at the top of each page.

**Train, compare, and register Models** Demo of training ML models, hyper-parameters, track and compare experiments, register and use the models.

**Serving pre-trained ML/DL models** How to deploy real-time serving pipelines with MLRun Serving and different types of pre-trained ML/DL models.

**Projects & automated ML pipeline** How to work with projects, source control (git), CI/CD, to easily build and deploy multi-stage ML pipelines.

**Real-time monitoring & drift detection** Demonstrate MLRun Serving pipelines, MLRun model monitoring, and automated drift detection.

**Add MLOps to existing code** Turn a Kaggle research notebook to a production ML micro-service with minimal code changes using MLRun.

**Basic feature store example (stocks)** Understand MLRun feature store with a simple example: build, transform, and serve features in batch and in real-time.

**Batch inference and drift detection** Use MLRun batch inference function (from MLRun Function Hub), run it as a batch job, and generate drift reports.

**Advanced real-time pipeline** Demonstrates a multi-step online pipeline with data prep, ensemble, model serving, and post processing.

**Feature store end-to-end demo** Use the feature store with data ingestion, model training, model serving, and automated pipeline.

## 3.12 End to end demos

You can find the different end-to-end demos in the MLRun demos repository: [github.com/mlrun/demos](https://github.com/mlrun/demos).

## 3.13 Cheat sheet

If you already know the basics, use the [cheat sheet](#) as a guide to typical use cases and their flows/SDK.

## 3.14 Running the demos in Open Source MLRun

By default, these demos work with the online feature store, which is currently not part of the Open Source MLRun default deployment:

- fraud-prevention-feature-store
- network-operations
- azureml\_demo



## INSTALLATION AND SETUP GUIDE

This guide outlines the steps for installing and running MLRun.

MLRun has two main components, the service and the client (SDK and UI):

- MLRun service runs over Kubernetes (can also be deployed using local Docker for demo and test purposes). It can orchestrate and integrate with other open source frameworks, as shown in the following diagram.
- MLRun client SDK is installed in your development environment and interacts with the service using REST API calls.

This release of MLRun supports only Python 3.9 for both the server and the client.

### In this section

- *Deployment options*
- *Set up your client*
- *Security*

## 4.1 Deployment options

There are several deployment options:

- *Local deployment*: Deploy a Docker on your laptop or on a single server. This option is good for testing the waters or when working in a small scale environment. It's limited in terms of computing resources and scale, but simpler for deployment.
- *Kubernetes cluster*: Deploy an MLRun server on Kubernetes. This option deploys MLRun on a Kubernetes cluster, which supports elastic scaling. Yet, it is more complex to install as it requires you to install Kubernetes on your own.
- *Amazon Web Services (AWS)*: Deploy an MLRun server on AWS. This option is the easiest way to install MLRun cluster and use cloud-based services. The MLRun software is free of charge, however, there is a cost for the AWS infrastructure services.
- *Iguazio's Managed Service*: A commercial offering by Iguazio. This is the fastest way to explore the full set of MLRun functionalities. Note that Iguazio provides a 14 day free trial.

## 4.2 Set up your client

You can work with your favorite IDE (e.g. Pycharm, VScode, Jupyter, Colab, etc.). Read how to configure your client against the deployed MLRun server in *Set up your environment* .

Once you have installed and configured MLRun, follow the [Quick Start tutorial](#) and additional *Tutorials and Examples* to learn how to use MLRun to develop and deploy machine learning applications to production.

### 4.2.1 MLRun client backward compatibility

Starting from MLRun v1.3.0, the MLRun server is compatible with the client and images of the previous two minor MLRun releases. When you upgrade to v1.3.0, for example, you can continue to use your v1.1- and v1.2-based images, but v1.0-based images are not compatible.

---

**Important**

- Images from 0.9.0 are not compatible with 0.10.0. Backward compatibility starts from 0.10.0.
  - When you upgrade the MLRun major version, for example 0.10.x to 1.0.x, there is no backward compatibility.
  - The feature store is not backward compatible.
  - When you upgrade the platform, for example from 3.2 to 3.3, the clients should be upgraded. There is no guaranteed compatibility with an older MLRun client after a platform upgrade.
- 

See also *Images and their usage in MLRun*.

## 4.3 Security

### 4.3.1 Non-root user support

By default, MLRun assigns the root user to MLRun runtimes and pods. You can improve the security context by changing the security mode, which is implemented by Iguazio during installation, and applied system-wide:

- **Override:** Use the user id of the user that triggered the current run or use the nogroupid for group id. Requires Iguazio v3.5.1.
- **Disabled:** Security context is not auto applied (the system applies the root user). (default)

### 4.3.2 Security context

If your system is configured in disabled mode, you can apply the security context to individual runtimes/pods by using `function.with_security_context`, and the job is assigned to the user or to the user's group that ran the job. (You cannot override the user of individual jobs if the system is configured in override mode.) The options are:

```
from kubernetes import client as k8s_client

security_context = k8s_client.V1SecurityContext(
    run_as_user=1000,
    run_as_group=3000,
```

(continues on next page)

(continued from previous page)

```

    )
function.with_security_context(security_context)

```

See the [full definition of the V1SecurityContext object](#).

Some services do not support security context yet:

- Infrastructure services
  - KubeFlow pipelines core services
- Services created by MLRun
  - Kaniko, used for building images. (To avoid using Kaniko, use prebuilt images that contain all the requirements.)
  - Spark services

## Install MLRun locally using Docker

You can install and use MLRun and Nuclio locally on your computer. This does not include all the services and elastic scaling capabilities, which you can get with the Kubernetes based deployment, but it is much simpler to start with.

---

### Note

Using Docker is limited to local, Nuclio, serving runtimes, and local pipelines.

---

## Prerequisites

- Memory: 8GB
- Storage: 7GB

## Overview

Use `docker compose` to install MLRun. It deploys the MLRun service, MLRun UI, Nuclio serverless engine, and optionally the Jupyter server. The MLRun service, MLRun UI, Nuclio, and Jupyter, do not have default resources. This means that they are set with the default cluster/namespace resources limits. These can be modified.

There are two installation options:

- *Use MLRun with your own client (PyCharm, VSCode, Jupyter)*
- *Use MLRun with MLRun Jupyter image (pre loaded with examples/demos)*

In both cases you need to set the `SHARED_DIR` environment variable to point to a host path for storing MLRun artifacts and DB, for example `export SHARED_DIR=~/.mlrun-data` (or use `set SHARED_DIR=c:\mlrun-data` in windows). Make sure the directory exists.

You also need to set the `HOST_IP` variable with your computer IP address (required for Nuclio dashboard). You can select a specific MLRun version with the `TAG` variable and Nuclio version with the `NUCLIO_TAG` variable.

---

### Note

Support for running as a non-root user was added in 1.0.5, hence the underlying exposed port was changed. If you want to use previous mlrun versions, modify the mlrun-ui port from 8090 back to 80.

If you are running more than one instance of MLRun, change the exposed port.

---

**Watch the installation:**

### Use MLRun with your own client

The following commands install MLRun and Nuclio for work with your own IDE or notebook.

[[Download here](#)] the `compose.yaml` file, save it to the working dir and type:

### show the `compose.yaml` file

```
services:
  init_nuclio:
    image: alpine:3.18
    command:
      - "/bin/sh"
      - "-c"
      - |
        mkdir -p /etc/nuclio/config/platform; \
        cat << EOF | tee /etc/nuclio/config/platform/platform.yaml
    runtime:
      common:
        env:
          MLRUN_DBPATH: http://${HOST_IP:?err}:8080
    local:
      defaultFunctionContainerNetworkName: mlrun
      defaultFunctionRestartPolicy:
        name: always
        maxRetryCount: 0
      defaultFunctionVolumes:
        - volume:
            name: mlrun-stuff
            hostPath:
              path: ${SHARED_DIR:?err}
            volumeMount:
              name: mlrun-stuff
              mountPath: /home/jovyan/data/
    logger:
      sinks:
        myStdoutLoggerSink:
          kind: stdout
      system:
        - level: debug
          sink: myStdoutLoggerSink
      functions:
        - level: debug
          sink: myStdoutLoggerSink
    EOF
```

(continues on next page)

(continued from previous page)

```

volumes:
  - nuclio-platform-config:/etc/nuclio/config

mlrun-api:
  image: "mlrun/mlrun-api:${TAG:-1.6.2}"
  ports:
    - "8080:8080"
  environment:
    MLRUN_ARTIFACT_PATH: "${SHARED_DIR}/${project}"
    # using local storage, meaning files / artifacts are stored locally, so we want to
    ↪allow access to them
    MLRUN_HTTPDB_REAL_PATH: /data
    MLRUN_HTTPDB_DATA_VOLUME: "${SHARED_DIR}"
    MLRUN_LOG_LEVEL: DEBUG
    MLRUN_NUCLIO_DASHBOARD_URL: http://nuclio:8070
    MLRUN_HTTPDB_DSN: "sqlite:///data/mlrun.db?check_same_thread=false"
    MLRUN_UI_URL: http://localhost:8060
    # not running on k8s meaning no need to store secrets
    MLRUN_SECRET_STORES_KUBERNETES_AUTO_ADD_PROJECT_SECRETS: "false"
    # let mlrun control nuclio resources
    MLRUN_HTTPDB_PROJECTS_FOLLOWERS: "nuclio"
  volumes:
    - "${SHARED_DIR:?err}:/data"
  networks:
    - mlrun

mlrun-ui:
  image: "mlrun/mlrun-ui:${TAG:-1.6.2}"
  ports:
    - "8060:8090"
  environment:
    MLRUN_API_PROXY_URL: http://mlrun-api:8080
    MLRUN_NUCLIO_MODE: enable
    MLRUN_NUCLIO_API_URL: http://nuclio:8070
    MLRUN_NUCLIO_UI_URL: http://localhost:8070
  networks:
    - mlrun

nuclio:
  image: "quay.io/nuclio/dashboard:${NUCLIO_TAG:-stable-amd64}"
  ports:
    - "8070:8070"
  environment:
    NUCLIO_DASHBOARD_EXTERNAL_IP_ADDRESSES: "${HOST_IP:?err}"
  volumes:
    - /var/run/docker.sock:/var/run/docker.sock
    - nuclio-platform-config:/etc/nuclio/config
  depends_on:
    - init_nuclio
  networks:
    - mlrun

```

(continues on next page)

(continued from previous page)

```
volumes:
  nuclio-platform-config: {}

networks:
  mlrun:
    name: mlrun
```

## Linux/Mac

```
export HOST_IP=<your host IP address>
export SHARED_DIR=~/.mlrun-data
mkdir $SHARED_DIR -p
docker-compose -f compose.yaml up -d
```

Your HOST\_IP address can be found using the `ip addr` or `ifconfig` commands (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the bridge interface).

## Windows (cmd)

```
set HOST_IP=<your host IP address>
set SHARED_DIR=c:\mlrun-data
mkdir %SHARED_DIR%
docker-compose -f compose.yaml up -d
```

Your HOST\_IP address can be found using the `ipconfig` shell command (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the vEthernet interface).

## Powershell

```
$Env:HOST_IP=<your host IP address>
$Env:SHARED_DIR=~/.mlrun-data"
mkdir $Env:SHARED_DIR
docker-compose -f compose.yaml up -d
```

Your HOST\_IP address can be found using the `Get-NetIPConfiguration` cmdlet (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the vEthernet interface).

This creates 3 services:

- MLRun API (in <http://localhost:8080>)
- MLRun UI (in <http://localhost:8060>)
- Nuclio Dashboard/controller (in <http://localhost:8070>)

After installing MLRun service, set your client environment to work with the service, by setting the MLRun path env variable to `MLRUN_DBPATH=http://localhost:8080` or using `.env` files (see [setting client environment](#)).

## Use MLRun with MLRun Jupyter image

For the quickest experience with MLRun you can deploy MLRun with a pre-integrated Jupyter server loaded with various ready-to-use MLRun examples.

[[Download here](#)] the `compose.with-jupyter.yaml` file, save it to the working dir and type:

```
services:
  init_nuclio:
    image: alpine:3.18
    command:
      - "/bin/sh"
      - "-c"
      - |
        mkdir -p /etc/nuclio/config/platform; \
        cat << EOF | tee /etc/nuclio/config/platform/platform.yaml
    runtime:
      common:
        env:
          MLRUN_DBPATH: http://${HOST_IP:?err}:8080
    local:
      defaultFunctionContainerNetworkName: mlrun
      defaultFunctionRestartPolicy:
        name: always
        maxRetryCount: 0
      defaultFunctionVolumes:
        - volume:
            name: mlrun-stuff
            hostPath:
              path: ${SHARED_DIR:?err}
            volumeMount:
              name: mlrun-stuff
              mountPath: /home/jovyan/data/
    logger:
      sinks:
        myStdoutLoggerSink:
          kind: stdout
      system:
        - level: debug
          sink: myStdoutLoggerSink
      functions:
        - level: debug
          sink: myStdoutLoggerSink
    EOF
  volumes:
    - nuclio-platform-config:/etc/nuclio/config

  jupyter:
    image: "mlrun/jupyter:${TAG:-1.6.2}"
    ports:
      - "8080:8080"
      - "8888:8888"
    environment:
      MLRUN_ARTIFACT_PATH: "/home/jovyan/data/{{project}}"
```

(continues on next page)

(continued from previous page)

```

MLRUN_LOG_LEVEL: DEBUG
MLRUN_NUCLIO_DASHBOARD_URL: http://nuclio:8070
MLRUN_HTTPDB_DSN: "sqlite:///home/jovyan/data/mlrun.db?check_same_thread=false"
MLRUN_UI_URL: http://localhost:8060
# using local storage, meaning files / artifacts are stored locally, so we want to
↪allow access to them
MLRUN_HTTPDB_REAL_PATH: "/home/jovyan/data"
# not running on k8s meaning no need to store secrets
MLRUN_SECRET_STORES_KUBERNETES_AUTO_ADD_PROJECT_SECRETS: "false"
# let mlrun control nuclio resources
MLRUN_HTTPDB_PROJECTS_FOLLOWERS: "nuclio"
volumes:
- "${SHARED_DIR:?err}:/home/jovyan/data"
networks:
- mlrun

mlrun-ui:
image: "mlrun/mlrun-ui:${TAG:-1.6.2}"
ports:
- "8060:8090"
environment:
MLRUN_API_PROXY_URL: http://jupyter:8080
MLRUN_NUCLIO_MODE: enable
MLRUN_NUCLIO_API_URL: http://nuclio:8070
MLRUN_NUCLIO_UI_URL: http://localhost:8070
networks:
- mlrun

nuclio:
image: "quay.io/nuclio/dashboard:${NUCLIO_TAG:-stable-amd64}"
ports:
- "8070:8070"
environment:
NUCLIO_DASHBOARD_EXTERNAL_IP_ADDRESSES: "${HOST_IP:?err}"
volumes:
- /var/run/docker.sock:/var/run/docker.sock
- nuclio-platform-config:/etc/nuclio/config
depends_on:
- init_nuclio
networks:
- mlrun

volumes:
nuclio-platform-config: {}

networks:
mlrun:
name: mlrun

```

## Linux/Mac

```
export HOST_IP=<your host IP address>
export SHARED_DIR=~/.mlrun-data
mkdir -p $SHARED_DIR
docker-compose -f compose.with-jupyter.yaml up -d
```

Your HOST\_IP address can be found using the `ip addr` or `ifconfig` commands (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the bridge interface).

## Windows (cmd)

```
set HOST_IP=<your host IP address>
set SHARED_DIR=c:\mlrun-data
mkdir %SHARED_DIR%
docker-compose -f compose.with-jupyter.yaml up -d
```

Your HOST\_IP address can be found using the `ipconfig` shell command (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the vEthernet interface).

## Powershell

```
$Env:HOST_IP=<your host IP address>
$Env:SHARED_DIR="~/.mlrun-data"
mkdir $Env:SHARED_DIR
docker-compose -f compose.with-jupyter.yaml up -d
```

Your HOST\_IP address can be found using the `Get-NetIPConfiguration` cmdlet (do not use `localhost` or `127.0.0.1`). It is recommended to select an address that does not change dynamically (for example the IP of the vEthernet interface).

This creates 4 services:

- Jupyter lab (in <http://localhost:8888>)
- MLRun API (in <http://localhost:8080>), running on the Jupyter container
- MLRun UI (in <http://localhost:8060>)
- Nuclio Dashboard/controller (in <http://localhost:8070>)

After the installation, access the Jupyter server (in <http://localhost:8888>) and run through the [quick-start tutorial](#) and demos. You can see the projects, tasks, and artifacts in MLRun UI (in <http://localhost:8060>).

The Jupyter environment is pre-configured to work with the local MLRun and Nuclio services. You can switch to a remote or managed MLRun cluster by editing the `mlrun.env` file in the Jupyter files tree.

The artifacts and DB are stored under `/home/jovyan/data` (`/data` in Jupyter tree).

## Install MLRun on Kubernetes

---

### Note

These instructions install the community edition, which currently includes MLRun v1.4.0. See the [release documentation](#).

---

### In this section

- *Prerequisites*
- *Community Edition flavors*
- *Installing the chart*
- *Configuring the online features store*
- *Usage*
- *Start working*
- *Configuring the remote environment*
- *Advanced chart configuration*
- *Storage resources*
- *Uninstalling the chart*
- *Upgrading the chart*
- *Storing artifacts in AWS S3 storage*

### Prerequisites

- Access to a Kubernetes cluster. To install MLRun on your cluster, you must have administrator permissions. MLRun fully supports k8s releases 1.22, 1.23, and 1.26. For local installation on Windows or Mac, [Docker Desktop](#) is recommended.
- The Kubernetes command-line tool (kubectl) compatible with your Kubernetes cluster is installed. Refer to the [kubectl installation instructions](#) for more information.
- Helm 3.6 CLI is installed. Refer to the [Helm installation instructions](#) for more information.
- An accessible docker-registry (such as [Docker Hub](#)). The registry's URL and credentials are consumed by the applications via a pre-created secret.
- Storage:
  - 8Gi
  - Set a default storage class for the kubernetes cluster, in order for the pods to have persistent storage. See the [Kubernetes documentation](#) for more information.
- RAM: A minimum of 8Gi is required for running all the initial MLRun components. The amount of RAM required for running MLRun jobs depends on the job's requirements.

---

### Note

The MLRun Community Edition resources are configured initially with the default cluster/namespace resource limits. You can modify the resources from outside if needed.

## Community Edition flavors

The MLRun CE (Community Edition) includes the following components:

- MLRun - <https://github.com/mlrun/mlrun>
  - MLRun API
  - MLRun UI
  - MLRun DB (MySQL)
- Nuclio - <https://github.com/nuclio/nuclio>
- Jupyter - <https://github.com/jupyter/notebook> (+MLRun integrated)
- MPI Operator - <https://github.com/kubeflow/mpi-operator>
- Minio - <https://github.com/minio/minio/tree/master/helm/minio>
- Spark Operator - <https://github.com/GoogleCloudPlatform/spark-on-k8s-operator>
- Pipelines - <https://github.com/kubeflow/pipelines>
- Prometheus stack - <https://github.com/prometheus-community/helm-charts>
  - Prometheus
  - Grafana

## Installing the chart

### Note

These instructions use `mlrun` as the namespace (`-n` parameter). You can choose a different namespace in your kubernetes cluster.

Create a namespace for the deployed components:

```
kubectl create namespace mlrun
```

Add the Community Edition helm chart repo:

```
helm repo add mlrun-ce https://mlrun.github.io/ce
```

Run the following command to ensure that the repo is installed and available:

```
helm repo list
```

It should output something like:

NAME	URL
mlrun-ce	<a href="https://github.com/mlrun/ce">https://github.com/mlrun/ce</a>

Update the repo to make sure you're getting the latest chart:

```
helm repo update
```

Create a secret with your docker-registry named `registry-credentials`:

```
kubectl --namespace mlrun create secret docker-registry registry-credentials \
  --docker-server <your-registry-server> \
  --docker-username <your-username> \
  --docker-password <your-password> \
  --docker-email <your-email>
```

**Note:** If using docker hub, the registry server is <https://registry.hub.docker.com/>. Refer to the [Docker ID documentation](#) for creating a user with login to configure in the secret.

Where:

- `<your-registry-server>` is your Private Docker Registry FQDN. (<https://index.docker.io/v1/> for Docker Hub).
- `<your-username>` is your Docker username.
- `<your-password>` is your Docker password.
- `<your-email>` is your Docker email.

---

### Note

First-time MLRun users experience a relatively longer installation time because all required images are pulled locally for the first time (it takes an average of 10-15 minutes, mostly depending on your internet speed).

---

To install the chart with the release name `mlrun-ce` use the following command. Note the reference to the pre-created `registry-credentials` secret in `global.registry.secretName`:

```
helm --namespace mlrun \
  install mlrun-ce \
  --wait \
  --timeout 960s \
  --set global.registry.url=<registry-url> \
  --set global.registry.secretName=registry-credentials \
  --set global.externalHostAddress=<host-machine-address> \
  mlrun-ce/mlrun-ce
```

Where:

- `<registry-url>` is the registry URL that can be authenticated by the `registry-credentials` secret (e.g., [index.docker.io/<your-username>](https://index.docker.io/v1/) for Docker Hub).
- `<host-machine-address>` is the IP address of the host machine (or `$(minikube ip)` if using minikube).

When the installation is complete, the helm command prints the URLs and ports of all the MLRun CE services.

**Note:** There is currently a known issue with installing the chart on Macs using Apple silicon (M1/M2). The current pipelines mysql database fails to start. The workaround for now is to opt out of pipelines by installing the chart with the `--set pipelines.enabled=false`.

## Configuring the online feature store

The MLRun Community Edition now supports the online feature store. To enable it, you need to first deploy a Redis service that is accessible to your MLRun CE cluster. To deploy a Redis service, refer to the [Redis documentation](#).

When you have a Redis service deployed, you can configure MLRun CE to use it by adding the following helm value configuration to your helm install command:

```
--set mlrun.api.extraEnvKeyValue.MLRUN_REDIS__URL=<redis-address>
```

## Usage

Your applications are now available in your local browser:

- Jupyter Notebook - <http://<host-machine-address>:30040>
- Nuclio - <http://<host-machine-address>:30050>
- MLRun UI - <http://<host-machine-address>:30060>
- MLRun API (external) - <http://<host-machine-address>:30070>
- MinIO API - <http://<host-machine-address>:30080>
- MinIO UI - <http://<host-machine-address>:30090>
- Pipeline UI - <http://<host-machine-address>:30100>
- Grafana UI - <http://<host-machine-address>:30110>

## Check state

You can check the current state of the installation via the command `kubectl -n mlrun get pods`, where the main information is in columns `Ready` and `State`. If all images have already been pulled locally, typically it takes a minute for all services to start.

## Note

You can change the ports by providing values to the helm install command. You can add and configure a Kubernetes ingress-controller for better security and control over external access.

## Start working

Open the Jupyter notebook on [jupyter-notebook UI](#) and run the code in the [examples/mlrun\\_basics.ipynb](#) notebook.

## Important

Make sure to save your changes in the `data` folder within the Jupyter Lab. The root folder and any other folders do not retain the changes when you restart the Jupyter Lab.

## Configuring the remote environment

You can use your code on a local machine while running your functions on a remote cluster. Refer to [Set up your environment](#) for more information.

## Advanced chart configuration

Configurable values are documented in the `values.yaml`, and the `values.yaml` of all sub charts. Override those in the [normal methods](#).

## Opt out of components

The chart installs many components. You may not need them all in your deployment depending on your use cases. To opt out of some of the components, use the following helm values:

```
...
--set pipelines.enabled=false \
--set kube-prometheus-stack.enabled=false \
--set sparkOperator.enabled=false \
...
```

## Installing on Docker Desktop

If you are using Docker Desktop, you can install MLRun CE on your local machine. Docker Desktop is available for Mac and Windows. For download information, system requirements, and installation instructions, see:

- [Install Docker Desktop on Mac](#)
- [Install Docker Desktop on Windows](#). Note that WSL 2 backend was tested, Hyper-V was not tested.

## Configuring Docker Desktop

Docker Desktop includes a standalone Kubernetes server and client, as well as Docker CLI integration that runs on your machine. The Kubernetes server runs locally within your Docker instance. To enable Kubernetes support and install a standalone instance of Kubernetes running as a Docker container, go to **Preferences > Kubernetes** and then press **Enable Kubernetes**. Press **Apply & Restart** to save the settings and then press **Install** to confirm. This instantiates the images that are required to run the Kubernetes server as containers, and installs the `/usr/local/bin/kubectl` command on your machine. For more information, see [the Kubernetes documentation](#).

It's recommended to limit the amount of memory allocated to Kubernetes. If you're using Windows and WSL 2, you can configure global WSL options by placing a `.wslconfig` file into the root directory of your users folder: `C:\Users\<yourUserName>\.wslconfig`. Keep in mind that you might need to run `wsl --shutdown` to shut down the WSL 2 VM and then restart your WSL instance for these changes to take effect.

```
[wsl2]
memory=8GB # Limits VM memory in WSL 2 to 8 GB
```

To learn about the various UI options and their usage, see:

- [Docker Desktop for Mac user manual](#)
- [Docker Desktop for Windows user manual](#)

## Storage resources

When installing the MLRun Community Edition, several storage resources are created:

- **PVs via default configured storage class:** Holds the file system of the stacks pods, including the MySQL database of MLRun, Minio for artifacts and Pipelines Storage and more. These are not deleted when the stack is uninstalled, which allows upgrading without losing data.
- **Container Images in the configured docker-registry:** When building and deploying MLRun and Nuclio functions via the MLRun Community Edition, the function images are stored in the given configured docker registry. These images persist in the docker registry and are not deleted.

## Uninstalling the chart

The following command deletes the pods, deployments, config maps, services and roles+role bindings associated with the chart and release.

```
helm --namespace mlrun uninstall mlrun-ce
```

## Notes on dangling resources

- The created CRDs are not deleted by default and should be manually cleaned up.
- The created PVs and PVCs are not deleted by default and should be manually cleaned up.
- As stated above, the images in the docker registry are not deleted either and should be cleaned up manually.
- If you installed the chart in its own namespace, it's also possible to delete the entire namespace to clean up all resources (apart from the docker registry images).

## Note on terminating pods and hanging resources

This chart generates several persistent volume claims that provide persistency (via PVC) out of the box. Upon uninstallation, any hanging / terminating pods hold the PVCs and PVs respectively, as those prevent their safe removal. Since pods that are stuck in terminating state seem to be a never-ending plague in Kubernetes, note this, and remember to clean the remaining PVs and PVCs.

## Handling stuck-at-terminating pods:

```
kubect1 --namespace mlrun delete pod --force --grace-period=0 <pod-name>
```

## Reclaim dangling persistency resources:

---

### WARNING

**This will result in data loss!**

---

```
# To list PVCs
$ kubectl --namespace mlrun get pvc
...

# To remove a PVC
$ kubectl --namespace mlrun delete pvc <pvc-name>
...

# To list PVs
$ kubectl --namespace mlrun get pv
...

# To remove a PVC
$ kubectl --namespace mlrun delete pvc <pv-name>
...
```

## Upgrading the chart

To upgrade to the latest version of the chart, first make sure you have the latest helm repo

```
helm repo update
```

Then try to upgrade the chart:

```
helm upgrade --install --reuse-values mlrun-ce -namespace mlrun mlrun-ce/mlrun-ce
```

If it fails, you should reinstall the chart:

1. remove current mlrun-ce

```
mkdir ~/tmp
helm get values -n mlrun mlrun-ce > ~/tmp/mlrun-ce-values.yaml
helm uninstall mlrun-ce
```

2. reinstall mlrun-ce, reuse values

```
helm install -n mlrun --values ~/tmp/mlrun-ce-values.yaml mlrun-ce mlrun-ce/mlrun-ce --
↪devel
```

---

### Note

If your values have fixed mlrun service versions (e.g.: mlrun:1.3.0) then you might want to remove it from the values file to allow newer chart defaults to kick in

---

## Storing artifacts in AWS S3 storage

MLRun CE uses a Minio service as shared storage for artifacts, and accesses it using S3 protocol. This means that any path that begins with `s3://` is automatically directed by MLRun to the Minio service. The default artifact path is also configured as `s3://mlrun/projects/{{run.project}}/artifacts` which is a path on the `mlrun` bucket in the Minio service.

To store artifacts in AWS S3 buckets instead of the local Minio service, these configurations need to be overridden to make `s3://` paths lead to AWS buckets instead.

### Note

These configurations are only required for AWS S3 storage, due to the usage of the same S3 protocol in Minio. For other storage options (such as GCS, Azure blobs etc.) only the artifact path needs to be modified, and credentials need to be provided.

## Setting up S3 credentials and endpoint

Set up the following project-secrets (refer to [Data stores](#) and [Project secrets](#)) for any project used:

- `AWS_ACCESS_KEY_ID`, `AWS_SECRET_ACCESS_KEY` — S3 credentials
- `S3_ENDPOINT_URL` — the AWS S3 endpoint to use, depending on the region. For example:

```
S3_ENDPOINT_URL = https://s3.us-east-2.amazonaws.com/
```

## Disabling auto-mount

Before running any MLRun job that writes to S3 bucket, make sure auto-mount is disabled for it, since by default auto-mount adds S3 configurations that point at the Minio service (refer to [Function storage](#) for more details on auto-mount). This can be done in one of following ways:

- Set the client-side MLRun configuration to disable auto-mount. This disables auto-mount for any function run after this command:

```
from mlrun.config import config as mlconf
mlconf.storage.auto_mount_type = "none"
```

- If running MLRun from an IDE, the configuration can be overridden using an environment variable. Set the following environment variable for your IDE environment:

```
MLRUN_STORAGE__AUTO_MOUNT_TYPE = "none"
```

- Disable auto-mount for a specific function. This must be done before running the function for the first time:

```
function.spec.disable_auto_mount = True
```

## Changing the artifact path

The artifact path needs to be modified since the bucket name is set to `mlrun` by default. It is recommended to keep the same path structure as the default, while modifying the bucket name. For example:

```
s3://<bucket name>/projects/{{run.project}}/artifacts
```

The artifact path can be set in several ways, refer to [Artifact path](#) for more details.

---

### Note

If your values have fixed mlrun service versions (e.g.: `mlrun:1.5.0`) then you might want to remove it from the values file to allow newer chart defaults to kick in.

---

## Install MLRun on AWS

For AWS users, the easiest way to install MLRun is to use a native AWS deployment. This option deploys MLRun on an AWS EKS service using a CloudFormation stack.

---

### Note

These instructions install the community edition, which currently includes MLRun v1.4.0. See the [release documentation](#).

---

### In this section

- *Prerequisites*
- *Post deployment expectations*
- *Configuration settings*
- *Getting started*
- *Storage resources*
- *Configuring the online features store*
- *Streaming support*
- *Cleanup*

## Prerequisites

1. An AWS account with permissions that include the ability to:

- Run a CloudFormation stack
- Create an EKS cluster
- Create EC2 instances
- Create VPC
- Create S3 buckets
- Deploy and pull images from ECR

For the full set of required permissions, **download the IAM policy** or expand & copy the IAM policy below:

#### show the IAM policy

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "BasicServices",
      "Effect": "Allow",
      "Action": [
        "autoscaling:*",
        "cloudwatch:*",
        "elasticloadbalancing:*",
        "sns:*",
        "ec2:*",
        "s3:*",
        "s3-object-lambda:*",
        "eks:*",
        "elasticfilesystem:*",
        "cloudformation:*",
        "acm:*",
        "route53:*"
      ],
      "Resource": "*"
    },
    {
      "Sid": "ServiceLinkedRoles",
      "Effect": "Allow",
      "Action": "iam:CreateServiceLinkedRole",
      "Resource": "*",
      "Condition": {
        "StringEquals": {
          "iam:AWSServiceName": [
            "autoscaling.amazonaws.com",
            "ec2scheduled.amazonaws.com",
            "elasticloadbalancing.amazonaws.com",
            "spot.amazonaws.com",
            "spotfleet.amazonaws.com",
            "transitgateway.amazonaws.com"
          ]
        }
      }
    },
    {
      "Sid": "IAMPermissions",
      "Effect": "Allow",
      "Action": [
        "iam:AddRoleToInstanceProfile",
        "iam:AttachRolePolicy",
        "iam:TagOpenIDConnectProvider",
        "iam:CreateInstanceProfile",
```

(continues on next page)

(continued from previous page)

```
"iam:CreateOpenIDConnectProvider",
"iam:CreateRole",
"iam:CreateServiceLinkedRole",
"iam:DeleteInstanceProfile",
"iam:DeleteOpenIDConnectProvider",
"iam:DeleteRole",
"iam:DeleteRolePolicy",
"iam:DetachRolePolicy",
"iam:GenerateServiceLastAccessedDetails",
"iam:GetAccessKeyLastUsed",
"iam:GetAccountPasswordPolicy",
"iam:GetAccountSummary",
"iam:GetGroup",
"iam:GetInstanceProfile",
"iam:GetLoginProfile",
"iam:GetOpenIDConnectProvider",
"iam:GetPolicy",
"iam:GetPolicyVersion",
"iam:GetRole",
"iam:GetRolePolicy",
"iam:GetServiceLastAccessedDetails",
"iam:GetUser",
"iam:ListAccessKeys",
"iam:ListAccountAliases",
"iam:ListAttachedGroupPolicies",
"iam:ListAttachedRolePolicies",
"iam:ListAttachedUserPolicies",
"iam:ListGroupPolicies",
"iam:ListGroups",
"iam:ListGroupsForUser",
"iam:ListInstanceProfilesForRole",
"iam:ListMFADevices",
"iam:ListOpenIDConnectProviders",
"iam:ListPolicies",
"iam:ListPoliciesGrantingServiceAccess",
"iam:ListRolePolicies",
"iam:ListRoles",
"iam:ListRoleTags",
"iam:ListSAMLProviders",
"iam:ListSigningCertificates",
"iam:ListUserPolicies",
"iam:ListUsers",
"iam:ListUserTags",
"iam:PassRole",
"iam:PutRolePolicy",
"iam:RemoveRoleFromInstanceProfile",
"kms:CreateGrant",
"kms:CreateKey",
"kms:Decrypt",
"kms:DescribeKey",
"kms:Encrypt",
"kms:GenerateDataKeyWithoutPlaintext",
```

(continues on next page)

(continued from previous page)

```

        "kms:GetKeyPolicy",
        "kms:GetKeyRotationStatus",
        "kms:ListResourceTags",
        "kms:PutKeyPolicy",
        "kms:ScheduleKeyDeletion",
        "kms:TagResource"
    ],
    "Resource": "*"
},
{
    "Sid": "AllowLanbda",
    "Effect": "Allow",
    "Action": [
        "lambda:CreateAlias",
        "lambda:CreateCodeSigningConfig",
        "lambda:CreateEventSourceMapping",
        "lambda:CreateFunction",
        "lambda:CreateFunctionUrlConfig",
        "lambda:Delete*",
        "lambda:Get*",
        "lambda:InvokeAsync",
        "lambda:InvokeFunction",
        "lambda:InvokeFunctionUrl",
        "lambda:List*",
        "lambda:PublishLayerVersion",
        "lambda:PublishVersion",
        "lambda:PutFunctionCodeSigningConfig",
        "lambda:PutFunctionConcurrency",
        "lambda:PutFunctionEventInvokeConfig",
        "lambda:PutProvisionedConcurrencyConfig",
        "lambda:TagResource",
        "lambda:UntagResource",
        "lambda:UpdateAlias",
        "lambda:UpdateCodeSigningConfig",
        "lambda:UpdateEventSourceMapping",
        "lambda:UpdateFunctionCode",
        "lambda:UpdateFunctionCodeSigningConfig",
        "lambda:UpdateFunctionConfiguration",
        "lambda:UpdateFunctionEventInvokeConfig",
        "lambda:UpdateFunctionUrlConfig"
    ],
    "Resource": "*"
},
{
    "Sid": "CertificateService",
    "Effect": "Allow",
    "Action": "iam:CreateServiceLinkedRole",
    "Resource": "arn:aws:iam::*:role/aws-service-role/acm.amazonaws.com/
↪AWSServiceRoleForCertificateManager*",
    "Condition": {
        "StringEquals": {
            "iam:AWSServiceName": "acm.amazonaws.com"
        }
    }
}

```

(continues on next page)

(continued from previous page)

```

    }
  },
  {
    "Sid": "DeleteRole",
    "Effect": "Allow",
    "Action": [
      "iam:DeleteServiceLinkedRole",
      "iam:GetServiceLinkedRoleDeletionStatus",
      "iam:GetRole"
    ],
    "Resource": "arn:aws:iam::*:role/aws-service-role/acm.amazonaws.com/
↪AWSServiceRoleForCertificateManager*"
  },
  {
    "Sid": "SSM",
    "Effect": "Allow",
    "Action": [
      "logs:*",
      "ssm:AddTagsToResource",
      "ssm:GetParameter",
      "ssm:DeleteParameter",
      "ssm:PutParameter",
      "cloudtrail:GetTrail",
      "cloudtrail:ListTrails"
    ],
    "Resource": "*"
  }
]
}

```

For more information, see [how to create a new AWS account and policies and permissions in IAM](#).

2. A Route53 domain configured in the same AWS account, and with the full domain name specified in **Route 53 hosted DNS domain** configuration (See *Step 11* below). External domain registration is currently not supported. For more information see [What is Amazon Route 53?](#).

---

## Notes

The MLRun software is free of charge, however, there is a cost for the AWS infrastructure services such as EKS, EC2, S3 and ECR. The actual pricing depends on a large set of factors including, for example, the region, the number of EC2 instances, the amount of storage consumed, and the data transfer costs. Other factors include, for example, reserved instance configuration, saving plan, and AWS credits you have associated with your account. It is recommended to use the [AWS pricing calculator](#) to calculate the expected cost, as well as the [AWS Cost Explorer](#) to manage the cost, monitor, and set-up alerts.

---

## Post deployment expectations

The key components deployed on your EKS cluster are:

- MLRun server (including the feature store and the MLRun graph)
- MLRun UI
- Kubeflow pipeline
- Real time serverless framework (Nuclio)
- Spark operator
- Jupyter lab
- Grafana

## Configuration settings

Make sure you are logged in to the correct AWS account.

**Click the button below to deploy MLRun.**



After clicking the icon, the browser directs you to the CloudFormation stack page in your AWS account, or redirects you to the AWS login page if you are not currently logged in.

---

### Note

You must fill in fields marked as mandatory (m) for the configuration to complete. Fields marked as optional (o) can be left blank.

---

1. **Stack name** (m) — the name of the stack. You cannot continue if left blank. This field becomes the logical id of the stack. Stack name can include letters (A-Z and a-z), numbers (0-9), and dashes (-). For example: "John-1".

### Parameters

2. **EKS cluster name** (m) — the name of EKS cluster created. The EKS cluster is used to run the MLRun services. For example: "John-1".

### VPC network Configuration

3. **Number of Availability Zones** (m) — The default is set to 3. Choose from the dropdown to change the number. The minimum is 2.
4. **Availability zones** (m) — select a zone from the dropdown. The list is based on the region of the instance. The number of zones must match the number of zones Number of Availability Zones.
5. **Allowed external access CIDR** (m) — range of IP addresses allowed to access the cluster. Addresses that are not in this range are not able to access the cluster. Contact your IT manager/network administrator if you are not sure what to fill in here.

### Amazon EKS configuration

6. **Additional EKS admin ARN (IAM user)** (o) — add an additional admin user to the instance. Users can be added after the stack has been created. For more information see [Create a kubeconfig for Amazon EKS](#).
7. **Instance type** (m) — select from the dropdown list. The default is m5.4xlarge. For size considerations see [Amazon EC2 Instance Types](#).

8. **Maximum Number of Nodes** (m) — maximum number of nodes in the cluster. The number of nodes combined with the **Instance type** determines the AWS infrastructure cost.

#### Amazon EC2 configuration

9. **SSH key name** (o) — To access the EC2 instance via SSH, enter an existing key. If left empty, it is possible to access the EC2 instance using the AWS Systems Manager Session Manager. For more information about SSH Keys see [Amazon EC2 key pairs and Linux instances](#).
10. **Provision bastion host** (m) — create a bastion host for SSH access to the Kubernetes nodes. The default is enabled. This allows SSH access to your EKS EC2 instances through a public IP.

#### Iguazio MLRun configuration

11. **Route 53 hosted DNS domain** (m) — Enter the name of your registered Route53 domain. **Only route53 domains are acceptable.**
12. **The URL of your REDIS database** (o) — This is only required if you're using Redis with the online feature store. See *how to configure the online feature store* for more details.

#### Other parameters

13. **MLRun CE Helm Chart version** (m) — the MLRun Community Edition version to install. Leave the default value for the latest CE release.

#### Capabilities

14. Check all the capabilities boxes (m).

Press **Create Stack** to continue the deployment. The stack creates a VPC with an EKS cluster and deploys all the services on top of it.

---

#### Note

It could take up to 2 hours for your stack to be created.

---

## Getting started

When the stack is complete, go to the **output** tab for the stack you created. There are links for the MLRun UI, Jupyter, and the Kubeconfig command.

It's recommended to go through the quick-start and the other tutorials in the [documentation](#). These tutorials and demos come built-in with Jupyter under the root folder of Jupyter.

## Storage resources

When installing the MLRun Community Edition via Cloud Formation, several storage resources are created:

- **PVs via AWS storage provider:** Used to hold the file system of the stacks pods, including the MySQL database of MLRun. These are deleted when the stack is uninstalled.
- **S3 Bucket:** A bucket named `<EKS cluster name>-<Random string>` is created in the AWS account that installs the stack (where `<EKS cluster name>` is the name of the EKS cluster you chose and `<Random string>` is part of the CloudFormation stack ID). You can see the bucket name in the output tab of the stack. The bucket is used for MLRun's artifact storage, and is not deleted when uninstalling the stack. The user must empty the bucket and delete it.

- **Container Images in ECR:** When building and deploying MLRun and Nuclio functions via the MLRun Community Edition, the function images are stored in an ECR belonging to the AWS account that installs the stack. These images persist in the account's ECR and are not deleted either.

## Configuring the online feature store

The feature store can store data on a fast key-value database table for quick serving. This online feature store capability requires an external key-value database.

Currently the MLRun feature store supports the following options:

- Redis
- Iguazio key-value database

To use Redis, you must install Redis separately and provide the Redis URL when configuring the AWS CloudFormation stack. Refer to the [Redis getting-started page](#) for information about Redis installation.

## Streaming support

For online serving, it is often convenient to use MLRun graph with a streaming engine. This allows managing queues between steps and functions. MLRun supports Kafka streams as well as Iguazio V3IO streams. See the examples on how to configure the MLRun serving graph with [Kafka](#) and [V3IO](#).

## Cleanup

To free up the resources used by MLRun:

- Delete the stack. See [instructions for deleting a stack on the AWS CloudFormation console](#) for more details.
- Delete the S3 bucket that begins with the same name as your EKS cluster. The S3 bucket name is available in the CloudFormation stack output tab.
- Delete any remaining images in ECR.

You may also need to check any external storage that you used.

## Set up your environment

You can write your code on a local machine while running your functions on a remote cluster. This tutorial explains how to set this up.

This release of MLRun supports only Python 3.9 for both the server and the client.

### In this section

- *Prerequisites*
- *Set up a Python 3.9 client environment*
- *Configure remote environment*
  - *Using `mlrun config set` command in MLRun CLI*
  - *Using `mlrun.set_environment` command in MLRun SDK*
  - *Using your IDE (e.g. PyCharm or VSCode)*
- *Setting up a dark site*

## Prerequisites

Before you begin, ensure that the following prerequisites are met:

Applications:

- Python 3.9
- Recommended pip 22.x+

The MLRun server is based on a Python 3.9 environment. It's recommended to move the client to a Python 3.9 environment as well.

For a Python 3.7 environment for platform versions up to and including v3.5.2, see [Set up a Python 3.7 client environment](#).

## MLRun client supported OS

The MLRun client supports:

- Linux
- Mac
- Windows via WSL

## Set up a Python 3.9 client environment

1. **Basic** Run `pip install mlrun` This installs MLRun locally with the requirements in the [requirements.txt](#).

---

### Note

To install a specific version, use the command: `pip install mlrun==<version>`. Replace the `<version>` placeholder with the MLRun version number.

---

### 2. Advanced

- If you expect to connect to, or work with, cloud providers (Azure/Google Cloud/S3), you can install additional packages. This is not part of the regular requirements since not all users work with those platforms. Using this option reduces the dependencies and the size of the installation. The additional packages include:
  - `pip install mlrun[s3]` Install requirements for S3
  - `pip install mlrun[azure-blob-storage]` Install requirements for Azure blob storage
  - `pip install mlrun[google-cloud-storage]` Install requirements for Google cloud storage
- To install all extras, run: `pip install mlrun[complete]` See the full list [here](#).

3. Alternatively, if you already installed a previous version of MLRun, upgrade it by running:

```
pip install -U mlrun==<version>
```

4. Ensure that you have remote access to your MLRun service (i.e., to the service URL on the remote Kubernetes cluster).

- When installing other python packages on top of MLRun, make sure to install them with mlrun in the same command/requirement file to avoid version conflicts. For example:

```
pip install mlrun <other-package>
```

or

```
pip install -r requirements.txt
```

where requirements.txt contains:

```
mlrun
<other-package>
```

Do so even if you already have MLRun installed so that pip will take MLRun requirements into consideration when installing the other package.

## Configure remote environment

You have a few options to configure your remote environment:

- Using `mlrun config set` command in *MLRun CLI*
- Using `mlrun.set_environment` command in *MLRun SDK*
- Using your *IDE* (e.g *PyCharm* or *VSCode*)

### Using `mlrun config set` command in *MLRun CLI*

**Example 1** Run this command in *MLRun CLI*:

```
mlrun config set -a http://localhost:8080
```

It creates the following environment file:

```
# this is an env file
MLRUN_DBPATH=http://localhost:8080
```

MLRUN\_DBPATH saves the URL endpoint of the MLRun APIs service endpoint. Since it is localhost, username and access\_key are not required (as in Example2)

**Example 2 Note:** Only relevant if your remote service is on an instance of the Iguazio MLOps Platform (**not MLRun CE**). Run this command in *MLRun CLI*:

```
mlrun config set -a https://mlrun-api.default-tenant.app.xxx.iguazio-cd1.com -u joe -k_
↵mykey -e
```

It creates the following environment file:

```
# this is another env file
V3IO_USERNAME=joe
V3IO_ACCESS_KEY=mykey
MLRUN_DBPATH=https://mlrun-api.default-tenant.app.xxx.iguazio-cd1.com
```

V3IO\_USERNAME saves the username of a platform user with access to the MLRun service. V3IO\_ACCESS\_KEY saves the platform access key.

You can get the platform access key from the platform dashboard: select the user-profile picture or icon from the top right corner of any page, and select **Access Keys** from the menu. In the **Access Keys** window, either copy an existing access key or create a new key and copy it. Alternatively, you can get the access key by checking the value of the V3IO\_ACCESS\_KEY environment variable in a web shell or Jupyter Notebook service.

---

**Note**

If the MLRUN\_DBPATH points to a remote iguazio cluster and the V3IO\_API and/or V3IO\_FRAMESD vars are not set, they are inferred from the DBPATH.

---

**Explanation:**

The `mlrun config set` command sets configuration parameters in mlrun default or the specified environment file. By default, it stores all of the configuration into the default environment file, and your own environment file does not need editing. The default environment file is created by default at `~/.mlrun.env`.

The `set` command can work with the following parameters:

- `--env-file` or `-f` to set the url path to the mlrun environment file
- `--api` or `-a` to set the url (local or remote) for MLRun API
- `--username` or `-u` to set the username
- `--access-key` or `-k` to set the access key
- `--artifact-path` or `-p` to set the [artifact path](#)
- `--env-vars` or `-e` to set additional environment variables, e.g. `-e ENV_NAME=<value>`

**Using `mlrun.set_environment` command in MLRun SDK**

You can set the environment using `mlrun.set_environment` command in MLRun SDK and either use the `env_file` parameter that saves the path/url to the `.env` file (which holds MLRun config and other env vars) or use `args` (without uploading from the environment file), for example:

```
# Use local service
mlrun.set_environment("http://localhost:8080", artifact_path=".")
# Use remote service
mlrun.set_environment("<remote-service-url>", access_key="xyz", username="joe")
```

For more explanations read the documentation [mlrun.set\\_environment](#).

**Using your IDE (e.g. PyCharm or VSCode)**

Use these procedures to access MLRun remotely from your IDE. These instructions are for PyCharm and VSCode.

## Create environment file

Create an environment file called `mlrun.env` in your workspace folder. Copy-paste the configuration below:

```
# Remote URL to mlrun service
MLRUN_DBPATH=<API endpoint of the MLRun APIs service endpoint; e.g., "https://mlrun-api.
↳ default-tenant.app.mycluster.iguazio.com">
# Iguazio platform username
V3IO_USERNAME=<username of a platform user with access to the MLRun service>
# Iguazio V3IO data layer credentials (copy from your user settings)
V3IO_ACCESS_KEY=<platform access key>
```

### Note

If your remote service is on an instance of the Iguazio MLOps Platform, you can get all these parameters from the platform dashboard: select the user-profile picture or icon from the top right corner of any page, and select **Remote settings**. They are copied to the clipboard.


### Note

Make sure that you add `.env` to your `.gitignore` file. The environment file contains sensitive information that you should not store in your source control.


## Remote environment from PyCharm

You can use PyCharm with MLRun remote by changing the environment variables configuration.


1. From the main menu, choose **Run | Edit Configurations**.

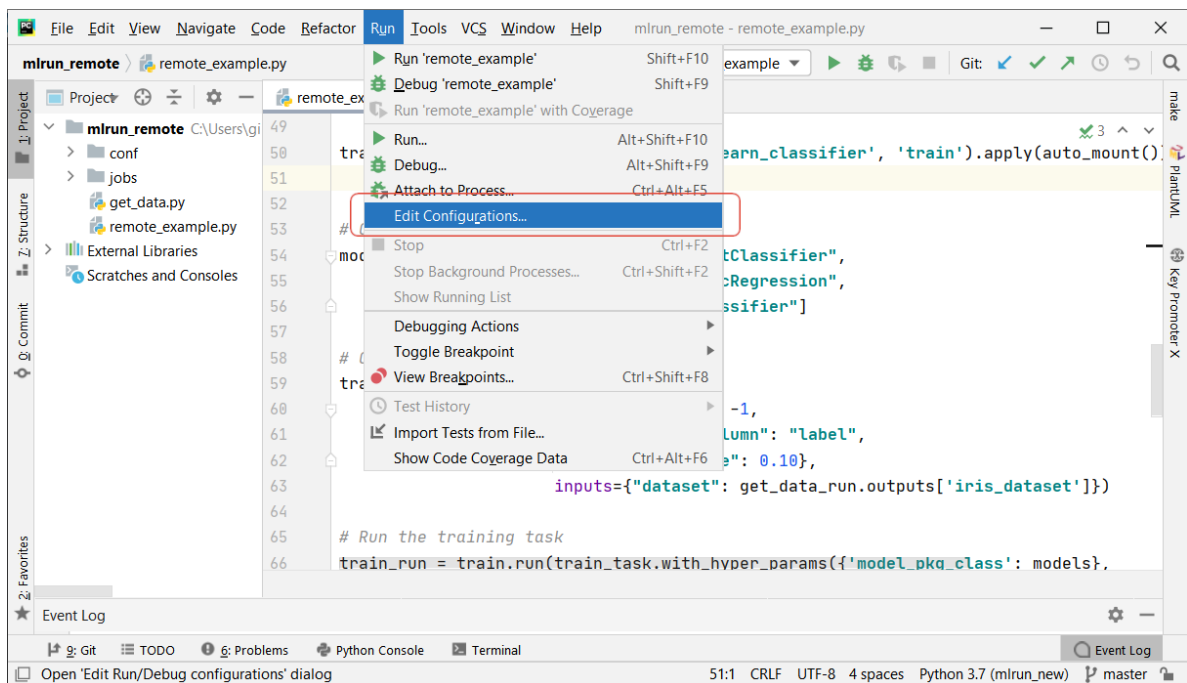

- To set-up default values for all Python configurations, on the left-hand pane of the run/debug configuration dialog, expand the **Templates** node and select the **Python** node. The corresponding configuration template appears in the right-hand pane. Alternatively, you can edit a specific file configuration by choosing the corresponding file on the left-hand pane. Choose the **Environment Variables** edit box and expand it to edit the environment variables.

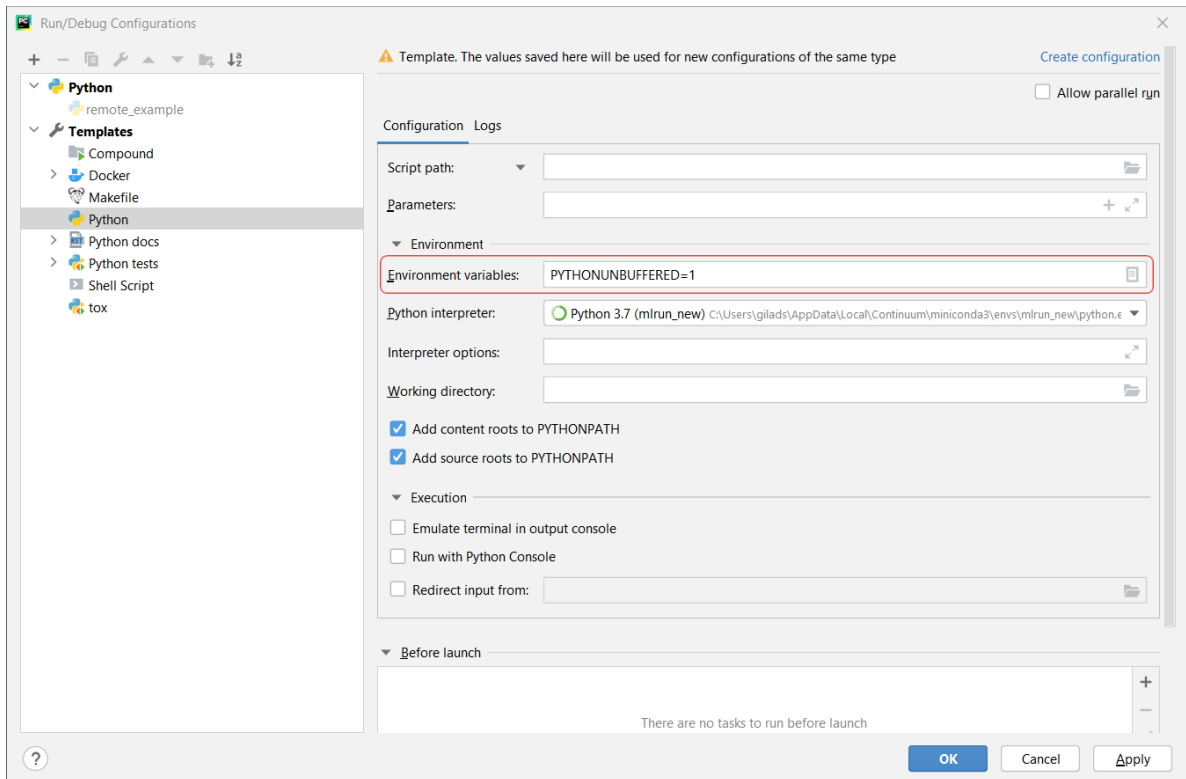

- Add the environment variable and value of `MLRUN_DBPATH`.

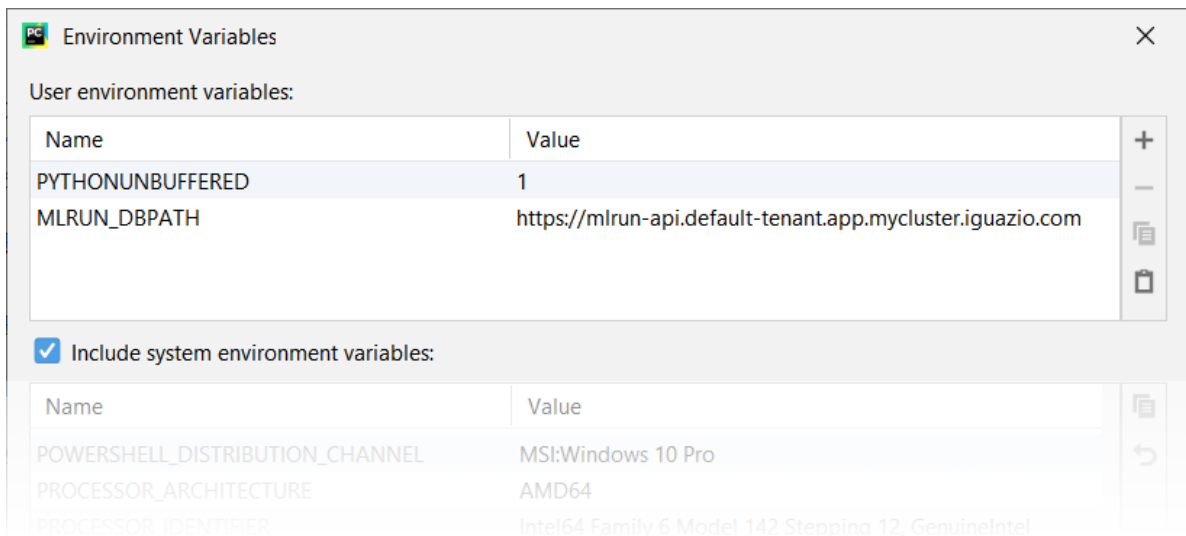


If the remote service is on an instance of the Iguazio MLOps Platform, also set the environment variables and values of `V3IO_USERNAME`, and `V3IO_ACCESS_KEY`.


## Remote environment from VScode

Create a [debug configuration in VSCode](#). Configurations are defined in a `launch.json` file that's stored in a `.vscode` folder in your workspace.

To initialize debug configurations, first select the **Run** view in the sidebar:

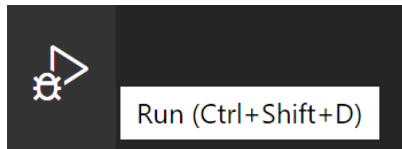


If you don't yet have any configurations defined, you'll see a button to Run and Debug, as well as a link to create a configuration (`launch.json`) file:

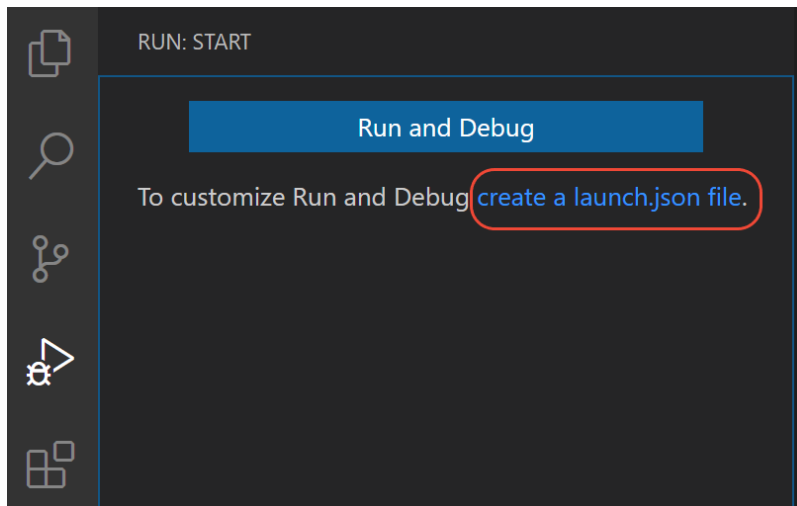

To generate a `launch.json` file with Python configurations:


1. Click the **create a launch.json file** link (circled in the image above) or use the **Run > Open configurations** menu command.
2. A configuration menu opens from the Command Palette. Select the type of debug configuration you want for the opened file. For now, in the **Select a debug configuration** menu that appears, select **Python File**.

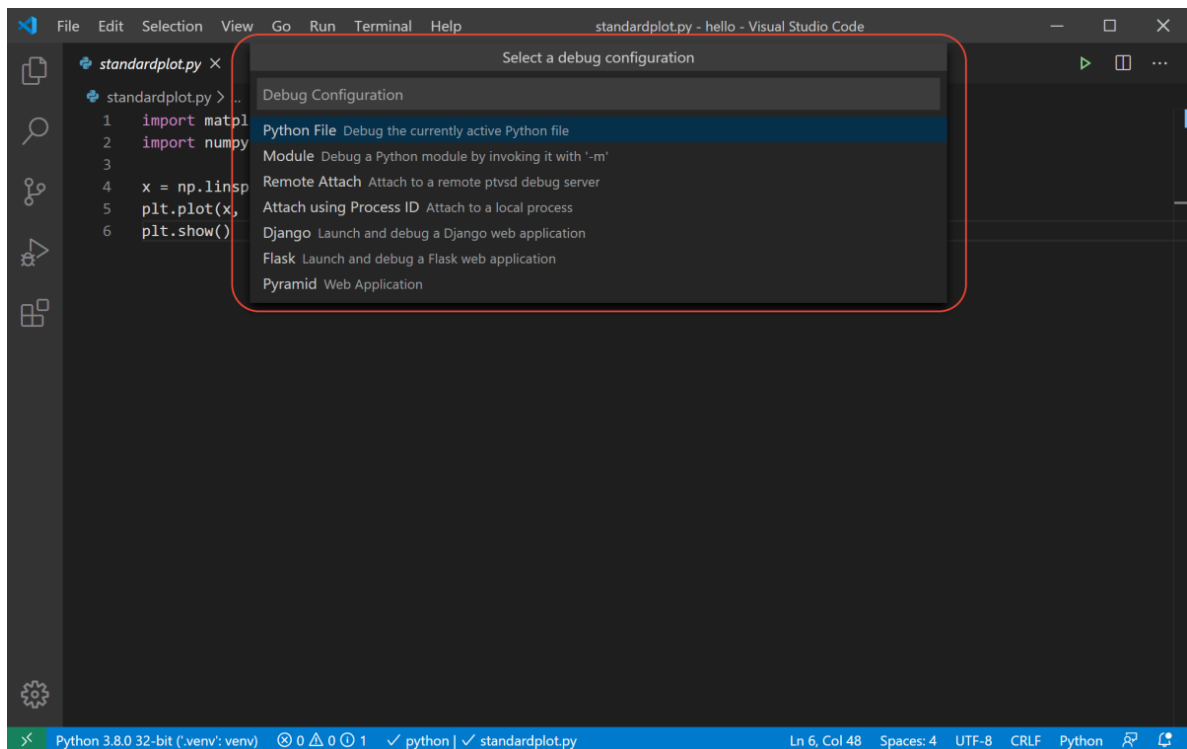

## Note

Starting a debugging session through the Debug Panel, **F5** or **Run > Start Debugging**, when no configuration exists also brings up the debug configuration menu, but does not create a launch.json file.

3. The Python extension then creates and opens a `launch.json` file that contains a pre-defined configuration based on what you previously selected, in this case **Python File**. You can modify configurations (to add arguments, for example), and also add custom configurations.

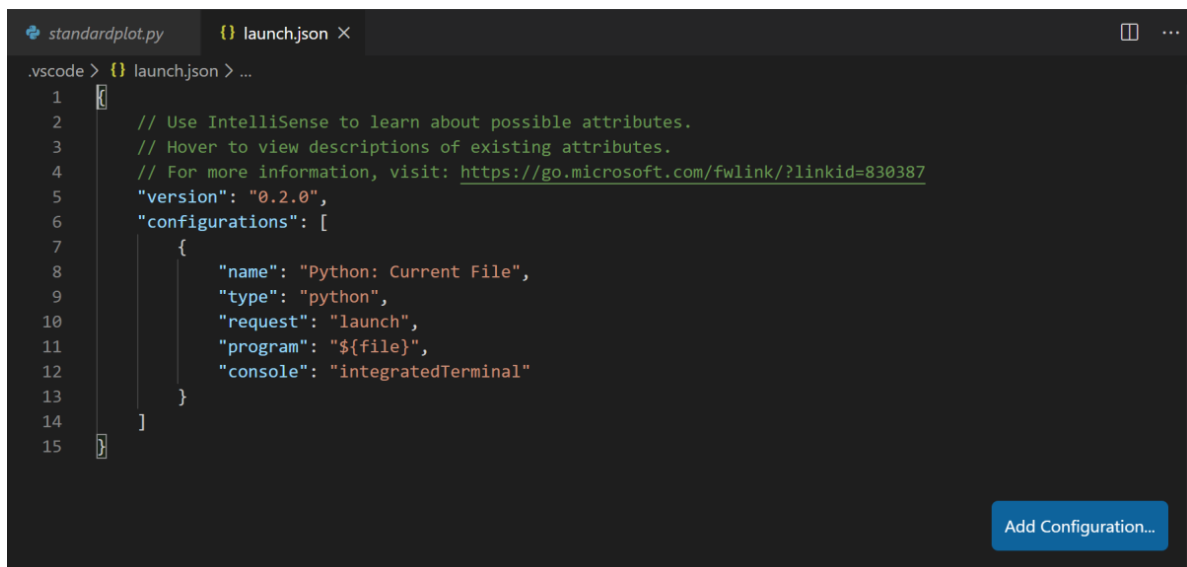

## Set environment file in debug configuration

Add an `envFile` setting to your configuration with the value of `${workspaceFolder}/mlrun.env`

If you created a new configuration in the previous step, your `launch.json` would look as follows:

```
{
  // Use IntelliSense to learn about possible attributes.
  // Hover to view descriptions of existing attributes.
  // For more information, visit: https://go.microsoft.com/fwlink/?linkid=830387
  "version": "0.2.0",
  "configurations": [
    {
      "name": "Python: Current File",
      "type": "python",
      "request": "launch",
      "program": "${file}",
      "console": "integratedTerminal",
      "envFile": "${workspaceFolder}/mlrun.env"
    }
  ]
}
```

## Setting up a dark site

Use this procedure for the MLRun package, and any other packages you want to install on a dark site.

To install a package in a dark (air-gapped) site:

1. Download the packages: `conda==23.1.0`, `pip`.
2. Pack the conda package file and upload it to your dark system.
3. Install the `tar.gz` by running:

```
conda install -y <package-filename>.tar.gz
```



## PROJECTS AND AUTOMATION

MLRun **Project** is a container for all your work on a particular ML application. Projects host [functions](#), [workflows](#), [artifacts](#) (datasets, models, etc.), [features](#) (sets, vectors), and configuration (parameters, [secrets](#), source, etc.). Projects have owners and members with role-based access control.

Projects are stored in a GIT or archive and map to IDE projects (in PyCharm, VSCode, etc.), which enables versioning, collaboration, and [CI/CD](#). Projects simplify how you process data, [submit jobs](#), run [multi-stage workflows](#), and deploy [real-time pipelines](#) in continuous development or production environments.

**In this section**

### 5.1 Create, save, and use projects

A project is a container for all the assets, configuration, and code of a particular application. It is the starting point for your work. Projects are stored in a versioned source repository (GIT) or archive and can map to IDE projects (in PyCharm, VSCode, etc.).

**In this section**

- *Creating a project*
- *Adding functions, artifacts, workflow, and config*
- *Pushing the project content into git or an archive*
- *Get a project from DB or create it*

#### 5.1.1 Creating a project

Project files (code, configuration, etc.) are stored in a directory (the project context path) and can be pushed to, or loaded from, the source repository. See the following project directory example:

```
my-project          # Parent directory of the project (context)
├── data             # Project data for local tests or outputs (not tracked by version_
└─> control)
├── docs            # Project documentation
├── src             # Project source code (functions, libs, workflows)
├── tests           # Unit tests (pytest) for the different functions
├── project.yaml    # MLRun project spec file
└── README.md       # Project README
```

(continues on next page)

(continued from previous page)

```
└─ requirements.txt # Default Python requirements file (can have function specific
↪ requirements as well)
```

To define a new project from scratch, use `new_project()`. You must specify a name. The context dir holds the configuration, code, and workflow files. Its default value is `"/"`, which is the directory the MLRun client runs from. File paths in the project are relative to the context root. There are additional, optional parameters. The `user_project` flag indicates that the project name is unique per user, and the `init_git` flag is used to initialize git in the context dir.

```
import mlrun
project = mlrun.new_project("myproj", "/", user_project=True,
                           init_git=True, description="my new project")
```

Projects can also be created from a template (yaml file, zip file, or git repo), allowing users to create reusable skeletons. The content of the zip/tar/git archive is copied into the context dir. The `remote` attribute can be used to register a remote git repository URL.

Example of creating a new project from a zip template:

```
# create a project from zip, initialize a local git, and register the git remote path
project = mlrun.new_project("myproj", "/", init_git=True, user_project=True,
                           remote="git://github.com/myorg/some-project.git",
                           from_template="http://mysite/proj.zip")
```

### 5.1.2 Adding functions, artifacts, workflow, and config

Projects host functions, workflows, artifacts (files, datasets, models, etc.), features, and configuration (parameters, secrets, source, etc.). This section explains how to add or register different project elements. For details on the feature store and its elements (sets, vectors) see the [feature store documentation](#).

#### Adding and registering functions:

Functions with basic attributes such as code, requirements, image, etc. can be registered using the `set_function()` method. Functions can be created from a single code/notebook file or have access to the entire project context directory. (By adding the `with_repo=True` flag, the project context is cloned into the function runtime environment.) See the examples:

```
# register a (single) python file as a function
project.set_function('src/data_prep.py', 'data-prep', image='mlrun/mlrun', handler='prep
↪', kind="job")

# register a notebook file as a function, specify custom image and extra requirements
project.set_function('src/mynb.ipynb', name='test-function', image="my-org/my-image",
                    handler="run_test", requirements="requirements.txt", kind="job")

# register a module.handler as a function (requires defining the default sources/work
↪dir, if it's not root)
project.spec.workdir = "src"
project.set_function(name="train", handler="training.train", image="mlrun/mlrun", kind=
↪"job", with_repo=True)
```

See details and examples on how to [create and register functions](#), how to [annotate notebooks](#) (to be used as functions), how to [run, build, or deploy](#) functions, and how to [use them in workflows](#).

**Register artifacts:**

Artifacts are used by functions and workflows and are referenced by a key (name) and optional tag (version). Users can define artifact files or objects in the project spec, which are registered during project load or when calling `project.register_artifacts()`. To register artifacts use the `set_artifact()` method. See the examples:

```
# register a simple file artifact in the project (point to remote object)
data_url = 'https://s3.wasabisys.com/iguazio/data/iris/iris.data.raw.csv'
project.set_artifact('data', target_path=data_url)

# register a model artifact
project.set_artifact('model', ModelArtifact(model_file="model.pkl"), target_path=model_
↪dir_url)

# register local or remote artifact object (yaml or zip), will be imported on project_
↪load
# to generate such a package use `artifact.export(zip_path)`
project.set_artifact('model', 'https://mystuff.com/models/mymodel.zip')
```

**Note**

Local file paths are relative to the context dir.

**Registering workflows:**

Projects contain one or more workflows (pipelines). The workflows can be registered using the `set_workflow()` method. Project workflows are executed using the `run()` method. See **building and running workflows** for details.

```
# Add a multi-stage workflow (./myflow.py) to the project with the name 'main' and save_
↪the project
project.set_workflow('main', "./src/workflow.py")
```

**Set project wide parameters and secrets:**

You can define global project parameters and secrets and use them in your functions enabling simple configuration and templates. See the examples:

```
# Read env vars from dict or file and set as project secrets
project.set_secrets({"SECRET1": "value"})
project.set_secrets(file_path="secrets.env")

project.spec.params = {"x": 5}
```

**Note**

Secrets are not loaded automatically (not part of the `project.yaml`); you need to apply `set_secrets()` methods manually or use the UI.

Project parameters, secrets and configuration can also be set in the UI, in the relevant project, click the



button at the left bottom corner.

Example, secrets configuration screen:

**Save the project:**

Use the `save()` method to store all the definitions (functions, artifacts, workflows, parameters, etc.) in the MLRun DB and in the `project.yaml` file (for automated loading and CI/CD).

```
project.save()
```

### show an example project.yaml file

The generated `project.yaml` for the above project looks like:

```
ind: project
metadata:
  name: myproj
spec:
  description: my new project
  params:
    x: 5
  functions:
  - url: src/data_prep.py
    name: data-prep
    image: mlrun/mlrun
    handler: prep
  - url: src/mynb.ipynb
    name: test-function
    kind: job
    image: my-org/my-image
    handler: run_test
    requirements: requirements.txt
  - name: train
    kind: job
    image: mlrun/mlrun
    handler: training.train
    with_repo: true
  workflows:
  - path: ./src/workflow.py
    name: main
  artifacts:
  - kind: artifact
    metadata:
      project: myproj
      key: data
    spec:
      target_path: https://s3.wasabisys.com/iguazio/data/iris/iris.data.raw.csv
  source: ''
  workdir: src``
```

### 5.1.3 Pushing the project content into git or an archive

Project code, metadata, and configuration are stored and versioned in source control systems like GIT or archives (zip, tar). This allows **loading an entire project** (with a specific version) into a development or production environment, or seamlessly **integrating with CI/CD frameworks**.

---

#### Note

You must push the updates before you build functions or run workflows that use code from git, since the builder or containers pull the code from the git repo.

---

Use standard Git commands to push the current project tree into a git archive. Make sure you `.save()` the project before pushing it

```
git remote add origin <server>
git commit -m "Commit message"
git push origin master
```

Alternatively, you can use MLRun SDK calls:

- `create_remote()` - to register the remote Git path
- `push()` - save project spec (`project.yaml`) and commit/push updates to remote repo

---

#### Note

If you are using containerized Jupyter you might need to first set your Git parameters, e.g. using the following commands and run git push from the terminal once to store your credentials:

---

```
git config --global user.email "<my@email.com>"
git config --global user.name "<name>"
git config --global credential.helper store
```

You can also save the project content and metadata into a local or remote `.zip` archive, for example:

```
project.export("../archive1.zip")
project.export("s3://my-bucket/archive1.zip")
project.export(f"v3io://projects/{project.name}/archive1.zip")
```

### 5.1.4 Get a project from DB or create it

If you already have a project saved in the DB and you need to access/use it (for example, from a different notebook or file), use the `get_or_create_project()` method. It first tries to read the project from the DB, and only if it doesn't exist in the DB it loads/creates it.

---

#### Note

If you update the project object from different files/notebooks/users, make sure you `.save()` your project after a change, and run `get_or_create_project` to load changes made by others.

---

Example:

```
# load project from the DB (if exists) or the source repo
project = mlrun.get_or_create_project("myproj", "./", "git://github.com/mlrun/demo-
↪xgb-project.git")
project.pull("development") # pull the latest code from git
project.run("main", arguments={'data': data_url}) # run the workflow "main"
```

### 5.1.5 Deleting a project

See `delete_project`.

## 5.2 Git best practices

This section provides an overview of developing and deploying ML applications using MLRun and Git. It covers the following:

- *MLRun and Git Overview*
  - *Load Code from Container vs Load Code at Runtime*
- *Common Tasks*
  - *Setting Up New MLRun Project Repo*
  - *Running Existing MLRun Project Repo*
  - *Pushing Changes to MLRun Project Repo*
  - *Utilizing Different Branches*

---

#### Note

This section assumes basic familiarity with version control software such as GitHub, GitLab, etc. If you're new to Git and version control, see the [GitHub Hello World documentation](#).

---


#### See also

- *CI/CD automation with Git*

### 5.2.1 MLRun and Git Overview

As a best practice, your MLRun project **should be backed by a Git repo**. This allows you to keep track of your code in source control as well as utilize your entire code library within your MLRun functions.

The typical lifecycle of a project is as follows:

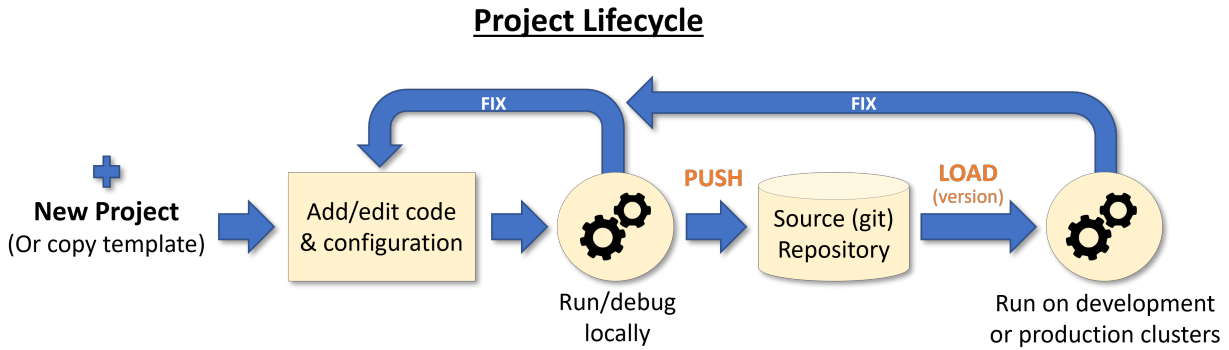

Many people like to develop locally on their laptops, Jupyter environments, or local IDE before submitting the code to Git and running on the larger cluster. See [Set up your client environment](#) for more details.

### Loading the code from container vs. loading the code at runtime

MLRun supports two approaches to loading the code from Git:

- Loading the code from container (default behavior) Before using this option, you must build the function with the `build_function` method. The image for the MLRun function is built once, and consumes the code in the repo. **This is the preferred approach for production workloads.** For example:

```
project.set_source(source="git://github.com/mlrun/project-archive.git")

fn = project.set_function(
    name="myjob", handler="job_func.job_handler",
    image="mlrun/mlrun", kind="job", with_repo=True,
)

project.build_function(fn)
```

- Loading the code at runtime The MLRun function pulls the source code directly from Git at runtime. **This is a simpler approach during development that allows for making code changes without re-building the image each time.** For example:

```
project.set_source(source="git://github.com/mlrun/project-archive.git", pull_at_
↪runtime=True)

fn = project.set_function(
    name="nuclio", handler="nuclio_func:nuclio_handler",
    image="mlrun/mlrun", kind="nuclio", with_repo=True,
)
```

## 5.2.2 Common tasks

### Setting up a new MLRun project repo

1. Initialize your repo using the command line as per [this guide](#) or using your version control software of choice (e.g. GitHub, GitLab, etc.).

```
git init ...
git add ...
git commit -m ...
git remote add origin ...
git branch -M <BRANCH>
git push -u origin <BRANCH>
```

2. Clone the repo to the local environment where the MLRun client is installed (e.g. Jupyter, VSCode, etc.) and navigate to the repo.

---

#### Note

It is assumed that your local environment has the required access to pull a private repo.

---

```
git clone <MY_REPO>
cd <MY_REPO>
```

3. Initialize a new MLRun project with the context pointing to your newly cloned repo.

```
import mlrun

project = mlrun.get_or_create_project(name="my-super-cool-project", context=".")
```

4. Set the MLRun project source with the desired `pull_at_runtime` behavior (see *Loading the code from container vs. loading the code at runtime* for more info). Also set `GIT_TOKEN` in MLRun project secrets for working with private repos.

```
# Notice the prefix has been changed to git://
project.set_source(source="git://github.com/mlrun/project-archive.git", pull_at_
↪runtime=True)
project.set_secrets(secrets={"GIT_TOKEN" : "XXXXXXXXXXXXXXXX"}, provider="kubernetes")
```

5. Register any MLRun functions or workflows and save. Make sure `with_repo` is `True` in order to add source code to the function.

```
project.set_function(name='train_model', func='train_model.py', kind='job', image='mlrun/
↪mlrun', with_repo=True)
project.set_workflow(name='training_pipeline', workflow_path='training_pipeline.py')
project.save()
```

6. Push additions to Git.

```
git add ...
git commit -m ...
git push ...
```

7. Run the MLRun function/workflow. The source code is added to the function and is available via imports as expected.

```
project.run_function(function="train_model")
project.run(name="training_pipeline")
```

## Running an existing MLRun project repo

1. Clone an existing MLRun project repo to your local environment where the MLRun client is installed (e.g. Jupyter, VSCode, etc.) and navigate to the repo.

```
git clone <MY_REPO>
cd <MY_REPO>
```

2. Load the MLRun project with the context pointing to your newly cloned repo. **MLRun is looking for a project.yaml file in the root of the repo.**

```
project = mlrun.load_project(context=".")
```

3. Optionally enable `pull_at_runtime` for easier development. Also set `GIT_TOKEN` in the MLRun Project secrets for working with private repos.

```
# source=None will use current Git source
project.set_source(source=None, pull_at_runtime=True)
project.set_secrets(secrets={"GIT_TOKEN" : "XXXXXXXXXXXXXXXX"}, provider="kubernetes")
```

4. Run the MLRun function/workflow. The source code is added to the function and is available via imports as expected.

```
project.run_function(function="train_model")
project.run(name="training_pipeline")
```

## Note

If another user previously ran the project in your MLRun environment, ensure that your user has project permissions (otherwise you may not be able to view or run the project).

## Pushing changes to the MLRun project repo

1. Edit the source code/functions/workflows in some way.
2. Check-in changes to Git.

```
git add ...
git commit -m ...
git push ...
```

3. If `pull_at_runtime=False`, re-build the Docker image. If `pull_at_runtime=True`, skip this step.

```
import mlrun
```

(continues on next page)

(continued from previous page)

```
project = mlrun.load_project(context=".")
project.build_function("my_updated_function")
```

4. Run the MLRun function/workflow. The source code with changes is added to the function and is available via imports as expected.

```
project.run_function(function="train_model")
project.run(name="training_pipeline")
```

## Utilizing different branches

1. Check out the desired branch in the local environment.

```
git checkout <BRANCH>
```

2. Update the desired branch in MLRun project. Optionally, save if the branch should be used for future runs.

```
project.set_source(
    source="git://github.com/igz-us-sales/mlrun-git-example.git#spanish",
    pull_at_runtime=True
)
project.save()
```

3. Run the MLRun function/workflow. The source code from desired branch is added to the function and is available via imports as expected.

```
project.run_function("greetings")
```

## 5.3 Load projects

Project code, metadata, and configuration are stored and versioned in source control systems like Git or archives (zip, tar) and can be loaded into your work environment or CI system with a single SDK or CLI command.

The project root (context) directory contains the `project.yaml` file with the required metadata and links to various project files/objects, and is read during the load process.

### In this section

- *Load projects using the SDK*
- *Load projects using the CLI*

See also details on loading and using projects **with CI/CD frameworks**.

### 5.3.1 Load projects using the SDK

When a project is already created and stored in a local dir, git, or archive, you can quickly load and use it with the `load_project()` method. `load_project` uses a local context directory (with initialized git) or clones a remote repo into the local dir and returns a project object.

You need to provide the git/zip/tar archive url. The context dir, by default, is `"/"`, which is the directory the MLRun client runs from. The name can be specified or taken from the project object. The project can also specify secrets (dict with repo credentials), `init_git` flag (initializes Git in the context dir), `clone` flag (project is cloned into the context dir, and the local copy is ignored/deleted), and `user_project` flag (indicates the project name is unique to the user).

Example of loading a project from git, using the default context dir, and running the main workflow:

```
# load the project and run the 'main' workflow
project = load_project(name="myproj", url="git://github.com/mlrun/project-archive.git")
project.run("main", arguments={'data': data_url})
```

#### Note

If the `url` parameter is not specified it searches for Git repo inside the context dir and uses its metadata, or if the flag `init_git=True`, it initializes a Git repo in the target context directory.

#### Note

When working with a private Git, set the project secrets. See [MLRun-managed secrets](#).

After the project object is loaded use the `run()` method to execute workflows. See details on [building and running workflows](#), and how to [run, build, or deploy](#) individual functions.

You can edit or add project elements like functions, workflows, artifacts, etc. (See [create and use projects](#).) Once you make changes use GIT or MLRun commands to push those changes to the archive (See [save into git or an archive](#).)

### 5.3.2 Load projects using the CLI

Loading a project from git into `./`:

```
mlrun project -n myproj --url "git://github.com/mlrun/project-demo.git" .
```

Running a specific workflow (main) from the project stored in `.` (current dir):

```
mlrun project --run main --watch .
```

#### CLI usage details

```
Usage: mlrun project [OPTIONS] [CONTEXT]
```

#### Options:

<code>-n, --name TEXT</code>	project name
<code>-u, --url TEXT</code>	remote git <b>or</b> archive url
<code>-r, --run TEXT</code>	run workflow name of <code>.py</code> file

(continues on next page)

(continued from previous page)

<code>-a, --arguments TEXT</code>	Kubeflow pipeline arguments name <b>and</b> value tuples ( <b>with</b> <code>-r</code> flag), e.g. <code>-a x=6</code>
<code>-p, --artifact-path TEXT</code>	output artifacts path
<code>-x, --param TEXT</code>	mlrun project parameter name <b>and</b> value tuples, e.g. <code>-p x=37 -p y='text'</code>
<code>-s, --secrets TEXT</code>	secrets file=<filename> <b>or</b> env=ENV_KEY1,..
<code>--db TEXT</code>	api <b>and</b> db service path/url
<code>--init-git</code>	<b>for</b> new projects init git context
<code>-c, --clone</code>	force override/clone into the context <b>dir</b>
<code>--sync</code>	sync functions into db
<code>-w, --watch</code>	wait <b>for</b> pipeline completion ( <b>with</b> <code>-r</code> flag)
<code>-d, --dirty</code>	allow run <b>with</b> uncommitted git changes
<code>--handler TEXT</code>	workflow function handler name
<code>--engine TEXT</code>	workflow engine (kfp/local/remote)
<code>--local</code>	<b>try</b> to run workflow functions locally
<code>--timeout INTEGER</code>	timeout <b>in</b> seconds to wait <b>for</b> pipeline completion (used when watch= <b>True</b> )
<code>--env-file TEXT</code>	path to .env file to load config/variables <b>from</b>
<code>--ensure-project</code>	ensure the project exists, <b>if not</b> , create project
<code>--schedule TEXT</code>	To create a schedule define a standard crontab expression string. For using the pre-defined workflow's <b>schedule</b> , set <code>--schedule 'true'</code>

## 5.4 Run, build, and deploy functions

### In this section

- *Overview*
- *run\_function*
- *build\_function*
- *deploy\_function*
- *Default image*
- *Image build configuration*
- *build\_image*

### 5.4.1 Overview

There is a set of methods used to deploy and run project functions. They can be used interactively or inside a pipeline (e.g. Kubeflow). When used inside a pipeline, each method is automatically mapped to the relevant pipeline engine command.

- `run_function()` — Run a local or remote task as part of local or remote batch/scheduled task
- `build_function()` — deploy an ML function, build a container with its dependencies for use in runs
- `deploy_function()` — deploy real-time/online (nuclio or serving based) functions

Use these methods as project methods. For example:

```
# run the "train" function in myproject
run = myproject.run_function("train", inputs={"data": data_url})
```

The first parameter in all three methods is either the function name (in the project), or a function object, used if you want to specify functions that you imported/created ad hoc, or to modify a function spec. For example:

```
# import a serving function from the Function Hub and deploy a trained model over it
serving = import_function("hub://v2_model_server", new_name="serving")
serving.spec.replicas = 2
deploy = deploy_function(
    serving,
    models=[{"key": "mymodel", "model_path": train.outputs["model"]}],
)
```

You can use the `get_function()` method to get the function object and manipulate it, for example:

```
trainer = project.get_function("train")
trainer.with_limits(mem="2G", cpu=2, gpus=1)
run = project.run_function("train", inputs={"data": data_url})
```

## 5.4.2 run\_function

Use the `run_function()` method to run a local or remote batch/scheduled task. The `run_function` method accepts various parameters such as `name`, `handler`, `params`, `inputs`, `schedule`, etc. Alternatively, you can pass a **Task** object (see: `new_task()`) that holds all of the parameters and the advanced options.

Functions can host multiple methods (handlers). You can set the default handler per function. You need to specify which handler you intend to call in the run command. You can pass `parameters` (arguments) or data `inputs` (such as datasets, feature-vectors, models, or files) to the functions through the `run_function` method.

The `run_function()` command returns an MLRun `RunObject` object that you can use to track the job and its results. If you pass the parameter `watch=True` (default), the command blocks until the job completes.

MLRun also supports iterative jobs that can run and track multiple child jobs (for hyperparameter tasks, AutoML, etc.). See *Hyperparameter tuning optimization* for details and examples.

Read further details on [running tasks and getting their results](#).

---

### Run/simulate functions locally:

Functions can also run and be debugged locally by using the local runtime or by setting the `local=True` parameter in the `run()` method (for batch functions).

---

Usage examples:

```
# create a project with two functions (local and from Function Hub)
project = mlrun.new_project(project_name, "./proj")
project.set_function("mycode.py", "prep", image="mlrun/mlrun")
project.set_function("hub://auto_trainer", "train")

# run functions (refer to them by name)
run1 = project.run_function("prep", params={"x": 7}, inputs={'data': data_url})
```

(continues on next page)

(continued from previous page)

```
run2 = project.run_function("train", inputs={"dataset": run1.outputs["data"]})
run2.artifact('confusion-matrix').show()
```

Example with new\_task:

```
import mlrun
project = mlrun.get_or_create_project('example-project')
---

from mlrun import RunTemplate, new_task, mlconf
from os import path
artifact_path = path.join(mlconf.artifact_path, '{{run.uid}}')
def handler(context, param, model_names):
    context.logger.info("Running handler")
    context.set_label('category', 'tests')
    for model_name, file_name in model_names:
        context.log_artifact(model_name, body=param.encode(), local_path=file_name)
----

func = project.set_function("my-func", kind="job", image="mlrun/mlrun")
func.save()
---

task = new_task(name='mytask', handler=handler, artifact_path=artifact_path, project=
→ 'project-name')
run_object = project.run_function("my-func", local=True, base_task=task)
```

See `mlrun.model.new_task()` for a description of the new\_task parameters.

### 5.4.3 build\_function

The `build_function()` method is used to deploy an ML function and build a container with its dependencies for use in runs.

Example:

```
# build the "trainer" function image (based on the specified requirements and code repo)
project.build_function("trainer")
```

The `build_function()` method accepts different parameters that can add to, or override, the function build spec. You can specify the target or base image extra docker commands, builder environment, and source credentials (builder\_env), etc.

See further details and examples in [Build function image](#).

### 5.4.4 deploy\_function

The `deploy_function()` method is used to deploy real-time/online (nuclio or serving) functions and pipelines. Read more about [Real-time serving pipelines](#).

Basic example:

```
# Deploy a real-time nuclio function ("myapi")
deployment = project.deploy_function("myapi")

# invoke the deployed function (using HTTP request)
resp = deployment.function.invoke("/do")
```

You can provide the env dict with: extra environment variables; models list to specify specific models and their attributes (in the case of serving functions); builder environment; and source credentials (builder\_env).

Example of using `deploy_function` inside a pipeline, after the `train` step, to generate a model:

```
# Deploy the trained model (from the "train" step) as a serverless serving function
serving_fn = mlrun.new_function("serving", image="mlrun/mlrun", kind="serving")
mlrun.deploy_function(
    serving_fn,
    models=[
        {
            "key": model_name,
            "model_path": train.outputs["model"],
            "class_name": 'mlrun.frameworks.sklearn.SklearnModelServer',
        }
    ],
)
```

#### Note

If you want to create a simulated (mock) function instead of a real Kubernetes service, set the `mock` flag is set to `True`. See `deploy_function` api.

### 5.4.5 Default image

You can set a default image for the project. This image will be used for deploying and running any function that does not have an explicit image assigned, and replaces MLRun's default image of `mlrun/mlrun`. To set the default image use the `set_default_image()` method with the name of the image.

The default image is applied to the functions in the process of enriching the function prior to running or deploying. Functions will therefore use the default image set in the project at the time of their execution, not the image that was set when the function was added to the project.

For example:

```
project = mlrun.new_project(project_name, "./proj")
# use v1 of a pre-built image as default
project.set_default_image("myrepo/my-prebuilt-image:v1")
# set function without an image, will use the project's default image
```

(continues on next page)

(continued from previous page)

```

project.set_function("mycode.py", "prep")

# function will run with the "myrepo/my-prebuilt-image:v1" image
run1 = project.run_function("prep", params={"x": 7}, inputs={'data': data_url})

...

# replace the default image with a newer v2
project.set_default_image("myrepo/my-prebuilt-image:v2")
# function will now run using the v2 version of the image
run2 = project.run_function("prep", params={"x": 7}, inputs={'data': data_url})

```

Read more about *Images and their usage in MLRun*.

### 5.4.6 Image build configuration

Use the `set_default_image()` function to configure a project to use an existing image. The configuration for building this default image can be contained within the project, by using the `build_config()` and `build_image()` functions.

The project build configuration is maintained in the project object. When saving, exporting and importing the project these configurations are carried over with it. This makes it simple to transport a project between systems while ensuring that the needed runtime images are built and are ready for execution.

When using `build_config()`, build configurations can be passed along with the resulting image name, and these are used to build the image. The image name is assigned following these rules, based on the project configuration and provided parameters:

1. If provided, the name passed in the `image` parameter of `build_config()`.
2. The project's default image name, if configured using `set_default_image()`.
3. The value set in MLRun's `default_project_image_name` config parameter - by default this value is `.mlrun-project-image-{name}` with the project name as template parameter.

For example:

```

# Set image config for current project object, using base mlrun image with additional
↪ requirements.
image_name = ".my-project-image"
project.build_config(
    image=image_name,
    set_as_default=True,
    with_mlrun=False,
    base_image="mlrun/mlrun",
    requirements=["vaderSentiment"],
)

# Export the project configuration. The yaml file will contain the build configuration
proj_file_path = "~/mlrun/my-project/project.yaml"
project.export(proj_file_path)

```

This project can then be imported and the default image can be built:

```
# Import the project as a new project with a different name
new_project = mlrun.load_project("~/mlrun/my-project", name="my-other-project")
# Build the default image for the project, based on project build config
new_project.build_image()

# Set a new function and run it (new function uses the my-project-image image built
↳ previously)
new_project.set_function("sentiment.py", name="scores", kind="job", handler="handler")
new_project.run_function("scores")
```

## 5.4.7 build\_image

The `build_image()` function builds an image using the existing build configuration. This method can also be used to set the build configuration and build the image based on it - in a single step.

If you set a source for the project (for example, git source) and set `pull_at_runtime = False`, then the generated image contains the project source in it. For example, this code builds `.some-project-image` image with the source in it.

```
project = mlrun.get_or_create_project(
    name="project-name", context="."
)

project.set_source(
    "git://some/repo",
    pull_at_runtime=False
)

project.build_image(image=".some-project-image")
```

And now you can run a function based on the project code without having to specify an image:

```
func = project.set_function(handler="package.function", name="func", kind="job")
func.save()
project.run_function("func", params={...})
```

When using `set_as_default=False` any build config provided is still kept in the project object but the generated image name is not set as the default image for this project. For example:

```
image_name = ".temporary-image"
project.build_image(image=image_name, set_as_default=False)

# Create a function using the temp image name
project.set_function("sentiment.py", name="scores", kind="job", handler="handler",
↳ image=image_name)
```

## 5.5 Build and run workflows/pipelines

This section shows how to write a batch pipeline so that it can be executed via an MLRun Project. With a batch pipeline, you can use the MLRun Project to execute several Functions in a DAG using the Python SDK or CLI.

This example creates a project with three MLRun functions and a single pipeline that orchestrates them. The pipeline steps are:

- `get-data` — Get iris data from sklearn
- `train-model` — Train model via sklearn
- `deploy-model` — Deploy model to HTTP endpoint

```
import mlrun
project = mlrun.get_or_create_project("iguazio-academy", context=".")
```

### 5.5.1 Add functions to a project

Add the functions to a project:

```
project.set_function(name='get-data', func='functions/get_data.py', kind='job', image=
↳ 'mlrun/mlrun')
project.set_function(name='train-model', func='functions/train.py', kind='job', image=
↳ 'mlrun/mlrun'),
project.set_function(name='deploy-model', func='hub://v2_model_server')
```

### 5.5.2 Write a pipeline

Next, define the pipeline that orchestrates the three components. This pipeline is simple, however, you can create very complex pipelines with branches, conditions, and more.

#### Tip

To pass parameters between steps, use the `outputs` parameter.

```
%%writefile pipelines/training_pipeline.py
from kfp import dsl
import mlrun

@dsl.pipeline(
    name="batch-pipeline-academy",
    description="Example of batch pipeline for Iguazio Academy"
)
def pipeline(label_column: str, test_size=0.2):

    # Ingest the data set
    ingest = mlrun.run_function(
        'get-data',
        handler='prep_data',
        params={'label_column': label_column},
```

(continues on next page)

(continued from previous page)

```

        outputs=["iris_dataset\"])
    )

    # Train a model
    train = mlrun.run_function(
        "train-model",
        handler="train_model",
        inputs={"dataset": ingest.outputs["iris_dataset"]},
        params={
            "label_column": label_column,
            "test_size": test_size
        },
        outputs=['model']
    )

    # Deploy the model as a serverless function
    deploy = mlrun.deploy_function(
        "deploy-model",
        models=[{"key": "model", "model_path": train.outputs["model"]}])
    )

```

### 5.5.3 Add a pipeline to a project

Add the pipeline to your project:

```

project.set_workflow(name='train', workflow_path="pipelines/training_pipeline.py")
project.save()

```

## 5.6 Working with secrets

When executing jobs through MLRun, the code might need access to specific secrets, for example to access data residing on a data-store that requires credentials (such as a private S3 bucket), or many other similar needs.

MLRun provides some facilities that allow handling secrets and passing those secrets to execution jobs. It's important to understand how these facilities work, as this has implications on the level of security they provide and how much exposure they create for your secrets.

### In this section

- *Overview*
- *MLRun-managed secrets*
  - *Using tasks with secrets*
  - *Secret providers*
    - \* *Kubernetes project secrets*
    - \* *Azure Vault*
    - \* *Demo/Development secret providers*
- *Externally managed secrets*

- *Mapping secrets to environment*
- *Mapping secrets as files*

### 5.6.1 Overview

There are two main use-cases for providing secrets to an MLRun job. These are:

- *Use MLRun-managed secrets*. This is a flow that enables the MLRun user (for example a data scientist or engineer) to create and use secrets through interfaces that MLRun implements and manages.
- *Create secrets externally* to MLRun using a Kubernetes secret or some other secret management framework (such as Azure vault), and utilize these secrets from within MLRun to enrich execution jobs. For example, the secrets are created and managed by an IT admin, and the data-scientist only accesses them.

The following sections cover the details of those two use-cases.

### 5.6.2 MLRun-managed secrets

The easiest way to pass secrets to MLRun jobs is through the MLRun project secrets mechanism. MLRun jobs automatically gain access to all project secrets defined for the same project. More details are available *later in this page*.

The following is an example of using project secrets:

```
# Create project secrets for the myproj project
project = mlrun.get_or_create_project("myproj", "./")
secrets = {'AWS_KEY': '111222333'}
project.set_secrets(secrets=secrets, provider="kubernetes")

# Create and run the MLRun job
function = mlrun.code_to_function(
    name="secret_func",
    filename="my_code.py",
    handler="test_function",
    kind="job",
    image="mlrun/mlrun"
)
function.run()
```

The handler defined in `my_code.py` accesses the `AWS_KEY` secret by using the `get_secret()` API:

```
def test_function(context):
    context.logger.info("running function")
    aws_key = context.get_secret("AWS_KEY")
    # Use aws_key to perform processing.
    ...
```

To create `GIT_TOKEN` secrets, use this command:

```
project.set_secrets({"GIT_TOKEN": <git token>})
```

## Using tasks with secrets

MLRun uses the concept of tasks to encapsulate runtime parameters. Tasks are used to specify execution context such as hyper-parameters. They can also be used to pass details about secrets that are going to be used in the runtime. This allows for control over specific secrets passed to runtimes, and support for the various MLRun secret providers.

To pass secret parameters, use the Task's `with_secrets()` function. For example, the following command passes specific project-secrets to the execution context:

```
function = mlrun.code_to_function(
    name="secret_func",
    filename="my_code.py",
    handler="test_function",
    kind="job",
    image="mlrun/mlrun"
)
task = mlrun.new_task().with_secrets("kubernetes", ["AWS_KEY", "DB_PASSWORD"])
run = function.run(task, ...)
```

The `with_secrets()` function tells MLRun what secrets the executed code needs to access. The MLRun framework prepares the needed infrastructure to make these secrets available to the runtime, and passes information about them to the execution framework by specifying those secrets in the spec of the runtime. For example, if running a kubernetes job, the secret keys are noted in the generated pod's spec.

The actual details of MLRun's handling of the secrets differ per the **secret provider** used. The following sections provide more details on these providers and how they handle secrets and their values.

Regardless of the type of secret provider used, the executed code uses the `get_secret()` API to gain access to the value of the secrets passed to it, as shown in the above example.

## Secret providers

MLRun provides several secret providers. Each of these providers functions differently and have different traits with respect to what secrets can be passed and how they're handled. It's important to understand these parameters to make sure secrets are not compromised and that their secrecy is maintained.

**Warning:** The *Inline*, *environment* and *file* providers do not guarantee confidentiality of the secret values handled by them, and **should only be used for development and demo purposes**. The *Kubernetes* and *Azure Vault* providers are secure and should be used for any other use-case.

## Kubernetes project secrets

MLRun can use Kubernetes (k8s) secrets to store and retrieve secret values on a per-project basis. This method is supported for all runtimes that generate k8s pods. MLRun creates a k8s secret per project, and stores multiple secret keys within this secret. Project secrets can be created through the MLRun SDK as well as through the MLRun UI.

By default, all jobs in a project automatically get access to all the associated project secrets. There is no need to use `with_secrets` to provide access to project secrets.

## Creating project secrets

To populate the MLRun k8s project secret with secret values, use the project object's `set_secrets()` function, which accepts a dictionary of secret values or a file containing a list of secrets. For example:

```
# Create project secrets for the myproj project.
project = mlrun.get_or_create_project("myproj", ".")
secrets = {'password': 'myPassw0rd', 'AWS_KEY': '111222333'}
project.set_secrets(secrets=secrets, provider="kubernetes")
```

**Warning:** This action should not be part of the code committed to git or part of ongoing execution - it is only a setup action, which normally should only be executed once. After the secrets are populated, this code should be removed to protect the confidentiality of the secret values.

The MLRun API does not allow the user to see project secrets values, but it does allow seeing the keys that belong to a given project, assuming the user has permissions on that specific project. See the [HTTPRunDB](#) class documentation for additional details.

When MLRun is executed in the Iguazio platform, the secret management APIs are protected by the platform such that only users with permissions to access and modify a specific project can alter its secrets.

## Creating secrets in the Projects UI page

The Settings dialog in the Projects page, accessed with the Settings icon, has a Secrets tab where you can add secrets as key-value pairs. The secrets are automatically available to all jobs belonging to this project. Users with the Editor or Admin role can add, modify, and delete secrets, and assign new secret values. Viewers can only view the secret keys. The values themselves are not visible to any users.

## Accessing the secrets

By default, any runtime not executed locally (`local=False`) automatically gains access to all the secrets of the project it belongs to, so no configuration is required to enable that. **Jobs that are executed locally (`local=True`) do not have access to the project secrets.** It is possible to limit access of an executing job to a subset of these secrets by calling the following function with a list of the secrets to be accessed:

```
task.with_secrets('kubernetes', ['password', 'AWS_KEY'])
```

When the job is executed, the MLRun framework adds environment variables to the pod spec whose value is retrieved through the k8s `valueFrom` option, with `secretKeyRef` pointing at the secret maintained by MLRun. As a result, this method does not expose the secret values at all, except inside the pod executing the code where the secret value is exposed through an environment variable. This means that even a user with `kubect1` looking at the pod spec cannot see the secret values.

Users, however, can view the secrets using the following methods:

- Run `kubect1` to view the actual contents of the k8s secret.
- Perform `kubect1 exec` into the running pod, and examine the environment variables.

To maintain the confidentiality of secret values, these operations must be strictly limited across the system by using k8s RBAC and ensuring that elevated permissions are granted to a very limited number of users (very few users have and use elevated permissions).

## Accessing secrets in nuclio functions

Nuclio functions do not have the MLRun context available to retrieve secret values. Secret values need to be retrieved from the environment variable of the same name. For example, to access the `AWS_KEY` secret in a nuclio function use:

```
aws_key = os.environ.get("AWS_KEY")
```

## Azure Vault

MLRun can serve secrets from an Azure key Vault.

**Note:** Azure key Vaults support 3 types of entities - keys, secrets and certificates. MLRun only supports accessing secret entities.

## Setting up access to Azure key vault

To enable this functionality, a secret must first be created in the k8s cluster that contains the Azure key Vault credentials. This secret should include credentials providing access to your specific Azure key Vault. To configure this, the following steps are needed:

1. Set up a key vault in your Azure subscription.
2. Create a service principal in Azure that will be granted access to the key vault. For creating a service principal through the Azure portal follow the steps listed in [this page](#).
3. Assign a key vault access policy to the service principal, as described in [this page](#).
4. Create a secret access key for the service principal, following the steps listed in [this page](#). Make sure you have access to the following three identifiers:
  - Directory (tenant) id
  - Application (client) id
  - Secret key
5. Generate a k8s secret with those details. Use the following command:

```
kubectl -n <namespace> create secret generic <azure_key_vault_k8s_secret> \
  --from-literal=secret=<secret key> \
  --from-literal=tenant_id=<tenant id> \
  --from-literal=client_id=<client id>
```

**Note:** The names of the secret keys *must* be as shown in the above example, as MLRun queries them by these exact names.

## Accessing Azure key vault secrets

Once these steps are done, use `with_secrets` in the following manner:

```
task.with_secrets(  
    "azure_vault",  
    {  
        "name": <azure_key_vault_name>,  
        "k8s_secret": <azure_key_vault_k8s_secret>,  
        "secrets": [],  
    },  
)
```

The `name` parameter should point at your Azure key Vault name. The `secrets` parameter is a list of the secret keys to be accessed from that specific vault. If it's empty (as in the example above) then all secrets in the vault can be accessed by their key name.

For example, if the Azure Vault has a secret whose name is `MY_AZURE_SECRET` and using the above example for `with_secrets()`, the executed code can use the following statement to access this secret:

```
azure_secret = context.get_secret("MY_AZURE_SECRET")
```

In terms of confidentiality, the executed pod has the Azure secret provided by the user mounted to it. This means that the access-keys to the vault are visible to a user that execs into the pod in question. The same security rules should be followed as described in the [Kubernetes](#) section above.

## Demo/Development secret providers

The rest of the MLRun secret providers are not secure by design, and should only be used for demonstration or development purposes.

### Inline

The inline secrets provider is a very basic framework that should mostly be used for testing and demos. The secrets passed by this framework are exposed in the source code creating the MLRun function, as well as in the function spec, and in the generated pod specs. To add inline secrets to a job, perform the following:

```
task.with_secrets("inline", {"MY_SECRET": "12345"})
```

As can be seen, even the client code exposes the secret value. If this is used to pass secrets to a job running in a kubernetes pod, the secret is also visible in the pod spec. This means that any user that can run `kubectl` and is permitted to view pod specs can also see the secret keys and their values.

## Environment

Environment variables are similar to the `inline` secrets, but their client-side value is not specified directly in code but rather is extracted from a client-side environment variable. For example, if running MLRun on a Jupyter notebook and there are environment variables named `MY_SECRET` and `ANOTHER_SECRET` on Jupyter, the following code passes those secrets to the executed runtime:

```
task.with_secrets("env", "MY_SECRET, ANOTHER_SECRET")
```

When generating the runtime execution environment (for example, pod for the job runtime), MLRun retrieves the value of the environment variable and places it in the pod spec. This means that a user with `kubect1` capabilities who can see pod specs can still see the secret values passed in this manner.

## File

The file provider is used to pass secret values that are stored in a local file. The file needs to be made of lines, each containing a secret and its value separated by `=`. For example:

```
# secrets.txt
SECRET1=123456
SECRET2=abcdef
```

Use the following command to add these secrets:

```
task.with_secrets("file", "/path/to/file/secrets.txt")
```

### 5.6.3 Externally managed secrets

MLRun provides facilities to map k8s secrets that were created externally to jobs that are executed. To enable that, the spec of the runtime that is created should be modified by mounting secrets to it - either as files or as environment variables containing specific keys from the secret.

In the following examples, assume a k8s secret called `my-secret` was created in the same k8s namespace where MLRun is running, with two keys in it - `secret1` and `secret2`.

#### Mapping secrets to environment

The following example adds these two secret keys as environment variables to an MLRun job:

```
function = mlrun.code_to_function(
    name="secret_func",
    handler="test_function",
    ...
)

function.set_env_from_secret(
    "SECRET_ENV_VAR_1", secret="my-secret", secret_key="secret1"
)
function.set_env_from_secret(
    "SECRET_ENV_VAR_2", secret="my-secret", secret_key="secret2"
)
```

This only takes effect for functions executed remotely, as the secret value is injected to the function pod, which does not exist for functions executed locally. Within the function code, the secret values will be exposed as regular environment variables, for example:

```
# Function handler
def test_function(context):
    # Getting the value in the secret2 key.
    my_secret_value = os.environ.get("SECRET_ENV_VAR_2")
    ...
```

## Mapping secrets as files

A k8s secret can be mapped as a filesystem folder to the function pod using the `mount_secret()` function:

```
# Mount all keys in the secret as files under /mnt/secrets
function.apply(mlrun.platforms.mount_secret("my-secret", "/mnt/secrets/"))
```

In our example, the two keys in `my-secret` are created as two files in the function pod, called `/mnt/secrets/secret1` and `/mnt/secrets/secret2`. Reading these files provide the values. It is possible to limit the keys mounted to the function - see the documentation of `mount_secret()` for more details.

## 5.7 MLRun project bootstrapping with `project_setup.py`

### 5.7.1 Overview

The `project_setup.py` script in MLRun automates project initialization and configuration, facilitating seamless setup of MLRun projects by registering functions, workflows, Git sources, Docker images, and more. It ensures consistency by registering and updating all functions and workflows within the project.

Upon loading an MLRun project via `get_or_create_project()` or `load_project()`, the system automatically invokes the `project_setup.py` script.

**Note:** Ensure the script resides in the root of the project context.

```
import mlrun

# Load or create an MLRun project
project = mlrun.get_or_create_project("my-project") # project_setup.py called while
↳ loading project
```

### 5.7.2 Format

The `project_setup.py` script returns the updated MLRun project after applying the specified configurations. It should have a `setup` function which receives an `MlrunProject` and returns an `MlrunProject`.

```
def setup(project: mlrun.projects.MlrunProject) -> mlrun.projects.MlrunProject:
    # ... (setup configurations)

    # Save and return the project:
    project.save()
    return project
```

### 5.7.3 Example Usage

Here's an example directory structure of a project utilizing the `project_setup.py` script:

```

.
├── .env
├── src
│   ├── functions
│   │   ├── data.py
│   │   └── train.py
│   ├── project_setup.py
│   ├── workflows
│   └── main_workflow.py

```

The `project_setup.py` script looks like the following:

```

import os

import mlrun

def setup(project: mlrun.projects.MlrunProject) -> mlrun.projects.MlrunProject:
    source = project.get_param("source")
    secrets_file = project.get_param("secrets_file")
    default_image = project.get_param("default_image")

    # Set project git/archive source and enable pulling latest code at runtime
    if source:
        print(f"Project Source: {source}")
        project.set_source(project.get_param("source"), pull_at_runtime=True)

    # Create project secrets and also load secrets in local environment
    if secrets_file and os.path.exists(secrets_file):
        project.set_secrets(file_path=secrets_file)
        mlrun.set_env_from_file(secrets_file)

    # Set default project docker image - functions that do not specify image will use
    ↪ this
    if default_image:
        project.set_default_image(default_image)

    # MLRun Functions - note that paths are relative to the project context (./src)
    project.set_function(
        name="get-data",
        func="functions/data.py",
        kind="job",
        handler="get_data",
    )

    project.set_function(
        name="train",
        func="functions/train.py",
        kind="job",
        handler="train_model",
    )

```

(continues on next page)

(continued from previous page)

```

)

# MLRun Workflows - note that paths are relative to the project context (./src)
project.set_workflow("main", "workflows/main_workflow.py")

# Save and return the project:
project.save()
return project

```

The project can then be loaded using the following code snippet:

```

project = mlrun.get_or_create_project(
    name="my-project",
    context="./src", # project_setup.py should be in this directory
    parameters={
        "source" : "https://github.com/mlrun/my-repo#main",
        "secrets_file" : ".env",
        "default_image" : "mlrun/mlrun"
    }
)

```

## 5.7.4 Common Operations

Some common operations that can be added to the `project_setup.py` script include:

### Set Project Source

Set the project source and enable pulling at runtime if specified. See `set_source()` for more info.

```

source = project.get_param("source") # https://github.com/mlrun/my-repo#main

project.set_source(source, pull_at_runtime=True)

```

### Export Project to Zip File Archive

Export the local project directory contents to a zip file archive. Use this in conjunction with setting the project source for rapid iteration without requiring a Git commit for each change. See `set_source()` and `export()` for more info.

**Note:** This requires using the Iguazio v3io data layer or some s3 compliant object storage such as minio.

```

source = project.get_param("source") # v3io:///bigdata/my_project.zip

project.set_source(source, pull_at_runtime=True)
if ".zip" in source:
    print(f"Exporting project as zip archive to {source}...")
    project.export(source)

```

## Set Existing Default Project Image

Define the default Docker image for the project. It will be used for functions without a specified image. See [set\\_default\\_image\(\)](#) for more info.

```
default_image = project.get_param("default_image") # mlrun/mlrun

if default_image:
    project.set_default_image(default_image)
```

## Build a Docker Image

Build a Docker image and optionally set it as the project default. See [build\\_image\(\)](#) for more info.

```
base_image = project.get_param("base_image") # mlrun/mlrun
requirements_file = project.get_param("requirements_file") # requirements.txt

project.build_image(
    base_image=base_image,
    requirements_file=requirements_file,
    set_as_default=True
)
```

## Register Functions

Register MLRun functions within the project, specifying their names, associated files, kind (e.g., job), and handlers. See [set\\_function\(\)](#) for more info.

```
project.set_function(
    name="get-data",
    func="data.py",
    kind="job",
    handler="get_data",
)
```

## Define Workflows

Define MLRun workflows within the project, associating them with specific files. See [set\\_workflow\(\)](#) for more info.

```
project.set_workflow("main", "main_workflow.py")
```

## Manage Secrets

Create project secrets by setting them from a specified file path and load them as environment variables in the local environment. See [set\\_secrets\(\)](#) and [set\\_env\\_from\\_file\(\)](#) for more info.

```
secrets_file = project.get_param("secrets_file") # .env

if secrets_file and os.path.exists(secrets_file):
    project.set_secrets(file_path=secrets_file)
    mlrun.set_env_from_file(secrets_file)
```

## Register Project Artifacts

Register artifacts like models or datasets in the project. Useful for version control and transferring artifacts between environments (e.g. dev, staging, prod) via CI/CD. See [set\\_artifact\(\)](#) and [register\\_artifacts\(\)](#) for more info.

```
project.set_artifact(
    key="model",
    artifact="artifacts/model:challenger.yaml", # YAML file in project directory
    tag="challenger"
)
project.register_artifacts()
```

## Defining K8s Resource Requirements for Functions

Add Kubernetes resources by setting requests/limits for a given MLRun function. See [CPU](#), [GPU](#), and [memory limits for user jobs](#) for more info.

```
gpus = project.get_param("num_gpus_per_replica") or 4
cpu = project.get_param("num_cpus_per_replica") or 48
mem = project.get_param("memory_per_replica") or "192Gi"

train_function = project.set_function(
    "trainer.py",
    name="training",
    kind="job",
)
train_function.with_limits(gpus=gpus, cpu=cpu, mem=mem)
train_function.save()
```


See also:

- [CI/CD automation with Git](#)
- [Run pipelines with Github Actions, GitLab](#)

## FUNCTIONS

All the executions in MLRun are based on serverless functions. Functions are essentially Python code that can be executed locally or on a Kubernetes cluster. MLRun functions are used to run jobs, deploy models, create pipelines, and more.

There are various kinds of MLRun functions with different capabilities, however, there are commonalities across all functions. In general, an MLRun function looks like the following:

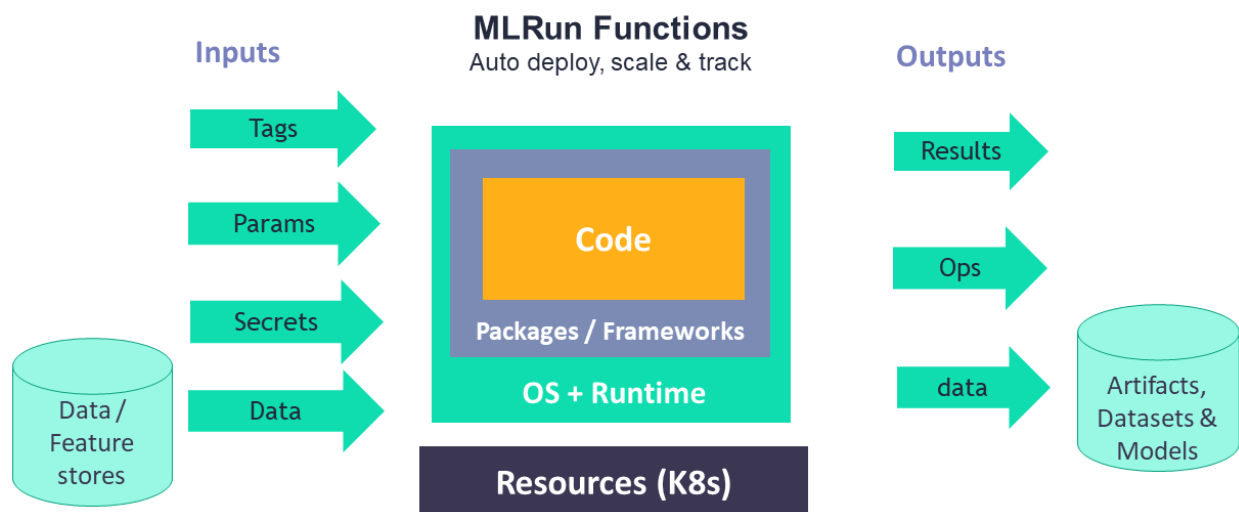

MLRun supports numerous real-time and batch runtimes, described in *Kinds of functions (runtimes)*. The different function runtimes take care of automatically transforming the code and spec to fully managed and elastic services over Kubernetes, which saves significant operational overhead, addresses scalability, and reduces infrastructure costs. The function parameters and capabilities are explained in more detail in *Create and use functions*.


Function objects are all inclusive, containing the code and all the operational aspects: (*image*, required packages, *pod resource configuration (replicas, CPU/GPU/memory limits, volumes, Spot vs. On-demand nodes, pod priority, node affinity)*, *storage*, environment, metadata definitions, etc.). Each function is versioned and stored in the MLRun database with a unique hash code, and gets a new hash code upon changes.

You can use the MLRun auto-logging to log results and artifacts, and to automatically and seamlessly track machine-learning processes while they execute, such as training a model. See *Decorators and auto-logging*.

## 6.1 Functions and projects

Functions are members of an **MLRun project**, a container for all your work on a particular ML application. Once you register a function within a project, you can execute it in your local environment or at scale on a Kubernetes cluster.

The relationship between **functions**, **workflows**, and **projects**, is as follows:

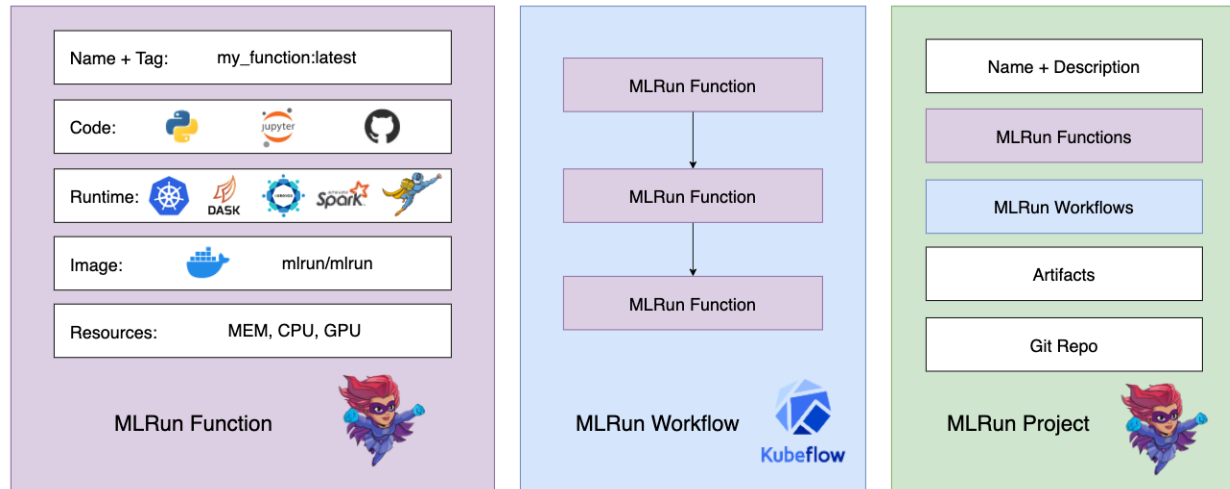

After the MLRun functions and workflows are created and **registered into the project**, they are invoked using the project object. This workflow pairs especially well with *CI/CD automation with Git*.


## 6.2 Function hub

Since function objects are all-inclusive (code, spec, API, and metadata definitions), they can be stored in, and reused from, a shared and versioned function hub. This means that multiple users can share the same MLRun project and get access to objects associated with it.

MLRun has an open **public function hub** that stores many pre-developed functions for use in your projects. Read more in *Function hub*.

## 6.3 Distributed functions

Many of the runtimes support horizontal scaling across multiple containers. You can specify the number of **replicas** or the min—max value range (for auto scaling in *Dask* or *Nuclio*). When scaling functions, MLRun uses a high-speed messaging protocol and shared storage (volumes, objects, databases, or streams). MLRun runtimes handle the orchestration and monitoring of the distributed task.

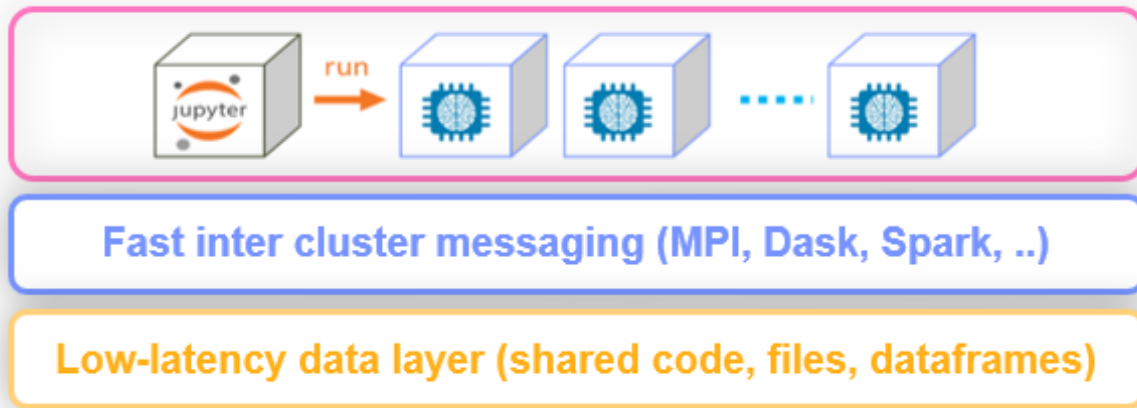

## 6.4 Hyperparameters

MLRun also supports iterative tasks for automatic and distributed execution of many tasks with variable parameters (hyperparams). See *Hyperparameter tuning optimization*.

**In this section**

### 6.4.1 Kinds of functions (runtimes)

When you create an MLRun function you need to specify a runtime kind (e.g. `kind='job'`). Each runtime supports its own specific attributes (e.g. Jars for Spark, Triggers for Nuclio, Auto-scaling for Dask, etc.).

MLRun supports real-time and batch runtimes.

Real-time runtimes:

- **nuclio** - real-time serverless functions over Nuclio
- **serving** - deploy models and higher-level real-time Graph (DAG) over one or more Nuclio functions

Batch runtimes:

- **handler** - execute python handler (used automatically in notebooks or for debug)
- **local** - execute a Python or shell program
- **job** - run the code in a Kubernetes Pod
- **dask** - run the code as a Dask Distributed job (over Kubernetes)
- **databricks** - run code on Databricks cluster (python scripts, Spark etc)
- **mpijob** - run distributed jobs and Horovod over the MPI job operator, used mainly for deep learning jobs
- **spark** - run the job as a Spark job (using Spark Kubernetes Operator)
- **remote-spark** - run the job on a remote Spark service/cluster (e.g. Iguazio Spark service)

#### Common attributes for Kubernetes based functions

All the Kubernetes-based runtimes (Job, Dask, Spark, Nuclio, MPIJob, Serving) support a common set of spec attributes and methods for setting the Pods:

`function.spec` attributes (similar to k8s pod spec attributes):

- volumes
- volume\_mounts
- env
- resources
- replicas
- image\_pull\_policy
- service\_account
- image\_pull\_secret

common function methods:

- set\_env(name, value)
- set\_envs(env\_vars)
- gpus(gpus, gpu\_type)
- set\_env\_from\_secret(name, secret, secret\_key)

The limits methods are different for Spark and Dask:

- Spark
  - with\_driver\_limits(mem, cpu, gpu\_type)
  - with\_executor\_limits(mem, cpu, gpu\_type)
- Dask
  - with\_scheduler\_limits(mem, cpu, gpu\_type)
  - with\_worker\_limits(mem, cpu, gpu\_type)

**In this section**

## Function of type job

You can deploy a model using a job type function, which runs the code in a Kubernetes Pod.

You can create (register) a job function with basic attributes such as code, requirements, image, etc. using the `set_function()` method. You can also import an existing job function/template from the [Function hub](#).

Functions can be created from a single code, notebook file, or have access to the entire project context directory. (By adding the `with_repo=True` flag, the project context is cloned into the function runtime environment.)

Examples:

```
# register a (single) python file as a function
project.set_function('src/data_prep.py', name='data-prep', image='mlrun/mlrun', handler=
↪ 'prep', kind="job")

# register a notebook file as a function, specify custom image and extra requirements
project.set_function('src/mynb.ipynb', name='test-function', image="my-org/my-image",
                    handler="run_test", requirements=["scikit-learn"], kind="job")

# register a module.handler as a function (requires defining the default sources/work_
↪ dir, if it's not root)
```

(continues on next page)

(continued from previous page)

```
project.spec.workdir = "src"
project.set_function(name="train", handler="training.train", image="mlrun/mlrun", kind=
↪ "job", with_repo=True)
```

To run the job:

```
project.run_function("train")
```

### See also

- [Create and register functions](#)
- [How to annotate notebooks \(to be used as functions\)](#)
- [How to run, build, or deploy functions](#)
- [Using functions in workflows](#)

## Function of type serving

Deploying models in MLRun uses the function type serving. You can create a serving function using the `set_function()` call from a notebook. You can also import an existing serving function/template from the *Function hub*.

## Creating a basic serving model using Scikit-learn

The following code shows how to create a basic serving model using Scikit-learn.

```
import os
import urllib.request
import mlrun

model_path = os.path.abspath('sklearn.pkl')

# Download the model file locally
urllib.request.urlretrieve(mlrun.get_sample_path('models/serving/sklearn.pkl'), model_
↪ path)

# Set the base project name
project_name_base = 'serving-project'

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name_base, context="./", user_project=True)

serving_function_image = "mlrun/mlrun"
serving_model_class_name = "mlrun.frameworks.sklearn.SklearnModelServer"

# Create a serving function
serving_fn = mlrun.new_function("serving", project=project.name, kind="serving",
↪ image=serving_function_image)

# Add a model, the model key can be anything we choose. The class will be the built-in
↪ scikit-learn model server class
```

(continues on next page)

(continued from previous page)

```
model_key = "scikit-learn"
serving_fn.add_model(key=model_key,
                     model_path=model_path,
                     class_name=serving_model_class_name)
```

After the serving function is created, you can test it:

```
# Test data to send
my_data = {"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]]}

# Create a mock server in order to test the model
mock_server = serving_fn.to_mock_server()

# Test the serving function
mock_server.test(f"/v2/models/{model_key}/infer", body=my_data)
```

Similarly, you can deploy the serving function and test it with some data:

```
# Deploy the serving function
serving_fn.apply(mlrun.auto_mount()).deploy()

# Check the result using the deployed serving function
serving_fn.invoke(path=f'/v2/models/{model_key}/infer', body=my_data)
```

## Using GIT with a serving function

This example illustrates how to use Git with serving function:

```
project = mlrun.get_or_create_project("serving-git", ".")
project.set_source(source="git://github.com/<username>/<repo>.git#main", pull_at_
    ↳ runtime=True)
function = project.set_function(name="serving", kind="serving", with_repo=True, func=
    ↳ <python-file>, image="mlrun/mlrun")
function.add_model("serve", <model_path>, class_name="MyClass")
project.deploy_function(function="serving")
```

### See also

- *Real-time serving pipelines (graphs)*: higher level real-time graphs (DAG) over one or more Nuclio functions
- *Serving graphs demos and tutorials*
- *Real-time serving*
- *Serving pre-trained ML/DL models*

## Dask distributed runtime

### Quick Links

- [Running Dask Over MLRun](#)
- [Pipelines Using Dask, Kubeflow and MLRun](#)

### Dask overview

Source: [Dask docs](#) Dask is a flexible library for parallel computing in Python.

Dask is composed of two parts:

1. **Dynamic task scheduling** optimized for computation. This is similar to Airflow, Luigi, Celery, or Make, but optimized for interactive computational workloads.
2. **“Big Data” collections** like parallel arrays, dataframes, and lists that extend common interfaces like NumPy, Pandas, or Python iterators to larger-than-memory or distributed environments. These parallel collections run on top of dynamic task schedulers.

Dask emphasizes the following virtues:

- **Familiar:** Provides parallelized NumPy array and Pandas DataFrame objects
- **Flexible:** Provides a task scheduling interface for more custom workloads and integration with other projects.
- **Native:** Enables distributed computing in pure Python with access to the PyData stack.
- **Fast:** Operates with low overhead, low latency, and minimal serialization necessary for fast numerical algorithms
- **Scales up:** Runs resiliently on clusters with 1000s of cores
- **Scales down:** Trivial to set up and run on a laptop in a single process
- **Responsive:** Designed with interactive computing in mind, it provides rapid feedback and diagnostics to aid humans Dask collections and schedulers

### Dask DataFrame mimics Pandas

```
import pandas as pd
df = pd.read_csv('2015-01-01.csv')
df.groupby(df.user_id).value.mean()

import dask.dataframe as dd
df = dd.read_csv('2015-*-.csv')
df.groupby(df.user_id).value.mean().compute()
```

Dask Array mimics NumPy - documentation

```
import numpy as np
f = h5py.File('myfile.hdf5')
x = np.array(f['/small-data'])
x = x.mean(axis=1)

import dask.array as da
f = h5py.File('myfile.hdf5')
x = da.from_array(f['/big-data'],
                  chunks=(1000, 1000))
x = x.mean(axis=1).compute()
```

Dask Bag mimics iterators, Toolz, and PySpark - documentation

```
import dask.bag as db
b = db.read_text('2015-*.json.gz').map(json.loads)
b.pluck('name').frequencies().topk(10, lambda pair: pair[1]).compute()
```

Dask Delayed mimics for loops and wraps custom code - documentation

```
from dask import delayed
L = []
for fn in filenames:
    data = delayed(load)(fn)           # Use for loops to build up computation
    L.append(delayed(process)(data))   # Delay execution of function
                                     # Build connections between variables

result = delayed(summarize)(L)
result.compute()
```

The concurrent.futures interface provides general submission of custom tasks: - documentation


```
from dask.distributed import Client
client = Client('scheduler:port')

futures = []
for fn in filenames:
    future = client.submit(load, fn)
    futures.append(future)

summary = client.submit(summarize, futures)
summary.result()
```

## Dask.distributed

`Dask.distributed` is a lightweight library for distributed computing in Python. It extends both the `concurrent.futures` and `dask` APIs to moderate sized clusters.

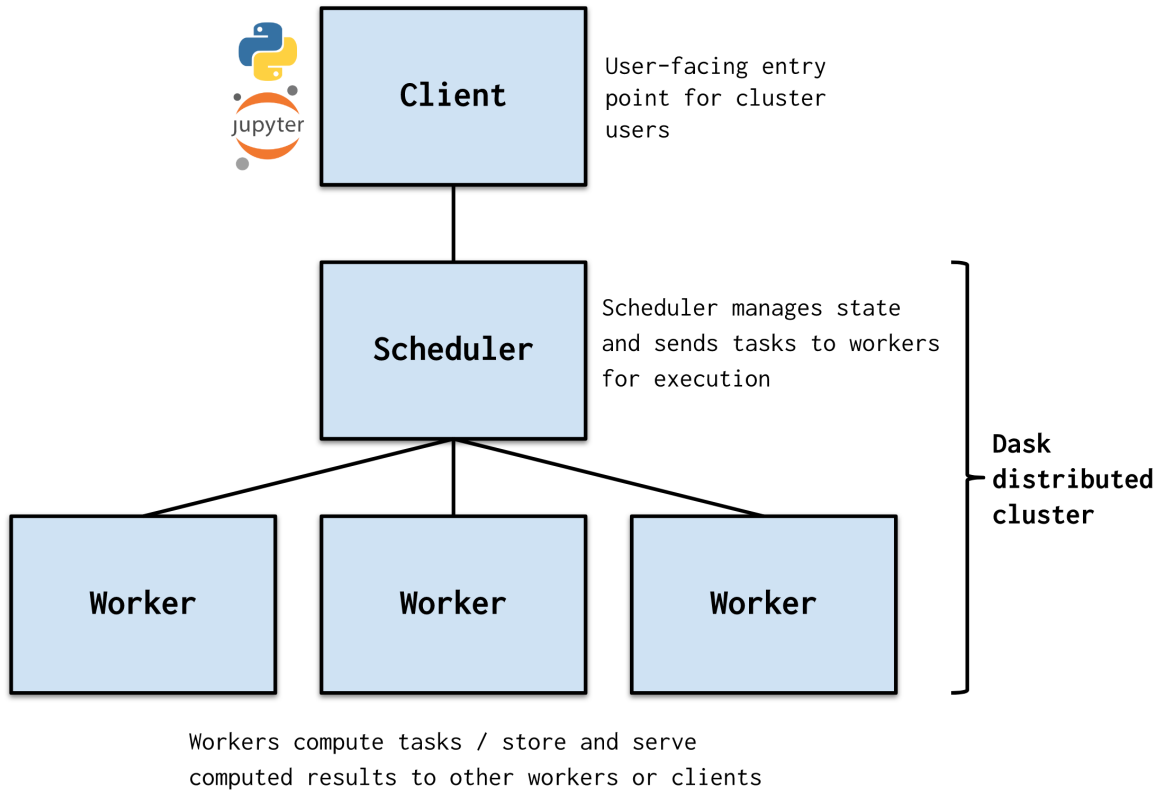

## Motivation

Distributed serves to complement the existing PyData analysis stack. In particular it meets the following needs:

- **Low latency:** Each task suffers about 1ms of overhead. A small computation and network roundtrip can complete in less than 10ms.
- **Peer-to-peer data sharing:** Workers communicate with each other to share data. This removes central bottlenecks for data transfer.
- **Complex Scheduling:** Supports complex workflows (not just map/filter/reduce) which are necessary for sophisticated algorithms used in nd-arrays, machine learning, image processing, and statistics.
- **Pure Python:** Built in Python using well-known technologies. This eases installation, improves efficiency (for Python users), and simplifies debugging.
- **Data Locality:** Scheduling algorithms cleverly execute computations where data lives. This minimizes network traffic and improves efficiency.
- **Familiar APIs:** Compatible with the `concurrent.futures` API in the Python standard library. Compatible with dask API for parallel algorithms
- **Easy Setup:** As a Pure Python package distributed is pip installable and easy to set up on your own cluster.

## Architecture

`Dask.distributed` is a centrally managed, distributed, dynamic task scheduler. The central `dask-scheduler` process coordinates the actions of several `dask-worker` processes spread across multiple machines and the concurrent requests of several clients.

The scheduler is asynchronous and event driven, simultaneously responding to requests for computation from multiple clients and tracking the progress of multiple workers. The event-driven and asynchronous nature makes it flexible to concurrently handle a variety of workloads coming from multiple users at the same time while also handling a fluid worker population with failures and additions. Workers communicate amongst each other for bulk data transfer over TCP.

Internally the scheduler tracks all work as a constantly changing directed acyclic graph of tasks. A task is a Python function operating on Python objects, which can be the results of other tasks. This graph of tasks grows as users submit more computations, fills out as workers complete tasks, and shrinks as users leave or become disinterested in previous results.

Users interact by connecting a local Python session to the scheduler and submitting work, either by individual calls to the simple interface `client.submit(function, *args, **kwargs)` or by using the large data collections and parallel algorithms of the parent dask library. The collections in the dask library like `dask.array` and `dask.dataframe` provide easy access to sophisticated algorithms and familiar APIs like NumPy and Pandas, while the simple `client.submit` interface provides users with custom control when they want to break out of canned “big data” abstractions and submit fully custom workloads.

## ~5X Faster with Dask

Short example which demonstrates the power of Dask, in this notebook we will preform the following:

- Generate random text files
- Process the file by sorting and counting it's content
- Compare run times

### Generate random text files

```
import random
import string
import os

from collections import Counter
from dask.distributed import Client

import warnings

warnings.filterwarnings("ignore")
```

```
def generate_big_random_letters(filename, size):
    """
    generate big random letters/alphabets to a file
    :param filename: the filename
    :param size: the size in bytes
    :return: void
```

(continues on next page)

(continued from previous page)

```

"""
chars = "".join([random.choice(string.ascii_letters) for i in range(size)]) # 1

with open(filename, "w") as f:
    f.write(chars)
pass

```

```

PATH = "/User/howto/dask/random_files"
SIZE = 10000000

for i in range(100):
    generate_big_random_letters(filename=PATH + "/file_" + str(i) + ".txt", size=SIZE)

```

### Setfunction for benchmark

```

def count_letters(path):
    """
    count letters in text file
    :param path: path to file
    """
    # open file in read mode
    file = open(path, "r")

    # read the content of file
    data = file.read()

    # sort file
    sorted_file = sorted(data)

    # count file
    number_of_characters = len(sorted_file)

    return number_of_characters

```

```

def process_files(path):
    """
    list file and count letters
    :param path: path to folder with files
    """
    num_list = []
    files = os.listdir(path)

    for file in files:
        cnt = count_letters(os.path.join(path, file))
        num_list.append(cnt)

    l = num_list
    return print("done!")

```

## Sort & count number of letters with Python

```
%%time
PATH = "/User/howto/dask/random_files/"
process_files(PATH)
```

```
done!
CPU times: user 2min 19s, sys: 9.31 s, total: 2min 29s
Wall time: 2min 32s
```

## Sort & count number of letters with Dask

```
# get the dask client address
client = Client()
```

```
# list all files in folder
files = [PATH + x for x in os.listdir(PATH)]
```

```
%%time
# run the count_letter function on a list of files while using multiple workers
a = client.map(count_letters, files)
```

```
CPU times: user 13.2 ms, sys: 983 µs, total: 14.2 ms
Wall time: 12.2 ms
```

```
%%time
# gather results
l = client.gather(a)
```

```
CPU times: user 3.39 s, sys: 533 ms, total: 3.92 s
Wall time: 40 s
```

## Additional topics

### Running Dask on the cluster with MLRun

---

#### Note

Dask is supported at the Tech Preview level only.

---

The Dask framework enables you to parallelize your Python code and run it as a distributed process on an Iguazio cluster and dramatically accelerate the performance. In this notebook you'll learn how to create a Dask cluster and then an MLRun function running as a Dask client. It also demonstrates how to run parallelize custom algorithm using Dask Delayed option.

For more information on Dask over Kubernetes: <https://kubernetes.dask.org/en/latest/>.

## Set up the environment

```
# set mlrun api path and artifact path for logging
import mlrun

project = mlrun.get_or_create_project("dask-demo", ".")
```

```
> 2023-02-19 07:48:52,191 [info] Created and saved project dask-demo: {'from_template': None, 'overwrite': False, 'context': './', 'save': True}
> 2023-02-19 07:48:52,194 [info] created project dask-demo and saved in MLRun DB
```

## Create and start Dask cluster

Dask functions can be local (local workers), or remote (use containers in the cluster). In the case of remote you can specify the number of replicas (optional) or leave blank for auto-scale. Use the `new_function()` to define the Dask cluster and set the desired configuration of that clustered function.

If the Dask workers need to access the shared file system, apply a shared volume mount (e.g. via v3io mount).

The Dask function spec has several unique attributes (in addition to the standard job attributes):

- **.remote** — bool, use local or clustered dask
- **.replicas** — number of desired replicas, keep 0 for auto-scale
- **.min\_replicas**, **.max\_replicas** — set replicas range for auto-scale
- **.scheduler\_timeout** — cluster is killed after timeout (inactivity), default is '60 minutes'
- **.nthreads** — number of worker threads

If you want to access the Dask dashboard or scheduler from remote you need to use NodePort service type (set `.service_type` to 'NodePort'), and the external IP need to be specified in the MLRun configuration (`ml-conf.remote_host`). This is set automatically if you are running on an Iguazio cluster.

Specify the kind (dask) and the container image:

```
# create an mlrun function that will init the dask cluster
dask_cluster_name = "dask-cluster"
dask_cluster = mlrun.new_function(dask_cluster_name, kind="dask", image="mlrun/mlrun")
dask_cluster.apply(mlrun.mount_v3io())
```

```
<mlrun.runtimes.daskjob.DaskCluster at 0x7f0dabf52460>
```

```
# set range for # of replicas with replicas and max_replicas
dask_cluster.spec.min_replicas = 1
dask_cluster.spec.max_replicas = 4

# set the use of dask remote cluster (distributed)
dask_cluster.spec.remote = True
dask_cluster.spec.service_type = "NodePort"

# set dask memory and cpu limits
dask_cluster.with_worker_requests(mem="2G", cpu="2")
```

## Initialize the Dask Cluster

When you request the dask cluster client attribute, it verifies that the cluster is up and running:

```
# init dask client and use the scheduler address as param in the following cell
dask_cluster.client
```

```
> 2023-02-19 07:49:07,462 [info] trying dask client at: tcp://mlrun-dask-cluster-
↳bae5cf76-0.default-tenant:8786
> 2023-02-19 07:49:07,516 [info] using remote dask scheduler (mlrun-dask-cluster-
↳bae5cf76-0) at: tcp://mlrun-dask-cluster-bae5cf76-0.default-tenant:8786
```

```
<IPython.core.display.HTML object>
```

```
<Client: 'tcp://10.200.196.73:8786' processes=0 threads=0, memory=0 B>
```

## Creating a function that runs over Dask

```
# mlrun: start-code
```

Import mlrun and dask. Nuclio is only used to convert the code into an MLRun function.

```
import mlrun
```

```
from dask.distributed import Client
from dask import delayed
from dask import dataframe as dd

import warnings
import numpy as np
import os
import mlrun

warnings.filterwarnings("ignore")
```

## Python function code

This simple function reads a .csv file using dask dataframe. It runs the groupby and describe functions on the dataset, and stores the results as a dataset artifact.

```
def test_dask(
    context, dataset: mlrun.DataItem, client=None, dask_function: str = None
) -> None:
    # setup dask client from the MLRun dask cluster function
    if dask_function:
        client = mlrun.import_function(dask_function).client
    elif not client:
        client = Client()
```

(continues on next page)

(continued from previous page)

```

# load the dataitem as dask dataframe (dd)
df = dataset.as_df(df_module=dd)

# run describe (get statistics for the dataframe) with dask
df_describe = df.describe().compute()

# run groupby and count using dask
df_grpby = df.groupby("VendorID").count().compute()

context.log_dataset("describe", df=df_grpby, format="csv", index=True)
return

```

```
# mlrun: end-code
```

## Test the function over Dask

### Load sample data

```
DATA_URL = "/User/examples/ytrip.csv"
```

```

!mkdir -p /User/examples/
!curl -L "https://s3.wasabisys.com/iguazio/data/Taxi/yellow_tripdata_2019-01_subset.csv"
↪> {DATA_URL}

```

% Total	% Received	% Xferd	Average Speed		Time	Time	Time	Current
			Dload	Upload	Total	Spent	Left	Speed
100 84.9M	100 84.9M	0 0	7136k	0	0:00:12	0:00:12	--:--:--	6371k

## Convert the code to MLRun function

Use `code_to_function` to convert the code to MLRun and specify the configuration for the Dask process (e.g. replicas, memory etc.). Note that the resource configurations are per worker.

```

# mlrun transforms the code above (up to nuclio: end-code cell) into serverless function
# which runs in k8s pods
fn = mlrun.code_to_function("test_dask", kind="job", handler="test_dask").apply(
    mlrun.mount_v3io()
)

```

## Run the function

```
# function URI is db://<project>/<name>
dask_uri = f"db://{project.name}/{dask_cluster_name}"
```

```
r = fn.run(
    handler=test_dask,
    inputs={"dataset": DATA_URL},
    params={"dask_function": dask_uri},
    auto_build=True,
)
```

```
> 2023-02-19 07:49:27,208 [info] starting run test-dask-test_dask_
↳ uid=a30942af70f347488daf4f653afd6c63 DB=http://mlrun-api:8080
> 2023-02-19 07:49:27,361 [info] Job is running in the background, pod: test-dask-test-
↳ dask-dqdlr
Names with underscore '_' are about to be deprecated, use dashes '-' instead. Replacing_
↳ underscores with dashes.
> 2023-02-19 07:49:35,137 [info] trying dask client at: tcp://mlrun-dask-cluster-
↳ bae5cf76-0.default-tenant:8786
> 2023-02-19 07:49:35,163 [info] using remote dask scheduler (mlrun-dask-cluster-
↳ bae5cf76-0) at: tcp://mlrun-dask-cluster-bae5cf76-0.default-tenant:8786
remote dashboard: default-tenant.app.vmdev94.lab.iguazeng.com:31886
> 2023-02-19 07:49:45,383 [info] To track results use the CLI: {'info_cmd': 'mlrun get_
↳ run a30942af70f347488daf4f653afd6c63 -p dask-demo', 'logs_cmd': 'mlrun logs_
↳ a30942af70f347488daf4f653afd6c63 -p dask-demo'}
> 2023-02-19 07:49:45,384 [info] Or click for UI: {'ui_url': 'https://dashboard.default-
↳ tenant.app.vmdev94.lab.iguazeng.com/mlprojects/dask-demo/jobs/monitor/
↳ a30942af70f347488daf4f653afd6c63/overview'}
> 2023-02-19 07:49:45,384 [info] run executed, status=completed
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-02-19 07:49:45,730 [info] run executed, status=completed
```

## Track the progress in the UI

You can view the progress and detailed information in the MLRun UI by clicking on the uid above. To track the dask progress: in the Dask UI click the "dashboard link" above the "client" section.

## Pipelines using Dask, Kubeflow and MLRun

### Create a project to host functions, jobs and artifacts

Projects are used to package multiple functions, workflows, and artifacts. Project code and definitions are usually stored in a Git archive.

The following code creates a new project in a local dir and initializes git tracking on it.

```
import os
import mlrun
import warnings

warnings.filterwarnings("ignore")

# set project name, dir, and artifacts path
project_name = "sk-project-dask"
project_dir = "./"
project.artifact_path = path

# set project
sk_dask_proj = mlrun.get_or_create_project(project_name, project_dir, init_git=True)
```

```
> 2022-09-27 17:26:14,808 [info] loaded project sk-project-dask from MLRun DB
```

### Init Dask cluster

```
import mlrun

# set up function from local file
dsf = mlrun.new_function(name="mydask", kind="dask", image="mlrun/mlrun")

# set up function specs for dask
dsf.spec.remote = True
dsf.spec.replicas = 5
dsf.spec.service_type = "NodePort"
dsf.with_limits(mem="6G")
dsf.spec.nthreads = 5

# apply mount_v3io over the function so that the k8s pod that runs the function
# can access the data (shared data access)
dsf.apply(mlrun.mount_v3io())
```

```
<mlrun.runtimes.daskjob.DaskCluster at 0x7f47fce9c850>
```

```
dsf.save()
```

```
'db://sk-project-dask/mydask'
```

```
# init dask cluster
```

```
dsf.client
```

```
> 2022-09-27 17:26:25,134 [info] trying dask client at: tcp://mlrun-mytask-d7df9301-d.
↳ default-tenant:8786
> 2022-09-27 17:26:25,162 [info] using remote dask scheduler (mlrun-mytask-d7df9301-d)
↳ at: tcp://mlrun-mytask-d7df9301-d.default-tenant:8786
```

```
<IPython.core.display.HTML object>
```

```
<Client: 'tcp://10.200.152.178:8786' processes=0 threads=0, memory=0 B>
```

## Load and run a functions

Load the function object from .py or .yaml file, or the Function Hub (marketplace).

```
# load function from the Function Hub
sk_dask_proj.set_function("hub://describe", name="describe")
sk_dask_proj.set_function("hub://sklearn_classifier_dask", name="dask_classifier")
```

```
<mlrun.runtimes.kubejob.KubejobRuntime at 0x7f48353d5130>
```

## Create a fully automated ML pipeline

### Add more functions to the project to be used in the pipeline (from the Function Hub)

Describe data, train and eval model with dask.

### Define and save a pipeline

The following workflow definition is written into a file. It describes a Kubeflow execution graph (DAG) and how functions and data are connected to form an end-to-end pipeline.

- Describe data.
- Train, test and evaluate with dask.

Check the code below to see how functions objects are initialized and used (by name) inside the workflow. The `workflow.py` file has two parts, initialize the function objects and define pipeline dsl (connect the function inputs and outputs).

Note: The pipeline can include CI steps like building container images and deploying models as illustrated in the following example.

```
%%writefile workflow.py
import os
from kfp import dsl
import mlrun

# params
funcs = {}
LABELS = "label"
DROP = "congestion_surcharge"
DATA_URL = mlrun.get_sample_path("data/iris/iris_dataset.csv")
DASK_CLIENT = "db://sk-project-dask/mydask"

# init functions are used to configure function resources and local settings
def init_functions(functions: dict, project=None, secrets=None):
    for f in functions.values():
        f.apply(mlrun.mount_v3io())
    pass

@dsl.pipeline(name="Demo training pipeline", description="Shows how to use mlrun")
def kfpipeline():
    # Describe the data
    describe = funcs["describe"].as_step(
        inputs={"table": DATA_URL},
        params={"dask_function": DASK_CLIENT},
    )

    # Train, test and evaluate:
    train = funcs["dask_classifier"].as_step(
        name="train",
        handler="train_model",
        inputs={"dataset": DATA_URL},
        params={
            "label_column": LABELS,
            "dask_function": DASK_CLIENT,
            "test_size": 0.10,
            "model_pkg_class": "sklearn.ensemble.RandomForestClassifier",
            "drop_cols": DROP,
        },
        outputs=["model", "test_set"],
    )
    train.after(describe)
```

Overwriting workflow.py

```
# register the workflow file as "main", embed the workflow code into the project YAML
sk_dask_proj.set_workflow("main", "workflow.py", embed=False)
```

Save the project definitions to a file (project.yaml). It is recommended to commit all changes to a Git repo.

```
sk_dask_proj.save()
```

```
<mlrun.projects.project.MlrunProject at 0x7f48342e4880>
```

## Run a pipeline workflow

Use the `run` method to execute a workflow. You can provide alternative arguments and specify the default target for workflow artifacts. The workflow ID is returned and can be used to track the progress or you can use the hyperlinks.

Note: The same command can be issued through CLI commands: `mlrun project my-proj/ -r main -p "v3io:///users/admin/mlrun/kfp/{{workflow.uid}}/"`

The `dirty` flag lets you run a project with uncommitted changes (when the notebook is in the same git dir it is always dirty). The `watch` flag waits for the pipeline to complete and print results.

```
artifact_path = os.path.abspath("./pipe/{{workflow.uid}}")
run_id = sk_dask_proj.run(
    "main", arguments={}, artifact_path=artifact_path, dirty=False, watch=True
)
```

```
<IPython.core.display.HTML object>
```

```
<graphviz.graphs.Digraph at 0x7f47fce02a90>
```

```
<IPython.core.display.HTML object>
```

*back to top*

## Databricks runtime

The databricks runtime runs on a Databricks cluster (and not in the Iguazio cluster). The function raises a pod on MLRun, which communicates with the Databricks cluster. The requests originate in MLRun and all computing is in the Databricks cluster.

With the databricks runtime, you can send your local file/code as a string to the job, and use a handler as an endpoint for user code. You can optionally send keyword arguments (kwargs) to this job.

You can run the function on:

- An existing cluster, by including `DATABRICKS_CLUSTER_ID`
- A job compute cluster, created and dedicated for this function only.

Params that are not related to a new cluster or an existing cluster:

- `timeout_minutes`
- `token_key`
- `artifact_json_dir` (location where the json file that contains all logged mlrun artifacts is saved, and which is deleted after the run)

Params that are related to a new cluster:

- `spark_version`
- `node_type_id`

- num\_workers

### Example of a job compute cluster

To create a job compute cluster, omit DATABRICKS\_CLUSTER\_ID, and set the `cluster specs` by using the task parameters when running the function. For example:

```
params['task_parameters'] = {'new_cluster_spec': {'node_type_id': 'm5d.large'}, 'number_
of_workers': 2, 'timeout_minutes': 15, 'token_key': non-default-value}
```

Do not send variables named `task_parameters` or `context` since these are utilized by the internal processes of the runtime.

### Example of running a Databricks job from a local file

This example uses an existing cluster: DATABRICKS\_CLUSTER\_ID.

```
import os
import mlrun
from mlrun.runtimes.function_reference import FunctionReference
```

```
# If using a Databricks data store, for example, set the credentials:
os.environ["DATABRICKS_HOST"] = "DATABRICKS_HOST"
os.environ["DATABRICKS_TOKEN"] = "DATABRICKS_TOKEN"
os.environ["DATABRICKS_CLUSTER_ID"] = "DATABRICKS_CLUSTER_ID"
```

```
def add_databricks_env(function):
    job_env = {
        "DATABRICKS_HOST": os.environ["DATABRICKS_HOST"],
        "DATABRICKS_CLUSTER_ID": os.environ.get("DATABRICKS_CLUSTER_ID"),
    }

    for name, val in job_env.items():
        function.spec.env.append({"name": name, "value": val})
```

```
project_name = "databricks-runtime-project"
project = mlrun.get_or_create_project(project_name, context=".", user_project=False)

secrets = {"DATABRICKS_TOKEN": os.environ["DATABRICKS_TOKEN"]}

project.set_secrets(secrets)

code = """
def print_kwargs(**kwargs):
    print(f"kwargs: {kwargs}")
"""

function_ref = FunctionReference(
    kind="databricks",
    code=code,
    image="mlrun/mlrun",
```

(continues on next page)

(continued from previous page)

```

    name="databricks-function",
)

function = function_ref.to_function()

add_databricks_env(function=function)

run = function.run(
    handler="print_kwargs",
    project=project_name,
    params={
        "param1": "value1",
        "param2": "value2",
        "task_parameters": {"timeout_minutes": 15},
    },
)

```

### Logging a Databricks response as an artifact

```

import numpy as np
import pandas as pd
from pyspark.sql import SparkSession

def main():
    df = pd.DataFrame({"A": np.random.randint(1, 100, 5), "B": np.random.rand(5)})
    path = "/dbfs/path/folder"
    parquet_df_path = f"{path}/df.parquet"
    csv_df_path = f"{path}/df.csv"

    if not os.path.exists(path):
        os.makedirs(path)

    # save df
    df.to_parquet(parquet_df_path)
    df.to_csv(csv_df_path, index=False)

    # log artifact
    mlrun_log_artifact("parquet_artifact", parquet_df_path)
    mlrun_log_artifact("csv_artifact", csv_df_path)

    # spark
    spark = SparkSession.builder.appName("example").getOrCreate()
    spark_df = spark.createDataFrame(df)

    # spark path format:
    spark_parquet_path = "dbfs:///path/folder/spark_df.parquet"
    spark_df.write.mode("overwrite").parquet(spark_parquet_path)
    mlrun_log_artifact("spark_artifact", spark_parquet_path)

```

(continues on next page)

(continued from previous page)

```
# an illegal artifact does not raise an error, it logs an error log instead, for
↪example:
# mlrun_log_artifact("illegal_artifact", "/not_exists_path/illegal_df.parquet")
```

```
function = mlrun.code_to_function(
    name="databricks-log_artifact",
    kind="databricks",
    project=project_name,
    filename="./databricks_job.py",
    image="mlrun/mlrun",
)
add_databricks_env(function=function)
run = function.run(
    handler="main",
    project=project_name,
)
```

```
project.list_artifacts()
```

## MPIJob and Horovod runtime

### Running distributed workloads

Training a Deep Neural Network is a hard task. With growing datasets, wider and deeper networks, training our Neural Network can require a lot of resources (CPUs / GPUs / Mem and Time).

There are two main reasons why we would like to distribute our Deep Learning workloads:

1. **Model Parallelism** — The **Model** is too big to fit a single GPU.

In this case the model contains too many parameters to hold within a single GPU.

To negate this we can use strategies like **Parameter Server** or slicing the model into slices of consecutive layers which we can fit in a single GPU.

Both strategies require **Synchronization** between the layers held on different GPUs / Parameter Server shards.

2. **Data Parallelism** — The **Dataset** is too big to fit a single GPU.


Using methods like **Stochastic Gradient Descent** we can send batches of data to our models for gradient estimation. This comes at the cost of longer time to converge since the estimated gradient may not fully represent the actual gradient.

To increase the likelihood of estimating the actual gradient we could use bigger batches, by sending small batches to different GPUs running the same Neural Network, calculating the batch gradient and then running a **Synchronization Step** to calculate the average gradient over the batches and update the Neural Networks running on the different GPUs.

It is important to understand that the act of distribution adds extra **Synchronization Costs** which may vary according to your cluster's configuration.

As the gradients and NN needs to be propagated to each GPU in the cluster every epoch (or a number of steps), Networking can become a bottleneck and sometimes different configurations need to be used for optimal performance.

**Scaling Efficiency** is the metric used to show by how much each additional GPU should benefit the training process with Horovod showing up to 90% (When running with a well written code and good parameters).

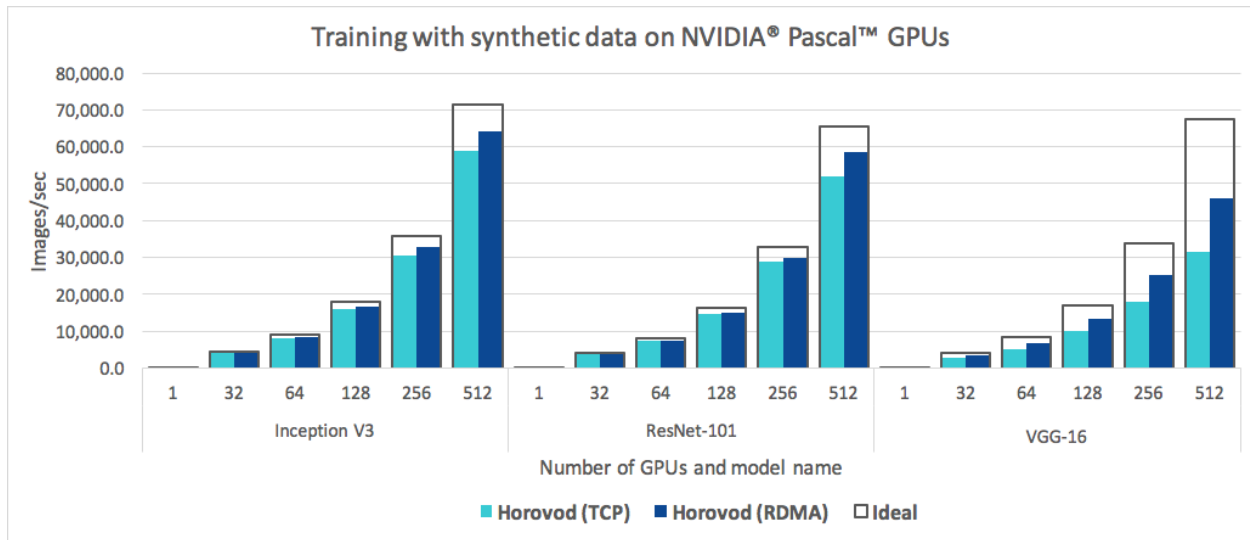

## How can we distribute our training?

There are two different cluster configurations (which can be combined) we need to take into account.

- **Multi Node** — GPUs are distributed over multiple nodes in the cluster.
- **Multi GPU** — GPUs are within a single Node.

In this demo we show a **Multi Node Multi GPU — Data Parallel** enabled training using Horovod.

However, you should always try and use the best distribution strategy for your use case (due to the added costs of the distribution itself, ability to run in an optimized way on specific hardware or other considerations that may arise).

## How Horovod works?

Horovod's primary motivation is to make it easy to take a single-GPU training script and successfully scale it to train across many GPUs in parallel. This has two aspects:


- How much modification does one have to make to a program to make it distributed, and how easy is it to run it?
- How much faster would it run in distributed mode?

Horovod Supports TensorFlow, Keras, PyTorch, and Apache MXNet.

in MLRun we use Horovod with MPI in order to create cluster resources and allow for optimized networking.

**Note:** Horovod and MPI may use [NCCL](#) when applicable which may require some specific configuration arguments to run optimally.

Horovod uses this MPI and NCCL concepts for distributed computation and messaging to quickly and easily synchronize between the different nodes or GPUs.

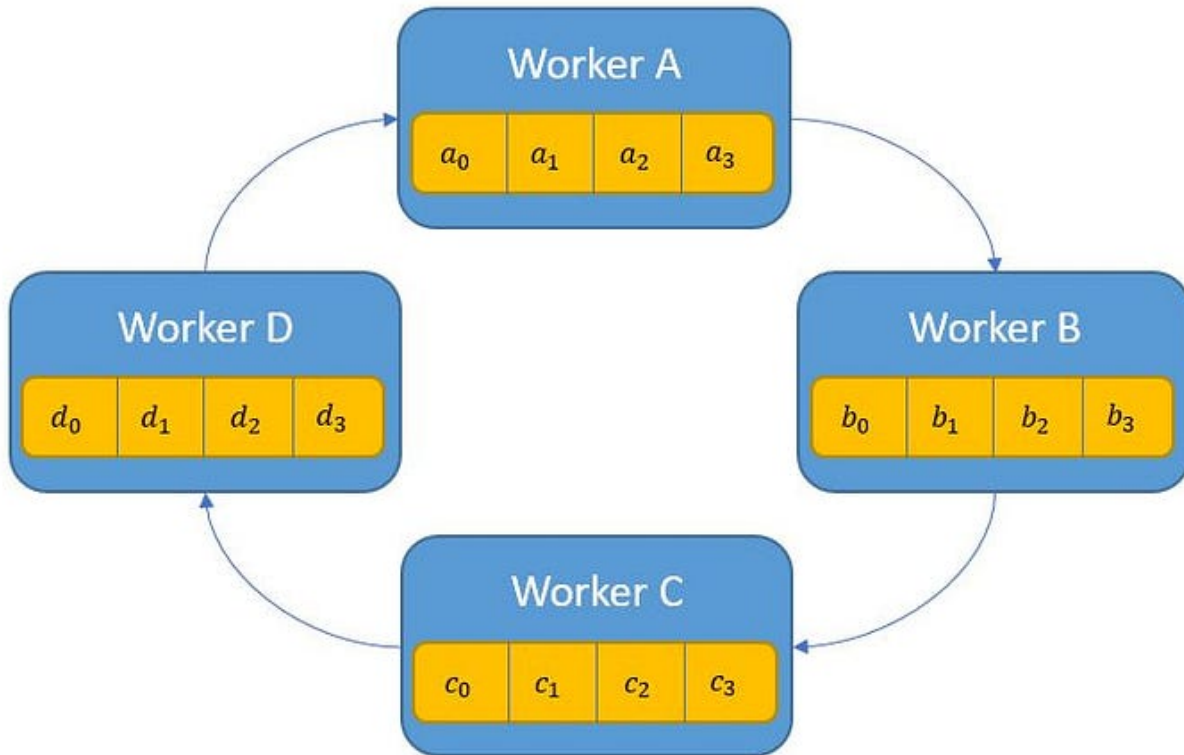

Horovod will run your code on all the given nodes (Specific node can be addressed via `hvd.rank()`) while using an `hvd.DistributedOptimizer` wrapper to run the **synchronization cycles** between the copies of your Neural Network running at each node.

**Note:** Since all the copies of your Neural Network must be the same, Your workers will adjust themselves to the rate of the slowest worker (simply by waiting for it to finish the epoch and receive its updates). Thus try not to make a specific worker do a lot of additional work on each epoch (Like a lot of saving, extra calculations, etc...) since this can affect the overall training time.

### How do we integrate TF2 with Horovod?

As it's one of the main motivations, integration is fairly easy and requires only a few steps: (You can read the full instructions for all the different frameworks on Horovod's documentation website).

1. Run `hvd.init()`.
2. Pin each GPU to a single process. With the typical setup of one GPU per process, set this to local rank. The first process on the server will be allocated the first GPU, the second process will be allocated the second GPU, and so forth.

```

gpus = tf.config.experimental.list_physical_devices('GPU')
for gpu in gpus:
    tf.config.experimental.set_memory_growth(gpu, True)
if gpus:
    tf.config.experimental.set_visible_devices(gpus[hvd.local_rank()], 'GPU')
  
```

3. Scale the learning rate by the number of workers.  
Effective batch size in synchronous distributed training is scaled by the number of workers. An increase in learning rate compensates for the increased batch size.

4. Wrap the optimizer in `hvd.DistributedOptimizer`.  
The distributed optimizer delegates gradient computation to the original optimizer, averages gradients using `allreduce` or `allgather`, and then applies those averaged gradients.  
For TensorFlow v2, when using a `tf.GradientTape`, wrap the tape in `hvd.DistributedGradientTape` instead of wrapping the optimizer.
5. Broadcast the initial variable states from rank 0 to all other processes.  
This is necessary to ensure consistent initialization of all workers when training is started with random weights or restored from a checkpoint.  
For TensorFlow v2, use `hvd.broadcast_variables` after models and optimizers have been initialized.
6. Modify your code to save checkpoints only on worker 0 to prevent other workers from corrupting them.  
For TensorFlow v2, construct a `tf.train.Checkpoint` and only call `checkpoint.save()` when `hvd.rank() == 0`.

You can go to [Horovod's Documentation](#) to read more about horovod.

## Image classification use case

See the end to end [Image Classification with Distributed Training Demo](#)

## Spark Operator runtime

---

### Note

The Spark runtimes `spark` and `remote-spark` do not support `dbfs`, `http`, or `memory` data stores.

---

The `spark-on-k8s-operator` allows Spark applications to be defined in a declarative manner and supports one-time Spark applications with `SparkApplication` and cron-scheduled applications with `ScheduledSparkApplication`.

When sending a request with MLRun to the Spark operator, the request contains your full application configuration including the code and dependencies to run (packaged as a docker image or specified via URIs), the infrastructure parameters, (e.g. the memory, CPU, and storage volume specs to allocate to each Spark executor), and the Spark configuration.

Kubernetes takes this request and starts the Spark driver in a Kubernetes pod (a k8s abstraction, just a docker container in this case). The Spark driver then communicates directly with the Kubernetes master to request executor pods, scaling them up and down at runtime according to the load if dynamic allocation is enabled. Kubernetes takes care of the bin-packing of the pods onto Kubernetes nodes (the physical VMs), and dynamically scales the various node pools to meet the requirements.

When using the Spark operator the resources are allocated per task, meaning that it scales down to zero when the task is done.

### Memory limit

The Spark memory limit is calculated inside Spark based on the requests and memory overhead, and uses the `spark.kubernetes.memoryOverheadFactor`, which is set, by default, to 0.4. (See [Running Spark on Kubernetes](#).) This results in higher memory than what you configure. To control the memory overhead, use:

```
func.spec.spark_conf["spark.driver.memoryOverhead"] = 0
func.spec.spark_conf["spark.executor.memoryOverhead"] = 0
```

where: 0 means no additional memory (in addition to what you configure); 100 means 100MiB of additional memory; "1g" means 1GiB of additional memory.

### V3IO access

If your runtime should access V3IO, use `with_igz_spark()`. When calling `func.with_igz_spark()` the default spec and dependencies are defined.

### WARNING

To avoid unexpected behavior, do not override these defaults.

The default spec is:

```
sj.spec.spark_conf
{'spark.eventLog.enabled': 'true',
 'spark.eventLog.dir': 'file:///v3io/users/spark_history_server_logs'} #only added if
↳ there is a spark history server configured
```

And the default dependencies are:

```
{'jars': ['local:///spark/v3io-lib/v3io-hcfs_2.12.jar',
 'local:///spark/v3io-lib/v3io-spark3-streaming_2.12.jar',
 'local:///spark/v3io-lib/v3io-spark3-object-dataframe_2.12.jar',
 'local:///igz/java/libs/scala-library-2.12.14.jar',
 'local:///spark/jars/jmx_prometheus_javaagent-0.16.1.jar'],
 'files': ['local:///igz/java/libs/v3io-pyspark.zip']}
```

### Example of Spark function with Spark operator

```
import mlrun
import os

# set up new spark function with spark operator
# command will use our spark code which needs to be located on our file system
# the name param can have only non capital letters (k8s convention)
read_csv_filepath = os.path.join(os.path.abspath("."), "spark_read_csv.py")
sj = mlrun.new_function(kind="spark", command=read_csv_filepath, name="sparkreadcsv")

# set spark driver config (gpu_type & gpus=<number_of_gpus> supported too)
sj.with_driver_limits(cpu="1300m")
sj.with_driver_requests(cpu=1, mem="512m")

# set spark executor config (gpu_type & gpus=<number_of_gpus> are supported too)
sj.with_executor_limits(cpu="1400m")
sj.with_executor_requests(cpu=1, mem="512m")

# adds fuse, daemon & iguazio's jars support
sj.with_igz_spark()

# Alternately, move volume_mounts to driver and executor-specific fields and leave
# v3io mounts out of executor mounts if mount_v3io_to_executor=False
# sj.with_igz_spark(mount_v3io_to_executor=False)

# set spark driver volume mount
```

(continues on next page)

(continued from previous page)

```
# sj.function.with_driver_host_path_volume("/host/path", "/mount/path")

# set spark executor volume mount
# sj.function.with_executor_host_path_volume("/host/path", "/mount/path")

# add python module
sj.with_requirements(["matplotlib"])

# Number of executors
sj.spec.replicas = 2

# add jars
# sj.spec.deps["jars"] += ["local:///<path to jar>"]

# Rebuilds the image with MLRun - needed in order to support logging artifacts etc.
sj.deploy()

# Run task while setting the artifact path on which the run artifact (in any) will be
↪ saved
sj.run(artifact_path="/User")
```

### Spark Code (spark\_read\_csv.py)

```
from pyspark.sql import SparkSession
from mlrun import get_or_create_ctx

context = get_or_create_ctx("spark-function")

# build spark session
spark = SparkSession.builder.appName("Spark job").getOrCreate()

# read csv
df = spark.read.load('iris.csv', format="csv",
                    sep=",", header="true")

# sample for logging
df_to_log = df.describe().toPandas()

# log final report
context.log_dataset("df_sample",
                  df=df_to_log,
                  format="csv")

spark.stop()
```

## Nuclio real-time functions

Nuclio is a high-performance "serverless" framework focused on data, I/O, and compute intensive workloads. It is well integrated with popular data science tools, such as Jupyter and Kubeflow; supports a variety of data and streaming sources; and supports execution over CPUs and GPUs.

You can use Nuclio through a fully managed application service (in the cloud or on-prem) in the Iguazio MLOps Platform. MLRun serving utilizes serverless Nuclio functions to create multi-stage real-time pipelines.

The underlying Nuclio serverless engine uses a high-performance parallel processing engine that maximizes the utilization of CPUs and GPUs, supports 13 protocols and invocation methods (for example, HTTP, Cron, Kafka, Kinesis), and includes dynamic auto-scaling for HTTP and streaming. Nuclio and MLRun support the full life cycle, including auto-generation of micro-services, APIs, load-balancing, logging, monitoring, and configuration management—such that developers can focus on code, and deploy to production faster with minimal work.

Nuclio is extremely fast: a single function instance can process hundreds of thousands of HTTP requests or data records per second. To learn more about how Nuclio works, see the Nuclio architecture [documentation](#).

Nuclio is secure: Nuclio is integrated with Kaniko to allow a secure and production-ready way of building Docker images at run time.

Read more in the [Nuclio documentation](#) and the open-source [MLRun library](#).

## Example of Nuclio function

You can create your own Nuclio function, for example a data processing function. For every Nuclio function, by default, there is one worker. See [Number of GPUs](#).

The following code illustrates an example of an MLRun function, of kind 'nuclio', that can be deployed to the cluster.

Create a file `func.py` with the code of the function:

```
def handler(context, event):
    return "Hello"
```

Create the project and the Nuclio function:

```
import mlrun
```

```
# Create the project
project = mlrun.get_or_create_project("nuclio-project", ".")
```

```
# Create a Nuclio function
project.set_function(
    func="func.py",
    image="mlrun/mlrun",
    kind="nuclio",
    name="nuclio-func",
    handler="handler",
)
# Save the function within the project
project.save()
# Deploy the function in the cluster
project.deploy_function("nuclio-func")
```

## Nuclio API gateway

This example demonstrates making an HTTP request to an HTTPS API Gateway of a Nuclio function using basic/access key authentication.

```
import mlrun
import nuclio
```

```
# Create a project
project = mlrun.get_or_create_project(
    "nuclio-api-gateway-example", context="./", user_project=True
)
```

```
# mlrun: start-code
```

```
def handler(context, event):
    return "test"
```

```
# mlrun: end-code
```

```
# Create a simple Nuclio function that gets basic authentication
basic_auth = project.set_function(
    name="basic-auth", handler="handler", image="mlrun/mlrun", kind="nuclio"
)
# Create a simple nuclio function that gets access key authentication
access_key_auth = project.set_function(
    name="access-key", handler="handler", image="mlrun/mlrun", kind="nuclio"
)
project.save()
```

```
# Deploy the function
basic_auth.deploy()
access_key_auth.deploy()
```

## Making an HTTP request using basic authentication

1. Create an API Gateway in the UI, with authentication basic. Set your desired username and password and choose the basic-auth nuclio function.
2. Give it a name and copy the endpoint.
3. Paste the endpoint after the https://.
4. Change the username and password in the code below.

```
import requests
from base64 import b64encode

# Authorization token: Encode to Base64 format
# and then decode it to ASCII since python 3 stores it as a byte string
```

(continues on next page)

(continued from previous page)

```
def basic_auth(username, password):
    token = b64encode(f"{username}:{password}".encode("utf-8")).decode("ascii")
    return f"Basic {token}"

# Enter your username and password here
username = "username"
password = "password"

# Enter your API Gateway endpoint here
basic_auth_api_gateway_path = "https://<API GATEWAY ENDPOINT>"

headers = {"Authorization": basic_auth(username, password)}
res = requests.get(url=basic_auth_api_gateway_path, headers=headers, verify=False)
print(res.text)
```

## Making an HTTP request using access key authentication

1. Create an API Gateway in the UI, with authentication access key and choose the access-key Nuclio function.
2. Give it a name and copy the endpoint.
3. Paste the endpoint after the https://.
4. In the UI, click the user's top right icon, then copy the access key from there.
5. Change the access key in the code below.

```
# Enter your access key here
access_key = "some-access-key"

# Enter your API Gateway endpoint here
access_key_auth_api_gateway_path = "https://<API GATEWAY ENDPOINT>"

headers = {"Cookie": 'session=j:{"sid": "' + access_key + '"}' }
res = requests.get(url=access_key_auth_api_gateway_path, headers=headers, verify=False)
print(res.text)
```

## 6.4.2 Create and use functions

Functions are the basic building blocks of MLRun. They are essentially Python objects that know how to run locally or on a Kubernetes cluster. This section covers how to create and customize an MLRun function, as well as common parameters across all functions.

**In this section:**

- *Naming functions - best practice*
- *Creating functions*
- *Customizing functions*

## Naming functions - best practice

When you create a function, you specify its name. When you deploy a function using the SDK, MLRun appends the project name to the function name. Project names are limited to 63 characters. You must ensure that the combined function-project name does not exceed 63 characters. A function created in the UI has a default limit of 56 characters. MLRun adds to nuclio functions, by default, "nuclio-", giving a total of 63 characters.

## Creating functions

The recommended way to create an MLRun function is by using an MLRun project (see [create and use projects](#)). The general flow looks like the following:

```
project = mlrun.get_or_create_project(...)
fn = project.set_function(...)
```

When creating a function, there are 3 main scenarios:

- *Single source file* — when your code can be contained in a single file
- *Multiple source files* — when your code requires additional files or dependencies
- *Import existing function* — when your function already exists elsewhere and you just want to import it

---

### Note

Using the `set_function` method of an MLRun project allows for each of these scenarios in a transparent way. Depending on the source passed in, the project registers the function using some lower level functions. For specific use cases, you also have access to the lower level functions `new_function()`, `code_to_function()`, and `import_function()`.

---

## Using set\_function

The MLRun project object has a method called `set_function()`, which is a one-size-fits-all way of creating an MLRun function. This method accepts a variety of sources including Python files, Jupyter Notebooks, Git repos, and more.

---

### Note

The return value of `set_function` is your MLRun function. You can immediately run it or apply additional configurations like resources, scaling, etc. See [Customizing functions](#) for more details.

---

When using `set_function` there are a number of common parameters across all function types and creation scenarios. Consider the following example:

```
fn = project.set_function(
    name="my-function", tag="latest", func="my_function.py",
    image="mlrun/mlrun", kind="job", handler="train_model",
```

(continues on next page)

(continued from previous page)

```
requirements=["pandas==1.3.5"], with_repo=True
)
```

- **name:** Name of your MLRun function within the given project. This is displayed in the MLRun UI together with the Kubernetes pod name.
- **tag:** Tag for your function (much like a Docker image). Omitting this parameter defaults to `latest`.
- **func:** What to run with the MLRun function. This can be a number of things including files (`.py`, `.ipynb`, `.yaml`, etc.), URIs (`hub://` prefixed Function Hub URI, `db://` prefixed MLRun DB URI), existing MLRun function objects, or `None` (for current `.ipynb` file).
- **image:** Docker image to use when containerizing the piece of code. If you also specify the `requirements` parameter to build a new Docker image, the `image` parameter is used as the base image.
- **kind:** Runtime the MLRun function uses. See [Kinds of functions \(runtimes\)](#) for the list of supported batch and real-time runtimes.
- **handler:** Default function handler to invoke (e.g. a Python function within your code). This handler can also be overridden when executing the function. For example, `project.run_function("func1", handler="f2")` executes the `f2` Python function, even if the default handler is `f1`.
- **requirements:** Additional Python dependencies needed for the function to run. Using this parameter results in a new Docker image (using the `image` parameter as a base image). This can be a list of Python dependencies or a path to a `requirements.txt` file.
- **with\_repo:** Set to `True` if the function requires additional files or dependencies within a Git repo or archive file. This Git repo or archive file is specified on a project level via `project.set_source(...)`, which the function consumes. If this parameter is omitted, the default is `False`.

## Building images

If your MLRun function requires additional libraries or files, you might need to build a new Docker image. You can do this by specifying a base image to use as the `image`, your requirements via `requirements`, and (optionally) your source code via `with_repo=True` (where the source is specified by `project.set_source(...)`). See more details about images in [MLRun images](#) and more information on when a build is required in [Build function image](#).

---

### Note

When using `with_repo`, the contents of the Git repo or archive are available in the current working directory of your MLRun function during runtime.

---

A good place to start is one of the default MLRun images:

- `mlrun/mlrun`: An MLRun image includes preinstalled OpenMPI and other ML packages. Useful as a base image for simple jobs.
- `mlrun/mlrun-gpu`: The same as `mlrun/mlrun` but for GPUs, including Open MPI.

Dockerfiles for the MLRun images can be found [here](#).

## Single source file

The simplest way to create a function is to use a single file as the source. The code itself is embedded into the MLRun function object. This makes the function quite portable since it does not depend on any external files. You can use any source file supported by MLRun such as Python or Jupyter notebook.

---

### Note

MLRun is not limited to Python. Files of type Bash, Go, etc. are also supported.

---

## Python

This is the simplest way to create a function out of a given piece of code. Simply pass in the path to the Python file *relative to your project context directory*.

```
fn = project.set_function(  
    name="python", func="job.py", kind="job",  
    image="mlrun/mlrun", handler="handler"  
)
```

## Jupyter Notebook

This is a great way to create a function out of a Jupyter Notebook. Just pass in the path to the Jupyter Notebook *relative to your project context directory*. You can use **MLRun cell tags** to specify which parts of the notebook should be included in the function.

---

### Note

To ensure that the latest changes are included, make sure you save your notebook before creating/updating the function.

---

You can also create an MLRun function out of the current Jupyter Notebook you are running in. To do this, simply omit the `func` parameter in `set_function`.

## Multiple source files

If your code requires additional files or external libraries, you need to use a source that supports multiple files such as Git, an archive (zip/tar), or V3IO file share. This approach (especially using a Git repo) pairs well with MLRun projects.

To do this, you must:

- Provide `with_repo=True` when creating your function via `project.set_function(...)`
- Set project source via `project.set_source(source=...)`

This instructs MLRun to load source code from the git repo/archive/file share associated with the project. There are two ways to load these additional files:

## Load code from container

The function is built once. *This is the preferred approach for production workloads.* For example:

```
project.set_source(source="git://github.com/mlrun/project-archive.git")

fn = project.set_function(
    name="myjob", handler="job_func.job_handler",
    image="mlrun/mlrun", kind="job", with_repo=True,
)

project.build_function(fn)
```

## Load code at runtime

The function pulls the source code at runtime. *This is a simpler approach during development that allows for making code changes without re-building the image each time.* For example:

```
archive_url = "https://s3.us-east-1.wasabisys.com/iguazio/project-archive/project-
↪archive.zip"
project.set_source(source=archive_url, pull_at_runtime=True)

fn = project.set_function(
    name="nuclio", handler="nuclio_func:nuclio_handler",
    image="mlrun/mlrun", kind="nuclio", with_repo=True,
)
```

## Load code at runtime using a non-default source

If your project already has a default source, you can still use a different source at runtime or build of a function. Based on the previous example:

```
archive_url = "https://s3.us-east-1.wasabisys.com/iguazio/project-archive/project-
↪archive.zip"
project.set_source(source=archive_url, pull_at_runtime=True)

fn = project.set_function(
    name="nuclio", handler="nuclio_func:nuclio_handler",
    image="mlrun/mlrun", kind="nuclio", with_repo=True,
)
fn.with_source_archive("https://s3.us-east-1.wasabisys.com/some/other/archive.zip")
```

See `LocalRuntime.with_source_archive`, `KubejobRuntime.with_source_archive`, `RemoteRuntime.with_source_archive`.

## Import or use an existing function

If you already have an MLRun function that you want to import, you can do so from multiple locations such as YAML, Function Hub, and MLRun DB.

---

### Note

In the UI, running a batch job from an existing function executes the generated spec merged with the function spec. Therefore, if you remove a function spec, for example env vars, it may re-appear in the final job spec.

---

## YAML

MLRun functions can be exported to YAML files via `fn.export()`. These YAML files can then be imported via the following:

```
fn = project.set_function(name="import", func="function.yaml")
```

## Function Hub

Functions can also be imported from the **MLRun Function Hub**: simply import using the name of the function and the `hub://` prefix:

---

### Note

By default, the `hub://` prefix points to the MLRun Function Hub. You can substitute your own repo. See [Using a Git repo as a function hub](#).

---

```
fn = project.set_function(name="describe", func="hub://describe")
```

## MLRun DB

You can also import functions directly from the MLRun DB. These could be functions that have not been pushed to a git repo, archive, or Function Hub. Import via the name of the function and the `db://` prefix:

```
fn = project.set_function(name="db", func="db://import")
```

## MLRun function

You can also directly use an existing MLRun function object. This is usually used when more granular control over function parameters is required (e.g. advanced parameters that are not supported by `set_function()`).

This example uses a *real-time serving pipeline (graph)*.

```
fn = mlrun.new_function("serving", kind="serving", image="mlrun/mlrun")
graph = serving.set_topology("flow")
graph.to(name="double", handler="mylib.double") \
    .to(name="add3", handler="mylib.add3") \
```

(continues on next page)

(continued from previous page)

```
.to(name="echo", handler="mylib.echo").respond()

project.set_function(name="serving", func=fn, with_repo=True)
```

## Customizing functions

Once you have created your MLRun function, there are many customizations you can add, including Memory / CPU / GPU resources, preemption mode, pod priority, node selection, and more. See full details in [Configuring runs and functions](#).

### 6.4.3 Converting notebooks to function

MLRun annotations are used to identify the code that needs to be converted into an MLRun function. They provide non-intrusive hints that indicate which parts of your notebook should be considered as the code of the function.

Annotations start a code block using `# mlrun: start-code` and end a code block(s), with `# mlrun: end-code`. Use the `#mlrun: ignore` to exclude items from the code qualified annotations. Make sure that the annotations include anything required for the function to run.

```
# mlrun: start-code

def sub_handler():
    return "hello world"
```

The `# mlrun: ignore` annotation enables you to exclude the cell from the function code.

```
# mlrun: ignore

# the handler in the code section below will not call this sub_handler
def sub_handler():
    return "I will be ignored!"
```

```
def handler(context, event):
    return sub_handler()
```

```
# mlrun: end-code
```

Convert the function with `mlrun.code_to_function` and run the handler. Notice the returned value under `results`.

#### Note

Make sure to save the notebook before running `mlrun.code_to_function` so that the latest changes will be reflected in the function.

```
from mlrun import code_to_function

some_function = code_to_function("some-function-name", kind="job", code_output=".")
some_function.run(name="some-function-name", handler="handler", local=True)
```

```
> 2021-11-01 07:42:44,930 [info] starting run some-function-name_
↪ uid=742e7d6e930c48f3a2f1d6175e971455 DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-11-01 07:42:45,214 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f3fc9ed81d0>
```

### In this section

- *Named annotations*
- *Multi section function*
- *Annotation's position in code cell*
- *Guidelines*

## Named annotations

The `# mlrun: start-code` and `# mlrun: end-code` annotations can be used to convert different code sections to different MLRun, functions in the same notebook. To do so add the name of the MLRun function to the end of the annotation as shown in the example below.

```
# mlrun: start-code my-function-name

def handler(context, event):
    return "hello from my-function"

# mlrun: end-code my-function-name
```

Convert the function and run the handler. Notice that the handler that is being used and that there is a change in the returned value under results.

```
my_function = code_to_function("my-function-name", kind="job")
my_function.run(name="my-function-name", handler="handler", local=True)
```

```
> 2021-11-01 07:42:53,892 [info] starting run my-function-name_
↪ uid=e4bbc3cae21042439cc1c3cb9631751c DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-11-01 07:42:54,137 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f3fc9ac71d0>
```

### Note

Make sure to use the name given to the `code_to_function` parameter (name='my-function-name' in the example above) so that all relevant `start-code` and `end-code` annotations are included. If none of the annotations are marked with the function's name, all annotations without any name are used.

### Multi section function

You can use the `# mlrun: start-code` and `# mlrun: end-code` annotations multiple times in a notebook since the whole notebook is scanned. The annotations can be named like the following example, and they can be nameless. If you choose nameless, remember all nameless annotations in the notebook are used.

```
# mlrun: start-code multi-section-function-name

function_name = "multi-section-function-name"

# mlrun: end-code multi-section-function-name
```

Any code between those sections are not included:

```
function_name = "I will be ignored!"
```

```
# mlrun: start-code multi-section-function-name
```

```
def handler(context, event):
    return f"hello from {function_name}"
```

```
# mlrun: end-code multi-section-function-name
```

```
my_multi_section_function = code_to_function("multi-section-function-name", kind="job")
my_multi_section_function.run(
    name="multi-section-function-name", handler="handler", local=True
)
```

```
> 2021-11-01 07:43:05,587 [info] starting run multi-section-function-name_
→uid=9ac6a0e977a54980b657bae067c2242a DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-11-01 07:43:05,834 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f3fc9a24e10>
```

### Annotation's position in code cell

# mlrun: start-code and # mlrun: end-code annotations are relative to their positions inside the code block. Notice how the assignments to function\_name below # mlrun: end-code don't override the assignment between the annotations in the function's context.

```
# mlrun: start-code part-cell-function

def handler(context, event):
    return f"hello from {function_name}"

function_name = "part-cell-function"

# mlrun: end-code part-cell-function

function_name = "I will be ignored"
```

```
my_multi_section_function = code_to_function("part-cell-function", kind="job")
my_multi_section_function.run(name="part-cell-function", handler="handler", local=True)
```

```
> 2021-11-01 07:43:14,347 [info] starting run part-cell-function.
↳ uid=5426e665c7bc4ba492e0a704c5555fb6 DB=http://mlrun-api:8080
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-11-01 07:43:14,628 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f3fc9a2bf50>
```

## Guidelines

- Make sure that every `# mlrun: start-code` has a corresponding `# mlrun: end-code` before the next `# mlrun: start-code` in the notebook.
- Only one MLRun function can have a nameless annotation per notebook.
- Do not use multiple `# mlrun: start-code` nor multiple `# mlrun: end-code` annotations in a single code cell. Only the first appearance of each is used.
- Using single annotations:
  - Use a `# mlrun: start-code` alone, and all code blocks from the annotation to the end of the notebook are included.
  - Use a `# mlrun: end-code` alone, and all code blocks from the beginning of the notebook to the annotation are included.

### 6.4.4 Attach storage to functions

In the vast majority of cases, an MLRun function requires access to storage. This storage might be used to provide inputs to the function including data-sets to process or data-streams that contain input events. Typically, storage is used to store function outputs and result artifacts. For example, trained models or processed data-sets.

Since MLRun functions can be distributed and executed in Kubernetes pods, the storage used would typically be shared, and execution pods would need some added configuration options applied to them so that the function code is able to access the designated storage. These configurations might be k8s volume mounts, specific environment variables that contain configuration and credentials, and other configuration of security settings. These storage configurations are not applicable to functions running locally in the development environment, since they are executed in the local context.

The common types of shared storage are:

1. **v3io storage through API** — When running as part of the Iguazio system, MLRun has access to the system's v3io storage through paths such as `v3io:///projects/my_projects/file.csv`. To enable this type of access, several environment variables need to be configured in the pod that provide the v3io API URL and access keys.
2. **v3io storage through FUSE mount** — Some tools cannot utilize the v3io API to access it and need basic filesystem semantics. For that purpose, v3io provides a FUSE (Filesystem in user-space) driver that can be used to mount v3io containers as specific paths in the pod itself. For example `/User`. To enable this, several specific volume mount configurations need to be applied to the pod spec.
3. **NFS storage access** — When MLRun is deployed as open-source, independent of Iguazio, the deployment automatically adds a pod running NFS storage. To access this NFS storage through pods, a kubernetes pvc mount is needed.
4. **Others** — As use-cases evolve, other cases of storage access may be needed. This will require various configurations to be applied to function execution pods.

MLRun attempts to offload this storage configuration task from the user by automatically applying the most common storage configuration to functions. As a result, most cases do not require any additional storage configurations before executing a function as a Kubernetes pod. The configurations applied by MLRun are:

- In an Iguazio system, apply configurations for v3io access through the API.
- In an open-source deployment where NFS is configured, apply configurations for pvc access to NFS storage.

This MLRun logic is referred to as **auto-mount**.

#### In this section

- *Disabling auto-mount*

- *Modifying the auto-mount default configuration*

## Disabling auto-mount

In cases where the default storage configuration does not fit the function needs, MLRun allows for function spec modifiers to be manually applied to functions. These modifiers can add various configurations to the function spec, adding environment variables, mounts and additional configurations. MLRun also provides a set of common modifiers that can be used to apply storage configurations. These modifiers can be applied by using the `.apply()` method on the function and adding the modifier to apply. You can see some examples of this later in this page.

When a different storage configuration is manually applied to a function, MLRun's auto-mount logic is disabled. This prevents conflicts between configurations. The auto-mount logic can also be disabled by setting `func.spec.disable_auto_mount = True` on any MLRun function.

## Modifying the auto-mount default configuration

The default auto-mount behavior applied by MLRun is controlled by setting MLRun configuration parameters. For example, the logic can be set to automatically mount the `v3io` FUSE driver on all functions, or perform `pvc` mount for NFS storage on all functions. The following code demonstrates how to apply the `v3io` FUSE driver by default:

```
# Change MLRun auto-mount configuration
import mlrun.mlconf

mlrun.mlconf.storage.auto_mount_type = "v3io_fuse"
```

Each of the auto-mount supported methods applies a specific modifier function. The supported methods are:

- `v3io_credentials` — apply `v3io` credentials needed for `v3io` API usage. Applies the `v3io_cred()` modifier.
- `v3io_fuse` — create Fuse driver mount. Applies the `mount_v3io()` modifier.
- `pvc` — create a `pvc` mount. Applies the `mount_pvc()` modifier.
- `auto` — the default auto-mount logic as described above (either `v3io_credentials` or `pvc`).
- `none` — perform no auto-mount (same as using `disable_auto_mount = True`).

The modifier functions executed by auto-mount can be further configured by specifying their parameters. These can be provided in the `storage.auto_mount_params` configuration parameters. Parameters can be passed as a string made of `key=value` pairs separated by commas. For example, the following code runs a `pvc` mount with specific parameters:

```
mlrun.mlconf.storage.auto_mount_type = "pvc"
pvc_params = {
    "pvc_name": "my_pvc_mount",
    "volume_name": "pvc_volume",
    "volume_mount_path": "/mnt/storage/nfs",
}
mlrun.mlconf.storage.auto_mount_params = ",".join(
    [f"{key}={value}" for key, value in pvc_params.items()]
)
```

Alternatively, the parameters can be provided as a base64-encoded JSON object, which can be useful when passing complex parameters or strings that contain special characters:

```
pvc_params_str = base64.b64encode(json.dumps(pvc_params).encode())
mlrun.mlconf.storage.auto_mount_params = pvc_params_str
```

## 6.4.5 Images and their usage in MLRun

Every release of MLRun includes several images for different usages. The build and the infrastructure images are described, and located, in the [README](#). They are also published to [dockerhub](#) and [quay.io](#).

This release of MLRun supports only Python 3.9.

### In this section

- *Using images*
- *MLRun images*
- *Building MLRun images*
- *Building a docker image using a dockerfile and using it*
- *MLRun images and external docker images*

### Using images

See *Build function image*.

### MLRun runtime images

All images are published to [dockerhub](#) and [quay.iohttps://quay.io/organization/mlrun](https://quay.io/organization/mlrun).

The images are:

- `mlrun/mlrun`: An MLRun image includes preinstalled OpenMPI and other ML packages. Useful as a base image for simple jobs.
- `mlrun/mlrun-gpu`: The same as `mlrun/mlrun` but for GPUs, including Open MPI.
- `mlrun/ml-base`: Image for file acquisition, compression, dask jobs, simple training jobs and other utilities.
- `mlrun/jupyter`: An image with Jupyter giving a playground to use MLRun in the open source. Built on top of `jupyter/scipy-notebook`, with the addition of MLRun and several demos and examples.

---

### Note

When using the `mlrun` or `mlrun-gpu` image, use PyTorch versions up to and including than 2.0.1, but not higher. You can build your own images with newer CUDA for later releases of PyTorch.

---

## Building MLRun images

To build all images, run this command from the root directory of the mlrun repository:

```
MLRUN_VERSION=X MLRUN_DOCKER_REPO=X MLRUN_DOCKER_REGISTRY=X make docker-images
```

Where:

- `MLRUN_VERSION` is used as the tag of the image and also as the version injected into the code (e.g. latest or 0.7.0 or 0.6.5-rc6, defaults to unstable)
- `MLRUN_DOCKER_REPO` is the docker repository (defaults to mlrun)
- `MLRUN_DOCKER_REGISTRY` is the docker registry (e.g. [quay.io/](https://quay.io/), [gcr.io/](https://gcr.io/), defaults to empty (docker hub))

For example, running `MLRUN_VERSION=x.y.z make docker-images` generates these images:

- `mlrun/mlrun-api:x.y.z`
- `mlrun/mlrun:x.y.z`
- `mlrun/mlrun-gpu:x.y.z`
- `mlrun/jupyter:x.y.z`
- `mlrun/ml-base:x.y.z`

You can also build only a specific image, for example, `make mlrun` (builds only the api image).

The possible commands are:

- `mlrun`
- `mlrun-gpu`

To run an image locally and explore its contents: `docker run -it <image-name>:<image-tag> /bin/bash` or to load python (or run a script): `docker run -it <image-name>:<image-tag> python`

## Building a docker image using a dockerfile and using it

This flow describes how to build the image externally, put it your private repo, and use it in MLRun.

1. Build an image using Dockerfile:

1. Create a Dockerfile

```
FROM mlrun/mlrun:X.X
RUN pip install package1
RUN pip install package2
```

2. Build the image:

```
docker build -t your_docker_registry/your_image_name:tag
```

3. Push the image:

```
docker push your_docker_registry/your_image_name:tag
```

2. Create a secret on K8s level for accessing your registry:

```
kubectl --namespace default-tenant create secret docker-registry registry-
↪credentials \
  --docker-server your-docker-registry \
  --docker-username < > \
  --docker-password < > \
  --docker-email < >
```

3. In the code, use the image you created and provide the secret for pulling it:

```
func = prj.set_function(name="func",...)
func.set_image_pull_configuration(image_pull_secret_name="registry-credentials")
```

Now when you run the function, the image is used.

## MLRun images and external docker images

There is no difference in the usage between the MLRun images and external docker images. However:

- MLRun images resolve auto tags: If you specify `image="mlrun/mlrun"` the API fills in the tag by the client version, e.g. changes it to `mlrun/mlrun:1.6.2`. So, if the client gets upgraded you'll automatically get a new image tag.
- Where the data node registry exists, MLRun Appends the registry prefix, so the image loads from the datanode registry. This pulls the image more quickly, and also supports air-gapped sites. When you specify an MLRun image, for example `mlrun/mlrun:1.6.2`, the actual image used is similar to `datanode-registry.iguazio-platform.app.vm/mlrun/mlrun:1.6.2`.

These characteristics are great when you're working in a POC or development environment. But MLRun typically upgrades packages as part of the image, and therefore the default MLRun images can break your product flow.

## Working with images in production

---

### Warning

For production, **create your own images** to ensure that the image is fixed.

---

- Pin the image tag, e.g. `image="mlrun/mlrun:1.6.2"`. This maintains the image tag at the version you specified, even when the client is upgraded. Otherwise, an upgrade of the client would also upgrade the image. (If you specify an external (not MLRun images) docker image, like `python`, the result is the docker/k8s default behavior, which defaults to `latest` when the tag is not provided.)
- Pin the versions of requirements, again to avoid breakages, e.g. `pandas==1.4.0`. (If you only specify the package name, e.g. `pandas`, then `pip/conda` (python's package managers) just pick up the latest version.)

### 6.4.6 Build function image

As discussed in *Images and their usage in MLRun*, MLRun provides pre-built images which contain the components necessary to execute an MLRun runtime. In some cases, however, custom images need to be created. This page details this process and the available options.

#### When is a build required?

In many cases an MLRun runtime can be executed without having to build an image. This will be true when the basic MLRun images fulfill all the requirements for the code to execute. It is required to build an image if one of the following is true:

- The code uses additional Python packages, OS packages, scripts or other configurations that need to be applied
- The code uses different base-images or different versions of MLRun images than provided by default
- Executed source code has changed, and the image has the code packaged in it - see [here](#) for more details on source code, and using `with_code()` to avoid re-building the image when the code has changed
- The code runs nuclio functions, which are packaged as images (the build is triggered by MLRun and executed by nuclio)

The build process in MLRun is based on [Kaniko](#) and automated by MLRun - MLRun generates the dockerfile for the build process, and configures Kaniko with parameters needed for the build.

Building images is done through functions provided by the `MlrunProject` class. By using project functions, the same process is used to build and deploy a stand-alone function or functions serving as steps in a pipeline.

#### Automatically building images

MLRun has the capability to auto-detect when a function image needs to first be built. Following is an example that will require building of the image:

```
project = mlrun.new_project(project_name, "./proj")

project.set_function(
    "train_code.py",
    name="trainer",
    kind="job",
    image="mlrun/mlrun",
    handler="train_func",
    requirements=["pandas"]
)

# auto_build will trigger building the image before running,
# due to the additional requirements.
project.run_function("trainer", auto_build=True)
```

Using the `auto_build` option is only suitable when the build configuration does not change between runs of the runtime. For example, if during the development process new requirements were added, the `auto_build` parameter should not be used, and manual build is needed to re-trigger a build of the image.

In the example above, the `requirements` parameter was used to specify a list of additional Python packages required by the code. This option directly affects the image build process - each requirement is installed using `pip` as part of the docker-build process. The `requirements` parameter can also contain a path to a requirements file, making it easier to reuse an existing configuration rather than specify a list of packages.

## Manually building an image

To manually build an image, use the `build_function()` function, which provides multiple options that control and configure the build process.

### Specifying base image

To use an existing image as the base image for building the image, set the image name in the `base_image` parameter. Note that this image serves as the base (dockerfile FROM property), and should not to be confused with the resulting image name, as specified in the `image` parameter.

```
project.build_function(
    "trainer",
    base_image="myrepo/my_base_image:latest",
)
```

### Running commands

To run arbitrary commands during the image build, pass them in the `commands` parameter of `build_function()`. For example:

```
github_repo = "myusername/myrepo.git@mybranch"

project.build_function(
    "trainer",
    base_image="myrepo/base_image:latest",
    commands= [
        "pip install git+https://github.com/" + github_repo,
        "mkdir -p /some/path && chmod 0777 /some/path",
    ]
)
```

These commands are added as RUN operations to the dockerfile generating the image.

### MLRun package deployment

The `with_mlrun` and `mlrun_version_specifier` parameters allow control over the inclusion of the MLRun package in the build process. Depending on the base-image used for the build, the MLRun package may already be available in which case use `with_mlrun=False`. If not specified, MLRun will attempt to detect this situation - if the image used is one of the default MLRun images released with MLRun, `with_mlrun` is automatically set to `False`. If the code execution requires a different version of MLRun than the one used to deploy the function, set the `mlrun_version_specifier` to point at the specific version needed. This uses the published MLRun images of the specified version instead. For example:

```
project.build_function(
    "trainer",
    with_mlrun=True,
    mlrun_version_specifier="1.0.0"
)
```

## Working with code repository

As the code matures and evolves, the code will usually be stored in a git code repository. When the MLRun project is associated with a git repo (see *Create, save, and use projects* for details), functions can be added by calling `set_function()` and setting `with_repo=True`. This indicates that the code of the function should be retrieved from the project code repository.

In this case, the entire code repository will be retrieved from git as part of the image-building process, and cloned into the built image. This is recommended when the function relies on code spread across multiple files and also is usually preferred for production code, since it means that the code of the function is stable, and further modifications to the code will not cause instability in deployed images.

During the development phase it may be desired to retrieve the code in runtime, rather than re-build the function image every time the code changes. To enable this, use `set_source()` which gets a path to the source (can be a git repository or a tar or zip file) and set `pull_at_runtime=True`.

## Using a private Docker registry

By default, images are pushed to the registry configured during MLRun deployment, using the configured registry credentials.

To push resulting images to a different registry, specify the registry URL in the `image` parameter. If the registry requires credentials, create a k8s secret containing these credentials, and pass its name in the `secret_name` parameter.

When using ECR as registry, MLRun uses Kaniko's ECR credentials helper, in which case the secret provided should contain AWS credentials needed to create ECR repositories, as described [here](#). MLRun detects automatically that the registry is an ECR registry based on its URL and configures Kaniko to use the ECR helper. For example:

```
# AWS credentials stored in a k8s secret -
# kubectl create secret generic ecr-credentials --from-file=<path to .aws/credentials>

project.build_function(
    "trainer",
    image="<aws_account_id>.dkr.ecr.us-east-2.amazonaws.com/myrepo/image:v1",
    secret_name="ecr-credentials",
)
```

When using an ECR registry and not providing a secret name, MLRun assumes that an EC2 instance role is used to authorize access to ECR. In this case MLRun clears out AWS credentials provided by project-secrets or environment variables (`AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`) from the Kaniko pod used for building the image. Otherwise Kaniko would attempt to use these credentials for ECR access instead of using the instance role. This means it's not possible to build an image with both ECR access via instance role and S3 access using a different set of credentials. To build this image, the instance role that has access to ECR must have the permissions required to access S3.

## Using self-signed registry

If you need to build your function and push the resulting container image to an external Docker registry that uses a self-signed SSL certificate, you can use Kaniko with the `--skip-tls-verify` flag. When using this flag, Kaniko ignores the SSL certificate verification while pulling base images and/or pushing the final built image to the registry over HTTPS.

Caution: Using the `--skip-tls-verify` flag poses security risks since it bypasses SSL certificate validation. Only use this flag in trusted environments or with private registries where you are confident in the security of the network connections.

To use this flag, pass it in the `extra_args` parameter, for example:

```
project.build_function(
    ...
    extra_args="--skip-tls-verify",
)
```

## Build environment variables

It is possible to pass environment variables that will be set in the Kaniko pod that executes the build. This may be useful to pass important information needed for the build process. The variables are passed as a dictionary in the `builder_env` parameter, for example:

```
project.build_function(
    ...
    builder_env={"GIT_TOKEN": token},
)
```

## Extra arguments

It is also possible to pass custom arguments and flags to Kaniko. The `extra_args` parameter can be utilized in `build_image()`, `build_function()`, or during the deployment of the function. It provides a way to fine-tune the Kaniko build process according to your specific needs.

You can provide the `extra_args` as a string in the format of a CLI command line, just as you would when using Kaniko directly, for example:

```
project.build_function(
    ...
    extra_args="--build arg GIT_TOKEN=token --skip-tls-verify",
)
```

Note that when building an image in MLRun, project secrets are automatically passed to the builder pod as environment variables whose name is the secret key.

## Deploying nuclio functions

When using nuclio functions, the image build process is done by nuclio as part of the deployment of the function. Most of the configurations mentioned in this page are available for nuclio functions as well. To deploy a nuclio function, use `deploy_function()` instead of using `build_function()` and `run_function()`.

## Creating default Spark runtime images

When using Spark to execute code, either using a Spark service (remote-spark) or the Spark operator, an image is required that contains both Spark binaries and dependencies, and MLRun code and dependencies. This image is used in the following scenarios:

1. For remote-spark, the image is used to run the initial MLRun code which will submit the Spark job using the remote Spark service
2. For Spark operator, the image is used for both the driver and the executor pods used to execute the Spark job

This image needs to be created any time a new version of Spark or MLRun is being used, to ensure that jobs are executed with the correct versions of both products.

To prepare this image, MLRun provides the following facilities:

```
# For remote Spark
from mlrun.runtimes import RemoteSparkRuntime
RemoteSparkRuntime.deploy_default_image()

# For Spark operator
from mlrun.runtimes import Spark3Runtime
Spark3Runtime.deploy_default_image()
```

## 6.4.7 Node affinity

You can assign a node or a node group for services or for jobs executed by a service. When specified, the service or the pods of a function can only run on nodes whose labels match the node selector entries configured for the specific service. If node selection for the service is not specified, the selection criteria defaults to the Kubernetes default behavior, and jobs run on a random node.

For MLRun and Nuclio, you can also specify node selectors on a per-job basis. The default node selectors (defined at the service level) are applied to all jobs unless you specifically override them for an individual job.

You can configure node affinity for:

- Jupyter
- Presto (The node selection also affects any additional services that are directly affected by Presto, for example hive and mariadb, which are created if Enable hive is checked in the Presto service.)
- Grafana
- Shell
- MLRun (default value applied to all jobs that can be overwritten for individual jobs)
- Nuclio (default value applied to all jobs that can be overwritten for individual jobs)

See more about [Kubernetes nodeSelector](#).

## UI configuration

Configure node selection on the service level in the service's **Custom Parameters** tab, under **Resources**, by adding or removing Key:Value pairs. For MLRun and Nuclio, this is the default node selection for all MLRun jobs and Nuclio functions.

You can also configure the node selection for individual MLRun jobs by going to **Platform dashboard | Projects | New Job | Resources | Node selector**, and adding or removing Key:Value pairs. Configure the node selection for individual Nuclio functions when creating a function in the **Configuration** tab, under **Resources**, by adding Key:Value pairs.

## SDK configuration

Configure node selection by adding the key:value pairs in your Jupyter notebook formatted as a Python dictionary. For example:

```
import mlrun
import os
train_fn = mlrun.code_to_function('training',
                                kind='job',
                                handler='my_training_function')
train_fn.with_preemption_mode(mode="prevent")
train_fn.run(inputs={"dataset":my_data})

# Add node selection
func.with_node_selection(node_selector={name})
```

See `with_node_selection`.

## 6.4.8 Function hub

This section demonstrates how to import a function from the hub into your project, and provides some basic instructions on how to run the function and view the results.

### In this section


- *MLRun Function hub*
- *Custom function hub*
- *Setting the project configuration*
- *Loading functions from the hub*
- *View the function params*
- *Running the function*

## MLRun function hub

The MLRun function hub has a wide range of functions that can be used for a variety of use cases. There are functions for ETL, data preparation, training (ML & Deep learning), serving, alerts and notifications and more. Each function has a docstring that explains how to use it. In addition, the functions are associated with categories to make it easier for you to find the relevant one.

Functions can be easily imported into your project and therefore help you to speed up your development cycle by reusing built-in code.

The function hub is located [here](#). You can search and filter the categories and kinds to find a function that meets your needs.

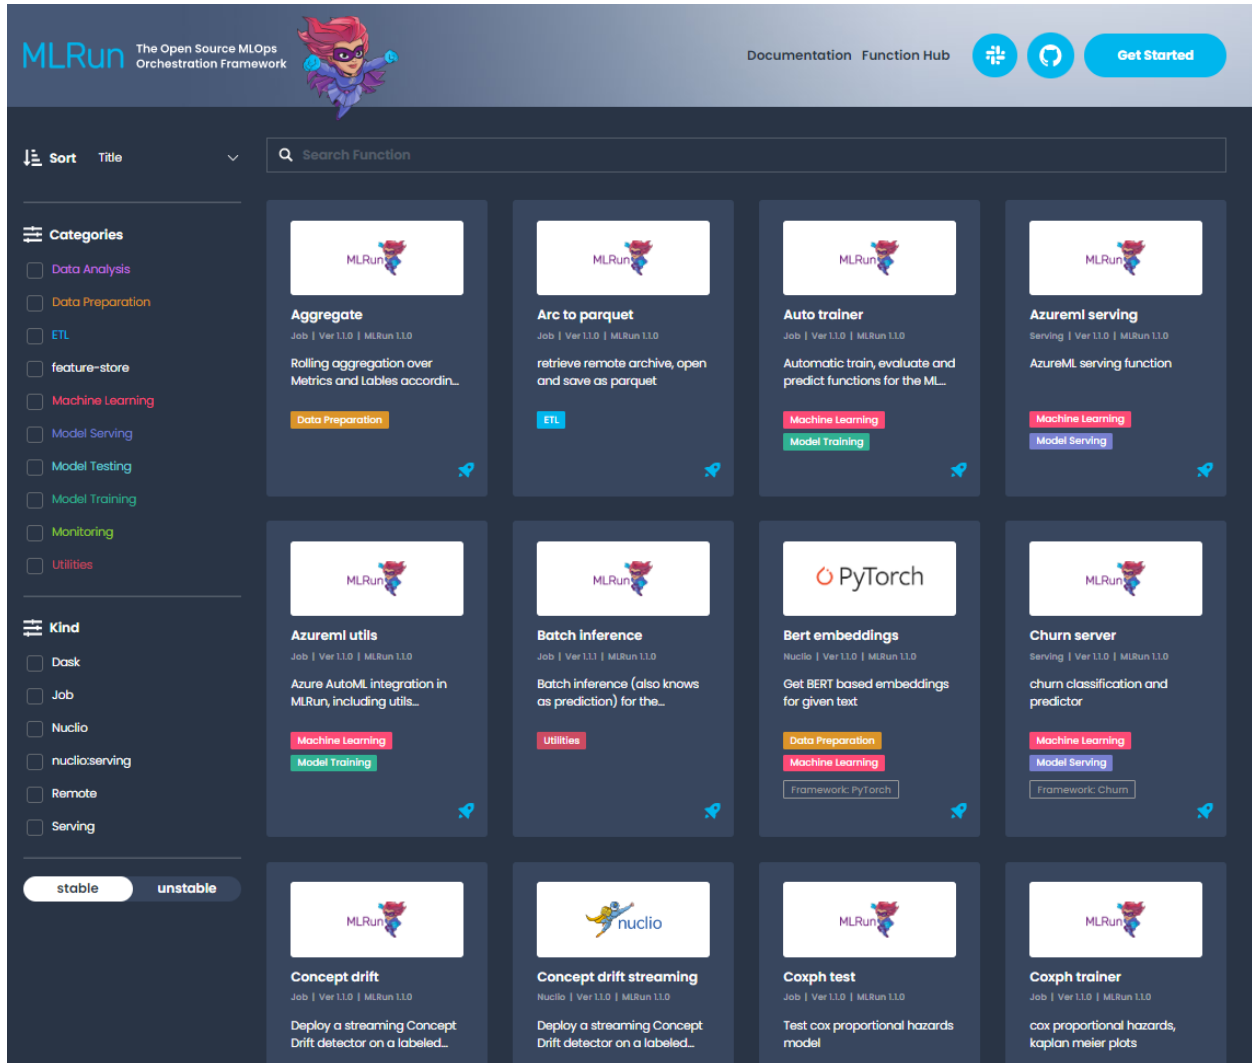

## Custom function hub

You can create your own function hub, and connect it to MLRun. Then you can import functions (with their tags) from your custom hub.

### Create a custom hub

You can either fork the [MLRun function hub repo](#) and add to it your Git repo, or create a hub from scratch. Read [CONTRIBUTING.md](#) to learn how to create a function.

---

**Note:** Make sure your hub source is accessible via github (private is also possible).

---

To create a function hub from scratch, the hub structure must be the same as the [MLRun hub](#).

The hierarchy must be:

- functions directory
  - channels directories
    - \* some-function-1
    - \* some-function-2
    - \* ...
    - \* some-function-n
      - version-1
      - ...
      - version-n
      - latest
      - src
      - function.yaml
      - item.yaml
      - [function.py](#)
      - ...
      - static (optional)
      - html files

### Add a custom hub to the MLRun database

When you add a hub, specify `order=-1` to add it to the top of the list. The list order is relevant when *loading a function*: if you don't specify a hub name, MLRun starts searching for the function with the last added hub. If you want to add a hub but not at the top of the list, view the current list using `list_hub_source()`. The MLRun function hub is always the last in the list (and cannot be modified).

To add a hub, run:

```
import mlrun.common.schemas

# Add a custom hub to the top of the list
private_source = mlrun.common.schemas.IndexedHubSource(
    order=-1,
    source=mlrun.common.schemas.HubSource(
        metadata=mlrun.common.schemas.HubObjectMetadata(
            name="private", description="a private hub"
        ),
        spec=mlrun.common.schemas.HubSourceSpec(
            path="https://mlrun.github.io/marketplace", channel="development"
        ),
    )
)

db.create_hub_source(private_source)
```

## Setting the project configuration

The first step for each project is to set the project name and path:

```
from os import path, getenv
from mlrun import new_project

project_name = 'load-func'
project_path = path.abspath('conf')
project = new_project(project_name, project_path, init_git=True)

print(f'Project path: {project_path}\nProject name: {project_name}')
```

## Set the artifacts path

The artifact path is the default path for saving all the artifacts that the functions generate:

```
from mlrun import mlconf

# Target location for storing pipeline artifacts
artifact_path = path.abspath('jobs')
# MLRun DB path or API service URL
mlconf.dbpath = mlconf.dbpath or 'http://mlrun-api:8080'

print(f'Artifacts path: {artifact_path}\nMLRun DB path: {mlconf.dbpath}')
```

## Loading functions from the hub

Run `project.set_function` to add or update a function object to the project.

```
set_function(func, name='', kind='', image=None, with_repo=None)
```

Partial list of parameters:

- **func** — function object or spec/code url.
- **name** — name of the function (under the project).
- **kind** — runtime kind e.g. job, nuclio, spark, dask, mpijob. Default: job.
- **image** — docker image to be used, can also be specified in the function object/yaml.
- **with\_repo** — add (clone) the current repo to the build source.

See all the parameters in [set\\_function\(\)](#) API documentation.

## Load function example

The `describe` function analyzes a csv or parquet file for data analysis. To load the `describe` function from the MLRun function hub:

```
project.set_function('hub://describe', 'describe')
```

To load the same function from your custom hub:

```
project.set_function('hub://<hub-name>/describe', 'describe')
```

**Caution:** If you don't specify a hub name at all, the algorithm searches for the function in all the hubs, giving preference to newly defined hubs. Therefore, if you have multiple hubs, best practice is to explicitly mention the hub name.

After loading the function, create a function object named, for example, `my_describe`:

```
my_describe = project.func('describe')
```

## View the function params

To view the parameters, run the function with `.doc()`:

```
my_describe.doc()
```

```
function: describe
describe and visualizes dataset stats
default handler: summarize
entry points:
  summarize: Summarize a table
    context(MLClientCtx) - the function context, default=
    table(DataItem) - MLRun input pointing to pandas dataframe (csv/parquet file,
↳ path), default=
    label_column(str) - ground truth column label, default=None
```

(continues on next page)

(continued from previous page)

```

class_labels(List[str]) - label for each class in tables and plots, default=[]
plot_hist(bool) - (True) set this to False for large tables, default=True
plots_dest(str) - destination folder of summary plots (relative to artifact_
↪path), default=plots
update_dataset - when the table is a registered dataset update the charts in-
↪place, default=False

```

## Running the function

Use the `run` method to run the function.

When working with functions, pay attention to the following:

- Input vs. params — for sending data items to a function, send it via "inputs" and not as params.
- Working with artifacts — Artifacts from each run are stored in the `artifact_path`, which can be set globally with the environment variable (`MLRUN_ARTIFACT_PATH`) or with the config. If it's not already set you can create a directory and use it in the runs. Using `{{run.uid}}` in the path creates a unique directory per run. When using pipelines you can use the `{{workflow.uid}}` template option.

This example runs the `describe` function. This function analyzes a dataset (in this case it's a csv file) and generates HTML files (e.g. correlation, histogram) and saves them under the artifact path.

```

DATA_URL = 'https://s3.wasabisys.com/iguazio/data/iris/iris_dataset.csv'

my_describe.run(name='describe',
                inputs={'table': DATA_URL},
                artifact_path=artifact_path)

```

## Saving the artifacts in a unique folder for each run

```

out = mlconf.artifact_path or path.abspath('./data')
my_describe.run(name='describe',
                inputs={'table': DATA_URL},
                artifact_path=path.join(out, '{{run.uid}}'))

```

## Viewing the jobs & the artifacts

There are few options to view the outputs of the jobs you ran:

- In Jupyter the result of the job is displayed in the Jupyter notebook. When you click on the artifacts it displays its content in Jupyter.
- In the MLRun UI, under the project name, you can view the job that was running as well as the artifacts it generated.

### 6.4.9 Using a Git repo as a function hub

You can save functions in a Git repo, and use this repo as your own function hub. This repo structure must conform with:

- The name of the function YAML must be named `function.yaml`. You can use the [export](#) method to create the function yaml file.
- The `.yaml` file must stored in a path like this: `/function-name/function.yaml` (e.g `/func/function.yaml`), for example: `https://raw.githubusercontent.com/user-name/repo-name/function-name/function.yaml`.
- If you have additional files, for example a source file or a notebook example, they can be stored in the same folder as the `function.yaml`.

#### Tip

You can use Git tags for function versioning in Git. For example, to import a function named `func` that has a `v1` tag:

```
import_func_1 = mlrun.import_function('hub://func:v1')
```

### Create and export an MLRun function from a file

You can use the function tag to tag the function in MLRun. It is not related to the Git tag. For example, this function has a 'version1' tag in MLRun and a 'v1' tag in Git.

```
function = project.set_function(
    name="func-hub",
    tag="version1",
    handler="func",
    image="mlrun/mlrun",
    func="./my-hub/func/func.py",
    kind="job",
)
```

Export the function to a YAML file

```
function.export("./my-hub/func/function.yaml")
```

### Import and run the function from your repo

You can use a import function from your "Git repo function hub" by pointing to it with its full URL, for example: `https://raw.githubusercontent.com/user-name/repo-name/tag/name/function.yaml`.

#### Working with tags

Assume there are multiple versions in Git: `v1`, `v2`, etc. You specify which version you want by appending `:tag#` to the hub path. The path must be to a folder that contains the `function.yaml` file in the `func` directory.

#### Private repo

If working from a private repo, set: `project.set_secret({"HTTPS_AUTH_TOKEN":<Http-Token, e.g. GIT-TOKEN>})`

---

```
# Import the v1 tag from git:
import_func_1 = project.set_function(
    "https://raw.githubusercontent.com/user-name/repo-name/v1/func/function.yaml",
    name="<function-name>",
)

# print the results
print(import_func_1.to_yaml())

# Run the function:
import_func_1.run()
```

## DATA AND ARTIFACTS

One of the biggest challenge in distributed systems is handling data given the different access methods, APIs, and authentication mechanisms across types and providers.

Working with the abstractions enable you to securely access different data sources through a single API, many continuance methods (e.g. to/from DataFrame, get, download, list, ...), automated data movement, and versioning.

MLRun provides these main abstractions to access structured and unstructured data:

### In this section

## 7.1 Data stores

A data store defines a storage provider (e.g. file system, S3, Azure blob, Iguazio v3io, etc.).

### In this section

- *Shared data stores*
- *Storage credentials and parameters*
- *Using data store profiles*

### 7.1.1 Shared data stores

MLRun supports multiple data stores. (More can easily added by extending the `DataStore` class.) Data stores are referred to using the schema prefix (e.g. `s3://my-bucket/path`). The currently supported schemas and their urls:

- **files** — local/shared file paths, format: `/file-dir/path/to/file` (Unix) or `C:/dir/file` (Windows)
- **http, https** — read data from HTTP sources (read-only), format: `https://host/path/to/file` (Not supported by runtimes spark and remote-spark)
- **s3** — S3 objects (AWS or other endpoints), format: `s3://<bucket>/path/to/file`
- **v3io, v3ios** — Iguazio v3io data fabric, format: `v3io://[<remote-host>]/<data-container>/path/to/file`
- **az** — Azure Blob storage, format: `az://<container>/path/to/file`
- **dbfs** — Databricks storage, format: `dbfs://path/to/file` (Not supported by runtimes spark and remote-spark)
- **gs, gcs** — Google Cloud Storage objects, format: `gs://<bucket>/path/to/file`
- **store** — MLRun versioned artifacts (see [Artifacts](#)), format: `store://artifacts/<project>/<artifact-name>[:tag]`

- **memory** — in memory data registry for passing data within the same process, format `memory://key`, use `mlrun.datastore.set_in_memory_item(key, value)` to register in memory data items (byte buffers or DataFrames). (Not supported by all Spark runtimes)

## 7.1.2 Storage credentials and parameters

Data stores might require connection credentials. These can be provided through environment variables or project/job context secrets. The exact credentials depend on the type of the data store. They are listed in the following sections. Each parameter specified can be provided as an environment variable, or as a project-secret that has the same key as the name of the parameter.

MLRun jobs that are executed remotely run in independent pods, with their own environment. When setting an environment variable in the development environment (for example Jupyter), this has no effect on the executing pods. Therefore, before executing jobs that require access to storage credentials, these need to be provided by assigning environment variables to the MLRun runtime itself, assigning secrets to it, or placing the variables in project-secrets.

You can also use *data store profiles* to provide credentials.

**Warning:** Passing secrets as environment variables to runtimes is discouraged, as they are exposed in the pod spec. Refer to [Working with secrets](#) for details on secret handling in MLRun.

For example, running a function locally:

```
# Access object in AWS S3, in the "input-data" bucket
source_url = "s3://input-data/input_data.csv"

os.environ["AWS_ACCESS_KEY_ID"] = "<access key ID>"
os.environ["AWS_SECRET_ACCESS_KEY"] = "<access key>"

# Execute a function that reads from the object pointed at by source_url.
# When running locally, the function can use the local environment variables.
local_run = func.run(name='aws_func', inputs={'source_url': source_url}, local=True)
```

Running the same function remotely:

```
# Executing the function remotely using env variables (not recommended!)
func.set_env("AWS_ACCESS_KEY_ID", "<access key ID>").set_env("AWS_SECRET_ACCESS_KEY", "<access key>")
remote_run = func.run(name='aws_func', inputs={'source_url': source_url})

# Using project-secrets (recommended) - project secrets are automatically mounted to project functions
secrets = {"AWS_ACCESS_KEY_ID": "<access key ID>", "AWS_SECRET_ACCESS_KEY": "<access key>"}
db = mlrun.get_run_db()
db.create_project_secrets(project=project_name, provider="kubernetes", secrets=secrets)

remote_run = func.run(name='aws_func', inputs={'source_url': source_url})
```

The following sections list the credentials and configuration parameters applicable to each storage type.

## v3io

When running in an Iguazio system, MLRun automatically configures the executed functions to use v3io storage, and passes the needed parameters (such as access-key) for authentication. Refer to the [auto-mount](#) section for more details on this process.

In some cases, the v3io configuration needs to be overridden. The following parameters can be configured:

- `V3IO_API` — URL pointing to the v3io web-API service.
- `V3IO_ACCESS_KEY` — access key used to authenticate with the web API.
- `V3IO_USERNAME` — the user-name authenticating with v3io. While not strictly required when using an access-key to authenticate, it is used in several use-cases, such as resolving paths to the home-directory.

## Azure Blob storage

The Azure Blob storage can utilize several methods of authentication. Each requires a different set of parameters as listed here:

Authentication method	Parameters
Connection string	<code>AZURE_STORAGE_CONNECTION_STRING</code>
SAS token	<code>AZURE_STORAGE_ACCOUNT_NAME</code> <code>AZURE_STORAGE_SAS_TOKEN</code>
Account key	<code>AZURE_STORAGE_ACCOUNT_NAME</code> <code>AZURE_STORAGE_KEY</code>
Service principal with a client secret	<code>AZURE_STORAGE_ACCOUNT_NAME</code> <code>AZURE_STORAGE_CLIENT_ID</code> <code>AZURE_STORAGE_CLIENT_SECRET</code> <code>AZURE_STORAGE_TENANT_ID</code>

**Note:** The `AZURE_STORAGE_CONNECTION_STRING` configuration uses the `BlobServiceClient` to access objects. This has limited functionality and cannot be used to access Azure Datalake storage objects. In this case use one of the other authentication methods that use the `fsspec` mechanism.

## Google cloud storage

- `GOOGLE_APPLICATION_CREDENTIALS` — path to the application credentials to use (in the form of a JSON file). This can be used if this file is located in a location on shared storage, accessible to pods executing MLRun jobs.
- `GCP_CREDENTIALS` — when the credentials file cannot be mounted to the pod, this secret or environment variable may contain the contents of this file. If configured in the function pod, MLRun dumps its contents to a temporary file and points `GOOGLE_APPLICATION_CREDENTIALS` at it. An exception is `BigQuerySource`, which passes `GCP_CREDENTIALS`'s contents directly to the query engine.

## Databricks file system

---

### Note

Not supported by the spark and remote-spark runtimes.

---

- `DATABRICKS_HOST` — hostname in the format: `https://abc-d1e2345f-a6b2.cloud.databricks.com'`
- `DATABRICKS_TOKEN` — Databricks access token. Perform [Databricks personal access token authentication](#).

## S3

- `AWS_ACCESS_KEY_ID`, `AWS_SECRET_ACCESS_KEY` — [access key](#) parameters
- `S3_ENDPOINT_URL` — the S3 endpoint to use. If not specified, it defaults to AWS. For example, to access a storage bucket in Wasabi storage, use `S3_ENDPOINT_URL = "https://s3.wasabisys.com"`
- `MLRUN_AWS_ROLE_ARN` — [IAM role to assume](#). Connect to AWS using the secret key and access key, and assume the role whose ARN is provided. The ARN must be of the format `arn:aws:iam::<account-of-role-to-assume>:role/<name-of-role>`
- `AWS_PROFILE` — name of credentials profile from a local AWS credentials file. When using a profile, the authentication secrets (if defined) are ignored, and credentials are retrieved from the file. This option should be used for local development where AWS credentials already exist (created by aws CLI, for example)

## 7.1.3 Using data store profiles

---

### Notes

- Datastore profile does not support: v3io (datastore, or source/target), snowflake source, DBFS for spark runtimes, Dask runtime.
  - Datastore profiles are not part of a project export/import.
- 

You can use a data store profile to manage datastore credentials. A data store profile holds all the information required to address an external data source, including credentials. You can create multiple profiles for one datasource, for example, two different Redis data stores with different credentials. Targets, sources, and artifacts, can all use the data store profile by using the `ds://<profile-name>` convention. After you create a profile object, you make it available on remote pods by calling `project.register_datastore_profile`.

Create a data store profile in the context of a project. Example of creating a Redis datastore profile:

1. Create the profile, for example: `profile = DatastoreProfileRedis(name="profile-name", endpoint_url="redis://11.22.33.44:6379", username="user", password="password")` The username and password parameters are optional.
2. Register it within the project: `project.register_datastore_profile(profile)`
3. Use the profile by specifying the 'ds' URI scheme. For example: `RedisNoSqlTarget(path="ds://profile-name/a/b")` If you want to use a profile from a different project, you can specify it explicitly in the URI using the format: `RedisNoSqlTarget(path="ds://another_project@profile-name")`

To access a profile from the client/sdk, register the profile locally by calling `register_temporary_client_datastore_profile()` with a profile object. You can also choose to retrieve the public information of an already registered profile by calling `project.get_datastore_profile()` and then adding the private credentials before registering it locally. For example, using Redis:

```
redis_profile = project.get_datastore_profile("my_profile")
local_redis_profile = DatastoreProfileRedis(redis_profile.name, redis_profile.endpoint_
↪url, username="mylocaluser", password="mylocalpassword")
register_temporary_client_datastore_profile(local_redis_profile)
```

## Azure data store profile

```
profile = DatastoreProfileAzureBlob(name="profile-name",connection_string=connection_
↪string)
ParquetTarget(path="ds://profile-name/az_blob/path/to/parquet.pq")
```

`DatastoreProfileAzureBlob` init parameters:

- **name** — Name of the profile.
- **connection\_string** — The Azure connection string that points at a storage account. For privacy reasons, it's tagged as a private attribute, and its default value is `None`. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_CONNECTION_STRING"`. for example: `DefaultEndpointsProtocol=https;AccountName=myAcct;AccountKey=XXXX;EndpointSuffix=core.windows.net`

The following variables allow alternative methods of authentication. All of these variables require `account_name`.

- **account\_name** — This parameter represents the name of the Azure Storage account. Each Azure Storage account has a unique name, and it serves as a globally-unique identifier for the storage account within the Azure cloud. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_ACCOUNT_NAME"`.
- **account\_key** — The storage account key is a security credential associated with an Azure Storage account. It is a primary access key used for authentication and authorization purposes. This key is sensitive information and is kept confidential. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_ACCOUNT_KEY"`.
- **sas\_token** — Shared Access Signature (SAS) token for time-bound access. This token is sensitive information. Equivalent to `"AZURE_STORAGE_SAS_TOKEN"` in environment authentication.

Authentication against Azure services using a Service Principal:

- **client\_id** — This variable holds the client ID associated with an Azure Active Directory (AAD) application, which represents the Service Principal. In Azure, a Service Principal is used for non-interactive authentication, allowing applications to access Azure resources. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_CLIENT_ID"`.
- **client\_secret** — This variable stores the client secret associated with the Azure AD application (Service Principal). The client secret is a credential that proves the identity of the application when it requests access to Azure resources. This key is sensitive information and is kept confidential. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_CLIENT_SECRET"`.
- **tenant\_id** — This variable holds the Azure AD tenant ID, which uniquely identifies the organization or directory in Azure Active Directory. The equivalent to this parameter in environment authentication is `"AZURE_STORAGE_TENANT_ID"`. credential authentication:

- `credential` — TokenCredential or SAS token. The credentials with which to authenticate. This variable is sensitive information and is kept confidential.

### DBFS data store profile

```
profile = DatastoreProfileDBFS(name="profile-name", endpoint_url="abc-d1e2345f-a6b2.
↳cloud.databricks.com", token=token)
ParquetTarget(path="ds://profile-name/path/to/parquet.pq")
```

DatastoreProfileDBFS init parameters:

- `name` — Name of the profile.
- `endpoint_url` — A string representing the endpoint URL of the DBFS service. The equivalent to this parameter in environment authentication is "DATABRICKS\_HOST".
- `token` — A string representing the secret key used for authentication to the DBFS service. For privacy reasons, it's tagged as a private attribute, and its default value is `None`. The equivalent to this parameter in environment authentication is "DATABRICKS\_TOKEN".

### GCS data store profile

```
profile = DatastoreProfileGCS(name="profile-name", credentials_path="/local_path/to/gcs_
↳credentials.json")
ParquetTarget(path="ds://profile-name/gcs_bucket/path/to/parquet.pq")
```

DatastoreProfileGCS init parameters:

- `name` — Name of the profile.
- `credentials_path` — A string representing the local JSON file path that contains the authentication parameters required by the GCS API. The equivalent to this parameter in environment authentication is "GOOGLE\_APPLICATION\_CREDENTIALS".
- `gcp_credentials` — A JSON in a string format representing the authentication parameters required by GCS API. For privacy reasons, it's tagged as a private attribute, and its default value is `None`. The equivalent to this parameter in environment authentication is "GCP\_CREDENTIALS".

The code prioritizes `gcp_credentials` over `credentials_path`.

### Kafka data store profile

```
profile = DatastoreProfileKafkaTarget(name="profile-name", bootstrap_servers="localhost",
↳topic="topic_name")
target = KafkaTarget(path="ds://profile-name")
```

DatastoreProfileKafkaTarget class parameters:

- `name` — Name of the profile
- `bootstrap_servers` — A string representing the 'bootstrap servers' for Kafka. These are the initial contact points you use to discover the full set of servers in the Kafka cluster, typically provided in the format `host1:port1,host2:port2,...`.
- `topic` — A string that denotes the Kafka topic to which data will be sent or from which data will be received.

- `kwargs_public` — This is a dictionary (Dict) meant to hold a collection of key-value pairs that could represent settings or configurations deemed public. These pairs are subsequently passed as parameters to the underlying `kafka.KafkaConsumer()` constructor. The default value for `kwargs_public` is `None`.
- `kwargs_private` — This dictionary (Dict) is designed to store key-value pairs, typically representing configurations that are of a private or sensitive nature. These pairs are also passed as parameters to the underlying `kafka.KafkaConsumer()` constructor. It defaults to `None`.

```
profile = DatastoreProfileKafkaSource(name="profile-name", bootstrap_servers="localhost",
↪topic="topic_name")
target = KafkaSource(path="ds://profile-name")
```

`DatastoreProfileKafkaSource` class parameters:

- `name` — Name of the profile
- `brokers` — This parameter can either be a single string or a list of strings representing the Kafka brokers. Brokers serve as the contact points for clients to connect to the Kafka cluster.
- `topics` — A string or list of strings that denote the Kafka topics from which data will be sourced or read.
- `group` — A string representing the consumer group name. Consumer groups are used in Kafka to allow multiple consumers to coordinate and consume messages from topics. The default consumer group is set to `"serving"`.
- `initial_offset` — A string that defines the starting point for the Kafka consumer. It can be set to `"earliest"` to start consuming from the beginning of the topic, or `"latest"` to start consuming new messages only. The default is `"earliest"`.
- `partitions` — This can either be a single string or a list of strings representing the specific partitions from which the consumer should read. If not specified, the consumer can read from all partitions.
- `sasl_user` — A string representing the username for SASL authentication, if required by the Kafka cluster. It's tagged as private for security reasons.
- `sasl_pass` — A string representing the password for SASL authentication, correlating with the `sasl_user`. It's tagged as private for security considerations.
- `kwargs_public` — This is a dictionary (Dict) that holds a collection of key-value pairs used to represent settings or configurations deemed public. These pairs are subsequently passed as parameters to the underlying `kafka.KafkaProducer()` constructor. It defaults to `None`.
- `kwargs_private` — This dictionary (Dict) is used to store key-value pairs, typically representing configurations that are of a private or sensitive nature. These pairs are subsequently passed as parameters to the underlying `kafka.KafkaProducer()` constructor. It defaults to `None`.

## Redis data store profile

```
profile = DatastoreProfileRedis(name="profile-name", endpoint_url="redis://11.22.33.
↪44:6379", username="user", password="password")
RedisNoSqlTarget(path="ds://profile-name/a/b")
```

## S3 data store profile

```
profile = DatastoreProfileS3(name="profile-name")
ParquetTarget(path="ds://profile-name/aws_bucket/path/to/parquet.pq")
```

DatastoreProfileS3 init parameters:

- **name** — Name of the profile
- **endpoint\_url** — A string representing the endpoint URL of the S3 service. It's typically required for non-AWS S3-compatible services. If not provided, the default is `None`. The equivalent to this parameter in environment authentication is `env["S3_ENDPOINT_URL"]`.
- **force\_non\_anonymous** — A string that determines whether to force non-anonymous access to the S3 bucket. The default value is `None`, meaning the behavior is not explicitly set. The equivalent to this parameter in environment authentication is `env["S3_NON_ANONYMOUS"]`.
- **profile\_name** — A string representing the name of the profile. This might be used to refer to specific named configurations for connecting to S3. The default value is `None`. The equivalent to this parameter in environment authentication is `env["AWS_PROFILE"]`.
- **assume\_role\_arn** — A string representing the Amazon Resource Name (ARN) of the role to assume when interacting with the S3 service. This can be useful for granting temporary permissions. By default, it is set to `None`. The equivalent to this parameter in environment authentication is `env["MLRUN_AWS_ROLE_ARN"]`.
- **access\_key\_id** — A string representing the access key used for authentication to the S3 service. It's one of the credentials parts when you're not using anonymous access or IAM roles. For privacy reasons, it's tagged as a private attribute, and its default value is `None`. The equivalent to this parameter in environment authentication is `env["AWS_ACCESS_KEY_ID"]`.
- **secret\_key** — A string representing the secret key, which pairs with the access key, used for authentication to the S3 service. It's the second part of the credentials when not using anonymous access or IAM roles. It's also tagged as private for privacy and security reasons. The default value is `None`. The equivalent to this parameter in environment authentication is `env["AWS_SECRET_ACCESS_KEY"]`.

## See also

- [\*list\\_datastore\\_profiles\*](#)
- [\*get\\_datastore\\_profile\*](#)
- [\*register\\_temporary\\_client\\_datastore\\_profile\*](#)
- [\*delete\\_datastore\\_profile\*](#)

The methods `get_datastore_profile()` and `list_datastore_profiles()` only return public information about the profiles. Access to private attributes is restricted to applications running in Kubernetes pods.

## 7.2 Data items

A data item can be one item or a collection of items (file, dir, table, etc.).

When running jobs or pipelines, data is passed using the *DataItem* objects. Data items objects abstract away the data backend implementation, provide a set of convenience methods (`.as_df`, `.get`, `.show`, ...), and enable auto logging/versioning of data and metadata.

Example function:

```
# Save this code as a .py file:
import mlrun

def prep_data(context, source_url: mlrun.DataItem, label_column='label'):
    # Convert the DataItem to a Pandas DataFrame
    df = source_url.as_df()
    df = df.drop(label_column, axis=1).dropna()
    context.log_dataset('cleaned_data', df=df, index=False, format='csv')
```

Creating a project, setting the function into it, defining the URL with the data and running the function:

```
source_url = mlrun.get_sample_path('data/batch-predict/training_set.parquet')
project = mlrun.get_or_create_project("data-items", "./", user_project=True)
data_prep_func = project.set_function("data-prep.py", name="data-prep", kind="job",
    ↪ image="mlrun/mlrun", handler="prep_data")
prep_data_run = data_prep_func.run(name='prep_data',
                                   handler=prep_data,
                                   inputs={'source_url': source_url},
                                   params={'label_column': 'label'})
```

To call the function with an input you can use the `inputs` dictionary attribute. To pass a simple parameter, use the `params` dictionary attribute. The input value is the specific item uri (per data store schema) as explained in [Shared data stores](#).

From v1.3, *DataItem* objects are automatically parsed to the hinted type when a type hint is available.

Reading the data results from the run, you can easily get a run output artifact as a *DataItem* (so that you can view/use the artifact) using:

```
# read the data locally as a Dataframe
prep_data_run.artifact('cleaned_data').as_df()
```

The *DataItem* supports multiple convenience methods such as:

- **get()**, **put()** - to read/write data
- **download()**, **upload()** - to download/upload files
- **as\_df()** - to convert the data to a *DataFrame* object
- **local** - to get a local file link to the data (that is downloaded locally if needed)
- **listdir()**, **stat** - file system like methods
- **meta** - access to the artifact metadata (in case of an artifact uri)
- **show()** - visualizes the data in Jupyter (as image, html, etc.)

See the *DataItem* class documentation for details.

In order to get a `DataItem` object from a url use `get_dataitem()` or `get_object()` (returns the `DataItem.get()`).

For example:

```
df = mlrun.get_dataitem('s3://demo-data/mydata.csv').as_df()
print(mlrun.get_object('https://my-site/data.json'))
```

## 7.3 Artifacts

An artifact is any data that is produced and/or consumed by functions, jobs, or pipelines.

There are several types of Artifacts. The type of the Artifact is reflected in the `kind` attribute of each Artifact. These types are also used for grouping the *artifacts in the UI*. The main kinds of artifacts are:

- Files — Files, directories, images, figures, and plotlines
- Datasets — Any data, such as tables and DataFrames
- Models — All trained models
- Feature Store Objects — Feature sets and feature vectors

Artifacts metadata is stored in the MLRun database.

### In this section

- *Viewing artifacts*
- *Artifact path*
- *Saving artifacts in run-specific paths*
- *Artifact URIs, versioning, and metadata*

### See also:

- *Working with data and model artifacts*
- *Model Artifacts*
- *Logging datasets*
- *Logging a Databricks response as an artifact.*

### 7.3.1 Viewing artifacts

Artifacts that are stored in certain paths (see *Artifact path*) can be viewed and managed in the UI. In the **Project** page, select the type of artifact you want to view from the left-hand menu: Feature Store (for feature-sets, feature-vectors, and features), Datasets, Models, and Artifacts (holds everything not in the other categories).

Example dataset artifact screen:

Projects > sk-project > Feature Store > Datasets > train-skrf\_test\_set > Metadata Register Dataset

**Datasets**

Tree: Latest Labels: key1=value1,... Name:

**train-skrf\_test\_set** 15 Jan, 01:23:39

Info Preview **Metadata**

Name	Type	Count	Mean	Std	Min	25%	50%	75%	Max
Index	integer								
sepal length (cm)	number	15	5.9	0.75969919	5	5.4	5.5	6.55	7.6
sepal width (cm)	number	15	3.07333333...	0.57004595	2.3	2.75	3	3.4	4
petal length (cm)	number	15	3.76	1.58104848	1.2	2.59999999...	4	4.6	6.6
petal width (cm)	number	15	1.21333333...	0.62777005	0.2	0.7	1.3	1.5	2.3
label	integer	15	0.86666666...	0.63994047	0	0.5	1	1	2

Artifacts that were generated by an MLRun job can also be viewed from the **Jobs > Artifacts** tab.

You can search the artifacts based on time and labels, and you can filter the artifacts by tag type. For each artifact, you can view its content, its location, the artifact type, labels, the producer of the artifact, the artifact owner, last update date, and type-specific information. You can download the artifact. You can also tag and remove tags from artifacts using the UI.

### 7.3.2 Artifact path

Any path that is supported by MLRun can be used to store artifacts. However, only artifacts that are stored in paths that are system-configured as "allowed" in the MLRun service are visible in the UI. These are:

- MLRun < 1.2: The allowed paths include only v3io paths
- MLRun 1.2 and higher: Allows cloud storage paths — v3io://, s3://, az://, gcs://, gs://. http:// paths are not visible due to security reasons.
- MLRun 1.5 adds support for dbfs (Databricks file system): dbfs://

Jobs use the default or job specific `artifact_path` parameter to determine where the artifacts are stored. The default `artifact_path` can be specified at the cluster level, client level, project level, or job level (at that precedence order), or can be specified as a parameter in the specific log operation.

You can set the default `artifact_path` for your environment using the `set_environment()` function.

You can override the default `artifact_path` configuration by setting the `artifact_path` parameter of the `MLrunProject` object, setting the artifact path for objects belonging to that project. You can use variables in the artifacts path, such as `{{project}}` for the name of the running project or `{{run.uid}}` for the current job/pipeline run UID. (The default artifacts path uses `{{project}}`.) The following example configures the artifacts path to an artifacts directory in the current active directory (`./artifacts`)

```
project.artifact_path='./artifacts'
```

#### For Iguazio MLOps Platform users

In the platform, the default artifacts path is the `/artifacts` directory in the predefined “projects” data container: `/v3io/projects/<project name>/artifacts` (for example, `/v3io/projects/myproject/artifacts` for a “mypro-

ject" project).

---

### 7.3.3 Saving artifacts in run-specific paths

When you specify `{{run.uid}}`, the artifacts for each job are stored in a dedicated directory for each executed job. Under the artifact path, you should see the source-data file in a new directory whose name is derived from the unique run ID. Otherwise, the same artifacts directory is used in all runs, and the artifacts for newer runs override those from the previous runs.

As previously explained, `set_environment` returns a tuple with the project name and artifacts path. You can optionally save your environment's artifacts path to a variable, as demonstrated in the previous steps. You can then use the artifacts-path variable to extract paths to task-specific artifact subdirectories. For example, the following code extracts the path to the artifacts directory of a training task, and saves the path to a `training_artifacts` variable:

```
from os import path
training_artifacts = path.join(artifact_path, 'training')
```

---

#### Note

The artifacts path uses [data store URLs](#), which are not necessarily local file paths (for example, `s3://bucket/path`). Be careful not to use such paths with general file utilities.

---

### 7.3.4 Artifact URIs, versioning, and metadata

Artifacts have unique URIs in the form `store://<type>/<project>/<key/path>[:tag]`. The URI is automatically generated by `log_artifact` and can be used as input to jobs, functions, pipelines, etc.

Artifacts are versioned. Each unique version has a unique IDs (uid) and can have a `tag` label. When the tag is not specified, it uses the `latest` version.

Artifact metadata and objects can be accessed through the SDK or downloaded from the UI (as YAML files). They host common and object specific metadata such as:

- Common metadata: name, project, updated, version info
- How they were produced (user, job, pipeline, etc.)
- Lineage data (sources used to produce that artifact)
- Information about formats, schema, sample data
- Links to other artifacts (e.g. a model can point to a chart)
- Type-specific attributes

Artifacts can be obtained via the SDK through type specific APIs or using generic artifact APIs such as:

- `get_dataitem()` - get the `DataItem` object for reading/downloading the artifact content
- `get_store_resource()` - get the artifact object

Example artifact URLs:

```
store://artifacts/default/my-table
store://artifacts/sk-project/train-model:e95f757e-7959-4d66-b500-9f6cdb1f0bc7
```

(continues on next page)

(continued from previous page)

```
store://feature-sets/stocks/quotes:v2
store://feature-vectors/stocks/enriched-ticker
```

*Back to top*

## 7.4 Model Artifacts

An essential piece of artifact management and versioning is storing a model version. This allows the users to experiment with different models and compare their performance, without having to worry about losing their previous results.

The simplest way to store a model named `my_model` is with the following code:

```
from pickle import dumps
model_data = dumps(model)
context.log_model(key='my_model', body=model_data, model_file='my_model.pkl')
```

You can also store any related metrics by providing a dictionary in the `metrics` parameter, such as `metrics={'accuracy': 0.9}`. Furthermore, any additional data that you would like to store along with the model can be specified in the `extra_data` parameter. For example `extra_data={'confusion': confusion.target_path}`

A convenient utility method, `eval_model_v2`, which calculates model metrics is available in `mlrun.utils`.

See example below for a simple model trained using scikit-learn (normally, you would send the data as input to the function). The last 2 lines evaluate the model and log the model.

```
from sklearn import linear_model
from sklearn import datasets
from sklearn.model_selection import train_test_split
from pickle import dumps

from mlrun.execution import MLClientCtx
from mlrun.mlutils import eval_model_v2

def train_iris(context: MLClientCtx):

    # Basic scikit-learn iris SVM model
    X, y = datasets.load_iris(return_X_y=True)
    X_train, X_test, y_train, y_test = train_test_split(
        X, y, test_size=0.2, random_state=42)
    model = linear_model.LogisticRegression(max_iter=10000)
    model.fit(X_train, y_train)

    # Evaluate model results and get the evaluation metrics
    eval_metrics = eval_model_v2(context, X_test, y_test, model)

    # Log model
    context.log_model("model",
                      body=dumps(model),
                      artifact_path=context.artifact_subpath("models"),
                      extra_data=eval_metrics,
                      model_file="model.pkl",
```

(continues on next page)

(continued from previous page)

```
metrics=context.results,
labels={"class": "sklearn.linear_model.LogisticRegression"})
```

Save the code above to `train_iris.py`. The following code loads the function and runs it as a job. See the [quick-start page](#) to learn how to create the project and set the artifact path.

```
from mlrun import code_to_function

gen_func = code_to_function(name='train_iris',
                           filename='train_iris.py',
                           handler='train_iris',
                           kind='job',
                           image='mlrun/mlrun')

train_iris_func = project.set_function(gen_func).apply(auto_mount())

train_iris = train_iris_func.run(name='train_iris',
                                handler='train_iris',
                                artifact_path=artifact_path)
```

You can now use `get_model` to read the model and run it. This function will get the model file, metadata, and extra data. The input can be either the path of the model, or the directory where the model resides. If you provide a directory, the function will search for the model file (by default it searches for `.pkl` files)

The following example gets the model from `models_path` and test data in `test_set` with the expected label provided as a column of the test data. The name of the column containing the expected label is provided in `label_column`. The example then retrieves the models, runs the model with the test data and updates the model with the metrics and results of the test data.

```
from pickle import load

from mlrun.execution import MLClientCtx
from mlrun.datastore import DataItem
from mlrun.artifacts import get_model, update_model
from mlrun.mlutils import eval_model_v2

def test_model(context: MLClientCtx,
              models_path: DataItem,
              test_set: DataItem,
              label_column: str):

    if models_path is None:
        models_path = context.artifact_subpath("models")
    xtest = test_set.as_df()
    ytest = xtest.pop(label_column)

    model_file, model_obj, _ = get_model(models_path)
    model = load(open(model_file, 'rb'))

    extra_data = eval_model_v2(context, xtest, ytest.values, model)
    update_model(model_artifact=model_obj, extra_data=extra_data,
                metrics=context.results, key_prefix='validation-')
```

To run the code, place the code above in `test_model.py` and use the following snippet. The model from the previous

step is provided as the `models_path`:

```
from mlrun.platforms import auto_mount
gen_func = code_to_function(name='test_model',
                           filename='test_model.py',
                           handler='test_model',
                           kind='job',
                           image='mlrun/mlrun')

func = project.set_function(gen_func).apply(auto_mount())


run = func.run(name='test_model',
              handler='test_model',
              params={'label_column': 'label'},
              inputs={'models_path': train_iris.outputs['model'],
                    'test_set': 'https://s3.wasabisys.com/iguazio/data/iris/iris_
↪dataset.csv'}),
              artifact_path=artifact_path)
```



## FEATURE STORE

A feature store provides a single pane of glass for sharing all available features across the organization along with their metadata. The MLRun feature store supports security, versioning, and data snapshots, enabling better data lineage, compliance, and manageability.

As illustrated in the diagram below, feature stores provide a mechanism (**Feature Sets**) to read data from various online or offline sources, conduct a set of data transformations, and persist the data in online and offline storage. Features are stored and cataloged along with all their metadata (schema, labels, statistics, etc.), allowing users to compose **Feature Vectors** and use them for training or serving. The feature vectors are generated when needed, taking into account data versioning and time correctness (time traveling). Different function kinds (Nuclio, Spark, Dask) are used for feature retrieval, real-time engines for serving, and batch for training.

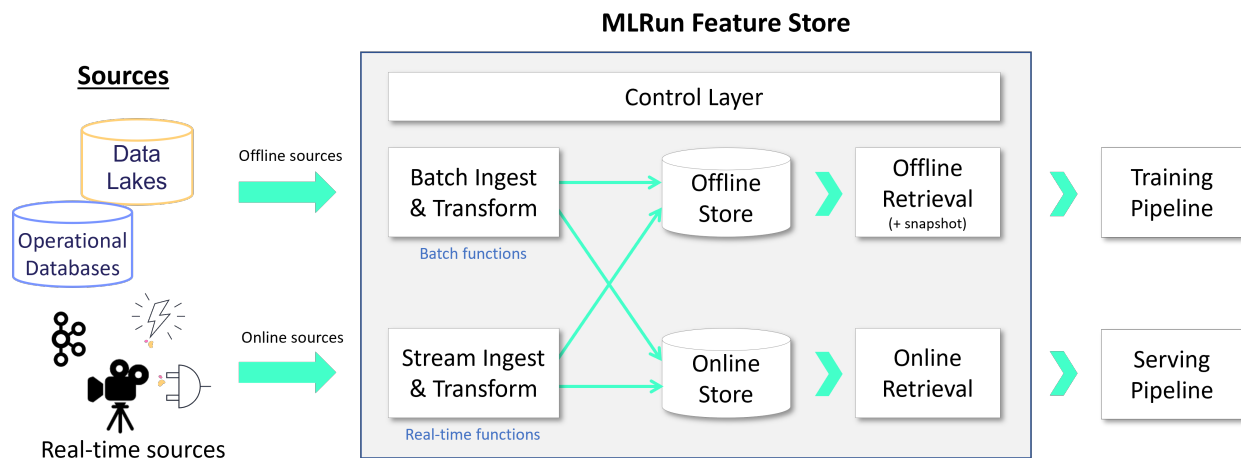


**In this section**

### 8.1 Feature store overview


In machine-learning scenarios, generating a new feature, called feature engineering, takes a tremendous amount of work. The same features must be used both for training, based on historical data, and for the model prediction based on the online or real-time data. This creates a significant additional engineering effort, and leads to model inaccuracy when the online and offline features do not match. Furthermore, monitoring solutions must be built to track features and results, and to send alerts upon data or model drift.

Consider a scenario in which you train a model and one of its features is a comparison of the current amount to the average amount spent during the last 3 months by the same person. Creating such a feature is easy when you have the full dataset in training, but for serving this feature must be calculated in an online manner. The "brute-force" way to address this is to have an ML engineer create an online pipeline that re-implements all the feature calculations that

comprise the offline process. This is not just time-consuming and error-prone, but very difficult to maintain over time, and results in a lengthy deployment time. This is exacerbated when having to deal with thousands of features, and an increasing number of data engineers and data scientists that are creating and using the features.

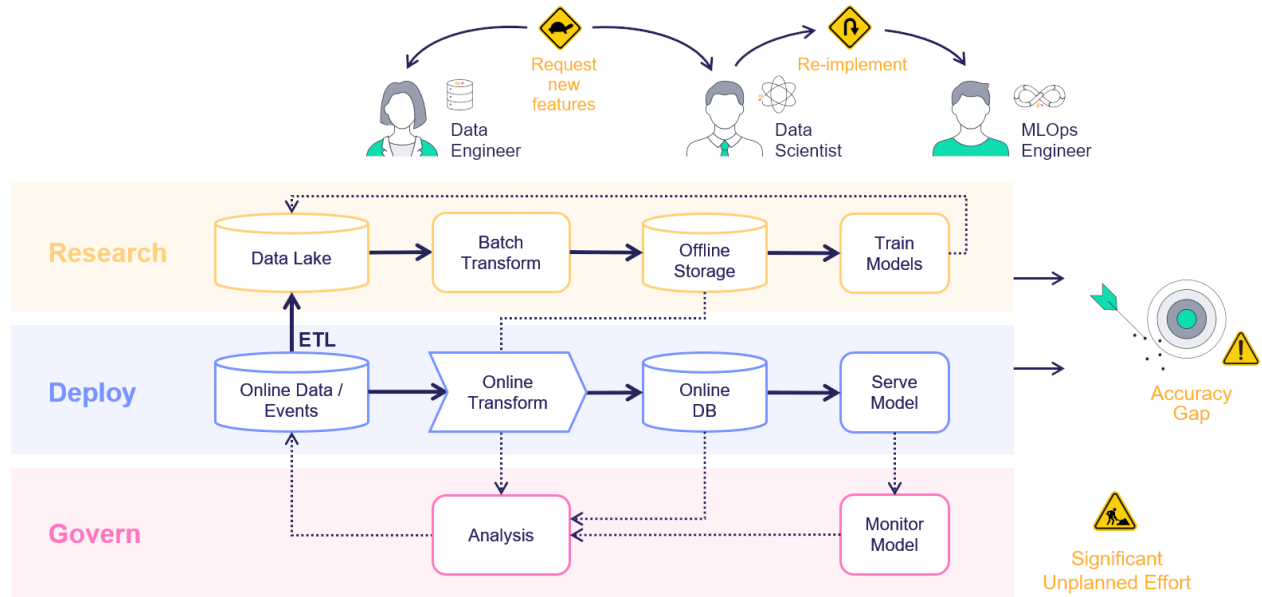


With MLRun's feature store you can easily define features during the training, which are deployable to serving, without having to define all the "glue" code. You simply create the necessary building blocks to define features and integration, with offline and online storage systems to access the features.

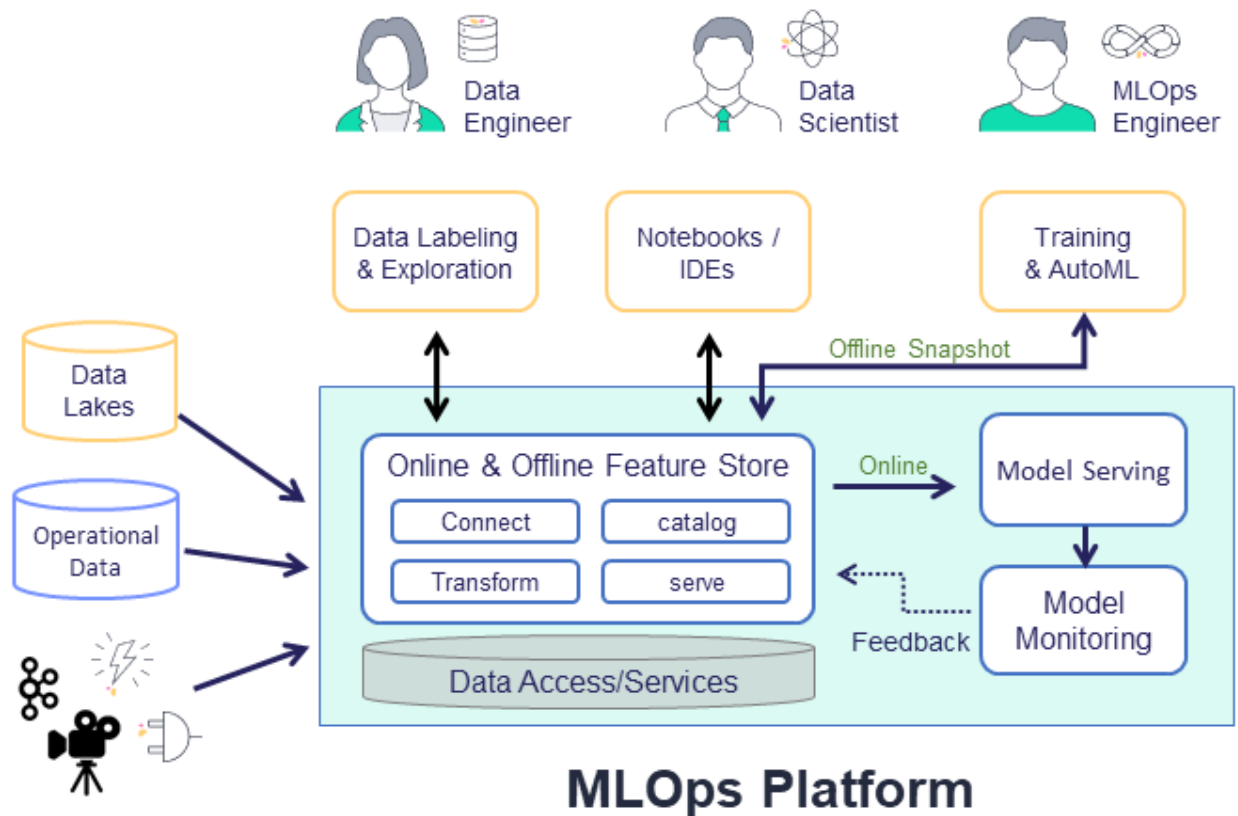

The feature store is comprised of the following:

- **Feature** — In machine-learning, a feature is an individual measurable property or characteristic of a phenomenon being observed. This can be raw data (e.g., transaction amount, image pixel, etc.) or a calculation derived from one or more other features (e.g., deviation from average, pattern on image, etc.).
- **Feature sets** — A grouping of features that are ingested together and stored in a logical group. Feature sets take data from offline or online sources, build a list of features through a set of transformations, and store the resulting features, along with the associated metadata and statistics. For example, transactions could be grouped by the ID of a person performing the transfer or by the device identifier used to perform the transaction. You can also define in the timestamp source in the feature set, and ingest data into a feature set.
- **Execution** — A set of operations performed on the data while it is ingested. The transformation graph contains steps that represent data sources and targets, and can also include steps that transform and enrich the data that is passed through the feature set. For a deeper dive, see [Feature set transformations](#).
- **Feature vectors** — A set of features, taken from one or more feature sets. The feature vector is defined prior to model training and serves as the input to the model training process. During model serving, the feature values in the vector are obtained from an online service.

### 8.1.1 How the feature store works

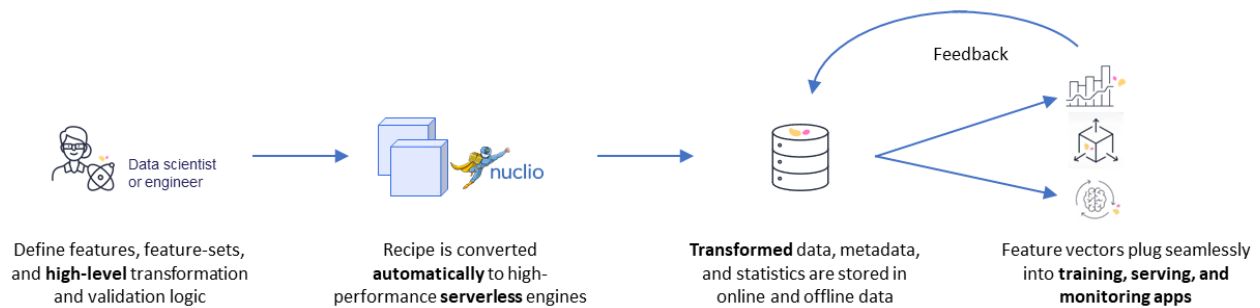

The common flow when working with the feature store is to first define the feature set with its source, transformation graph, and targets. (See the supported [Sources and targets](#).) MLRun's robust transformation engine performs complex operations with just a few lines of Python code. To test the execution process, call the `infer` method with a sample DataFrame. This runs all operations in memory without storing the results.

Once the graph is defined, it's time to ingest the data. You can ingest data directly from a DataFrame, by calling the feature set `ingest` method. You can also define an ingestion process that runs as a Kubernetes job. This is useful if there is a large ingestion process, or if there is a recurrent ingestion and you want to schedule the job.

MLRun can also leverage [Nuclio](#) to perform real-time ingestion by calling the `deploy_ingestion_service` function. This means that during serving you can update feature values, and not just read them. For example, you can update a sliding window aggregation as part of a model serving process.

The next step is to define the **feature vector**. Call the `get_offline_features()` function to join together features across different feature sets.


## Ingestion engines

MLRun supports several ingestion engines:

- **storey engine** (default) is designed for real-time data (e.g. individual records) that will be transformed using Python functions and classes
- **pandas engine** is designed for batch data that can fit into memory that will be transformed using Pandas dataframes. Pandas is used for testing, and is not recommended for production deployments
- **spark engine** is designed for batch data.

See also [transformation — engine support](#).

### 8.1.2 Training and serving using the feature store

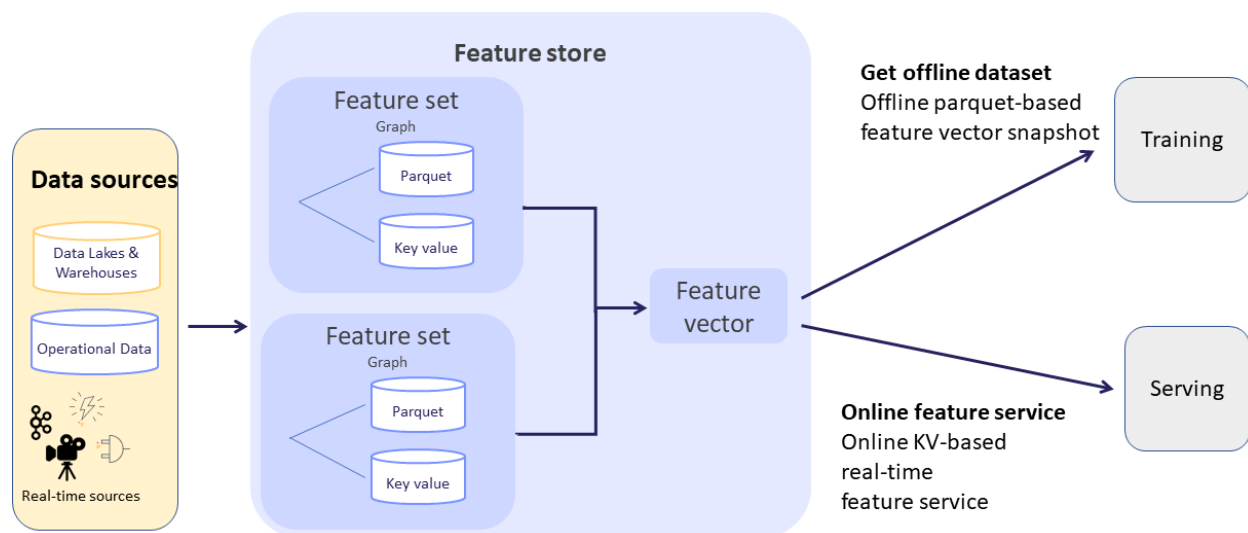

Next, extract a versioned **offline** static dataset for training, based on the parquet target defined in the feature sets. You can train a model with the feature vector data by providing the input in the form of `'store://feature-vectors/{project}/{feature_vector_name}'`.

Training functions generate models and various model statistics. Use MLRun's auto logging capabilities to store the models along with all the relevant data, metadata, and measurements.

MLRun can apply all the MLOps functionality by using the framework specific `apply_mlrun()` method, which manages the training process and automatically logs all the framework specific model details, data, metadata, and metrics.

The training job automatically generates a set of results and versioned artifacts (run `train_run.outputs` to view the job outputs).

After you validate the feature vector, use the **online** feature service, based on the nosql target defined in the feature set, for real-time serving. For serving, you define a serving class derived from `mlrun.serving.V2ModelServer`. In the class load method, call the `get_online_feature_service()` function with the vector name, which returns a feature service object. In the class `preprocess` method, call the feature service `get` method to get the values of those features.

This feature store centric process, using one computation graph definition for a feature set, gives you an automatic online and offline implementation for the feature vectors with data versioning, both in terms of the actual graph that was used to calculate each data point, and the offline datasets that were created to train each model.

See more information in [training with the feature store](#) and [Serving with the feature store](#).

## 8.2 Feature sets

In MLRun, a group of features can be ingested together and stored in logical group called feature set. Feature sets take data from offline or online sources, build a list of features through a set of transformations, and store the resulting features along with the associated metadata and statistics. A feature set can be viewed as a database table with multiple material implementations for batch and real-time access, along with the data pipeline definitions used to produce the features.

The feature set object contains the following information:

- **Metadata** — General information which is helpful for search and organization. Examples are project, name, owner, last update, description, labels, etc.
- **Key attributes** — Entity, timestamp key (optional), label column.
- **Features** — The list of features along with their schema, metadata, validation policies and statistics.
- **Source** — The online or offline data source definitions and ingestion policy (file, database, stream, http endpoint, etc.). See the [source descriptions](#).
- **Transformation** — The data transformation pipeline (e.g. aggregation, enrichment etc.).
- **Target stores** — The type (i.e. parquet/csv or key value), location and status for the feature set materialized data. See the [target descriptions](#).
- **Function** — The type (storey, pandas, spark) and attributes of the data pipeline serverless functions.

### In this section

- [Create a Feature Set](#)
- [Create a feature set without ingesting its data](#)
- [Add transformations](#)

### See also:

- [Verify a feature set with a small dataset by inferring data](#)
- [Ingest data using the feature store](#)

### 8.2.1 Create a feature set

Create a `FeatureSet` with the base definitions:

- **name** — The feature set name is a unique name within a project.
- **entities** — Each feature set must be associated with one or more index columns. When joining feature sets, the key columns are determined by the `relations` field if it exists, and otherwise by the entities.

---

### Caution

Avoid using timestamps or bool as entities.

---

- **timestamp\_key** — (optional) Used for specifying the time field when joining by time.
- **engine** — The processing engine type:
  - spark — Good for simple batch transformations
  - pandas — Good for simple batch transformations

- **storey** — Default. Stream processing engine that can handle complex workflows and real-time sources. (Some advanced functionalities are in the Beta state.) See more about [transformations](#).
- **label\_column** — Name of the label column (the one holding the target (y) values).
- **relations** — (optional) Dictionary that indicates all of the relations between current feature set to other featuresets. It looks like: {"<my\_column\_name>":Entity, ...}. If the feature\_set relations is None, the join is done based on feature\_set entities. Relevant only for Dask and storey (local) engines. See more about joins in [Using joins in an offline feature vector](#).

Example:

```
#Create a basic feature set example
stocks_set = FeatureSet("stocks", entities=[Entity("ticker")])
```

## Create a feature set in the UI

1. Select a project and press **Feature store**, then press **Create Set**.
2. After completing the form, press **Save and Ingest** to start the process, or **Save** to save the set for later ingestion.

### 8.2.2 Create a feature set without ingesting its data

You can define and register a feature set (and use it in a feature vector) without ingesting its data into MLRun offline targets. This supports all batch sources.

The use-case for this is when you have a large amount of data in a remote storage that is ready to be consumed by a model-training pipeline. When this feature is enabled on a feature set, data is **not** saved to the offline target during ingestion. Instead, when `get_offline_features` is called on a vector containing that feature set, that data is read directly from the source. Online targets are still ingested, and their value represents a timeslice of the offline source. Transformations are not allowed when this feature is enabled: no computation graph, no aggregations, etc. Enable this feature by including `passthrough=True` in the feature set definition. All three ingestion engines (Storey, Spark, Pandas) are supported, as well as the retrieval engines "local" and "spark".

Typical code, from defining the feature set through ingesting its data:

```
# Flag the feature set as passthrough
my_fset = fstore.FeatureSet("my_fset", entities=[Entity("patient_id)], timestamp_key=
↳ "timestamp", passthrough=True)
csv_source = CSVSource("my_csv", path="data.csv"), time_field="timestamp")
# Ingest the source data, but only to online/nosql target
my_fset.ingest(csv_source)
vector = fstore.FeatureVector("myvector", features=[f"my_fset"])
# Read the offline data directly from the csv source
resp = vector.get_offline_features(entity_timestamp_column="timestamp", with_
↳ indexes=True)
```

### 8.2.3 Add transformations

Define the data processing steps using a transformations graph (DAG).

A feature set data pipeline takes raw data from online or offline sources and transforms it to meaningful features. The MLRun feature store supports three processing engines (storey, pandas, spark) that can run in the client (e.g. Notebook) for interactive development or in elastic serverless functions for production and scale.

The data pipeline is defined using MLRun graph (DAG) language. Graph steps can be pre-defined operators (such as aggregate, filter, encode, map, join, impute, etc.) or custom python classes/functions. Read more about the graph in [Real-time serving pipelines \(graphs\)](#).

The results from the transformation pipeline are stored in one or more material targets. Data for offline access, such as training, is usually stored in Parquet files. Data for online access such as serving is stored in the Iguazio NoSQL DB (NoSqlTarget). You can use the default targets or add/replace with additional custom targets.

Graph example (storey engine):

```
import mlrun.feature_store as fstore
feature_set = fstore.FeatureSet("measurements", entities=[Entity(key)], timestamp_key=
    ↪ "timestamp")
# Define the computational graph including the custom functions
feature_set.graph.to(DropColumns(drop_columns))\
    .to(RenameColumns(mapping={'bad': 'bed'}))
feature_set.add_aggregation('hr', ['avg'], ['1h'])
feature_set.plot()
feature_set.ingest(data_df)
```

Graph example (pandas engine):

```
def myfunc1(df, context=None):
    df = df.drop(columns=["exchange"])
    return df

stocks_set = fstore.FeatureSet("stocks", entities=[Entity("ticker")], engine="pandas")
stocks_set.graph.to(name="s1", handler="myfunc1")
df = stocks_set.ingest(stocks_df)
```

The graph steps can use built-in transformation classes, simple python classes, or function handlers.

See more details in [Feature set transformations](#).

### 8.2.4 Simulate and debug the data pipeline with a small dataset

During the development phase it's pretty common to check the feature set definition and to simulate the creation of the feature set before ingesting the entire dataset, since ingesting the entire feature set can take time. This allows you to get a preview of the results (in the returned dataframe). The simulation method is called `preview`. It previews in the source data schema, as well as processing the graph logic (assuming there is one) on a small subset of data. The preview operation also learns the feature set schema and does statistical analysis on the result by default.

```
df = fstore.preview(quotes_set, quotes)

# print the feature statistics
print(quotes_set.get_stats_table())
```

## 8.3 Feature set transformations


A feature set contains an execution graph of operations that are performed when data is ingested, or when simulating data flow for inferring its metadata. This graph utilizes MLRun's *Real-time serving pipelines (graphs)*.

The graph contains steps that represent data sources and targets, and may also contain steps whose purpose is transformations and enrichment of the data passed through the feature set. These transformations can be provided in one of three ways:

- **Aggregations** — MLRun supports adding aggregate features to a feature set through the `add_aggregation()` function.
- **Built-in transformations** — MLRun is equipped with a set of transformations provided through the `storey.transformations` package. These transformations can be added to the execution graph to perform common operations and transformations.
- **Custom transformations** — You can extend the built-in functionality by adding new classes that perform any custom operation and use them in the serving graph.

Once a feature-set is created, its internal execution graph can be observed by calling the feature-set's `plot()` function, which generates a `graphviz` plot based on the internal graph. This is very useful when running within a Jupyter notebook, and produces a graph such as the following example:

This plot shows various transformations and aggregations being used as part of the feature-set processing, as well as the targets where results are saved to (in this case two targets). Feature-sets can also be observed in the MLRun UI, where the full graph can be seen and specific step properties can be observed:

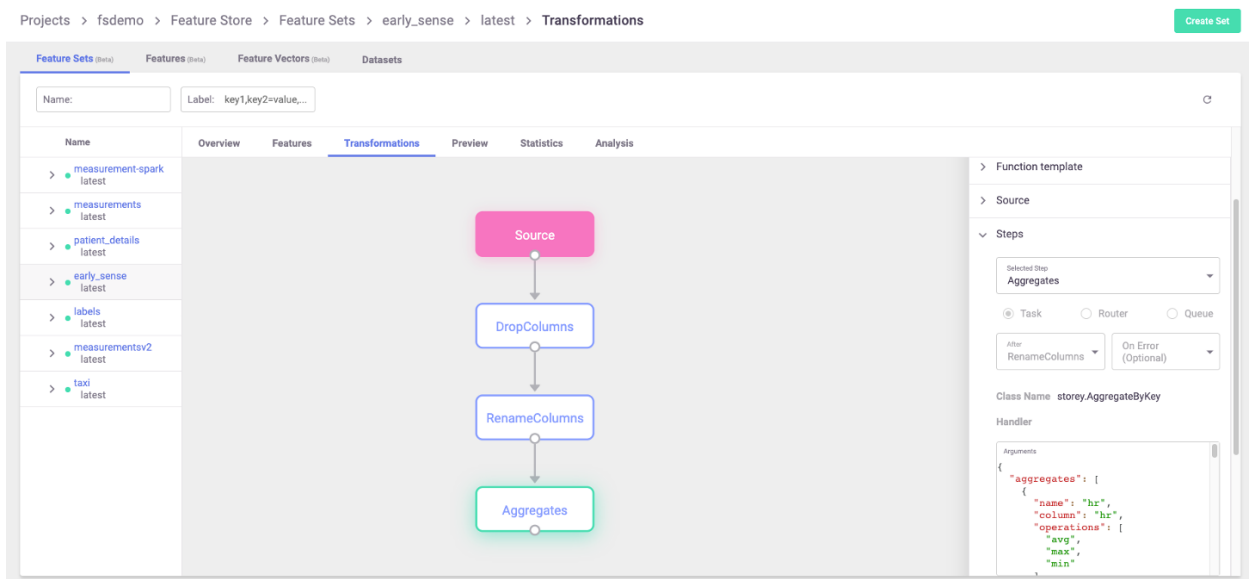

For a full end-to-end example of feature-store and usage of the functionality described in this page, refer to the [feature store example](#).

### In this section

- *Aggregations*
- *Built-in transformations*
- *Custom transformations*
- *Data transformation steps*

### 8.3.1 Aggregations

Aggregations, being a common tool in data preparation and ML feature engineering, are available directly through the MLRun [FeatureSet](#) class. These transformations add a new feature to the feature-set, which is created by performing an aggregate function over the feature's values.

If the `name` parameter is not specified, features are generated in the format `{column_name}_{operation}_{window}`. If you supply the optional `name` parameter, features are generated in the format `{name}_{operation}_{window}`.

Feature names, which are generated internally, must match this regex pattern to be treated as aggregations: `*_[a-z]++_[0-9]+[smhd]$`, where `[a-z]++` is the name of an aggregation.

---

#### Warning

You must ensure that your features will not conflict with the automatically generated feature names. For example, when using `add_aggregation()` on a feature `X`, you may get a generated feature name of `X_count_1h`. But if your dataset already contains `X_count_1h`, this would result in either unreliable aggregations or errors.

---

If either the pattern or the condition is not met, the feature is treated as a static (or "regular") feature.

These features can be fed into predictive models or can be used for additional processing and feature generation.

---

#### Notes

- Internally, the graph step that is created to perform these aggregations is named "Aggregates". If more than one aggregation steps are needed, a unique name must be provided to each, using the `step_name` parameter.
  - The timestamp column must be part of the feature set definition (for aggregation).
- 

Aggregations that are supported using this function are:

- `count`
- `sum`
- `sqr` (sum of squares)
- `max`
- `min`
- `first`
- `last`
- `avg`
- `stdvar` (variance)
- `stddev` (standard deviation)

For full description of this function, see the [add\\_aggregation\(\)](#) documentation.

## Windows

You can use aggregation for time-based sliding windows and fixed windows. In general, sliding windows are used for real time data, while fixed windows are used for historical aggregations.


A window can be measured in years, days, hours, seconds, minutes. A window can be a single window, e.g. '1h', '1d', or a list of same unit windows e.g. ['1h', '6h']. If you define the time period (in addition to the window), then you have a sliding window. If you don't define the time period, then the time period and the window are the same. All time windows are aligned to the epoch (1970-01-01T00:00:00Z).

- Sliding window

Sliding windows are fixed-size, overlapping, windows (defined by `windows`) that are evaluated at a sliding interval (defined by `period`).

The period size must be an integral divisor of the window size.

The following figure illustrates sliding windows of size 20 seconds, and periods of 10 seconds. Since the period is less than the window size, the windows contain overlapping data. In this example, events E4-E6 are in Windows 1 and 2. When Window 2 is evaluated at time  $t = 30$  seconds, events E4-E6 are dropped from the event queue.

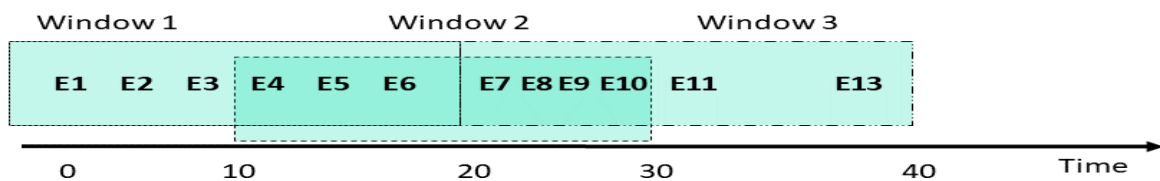


The following code illustrates a feature-set that contains stock trading data including the specific bid price for each bid at any given time. You can add aggregate features that show the minimal and maximal bidding price over all the bids in the last 60 minutes, evaluated (sliding) at a 10 minute interval, per stock ticker (which is the entity in question).

```
import mlrun.feature_store as fstore
# create a new feature set
quotes_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")])
quotes_set.add_aggregation("bid", ["min", "max"], ["1h"], "10m", name="price")
```

This code generates two new features: `bid_min_1h` and `bid_max_1h` every 10 minutes.

- Fixed window

A fixed window has a fixed-size, is non-overlapping, and gapless. A fixed time window is used for aggregating over a time period, (or day of the week). For example, how busy is a restaurant between 1 and 2 pm. When using a fixed window, each record in an in-application stream belongs to a specific window. The record is processed only once (when the query processes the window to which the record belongs).

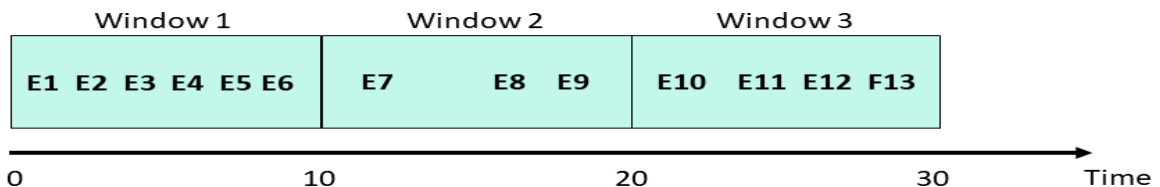

To define a fixed window, omit the time period. Using the above example, but for a fixed window:

```
import mlrun.feature_store as fstore
# create a new feature set
```

(continues on next page)

(continued from previous page)

```
quotes_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")])
quotes_set.add_aggregation("bid", ["min", "max"], ["1h"] name="price")
```

This code generates two new features: `bid_min_1h` and `bid_max_1h` once per hour.

### 8.3.2 Built-in transformations

MLRun, and the associated `storey` package, have a built-in library of [transformation functions](#) that can be applied as steps in the feature-set's internal execution graph. To add steps to the graph, reference them from the `FeatureSet` object by using the `graph` property. Then, new steps can be added to the graph using the functions in `storey.transformations` (follow the link to browse the documentation and the list of existing functions). The transformations are also accessible directly from the `storey` module.

See the [built-in steps](#).

#### Note

Internally, MLRun makes use of functions defined in the `storey` package for various purposes. When creating a feature-set and configuring it with sources and targets, what MLRun does behind the scenes is to add steps to the execution graph that wraps methods and classes that perform the actions. When defining an async execution graph, `storey` classes are used. For example, when defining a Parquet data-target in MLRun, a graph step is created that wraps `storey's ParquetTarget` function.

To use a function:

1. Access the graph from the feature-set object, using the `graph` property.
2. Add steps to the graph using the various graph functions, such as `to()`. The function object passed to the step should point at the transformation function being used.

The following is an example for adding a simple `filter` to the graph, that drops any bid that is lower than 50USD:

```
quotes_set.graph.to("storey.Filter", "filter", _fn="(event['bid'] > 50)")
```

In the example above, the parameter `_fn` denotes a callable expression that is passed to the `storey.Filter` class as the parameter `fn`. The callable parameter can also be a Python function, in which case there's no need for parentheses around it. This call generates a step in the graph called `filter` that calls the expression provided with the event being propagated through the graph as the data is fed to the feature-set.

### 8.3.3 Custom transformations

When a transformation is needed that is not provided by the built-in functions, new classes that implement transformations can be created and added to the execution graph. Such classes should extend the `MapClass` class, and the actual transformation should be implemented within their `do()` function, which receives an event and returns the event after performing transformations and manipulations on it. For example, consider the following code:

```
class MyMap(MapClass):
    def __init__(self, multiplier=1, **kwargs):
        super().__init__(**kwargs)
        self._multiplier = multiplier

    def do(self, event):
```

(continues on next page)

(continued from previous page)

```
event["multi"] = event["bid"] * self._multiplier
return event
```

The MyMap class can then be used to construct graph steps, in the same way as shown above for built-in functions:

```
quotes_set.graph.add_step("MyMap", "multi", after="filter", multiplier=3)
```

This uses the `add_step` function of the graph to add a step called `multi` utilizing `MyMap` after the `filter` step that was added previously. The class is initialized with a multiplier of 3.

### 8.3.4 Supporting multiple engines

MLRun supports multiple processing engines for executing graphs. These engines differ in the way they invoke graph steps. When implementing custom transformations, the code has to support all engines that are expected to run it.

#### Note

The vast majority of MLRun's built-in transformations support all engines. The support matrix is available [here](#).

The following are the main differences between transformation steps executing on different engines:

- **storey** - the step receives a single event (either as a dictionary or as an Event object, depending on whether `full_event` is configured for the step). The step is expected to process the event and return the modified event.
- **spark** - the step receives a Spark dataframe object. Steps are expected to add their processing and calculations to the dataframe (either in-place or not) and return the resulting dataframe without materializing the data.
- **pandas** - the step receives a Pandas dataframe, processes it, and returns the dataframe.

To support multiple engines, extend the `MLRunStep` class with a custom transformation. This class allows implementing engine-specific code by overriding the following methods: `_do_storey()`, `_do_pandas()` and `_do_spark()`. To add support for a given engine, the relevant do method needs to be implemented.

When a graph is executed, each step is a single instance of the relevant class that gets invoked as events flow through the graph. For `spark` and `pandas` engines, this only happens once per ingestion, since the entire data-frame is fed to the graph. For the `storey` engine the same instance's `_do_storey()` function will be invoked per input row. As the graph is initialized, this class instance can receive global parameters in its `__init__` method that determines its behavior.

The following example class multiplies a feature by a value and adds it to the event. (For simplicity, data type checks and validations were omitted as well as needed imports.) Note that the class also extends `StepToDict` - this class implements generic serialization of graph steps to a python dictionary. This functionality allows passing instances of this class to `graph.to()` and `graph.add_step()`:

```
class MultiplyFeature(StepToDict, MLRunStep):
    def __init__(self, feature: str, value: int, **kwargs):
        super().__init__(**kwargs)
        self._feature = feature
        self._value = value
        self._new_feature = f"{feature}_times_{value}"

    def _do_storey(self, event):
        # event is a single row represented by a dictionary
        event[self._new_feature] = event[self._feature] * self._value
```

(continues on next page)

(continued from previous page)

```

    return event

    def _do_pandas(self, event):
        # event is a pandas.DataFrame
        event[self._new_feature] = event[self._feature].multiply(self._value)
        return event

    def _do_spark(self, event):
        # event is a pyspark.sql.DataFrame
        return event.withColumn(self._new_feature,
                                col(self._feature) * lit(self._value)
                                )

```

The following example uses this step in a feature-set graph with the pandas engine. This example adds a feature called `number1_times_4` with the value of the `number1` feature multiplied by 4. Note how the global parameters are passed when creating the graph step:

```

import mlrun.feature_store as fstore

feature_set = fstore.FeatureSet("fs-new",
                                entities=[fstore.Entity("id")],
                                engine="pandas",
                                )

# Adding multiply step, with specific parameters
feature_set.graph.to(MultiplyFeature(feature="number1", value=4))
df_pandas = feature_set.ingest(data)

```

### 8.3.5 Data transformation steps

The following table lists the available data-transformation steps. The next table details the ingestion engines support of these steps.

Class name	Description	Storey	Spark	Pan- das
<code>#mlrun. feature_store. FeatureSet. add_aggregation</code>	Aggregates the data into the table object provided for later persistence, and outputs an event enriched with the requested aggregation features.	Y Not supported with online target SQLTarget	Y	N
<code>mlrun. feature_store. steps. DateExtractor()</code>	Extract a date-time component.	Y	N Supports part extract (ex. day_of_week) but does not support boolean (ex. is_leap_year)	Y
<code>mlrun. feature_store. steps. DropFeatures()</code>	Drop features from feature list.	Y	Y	Y
<code>mlrun. feature_store. steps. Imputer()</code>	Replace None values with default values.	Y	Y	Y
<code>mlrun. feature_store. steps. MapValues()</code>	Map column values to new values.	Y	Y	Y
<code>mlrun. feature_store. steps. OneHotEncoder()</code>	Create new binary fields, one per category (one hot encoded).	Y	Y	Y
<code>mlrun. feature_store. steps. SetEventMetadata</code>	Set the event metadata (id, key, timestamp) from the event body.	Y	N	N
<code>mlrun. feature_store. steps. FeaturesetValid</code>	Validate feature values according to the feature set validation policy	Y	N	Y

## 8.4 Creating and using feature vectors

You can define a group of features from different feature sets as a [FeatureVector](#).

Feature vectors are used as an input for models, allowing you to define the feature vector once, and in turn create and track the [datasets](#) created from it or the online manifestation of the vector for real-time prediction needs.

The feature vector handles all the merging logic for you using an `asof merge` type merge that accounts for both the time and the entity. It ensures that all the latest relevant data is fetched, without concerns about "seeing the future" or other types of common time-related errors.

After a feature vector is saved, it can be used to create both offline (static) datasets and online (real-time) instances to supply as input to a machine learning model.

### In this section

- [Creating a feature vector](#)
- [Using an offline feature vector](#)

- *Using an online feature vector*

### 8.4.1 Creating a feature vector

The feature vector object minimally holds the following information:

- Name — the feature vector's name as will be later addressed in the store reference `store://feature_vectors/<project>/<feature-vector-name>` and the UI (after saving the vector).
- Description — a string description of the feature vector.
- Features — a list of features that comprise the feature vector.  
The feature list is defined by specifying the `<feature-set>.<feature-name>` for specific features or `<feature-set>.*` for all of the feature set's features.
- Label feature — the feature that is the label for this specific feature vector, as a `<feature-set>.<feature-name>` string specification. In classification tasks, the `label_feature` may contain the expected label of each record, and be compared with the model output when training or evaluating a model.

Example of creating a feature vector:

```
import mlrun.feature_store as fstore

# Feature vector definitions
feature_vector_name = 'example-fv'
feature_vector_description = 'Example feature vector'
features = ['data_source_1.*',
            'data_source_2.feature_1',
            'data_source_2.feature_2',
            'data_source_3.*']
label_feature = 'label_source_1.label_feature'

# Feature vector creation
fv = fstore.FeatureVector(name=feature_vector_name,
                          features=features,
                          label_feature=label_feature,
                          description=feature_vector_description)

# Save the feature vector in the MLRun DB
# so it can be referenced by the `store://`
# and show in the UI
fv.save()
```

After saving the feature vector, it appears in the UI:

Projects > fraud-demo-orz > Feature Store (Beta) > Feature Vectors

Feature Sets   Features <b>Feature Vectors</b> Datasets			
<div> <div>Tag: latest</div> <div>Name:</div> <div>Label: key1,key2=value,...</div> <div></div> </div>			
Name	Description	Labels	Updated
<a href="#">transactions-fraud</a> latest	Predict if the transaction is fraud		2 Jun, 16:22:09

You can also view some metadata about the feature vector, including all the features, their types, a preview, and statistics:

The screenshot shows the 'Feature Vectors' tab in the mlrun interface. At the top, there are tabs for 'Feature Sets', 'Features', 'Feature Vectors' (selected), and 'Datasets'. Below these, there are input fields for 'Tag: latest', 'Name:', and 'Label: key1,key2=value,...'. The main content area displays the configuration for a feature vector named 'transactions-fraud', created on '2 Jun, 16:22:09'. It includes a 'Cancel' button, an 'Apply Changes' button, and a close icon. The configuration is organized into tabs: 'Overview' (selected), 'Requested Features', 'Returned Features', 'Preview', 'Statistics', and 'Analysis'. The 'Overview' tab shows a 'General' section with the following details:

Description	Predict if the transaction is fraud
Labels	
Version	latest
URI	store://feature-vectors/fraud-demo-orz/transactions-fraud:latest
Last updated	2 Jun, 16:22:09
Timestamp Key	
Label column	label

## Feature vectors with different entities and complex joins

### Note

#### Tech Preview

You can define a feature vector that joins between different feature sets not using the same entity and with a "complex" join types. The join types can differ for different feature set combinations. This configuration supports online and offline feature vectors.

You can define relations within a feature set in two ways:

- Explicitly defining relations within the feature set itself.
- Specifying relations in the context of a feature vector by passing them through the `relations` parameter (`FeatureVector()`). This is a dictionary specifying the relations between feature sets in the feature vector. The keys of the dictionary are feature set names, and the values are both dictionaries whose keys represent column names (of the feature set), and they represent the target entities to join with. The `relations` take precedence over the relations that were specified on the feature sets themselves. If a specific feature set is not mentioned as a key in `relations`, the function falls back to using the default relations defined in the feature set.

You can define a graph using the `join_graph` parameter (`FeatureVector()`), which defines the join type. You can use the graph to define complex joins and pass on the relations to the vector. Currently, only one branch (DAG) is supported. This means that operations involving brackets are not available.

You can merge two feature sets when the left one has more entities, only if all the entities of the right feature set exist in the left feature set's entities.

When using a left join, you must explicitly specify whether you want to perform an `as_of` join or not. The left join type is the only one that implements the "as\_of" join.

An example, assuming three feature sets: [fs1, fs2, fs3]:

```

join_graph = JoinGraph(first_feature_set=fs_1).inner(fs_2).outer(fs_3)
vector = FeatureVector("myvector", features,
                        join_graph=join_graph,
                        relation={fs_1: {'col_1': 'entity_2'}}) # the relation between fs1-
↳ fs3 / fs2-> fs3 is already defined or they have the same
↳ entity

```

## 8.4.2 Using an offline feature vector

Use the feature store's `get_offline_features()` function to produce a dataset from the feature vector. It creates the dataset (asynchronously if possible), saves it to the requested target, and returns an `OfflineVectorResponse`. Due to the async nature of this action, the response object contains an `fv_response.status` indicator that, once completed, could be directly turned into a dataframe, parquet or a csv.

`get_offline_features` supports Storey, Dask, Spark Operator, and Remote Spark.

See `get_offline_features()` for the list of parameters it expects to receive,

You can create a feature vector that comprises different feature sets, while joining the data based on specific fields and not the entity. For example:

- Feature set A is a transaction feature set and one of the fields is email.
- Feature set B is feature set with the fields email and count distinct. You can build a feature vector that comprises fields in feature set A and get the count distinct for the email from feature set B. The join in this case is based on the email column.

Here's an example of a new dataset from a Parquet target:

```

# Import the Parquet Target, so you can build your dataset from a parquet file
from mlrun.datastore.targets import ParquetTarget

# Get offline feature vector based on vector and parquet target
offline_fv = fstore.get_offline_features(feature_vector_name, target=ParquetTarget())

# Return dataset
dataset = offline_fv.to_dataframe()

```

After you create an offline feature vector with a static target (such as `ParquetTarget()`) the reference to this dataset is saved as part of the feature vector's metadata and can be referenced directly through the store as a function input using `store://feature-vectors/{project}/{feature_vector_name}`.

For example:

```

fn = mlrun.import_function('hub://sklearn-classifier').apply(auto_mount())

# Define the training task, including the feature vector and label
task = mlrun.new_task('training',
                      inputs={'dataset': f'store://feature-vectors/{project}/{feature_
↳ vector_name}'},
                      params={'label_column': 'label'})

# Run the function
run = fn.run(task)

```

See a full example of using the offline feature vector to create an ML model in [part 2 of the end-to-end demo](#).

You can use `get_offline_features` for a feature vector whose data is not ingested. See [Create a feature set without ingesting its data](#).

## Using joins in an offline feature vector

You can create a join for:

- Feature sets that have a common entity
- Feature sets that do not have a common entity

### Feature sets that have a common entity

In this case, the join is performed on the common entity.

```
employees_set_entity = fs.Entity("id")
employees_set = fs.FeatureSet(
    "employees",
    entities=[employees_set_entity],
)
employees_set.set_targets(targets=["parquet"], with_defaults=False)
fs.ingest(employees_set, employees)

mini_employees_set = fs.FeatureSet(
    "mini-employees",
    entities=[employees_set_entity],
    },
)
mini_employees_set.set_targets(targets=["parquet"], with_defaults=False)
fs.ingest(mini_employees_set, employees_mini)

features = ["employees.name as n", "mini-employees.name as mini_name"]

vector = fs.FeatureVector(
    "mini-emp-vec", features, description="Employees feature vector"
)
vector.save()

resp = fs.get_offline_features(
    vector,
    engine_args=engine_args,
    with_indexes=True,
)
```

### Feature sets that do not have a common entity

In this case, you define the relations between the features set with the argument: `relations={column_name(str): Entity}` and you include this dictionary when initializing the feature set.

```
departments_set_entity = fs.Entity("d_id")
departments_set = fs.FeatureSet(
    "departments",
    entities=[departments_set_entity],
)
```

(continues on next page)

(continued from previous page)

```

departments_set.set_targets(targets=["parquet"], with_defaults=False)
fs.ingest(departments_set, departments)

employees_set_entity = fs.Entity("id")
employees_set = fs.FeatureSet(
    "employees",
    entities=[employees_set_entity],
    relations={"department_id": departments_set_entity}, # dictionary where the key is_
    ↪ str identifying a column/feature on this feature-set, and the dictionary value is an_
    ↪ Entity object on another feature-set
)
employees_set.set_targets(targets=["parquet"], with_defaults=False)
fs.ingest(employees_set, employees)
features = ["employees.name as emp_name", "departments.name as dep_name"]

vector = fs.FeatureVector(
    "employees-vec", features, description="Employees feature vector"
)

resp = fs.get_offline_features(
    vector,
    engine_args=engine_args,
    with_indexes=False,
)

```

### 8.4.3 Using an online feature vector

The online feature vector provides real-time feature vectors to the model using the latest data available.

First create an Online Feature Service using `get_online_feature_service()`. Then feed the Entity of the feature vector to the service and receive the latest feature vector.

To create the `OnlineVectorService` you only need to pass it the feature vector's store reference.

```

import mlrun.feature_store as fstore

# Create the Feature Vector Online Service
feature_vector = 'store://feature-vectors/{project}/{feature_vector_name}'
svc = fstore.get_online_feature_service(feature_vector)

```

The online feature service supports value imputing (substitute NaN/Inf values with statistical or constant value). You can set the `impute_policy` parameter with the imputing policy, and specify which constant or statistical value will be used instead of NaN/Inf value. This can be defined per column or for all the columns ("\*"). The replaced value can be a fixed number for constants or `$mean`, `$max`, `$min`, `$std`, `$count` for statistical values. "\*" is used to specify the default for all features, for example:

```

svc = fstore.get_online_feature_service(feature_vector, impute_policy={"*": "$mean", "age": 33})

```

To use the online feature service you need to supply a list of entities you want to get the feature vectors for. The service returns the feature vectors as a dictionary of {<feature-name>: <feature-value>} or simply a list of values as numpy arrays.

For example:

```
# Define the wanted entities
entities = [{<feature-vector-entity-column-name>: <entity>}]

# Get the feature vectors from the service
svc.get(entities)
```

The `entities` can be a list of dictionaries as shown in the example, or a list of lists where the values in the internal list correspond to the entity values (e.g. `entities = [{"Joe"}, {"Mike"}]`). The `.get()` method returns a dict by default. If you want to return an ordered list of values, set the `as_list` parameter to `True`. The list input is required by many ML frameworks and this eliminates additional glue logic.

When defining a graph using the `join_graph` parameter (`FeatureVector()`), the `get_online_feature_service` uses `QueryByKey` on the kv store: all join types in the graph turn into left joins. Consequently, the function performs joins using the latest events for each required entity within each feature set.

You can use the parameter `entity_keys` to join features by relations, instead of common entities. You define the relations, and the starting place. See `get_online_feature_service()`.

See a full example of using the online feature service inside a serving function in [part 3 of the end-to-end demo](#).

## 8.5 Sources and targets

- *Sources*
- *Targets*

## 8.6 Sources

For batch ingestion the feature store supports dataframes and files (i.e. csv & parquet). The files can reside on S3, NFS, SQL (for example, MYSQL), Azure blob storage, or the Iguazio platform. MLRun also supports Google BigQuery as a data source.

For real time ingestion the source can be http, Kafka, MySQL, or V3IO stream, etc. When defining a source, it maps to nuclio event triggers.

You can also create a custom `source` to access various databases or data sources.

Class name	Description	store	spark	pandas
<a href="#">BigQuerySource</a>	Batch. Reads Google BigQuery query results as input source for a flow.	N	Y	Y
<a href="#">SnowflakeSource</a>	Batch. Reads Snowflake query results as input source for a flow	N	Y	N
<a href="#">SQLSource</a>	Batch. Reads SQL query results as input source for a flow	Y	N	Y
<a href="#">CSVSource</a>	Batch. Reads a CSV file as input source for a flow.	Y	Y	Y
<a href="#">DataframeSource</a>	Batch. Reads data frame as input source for a flow.	Y	N	N
<a href="#">ParquetSource</a>	Batch. Reads the Parquet file/dir as the input source for a flow.	Y	Y	Y
<a href="#">HttpSource</a>	Event-based. Sets the HTTP-endpoint source for the flow.	Y	N	N
<a href="#">Apache Kafka source</a> and <a href="#">Confluent Kafka source</a>	Event-based. Sets the kafka source for the flow.	Y	N	N
<a href="#">StreamSource</a>	Event-based. Sets the stream source for the flow. If the stream doesn't exist it creates it.	Y	N	N

### 8.6.1 S3/Azure source

When working with S3/Azure, there are additional requirements. Use: `pip install mlrun[s3]`; `pip install mlrun[azure-blob-storage]`; or `pip install mlrun[google-cloud-storage]` to install them.

- Azure: define the environment variable `AZURE_STORAGE_CONNECTION_STRING`
- S3: define `AWS_ACCESS_KEY_ID`, `AWS_SECRET_ACCESS_KEY` and `AWS_BUCKET`

### 8.6.2 SQL source

#### Note

Tech Preview

#### Limitation

Do not use SQL reserved words as entity names. See more details in [Keywords and Reserved Words](#).

`SQLSource` can be used for both batch ingestion and real time ingestion. It supports storey but does not support Spark. To configure either, pass the `db_uri` or overwrite the `MLRUN_SQL__URL` env var, in this format: `mysql+pymysql://<username>:<password>@<host>:<port>/<db_name>`, for example:

```
source = SQLSource(table_name='my_table',
                    db_path="mysql+pymysql://abc:abc@localhost:3306/my_db",
                    key_field='key',
                    parse_dates=['timestamp'])

feature_set = fs.FeatureSet("my_fs", entities=[fs.Entity('key')],)
feature_set.set_targets([])
df = fs.ingest(feature_set, source=source)
```

### 8.6.3 Apache Kafka source

Example:

```
from mlrun.datastore.sources import KafkaSource

with open('/v3io/bigdata/name.crt') as x:
    caCert = x.read()
caCert

kafka_source = KafkaSource(
    brokers=['default-tenant.app.vmdev76.lab.iguazeng.com:9092'],
    topics="stocks-topic",
    initial_offset="earliest",
    group="my_group",
)

run_config = fstore.RunConfig(local=False).apply(mlrun.auto_mount())

stocks_set_endpoint = stocks_set.deploy_ingestion_service(source=kafka_source, run_
↪ config=run_config)
```

### 8.6.4 Confluent Kafka source

---

#### Note

Tech Preview

---

Example:

```
from mlrun.datastore.sources import KafkaSource

with open('/v3io/bigdata/name.crt') as x:
    caCert = x.read()
caCert

kafka_source = KafkaSource(
    brokers=['server-1:9092',
            'server-2:9092',
            'server-3:9092',
            'server-4:9092',
            'server-5:9092'],
    topics=["topic-name"],
    initial_offset="earliest",
    group="test",
    attributes={"sasl" : {
                "enable": True,
                "password" : "pword",
```

(continues on next page)

(continued from previous page)

```

        "user" : "user",
        "handshake" : True,
        "mechanism" : "SCRAM-SHA-256"},
    "tls" : {
        "enable": True,
        "insecureSkipVerify" : False
    },
    "caCert" : caCert}

)

run_config = fstore.RunConfig(local=False).apply(mlrun.auto_mount())

stocks_set_endpoint = stocks_set.deploy_ingestion_service(source=kafka_source,run_
↪config=run_config)

```

## 8.7 Targets

By default, the feature sets are saved in parquet and the Iguazio NoSQL DB (*NoSqlTarget*). The Parquet file is ideal for fetching large set of data for training while the key value is ideal for an online application since it supports low latency data retrieval based on key access.

### Note

When working with the Iguazio MLOps platform the default feature set storage location is under the "Projects" container: <project name>/fs/. . folder. The default location can be modified in mlrun config or specified per ingest operation. The parquet/csv files can be stored in NFS, S3, Azure blob storage, Redis, SQL, and on Iguazio DB/FS.

Class name	Description	storey	spark	pan- das
<i>CSVTarget</i>	Offline. Writes events to a CSV file.	Y	Y	Y
<i>KafkaTarget</i>	Offline. Writes all incoming events into a Kafka stream.	Y	N	N
<i>ParquetTar- get</i>	Offline. The Parquet target storage driver, used to materialize feature set/vector data into parquet files.	Y	Y	Y
<i>StreamTar- get</i>	Offline. Writes all incoming events into a V3IO stream.	Y	N	N
<i>NoSqlTarget</i>	Online. Persists the data in V3IO table to its associated storage by key .	Y	Y	Y
<i>RedisNoSql- Target</i>	Online. Persists the data in Redis table to its associated storage by key.	Y	Y	N
<i>SqlTarget</i>	Online. Persists the data in SQL table to its associated storage by key.	Y	N	Y

### 8.7.1 ParquetTarget

`ParquetTarget()` is the default target for offline data. The Parquet file is ideal for fetching large sets of data for training.

#### Partitioning

When writing data to a `ParquetTarget`, you can use partitioning. Partitioning organizes data in Parquet files by dividing large data sets into smaller and more manageable pieces. The data is divided into separate files according to specific criteria, for example: date, time, or specific values in a column. Partitioning, when configured correctly, improves read performance by reducing the amount of data that needs to be processed for any given function, for example, when reading back a limited time range with `get_offline_features()`.

When using the pandas engine for ingestion, pandas incurs a maximum limit of 1024 partitions on each ingestion. If the data being ingested spans over more than 1024 partitions, the ingestion fails. Decrease the number of partitions by filtering the time (for example, using `start_filter/end_filter` of the `ParquetSource()`), and/or increasing the `time_partitioning_granularity`.

Storey processes the data row by row (as a streaming engine, it doesn't get all the data up front, so it needs to process row by row). These rows are batched together according to the partitions defined, and they are written to each partition separately. (Therefore, storey does not have the 1024 partitions limitation.)

Spark does not have the partitions limitation, either.

Configure partitioning with:

- `partitioned` — Optional. Whether to partition the file. False by default. If True without passing any other partition fields, the data is partitioned by `/year/month/day/hour`.
- `key_bucketing_number` — Optional. None by default: does not partition by key. 0 partitions by the key as is. Any other number "X" creates X partitions and hashes the keys to one of them.
- `partition_cols` — Optional. Name of columns from the data to partition by.
- `time_partitioning_granularity` — Optional. The smallest time unit to partition the data by, in the format `/year/month/day/hour` (default). For example "hour" yields the smallest possible partitions.

For example:

- `ParquetTarget()` partitions by `year/month/day/hour/`
- `ParquetTarget(partition_cols=[])` writes to a directory without partitioning
- `ParquetTarget(partition_cols=["col1", "col2"])` partitions by `col1/col2/`
- `ParquetTarget(time_partitioning_granularity="day")` partitions by `year/month/day/`
- `ParquetTarget(partition_cols=["col1", "col2"], time_partitioning_granularity="day")` partitions by `col1/col2/year/month/day/`

Disable partitioning with:

- `ParquetTarget(partitioned=False)`

## 8.7.2 NoSql target

The `NoSqlTarget()` is a V3IO key-value based target. It is the default target for online (real-time) data. It supports low latency data retrieval based on key access, making it ideal for online applications.

The combination of a NoSQL target with the storey engine does not support features of type string with a value containing both quote (') and double-quote (").

## 8.7.3 Redis target

---

### Note

Tech Preview

---

The Redis online target is called, in MLRun, `RedisNoSqlTarget`. The functionality of the `RedisNoSqlTarget` is identical to the `NoSqlTarget` except for:

- The `RedisNoSqlTarget` accepts the path parameter in the form: `<redis|rediss>://<host>[:port]` For example: `rediss://localhost:6379` creates a redis target, where:
  - The client/server protocol (rediss) is TLS protected (vs. "redis" if no TLS is established)
  - The server location is localhost port 6379.
- If the path parameter is not set, it tries to fetch it from the `MLRUN_REDIS__URL` environment variable.
- You cannot pass the username/password as part of the URL. If you want to provide the username/password, use secrets as: `<prefix>REDIS_USER <prefix>REDIS_PASSWORD` where `<prefix>` is the optional `RedisNoSqlTarget credentials_prefix` parameter.
- Two types of Redis servers are supported: `StandAlone` and `Cluster` (no need to specify the server type in the config).
- A feature set supports one online target only. Therefore `RedisNoSqlTarget` and `NoSqlTarget` cannot be used as two targets of the same feature set.

The K8s secrets are not available when executing locally (from the sdk). Therefore, if `RedisNoSqlTarget` with secret is used, You must add the secret as an env-var.

To use the Redis online target store, you can either change the default to be parquet and Redis, or you can specify the Redis target explicitly each time with the path parameter, for example: `RedisNoSqlTarget(path = "redis://1.2.3.4:6379")`

## 8.7.4 SQL target

---

### Note

Tech Preview

---

### Limitation

Do not use SQL reserved words as entity names. See more details in [Keywords and Reserved Words](#).

---

The SQLTarget online target supports storey but does not support Spark. Aggregations are not supported. To configure, pass the db\_uri or overwrite the MLRUN\_SQL\_\_URL env var, in this format: mysql+pymysql://<username>:<password>@<host>:<port>/<db\_name>

You can pass the schema and the name of the table you want to create or the name of an existing table, for example:

```
target = SQLTarget(
    table_name='my_table',
    schema= {'id': string, 'age': int, 'time': pd.Timestamp, ...}
    create_table=True,
    primary_key_column='id',
    parse_dates=["time"],
)
feature_set = fs.FeatureSet("my_fs", entities=[fs.Entity('id')],)
fs.ingest(feature_set, source=df, targets=[target])
```

## 8.8 Feature store end-to-end demo


This demo shows the usage of MLRun and the feature store:

- **Data ingestion & preparation**
- **Model training & testing**
- **Model serving**
- **Building an automated ML pipeline**

Fraud prevention, specifically, is a challenge since it requires processing raw transactions and events in real-time and being able to quickly respond and block transactions before they occur. Consider, for example, a case where you would like to evaluate the average transaction amount. When training the model, it is common to take a DataFrame and just calculate the average. However, when dealing with real-time/online scenarios, this average has to be calculated incrementally.

This demo illustrates how to **Ingest** different data sources to the **Feature Store**. Specifically, it covers two types of data:

- **Transactions:** Monetary activity between two parties to transfer funds.
- **Events:** Activity performed by a party, such as login or password change.

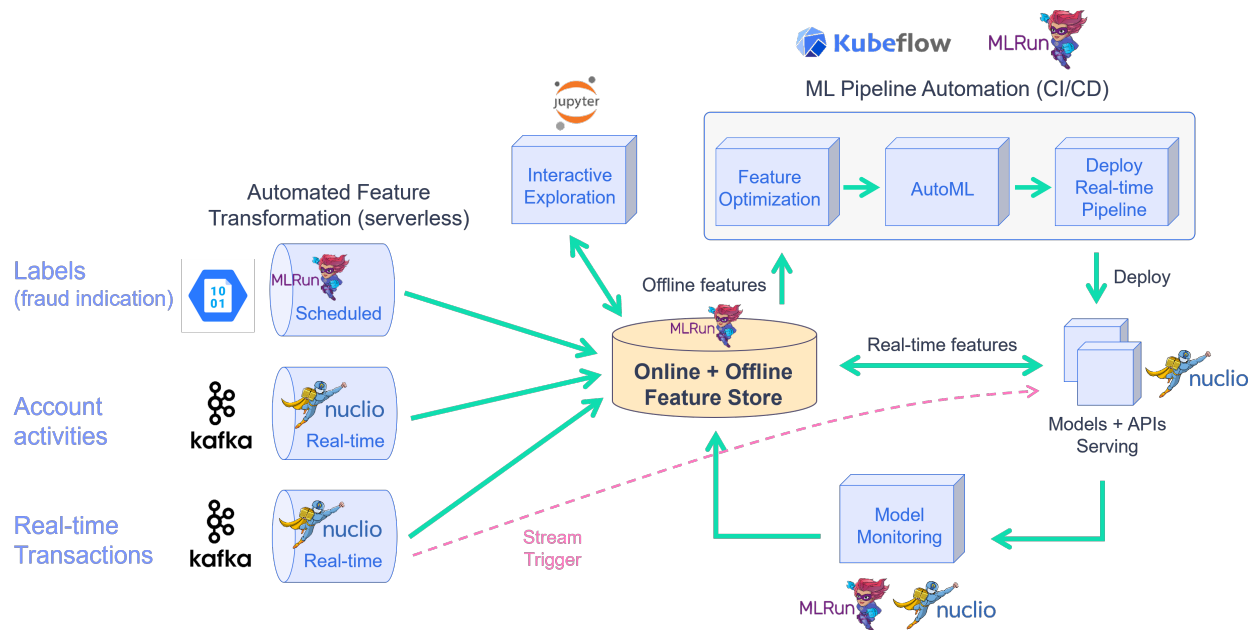

The demo walks through creation of an ingestion pipeline for each data source with all the needed preprocessing and validation. It runs the pipeline locally within the notebook and then launches a real-time function to **ingest live data** or schedule a cron to run the task when needed.

Following the ingestion, you create a feature vector, select the most relevant features and create a final model. Then you deploy the model and showcase the feature vector and model serving.


### 8.8.1 Part 1: Data ingestion

#### Note

This demo works with the online feature store, which is currently not part of the Open Source default deployment.

This demo showcases financial fraud prevention using the MLRun feature store to define complex features that help identify fraud. Fraud prevention specifically is a challenge because it requires processing raw transaction and events in real-time, and being able to quickly respond and block transactions before they occur.

To address this, you create a development pipeline and a production pipeline. Both pipelines share the same feature engineering and model code, but serve data very differently. Furthermore, you automate the data and model monitoring process, identify drift and trigger retraining in a CI/CD pipeline. This process is described in the diagram below:

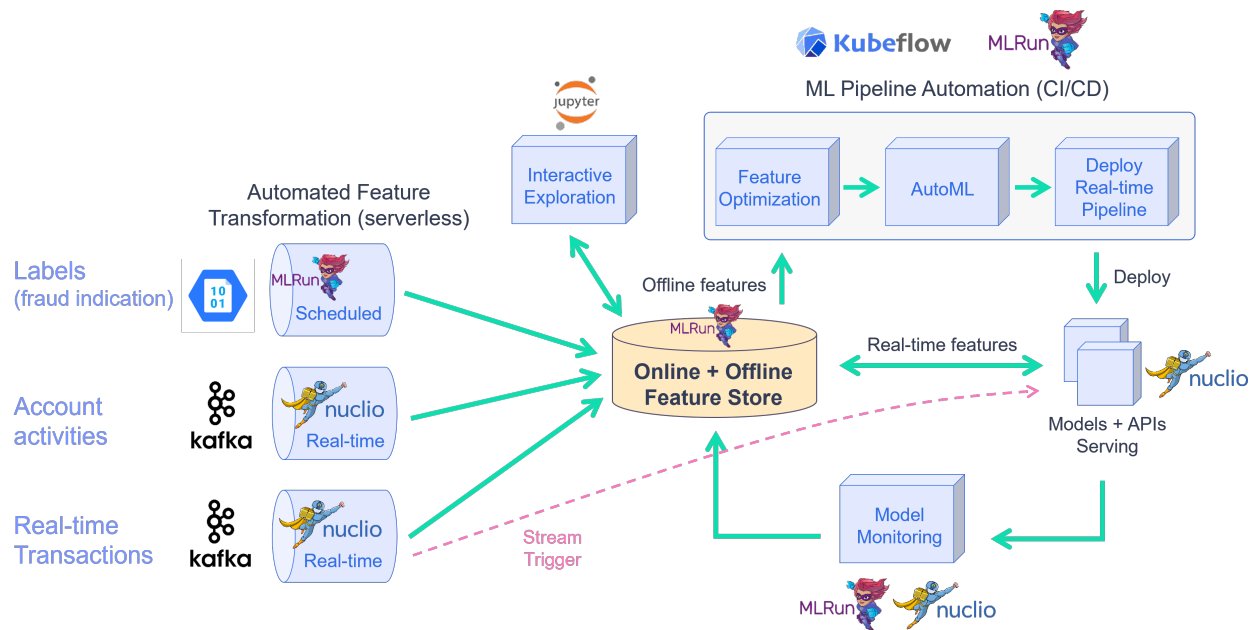

By the end of this tutorial you'll learn how to:

- Create an ingestion pipeline for each data source.
- Define preprocessing, aggregation and validation of the pipeline.
- Run the pipeline locally within the notebook.
- Launch a real-time function to ingest live data.
- Schedule a cron to run the task when needed.

The raw data is described as follows:

TRANSACTIONS		USER EVENTS	
<b>age</b>	age group value 0-6. Some values are marked as U for unknown	<b>source</b>	The party/entity related to the event
<b>gender</b>	A character to define the gender	<b>event</b>	event, such as login or password change
<b>zipcodeOri</b>	ZIP code of the person originating the transaction	<b>timestamp</b>	The date and time of the event
<b>zipMerchant</b>	ZIP code of the merchant receiving the transaction		
<b>category</b>	category of the transaction (e.g., transportation, food, etc.)		
<b>amount</b>	the total amount of the transaction		
<b>fraud</b>	whether the transaction is fraudulent		
<b>timestamp</b>	the date and time in which the transaction took place		
<b>source</b>	the ID of the party/entity performing the transaction		
<b>target</b>	the ID of the party/entity receiving the transaction		
<b>device</b>	the device ID used to perform the transaction		

This notebook introduces how to **Ingest** different data sources to the **Feature Store**.

The following FeatureSets are created:

- **Transactions:** Monetary transactions between a source and a target.
- **Events:** Account events such as account login or a password change.
- **Label:** Fraud label for the data.

```
!/User/align_mlrun.sh
```

```
Both server & client are aligned (1.3.0rc23).
```

```
project_name = "fraud-demo"
```

```
import mlrun

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name, context="./", user_project=True)
```

```
> 2023-02-15 14:40:30,932 [info] loaded project fraud-demo from ./ and saved in MLRun DB
```

## Step 1 - Fetch, process and ingest the datasets

### 1.1 - Transactions

#### Transactions

```
# Helper functions to adjust the timestamps of our data
# while keeping the order of the selected events and
# the relative distance from one event to the other

def date_adjustment(sample, data_max, new_max, old_data_period, new_data_period):
    """
    Adjust a specific sample's date according to the original and new time periods
    """
    sample_dates_scale = (data_max - sample) / old_data_period
    sample_delta = new_data_period * sample_dates_scale
    new_sample_ts = new_max - sample_delta
    return new_sample_ts

def adjust_data_timespan(
    dataframe, timestamp_col="timestamp", new_period="2d", new_max_date_str="now"
):
    """
    Adjust the dataframe timestamps to the new time period
    """
    # Calculate old time period
    data_min = dataframe.timestamp.min()
    data_max = dataframe.timestamp.max()
    old_data_period = data_max - data_min

    # Set new time period
    new_time_period = pd.Timedelta(new_period)
    new_max = pd.Timestamp(new_max_date_str)
    new_min = new_max - new_time_period
    new_data_period = new_max - new_min

    # Apply the timestamp change
    df = dataframe.copy()
    df[timestamp_col] = df[timestamp_col].apply(
        lambda x: date_adjustment(
            x, data_max, new_max, old_data_period, new_data_period
        )
    )
    return df
```

```
import pandas as pd

# Fetch the transactions dataset from the server
transactions_data = pd.read_csv(
    "https://s3.wasabisys.com/iguazio/data/fraud-demo-mlrun-fs-docs/data.csv",
```

(continues on next page)

(continued from previous page)

```

    parse_dates=["timestamp"],
)

# use only first 50k
transactions_data = transactions_data.sort_values(by="source", axis=0)[:10000]

# Adjust the samples timestamp for the past 2 days
transactions_data = adjust_data_timespan(transactions_data, new_period="2d")

# Sorting after adjusting timestamps
transactions_data = transactions_data.sort_values(by="timestamp", axis=0)

# Preview
transactions_data.head(3)

```

	step	age	gender	zipcodeOri	zipMerchant	category	amount	\
274633	91	5	F	28007	28007	es_transportation	26.92	
286902	94	2	M	28007	28007	es_transportation	48.22	
416998	131	3	M	28007	28007	es_transportation	17.56	

	fraud		timestamp	source	target	\
274633	0	2023-02-13	14:41:37.388791000	C1022153336	M1823072687	
286902	0	2023-02-13	14:41:55.682416913	C1006176917	M348934600	
416998	0	2023-02-13	14:42:00.789586939	C1010936270	M348934600	

	device
274633	33832bb8607545df97632a7ab02d69c4
286902	fadd829c49e74ffa86c8da3be75ada53
416998	58d0422a50bc40c89d2b4977b2f1beea

## Transactions - create a feature set and preprocessing pipeline

Create the feature set (data pipeline) definition for the **credit transaction processing** that describes the offline/online data transformations and aggregations. The feature store automatically adds an offline **parquet** target and an online **NoSQL** target by using `set_targets()`.

The data pipeline consists of:

- **Extracting** the data components (hour, day of week)
- **Mapping** the age values
- **One hot encoding** for the transaction category and the gender
- **Aggregating** the amount (avg, sum, count, max over 2/12/24 hour time windows)
- **Aggregating** the transactions per category (over 14 days time windows)
- **Writing** the results to **offline** (Parquet) and **online** (NoSQL) targets

```

# Import MLRun's Feature Store
import mlrun.feature_store as fstore
from mlrun.feature_store.steps import OneHotEncoder, MapValues, DateExtractor

```

```
# Define the transactions FeatureSet
transaction_set = fstore.FeatureSet(
    "transactions",
    entities=[fstore.Entity("source")],
    timestamp_key="timestamp",
    description="transactions feature set",
)
```

```
# Define and add value mapping
main_categories = [
    "es_transportation",
    "es_health",
    "es_otherservices",
    "es_food",
    "es_hotelservices",
    "es_barsandrestaurants",
    "es_tech",
    "es_sportsandtoys",
    "es_wellnessandbeauty",
    "es_hyper",
    "es_fashion",
    "es_home",
    "es_contents",
    "es_travel",
    "es_leisure",
]

# One Hot Encode the newly defined mappings
one_hot_encoder_mapping = {
    "category": main_categories,
    "gender": list(transactions_data.gender.unique()),
}

# Define the graph steps
transaction_set.graph.to(
    DateExtractor(parts=["hour", "day_of_week"], timestamp_col="timestamp")
).to(MapValues(mapping={"age": {"U": "0"}}, with_original_features=True)).to(
    OneHotEncoder(mapping=one_hot_encoder_mapping)
)

# Add aggregations for 2, 12, and 24 hour time windows
transaction_set.add_aggregation(
    name="amount",
    column="amount",
    operations=["avg", "sum", "count", "max"],
    windows=["2h", "12h", "24h"],
    period="1h",
)

# Add the category aggregations over a 14 day window
```

(continues on next page)

(continued from previous page)

```

for category in main_categories:
    transaction_set.add_aggregation(
        name=category,
        column=f"category_{category}",
        operations=["sum"],
        windows=["14d"],
        period="1d",
    )

# Add default (offline-parquet & online-nosql) targets
transaction_set.set_targets()

# Plot the pipeline so you can see the different steps
transaction_set.plot(rankdir="LR", with_targets=True)

```

```
<graphviz.graphs.Digraph at 0x7f8391014ee0>
```

## Transactions - ingestion

```

# Ingest your transactions dataset through your defined pipeline
transactions_df = fstore.ingest(
    transaction_set, transactions_data, infer_options=fstore.InferOptions.default()
)

transactions_df.head(3)

```

	amount_sum_2h	amount_sum_12h	amount_sum_24h	amount_max_2h	\
source					
C1022153336	26.92	26.92	26.92	26.92	
C1006176917	48.22	48.22	48.22	48.22	
C1010936270	17.56	17.56	17.56	17.56	

	amount_max_12h	amount_max_24h	amount_count_2h	\
source				
C1022153336	26.92	26.92	1.0	
C1006176917	48.22	48.22	1.0	
C1010936270	17.56	17.56	1.0	

	amount_count_12h	amount_count_24h	amount_avg_2h	...	\
source				...	
C1022153336	1.0	1.0	26.92	...	
C1006176917	1.0	1.0	48.22	...	
C1010936270	1.0	1.0	17.56	...	

	category_es_contents	category_es_travel	category_es_leisure	\
source				
C1022153336	0	0	0	
C1006176917	0	0	0	
C1010936270	0	0	0	

(continues on next page)

(continued from previous page)

	amount	fraud		timestamp	target	\
source						
C1022153336	26.92	0	2023-02-13	14:41:37.388791000	M1823072687	
C1006176917	48.22	0	2023-02-13	14:41:55.682416913	M348934600	
C1010936270	17.56	0	2023-02-13	14:42:00.789586939	M348934600	

		device	timestamp_hour	\
source				
C1022153336	33832bb8607545df97632a7ab02d69c4		14	
C1006176917	fadd829c49e74ffa86c8da3be75ada53		14	
C1010936270	58d0422a50bc40c89d2b4977b2f1beea		14	

	timestamp_day_of_week
source	
C1022153336	0
C1006176917	0
C1010936270	0

[3 rows x 56 columns]

After performing the ingestion process, you can see all of the different features that were created with the help of the UI, as shown in the image below.

datasets

Label: key1,key2=value,...

Cancel

Apply Chan

is

Transformations

Preview

Statistics ?

Analysis

	Type	Description	Labels	Validators
	str			
	float			
	float			
	float			
	float			
	float			
	float			
	float			
	float			
	float			
	-			

## 1.2 - User events

### User events - fetching

```
# Fetch the user_events dataset from the server
user_events_data = pd.read_csv(
    "https://s3.wasabisys.com/iguazio/data/fraud-demo-mlrun-fs-docs/events.csv",
    index_col=0,
    quotechar="'",
    parse_dates=["timestamp"],
)

# Adjust to the last 2 days to see the latest aggregations in the online feature vectors
user_events_data = adjust_data_timespan(user_events_data, new_period="2d")

# Preview
user_events_data.head(3)
```

	source	event	timestamp
0	C1974668487	details_change	2023-02-14 23:49:22.487035086
1	C1973547259	login	2023-02-15 02:50:56.744175508
2	C515668508	login	2023-02-14 23:24:03.025352302

### User events - create a feature set and preprocessing pipeline

Now define the events feature set. This is a pretty straightforward pipeline in which you only "one hot encode" the event categories and save the data to the default targets.

```
user_events_set = fstore.FeatureSet(
    "events",
    entities=[fstore.Entity("source")],
    timestamp_key="timestamp",
    description="user events feature set",
)
```

```
# Define and add value mapping
events_mapping = {"event": list(user_events_data.event.unique())}

# One Hot Encode
user_events_set.graph.to(OneHotEncoder(mapping=events_mapping))

# Add default (offline-parquet & online-nosql) targets
user_events_set.set_targets()

# Plot the pipeline so you can see the different steps
user_events_set.plot(rankdir="LR", with_targets=True)
```

```
<graphviz.graphs.Digraph at 0x7f834754c8e0>
```

## User Events - Ingestion

```
# Ingestion of your newly created events feature set
events_df = fstore.ingest(user_events_set, user_events_data)
events_df.head(3)
```

	event_details_change	event_login	event_password_change	\
source				
C1974668487	1	0	0	
C1973547259	0	1	0	
C515668508	0	1	0	

	timestamp
source	
C1974668487	2023-02-14 23:49:22.487035086
C1973547259	2023-02-15 02:50:56.744175508
C515668508	2023-02-14 23:24:03.025352302

## Step 2 - Create a labels data set for model training

### Label set - create a feature set

This feature set contains the label for the fraud demo. It is ingested directly to the default targets without any changes.

```
def create_labels(df):
    labels = df[["fraud", "timestamp"]].copy()
    labels = labels.rename(columns={"fraud": "label"})
    labels["timestamp"] = labels["timestamp"].astype("datetime64[ms]")
    labels["label"] = labels["label"].astype(int)
    return labels
```

```
from mlrun.datastore import ParquetTarget
import os

# Define the "labels" feature set
labels_set = fstore.FeatureSet(
    "labels",
    entities=[fstore.Entity("source")],
    timestamp_key="timestamp",
    description="training labels",
    engine="pandas",
)

labels_set.graph.to(name="create_labels", handler=create_labels)

# specify only Parquet (offline) target since its not used for real-time
target = ParquetTarget(
    name="labels", path=f"v3io:///projects/{project.name}/target.parquet"
)
```

(continues on next page)

(continued from previous page)

```
labels_set.set_targets([target], with_defaults=False)
labels_set.plot(with_targets=True)
```

```
<graphviz.graphs.Digraph at 0x7f834a530ee0>
```

## Label set - ingestion

```
# Ingest the labels feature set
labels_df = fstore.ingest(labels_set, transactions_data)
labels_df.head(3)
```

	label	timestamp
source		
C1022153336	0	2023-02-13 14:41:37.388
C1006176917	0	2023-02-13 14:41:55.682
C1010936270	0	2023-02-13 14:42:00.789

## Step 3 - Deploy a real-time pipeline

When dealing with real-time aggregation, it's important to be able to update these aggregations in real-time. For this purpose, you create live serving functions that update the online feature store of the `transactions` FeatureSet and `Events` FeatureSet.

Using MLRun's serving runtime, create a nuclio function loaded with your feature set's computational graph definition and an `HttpSource` to define the HTTP trigger.

Notice that the implementation below does not require any rewrite of the pipeline logic.

### 3.1 - Transactions

#### Transactions - deploy the feature set live endpoint

```
# Create iguazio v3io stream and transactions push API endpoint
transaction_stream = f"v3io:///projects/{project.name}/streams/transaction"
transaction_pusher = mlrun.datastore.get_stream_pusher(transaction_stream)
```

```
# Define the source stream trigger (use v3io streams)
# define the `key` and `time` fields (extracted from the json message).
source = mlrun.datastore.sources.StreamSource(
    path=transaction_stream, key_field="source", time_field="timestamp"
)

# Deploy the transactions feature set's ingestion service over a real-time (Nuclio)
↪ serverless function
# you can use the run_config parameter to pass function/service specific configuration
transaction_set_endpoint, function = transaction_set.deploy_ingestion_service(
    source=source
)
```

```
> 2023-02-15 14:43:00,894 [info] Starting remote function deploy
2023-02-15 14:43:01 (info) Deploying function
2023-02-15 14:43:01 (info) Building
2023-02-15 14:43:01 (info) Staging files and preparing base images
2023-02-15 14:43:01 (info) Building processor image
2023-02-15 14:44:06 (info) Build complete
> 2023-02-15 14:45:06,185 [info] successfully deployed function: {'internal_invocation_
→ urls': ['nuclio-fraud-demo-dani-transactions-ingest.default-tenant.svc.cluster.
→ local:8080'], 'external_invocation_urls': ['fraud-demo-dani-transactions-ingest-fraud-
→ demo-dani.default-tenant.app.vmddev94.lab.iguazeng.com/']}
```

## Transactions - test the feature set HTTP endpoint

By defining your transactions feature set you can now use MLRun and Storey to deploy it as a live endpoint, ready to ingest new data!

Using MLRun's serving runtime, create a nuclio function loaded with your feature set's computational graph definition and an HttpSource to define the HTTP trigger.

```
import requests
import json

# Select a sample from the dataset and serialize it to JSON
transaction_sample = json.loads(transactions_data.sample(1).to_json(orient="records"))[
    0
]
transaction_sample["timestamp"] = str(pd.Timestamp.now())
transaction_sample
```

```
{'step': 7,
 'age': '4',
 'gender': 'M',
 'zipcodeOri': 28007,
 'zipMerchant': 28007,
 'category': 'es_transportation',
 'amount': 3.13,
 'fraud': 0,
 'timestamp': '2023-02-15 14:45:06.241183',
 'source': 'C1039390058',
 'target': 'M348934600',
 'device': '6c08480bd1234bac9e6a4b57310ba9ab'}
```

```
# Post the sample to the ingestion endpoint
requests.post(transaction_set_endpoint, json=transaction_sample).text
```

```
'{"id": "753953e5-a7df-4fe0-b728-822fadb92ceb"}'
```

### 3.2 - User events

#### User events - deploy the feature set live endpoint

Deploy the events feature set's ingestion service using the feature set and all the previously defined resources.

```
# Create iguazio v3io stream and transactions push API endpoint
events_stream = f"v3io:///projects/{project.name}/streams/events"
events_pusher = mlrun.datastore.get_stream_pusher(events_stream)
```

```
# Define the source stream trigger (use v3io streams)
# define the `key` and `time` fields (extracted from the Json message).
source = mlrun.datastore.sources.StreamSource(
    path=events_stream, key_field="source", time_field="timestamp"
)

# Deploy the transactions feature set's ingestion service over a real-time (Nuclio)
↳ serverless function
# you can use the run_config parameter to pass function/service specific configuration
events_set_endpoint, function = user_events_set.deploy_ingestion_service(source=source)
```

```
> 2023-02-15 14:45:06,443 [info] Starting remote function deploy
2023-02-15 14:45:06 (info) Deploying function
2023-02-15 14:45:06 (info) Building
2023-02-15 14:45:06 (info) Staging files and preparing base images
2023-02-15 14:45:06 (info) Building processor image
```

#### User Events - Test the feature set HTTP endpoint

```
# Select a sample from the events dataset and serialize it to JSON
user_events_sample = json.loads(user_events_data.sample(1).to_json(orient="records"))[0]
user_events_sample["timestamp"] = str(pd.Timestamp.now())
user_events_sample
```

```
# Post the sample to the ingestion endpoint
requests.post(events_set_endpoint, json=user_events_sample).text
```

## Done!

You've completed Part 1 of the data-ingestion with the feature store. Proceed to [Part 2](#) to learn how to train an ML model using the feature store data.

### 8.8.2 Part 2: Training

In this part you learn how to use MLRun's **Feature Store** to easily define a **Feature Vector** and create the dataset you need to run the training process.

By the end of this tutorial you'll learn how to:

- Combine multiple data sources to a single feature vector
- Create training dataset
- Create a model using an MLRun hub function

```
project_name = "fraud-demo"
```

```
import mlrun

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name, context="./", user_project=True)
```

```
> 2023-02-15 14:43:21,980 [info] loaded project fraud-demo from MLRun DB
```

#### Step 1 - Create a feature vector

In this section you create a feature vector.

The Feature vector has a **name** so you can reference to it later via the URI or your serving function, and it has a list of **features** from the available feature sets. You can add a feature from a feature set by adding `<FeatureSet>.<Feature>` to the list, or add `<FeatureSet>.*` to add all the feature set's available features.

By default, the first FeatureSet in the feature list acts as the spine, meaning that all the other features are joined to it. For example, in this instance you use the early sense sensor data as the spine, so for each early sense event you create produces a row in the resulted feature vector.

```
# Define the list of features to use
features = [
    "events.*",
    "transactions.amount_max_2h",
    "transactions.amount_sum_2h",
    "transactions.amount_count_2h",
    "transactions.amount_avg_2h",
    "transactions.amount_max_12h",
    "transactions.amount_sum_12h",
    "transactions.amount_count_12h",
    "transactions.amount_avg_12h",
    "transactions.amount_max_24h",
    "transactions.amount_sum_24h",
    "transactions.amount_count_24h",
    "transactions.amount_avg_24h",
    "transactions.es_transportation_sum_14d",
```

(continues on next page)

(continued from previous page)

```

    "transactions.es_health_sum_14d",
    "transactions.es_otherservices_sum_14d",
    "transactions.es_food_sum_14d",
    "transactions.es_hotelservices_sum_14d",
    "transactions.es_barsandrestaurants_sum_14d",
    "transactions.es_tech_sum_14d",
    "transactions.es_sportsandtoys_sum_14d",
    "transactions.es_wellnessandbeauty_sum_14d",
    "transactions.es_hyper_sum_14d",
    "transactions.es_fashion_sum_14d",
    "transactions.es_home_sum_14d",
    "transactions.es_travel_sum_14d",
    "transactions.es_leisure_sum_14d",
    "transactions.gender_F",
    "transactions.gender_M",
    "transactions.step",
    "transactions.amount",
    "transactions.timestamp_hour",
    "transactions.timestamp_day_of_week",
]

```

```

# Import MLRun's Feature Store
import mlrun.feature_store as fstore

# Define the feature vector name for future reference
fv_name = "transactions-fraud"

# Define the feature vector using the feature store (fstore)
transactions_fv = fstore.FeatureVector(
    fv_name,
    features,
    label_feature="labels.label",
    description="Predicting a fraudulent transaction",
)

# Save the feature vector in the feature store
transactions_fv.save()

```

## Step 2 - Preview the feature vector data

Obtain the values of the features in the feature vector, to ensure the data appears as expected.

```

# Import the Parquet Target so you can directly save your dataset as a file
from mlrun.datastore.targets import ParquetTarget

# Get offline feature vector as dataframe and save the dataset to parquet
train_dataset = fstore.get_offline_features(fv_name, target=ParquetTarget())

```

```

> 2023-02-15 14:43:23,376 [info] wrote target: {'name': 'parquet', 'kind': 'parquet',
↪ 'path': 'v3io:///projects/fraud-demo-dani/FeatureStore/transactions-fraud/parquet/

```

(continues on next page)

(continued from previous page)

```
→vectors/transactions-fraud-latest.parquet', 'status': 'ready', 'updated': '2023-02-15T14:43:23.375968+00:00', 'size': 140838, 'partitioned': True}
```

```
# Preview your dataset
```

```
train_dataset.to_dataframe().tail(5)
```

```

event_details_change  event_login  event_password_change  amount_max_2h  \
1763                  0           0                      1        45.28
1764                  1           0                      0        26.81
1765                  0           1                      0        33.10
1766                  0           0                      1        22.35
1767                  0           0                      1        44.37

amount_sum_2h  amount_count_2h  amount_avg_2h  amount_max_12h  \
1763        144.56           5.0        28.9120        161.75
1764         47.75           2.0        23.8750         68.16
1765         91.11           4.0        22.7775        121.96
1766         37.68           3.0        12.5600         71.63
1767         76.87           4.0        19.2175        159.32

amount_sum_12h  amount_count_12h  ...  es_home_sum_14d  \
1763        1017.80           33.0  ...           0.0
1764         653.02           24.0  ...           0.0
1765        1001.32           32.0  ...           2.0
1766        1052.44           37.0  ...           0.0
1767        1189.73           39.0  ...           0.0

es_travel_sum_14d  es_leisure_sum_14d  gender_F  gender_M  step  \
1763              1.0              0.0        1.0        0.0   96.0
1764              0.0              0.0        0.0        1.0  134.0
1765              0.0              0.0        1.0        0.0  141.0
1766              0.0              0.0        0.0        1.0  101.0
1767              0.0              0.0        0.0        1.0   40.0

amount  timestamp_hour  timestamp_day_of_week  label
1763    24.02           14.0              2.0    0.0
1764    26.81           14.0              2.0    0.0
1765    14.95           14.0              2.0    0.0
1766    13.62           14.0              2.0    0.0
1767    12.82           14.0              2.0    0.0
```

```
[5 rows x 36 columns]
```

### Step 3 - Train models and choose the highest accuracy

With MLRun, you can easily train different models and compare the results. In the code below, you train three different models. Each one uses a different algorithm (random forest, XGBoost, adaboost), and you choose the model with the highest accuracy.

```
# Import the Sklearn classifier function from the functions hub
classifier_fn = mlrun.import_function("hub://auto_trainer")

# Prepare the parameters list for the training function
# you use 3 different models
training_params = {
    "model_name": [
        "transaction_fraud_rf",
        "transaction_fraud_xgboost",
        "transaction_fraud_adaboost",
    ],
    "model_class": [
        "sklearn.ensemble.RandomForestClassifier",
        "sklearn.ensemble.GradientBoostingClassifier",
        "sklearn.ensemble.AdaBoostClassifier",
    ],
}

# Define the training task, including your feature vector, label and hyperparams
↳ definitions
train_task = mlrun.new_task(
    "training",
    inputs={"dataset": transactions_fv.uri},
    params={"label_columns": "label"},
)

train_task.with_hyper_params(training_params, strategy="list", selector="max.accuracy")

# Specify your cluster image
classifier_fn.spec.image = "mlrun/mlrun"

# Run training
classifier_fn.run(train_task, local=False)
```

```
> 2023-02-15 14:43:23,870 [info] starting run training
↳ uid=946725e1c01f4e0ba9d7eb62f7f24142 DB=http://mlrun-api:8080
> 2023-02-15 14:43:24,069 [info] Job is running in the background, pod: training-68dct
> 2023-02-15 14:43:58,472 [info] test_set or train_test_split_size are not provided,
↳ setting train_test_split_size to 0.2
> 2023-02-15 14:44:00,031 [info] label columns: label
> 2023-02-15 14:44:00,031 [info] Sample set not given, using the whole training set as
↳ the sample set
> 2023-02-15 14:44:00,278 [info] training 'transaction_fraud_rf'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:
```

```
The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly
↳ normalizing y_prob will reproduce this behavior, but it is recommended that a proper
```

(continues on next page)

(continued from previous page)

```

↪probability is used (i.e. a classifier's `predict_proba` positive class or `decision_
↪function` output calibrated with `CalibratedClassifierCV`).

> 2023-02-15 14:44:03,298 [info] test_set or train_test_split_size are not provided,
↪setting train_test_split_size to 0.2
> 2023-02-15 14:44:04,277 [info] label columns: label
> 2023-02-15 14:44:04,277 [info] Sample set not given, using the whole training set as
↪the sample set
> 2023-02-15 14:44:04,281 [info] training 'transaction_fraud_xgboost'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:

The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly
↪normalizing y_prob will reproduce this behavior, but it is recommended that a proper
↪probability is used (i.e. a classifier's `predict_proba` positive class or `decision_
↪function` output calibrated with `CalibratedClassifierCV`).

> 2023-02-15 14:44:07,773 [info] test_set or train_test_split_size are not provided,
↪setting train_test_split_size to 0.2
> 2023-02-15 14:44:09,037 [info] label columns: label
> 2023-02-15 14:44:09,037 [info] Sample set not given, using the whole training set as
↪the sample set
> 2023-02-15 14:44:09,040 [info] training 'transaction_fraud_adaboost'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:

The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly
↪normalizing y_prob will reproduce this behavior, but it is recommended that a proper
↪probability is used (i.e. a classifier's `predict_proba` positive class or `decision_
↪function` output calibrated with `CalibratedClassifierCV`).

> 2023-02-15 14:44:11,957 [info] best iteration=1, used criteria max.accuracy
> 2023-02-15 14:44:12,668 [info] To track results use the CLI: {'info_cmd': 'mlrun get
↪run 946725e1c01f4e0ba9d7eb62f7f24142 -p fraud-demo-dani', 'logs_cmd': 'mlrun logs
↪946725e1c01f4e0ba9d7eb62f7f24142 -p fraud-demo-dani'}
> 2023-02-15 14:44:12,668 [info] Or click for UI: {'ui_url': 'https://dashboard.default-
↪tenant.app.vmdev94.lab.iguazeng.com/mlprojects/fraud-demo-dani/jobs/monitor/
↪946725e1c01f4e0ba9d7eb62f7f24142/overview'}
> 2023-02-15 14:44:12,669 [info] run executed, status=completed
final state: completed

```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-02-15 14:44:15,576 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f3288543e20>
```

## Step 4 - Perform feature selection

As part of the data science process, try to reduce the training dataset's size to get rid of bad or useless features and save computation time.

Use your ready-made feature selection function from MLRun's [hub://feature\\_selection](https://github.com/mlrun/mlrun/blob/main/docs/feature_selection.md) to select the best features to keep on a sample from your dataset, and run the function on that.

```
feature_selection_fn = mlrun.import_function("hub://feature_selection")

feature_selection_run = feature_selection_fn.run(
    params={
        "k": 18,
        "min_votes": 2,
        "label_column": "label",
        "output_vector_name": fv_name + "-short",
        "ignore_type_errors": True,
    },
    inputs={"df_artifact": transactions_fv.uri},
    name="feature_extraction",
    handler="feature_selection",
    local=False,
)
```

```
> 2023-02-15 14:44:16,098 [info] starting run feature_extraction_
↳ uid=da55327c222f4a9389232f25fc6b9739 DB=http://mlrun-api:8080
> 2023-02-15 14:44:16,262 [info] Job is running in the background, pod: feature-
↳ extraction-pv66m
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-02-15 14:46:05,989 [info] run executed, status=completed
```

```
mlrun.get_dataitem(feature_selection_run.outputs["top_features_vector"]).as_df().tail(5)
```

	amount_max_2h	amount_sum_2h	amount_count_2h	amount_avg_2h	\
9995	54.55	118.62	4.0	29.655	
9996	31.14	31.14	1.0	31.140	
9997	218.48	365.30	5.0	73.060	
9998	34.93	118.22	5.0	23.644	
9999	77.76	237.95	5.0	47.590	

	amount_max_12h	amount_sum_12h	amount_count_12h	amount_avg_12h	\
9995	70.47	805.10	27.0	29.818519	
9996	119.50	150.64	2.0	75.320000	
9997	218.48	1076.37	25.0	43.054800	
9998	79.16	935.26	31.0	30.169677	

(continues on next page)

(continued from previous page)

9999	95.71	1259.07	37.0	34.028919
	amount_max_24h	amount_sum_24h	amount_count_24h	amount_avg_24h \
9995	85.97	1730.23	58.0	29.831552
9996	119.50	330.61	5.0	66.122000
9997	218.48	1968.00	59.0	33.355932
9998	89.85	2062.69	68.0	30.333676
9999	95.71	2451.98	72.0	34.055278
	es_transportation_sum_14d	es_health_sum_14d	es_otherservices_sum_14d	\
9995	120.0	0.0	0.0	
9996	0.0	7.0	0.0	
9997	107.0	5.0	1.0	
9998	116.0	0.0	0.0	
9999	122.0	0.0	0.0	
	label			
9995	0			
9996	0			
9997	0			
9998	0			
9999	0			

### Step 5 - Train your models with top features

Following the feature selection, you train new models using the resultant features. You can observe that the accuracy and other results remain high, meaning you get a model that requires less features to be accurate and thus less error-prone.

```
# Define your training task, including your feature vector, label and hyperparams.
↳ definitions
ensemble_train_task = mlrun.new_task(
    "training",
    inputs={"dataset": feature_selection_run.outputs["top_features_vector"]},
    params={"label_columns": "label"},
)
ensemble_train_task.with_hyper_params(
    training_params, strategy="list", selector="max.accuracy"
)

classifier_fn.run(ensemble_train_task)
```

```
> 2023-02-15 14:46:06,131 [info] starting run training.
↳ uid=4ac3afbfb6a1409daa1e834f8f153295 DB=http://mlrun-api:8080
> 2023-02-15 14:46:07,756 [info] Job is running in the background, pod: training-hgz6t
> 2023-02-15 14:46:17,141 [info] test_set or train_test_split_size are not provided,
↳ setting train_test_split_size to 0.2
> 2023-02-15 14:46:17,731 [info] label columns: label
> 2023-02-15 14:46:17,732 [info] Sample set not given, using the whole training set as
↳ the sample set
> 2023-02-15 14:46:18,031 [info] training 'transaction_fraud_rf'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:
```

(continues on next page)

(continued from previous page)

The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly,  
 ↳normalizing y\_prob will reproduce this behavior, but it is recommended that a proper,  
 ↳probability is used (i.e. a classifier's `predict\_proba` positive class or `decision\_  
 ↳function` output calibrated with `CalibratedClassifierCV`).

```
> 2023-02-15 14:46:21,793 [info] test_set or train_test_split_size are not provided,
↳setting train_test_split_size to 0.2
> 2023-02-15 14:46:22,767 [info] label columns: label
> 2023-02-15 14:46:22,767 [info] Sample set not given, using the whole training set as
↳the sample set
> 2023-02-15 14:46:22,770 [info] training 'transaction_fraud_xgboost'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:
```

The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly,  
 ↳normalizing y\_prob will reproduce this behavior, but it is recommended that a proper,  
 ↳probability is used (i.e. a classifier's `predict\_proba` positive class or `decision\_  
 ↳function` output calibrated with `CalibratedClassifierCV`).

```
> 2023-02-15 14:46:28,944 [info] test_set or train_test_split_size are not provided,
↳setting train_test_split_size to 0.2
> 2023-02-15 14:46:29,507 [info] label columns: label
> 2023-02-15 14:46:29,507 [info] Sample set not given, using the whole training set as
↳the sample set
> 2023-02-15 14:46:29,511 [info] training 'transaction_fraud_adaboost'
/usr/local/lib/python3.9/site-packages/sklearn/calibration.py:1000: FutureWarning:
```

The normalize argument is deprecated in v1.1 and will be removed in v1.3. Explicitly,  
 ↳normalizing y\_prob will reproduce this behavior, but it is recommended that a proper,  
 ↳probability is used (i.e. a classifier's `predict\_proba` positive class or `decision\_  
 ↳function` output calibrated with `CalibratedClassifierCV`).

```
> 2023-02-15 14:46:31,968 [info] best iteration=2, used criteria max.accuracy
> 2023-02-15 14:46:32,376 [info] To track results use the CLI: {'info_cmd': 'mlrun get
↳run 4ac3afbfb6a1409daa1e834f8f153295 -p fraud-demo-dani', 'logs_cmd': 'mlrun logs
↳4ac3afbfb6a1409daa1e834f8f153295 -p fraud-demo-dani'}
> 2023-02-15 14:46:32,376 [info] Or click for UI: {'ui_url': 'https://dashboard.default-
↳tenant.app.vmdev94.lab.iguazeng.com/mlprojects/fraud-demo-dani/jobs/monitor/
↳4ac3afbfb6a1409daa1e834f8f153295/overview'}
> 2023-02-15 14:46:32,377 [info] run executed, status=completed
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-02-15 14:46:33,094 [info] run executed, status=completed
```

```
<mlrun.model.RunObject at 0x7f324160af40>
```

## Done!

You've completed Part 2 of the model training with the feature store. Proceed to [Part 3](#) to learn how to deploy and monitor the model.

## 8.8.3 Part 3: Serving

In this part you use MLRun's **serving runtime** to deploy your trained models from the previous stage, a Voting Ensemble using **max vote** logic. You also use MLRun's **Feature store** to receive the latest tag of the online **Feature Vector** you defined in the previous stage.

By the end of this tutorial you'll learn how to:

- Define a model class to load your models, run preprocessing, and predict on the data
- Define a Voting Ensemble function on top of your models
- Test the serving function locally using your `mock server`
- Deploy the function to the cluster and test it live

### Environment setup

First, make sure SciKit-Learn is installed in the correct version:

```
!pip install -U scikit-learn
```

```
Requirement already satisfied: scikit-learn in /conda/envs/mlrun-extended/lib/python3.9/
↪site-packages (1.2.1)
Requirement already satisfied: numpy>=1.17.3 in /conda/envs/mlrun-extended/lib/python3.9/
↪site-packages (from scikit-learn) (1.22.4)
Requirement already satisfied: joblib>=1.1.1 in /conda/envs/mlrun-extended/lib/python3.9/
↪site-packages (from scikit-learn) (1.2.0)
Requirement already satisfied: threadpoolctl>=2.0.0 in /conda/envs/mlrun-extended/lib/
↪python3.9/site-packages (from scikit-learn) (3.1.0)
Requirement already satisfied: scipy>=1.3.2 in /conda/envs/mlrun-extended/lib/python3.9/
↪site-packages (from scikit-learn) (1.10.0)
```

Restart your kernel post installing. Since your work is done in this project scope, you should define the project itself for all your MLRun work in this notebook.

```
project_name = "fraud-demo"
```

```
import mlrun
```

```
# Initialize the MLRun project object
```

```
project = mlrun.get_or_create_project(project_name, context="./", user_project=True)
```

```
> 2023-02-15 14:48:31,777 [info] loaded project fraud-demo from MLRun DB
```

## Define model class

- Load models
- Predict from the feature store online service via the source key

```
# mlrun: start-code
```

```
import numpy as np
from cloudpickle import load
from mlrun.serving.v2_serving import V2ModelServer

class ClassifierModel(V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model(".pkl")
        self.model = load(open(model_file, "rb"))

    def predict(self, body: dict) -> list:
        """Generate model predictions from sample"""
        print(f"Input -> {body['inputs']}")
        feats = np.asarray(body["inputs"])
        result: np.ndarray = self.model.predict(feats)
        return result.tolist()
```

```
# mlrun: end-code
```

## Define a serving function

MLRun serving can produce managed real-time serverless pipelines from various tasks, including MLRun models or standard model files. The pipelines use the Nuclio real-time serverless engine, which can be deployed anywhere. [Nuclio](#) is a high-performance open-source serverless framework that's focused on data, I/O, and compute-intensive workloads.

The **EnrichmentVotingEnsemble** and the **EnrichmentModelRouter** router classes auto-enrich the request with data from the feature store. The router input accepts a list of inference requests (each request can be a dict or list of incoming features/keys). It enriches the request with data from the specified feature vector (`feature_vector_uri`).

In many cases the features can have null values (None, NaN, Inf, ...). The **Enrichment** routers can substitute the null value with fixed or statistical value per feature. This is done through the `impute_policy` parameter, which accepts the impute policy per feature (where \* is used to specify the default). The value can be a fixed number for constants or `$mean`, `$max`, `$min`, `$std`, `$count` for statistical values, to substitute the value with the equivalent feature stats (taken from the feature store).

The following code achieves:

- Gather ClassifierModel code from this notebook
- Define EnrichmentVotingEnsemble - Max-Vote based ensemble with feature enrichment and imputing
- Add the previously trained models to the ensemble

```
# Create the serving function from your code above
serving_fn = mlrun.code_to_function(
    "transaction-fraud", kind="serving", image="mlrun/mlrun"
```

(continues on next page)

(continued from previous page)

```

).apply(mlrun.auto_mount())

serving_fn.set_topology(
    "router",
    "mlrun.serving.routers.EnrichmentVotingEnsemble",
    name="VotingEnsemble",
    feature_vector_uri="transactions-fraud-short",
    impute_policy={"*": "$mean"},
)

model_names = [
    "transaction_fraud_rf",
    "transaction_fraud_xgboost",
    "transaction_fraud_adaboost",
]

for i, name in enumerate(model_names, start=1):
    serving_fn.add_model(
        name,
        class_name="ClassifierModel",
        model_path=project.get_artifact_uri(f"{name}#{i}:latest"),
    )

# Plot the ensemble configuration
serving_fn.spec.graph.plot()

```

```
<graphviz.graphs.Digraph at 0x7f208d6484c0>
```

## Test the server locally

Before deploying the serving function, you can test it in the current notebook and check the model output.

```

# Create a mock server from the serving function
local_server = serving_fn.to_mock_server()

```

```

> 2023-02-15 14:48:36,438 [info] model transaction_fraud_rf was loaded
> 2023-02-15 14:48:36,482 [info] model transaction_fraud_xgboost was loaded
> 2023-02-15 14:48:36,520 [info] model transaction_fraud_adaboost was loaded

```

```

# Choose an id for your test
sample_id = "C1000148617"

model_inference_path = "/v2/models/infer"

# Send your sample ID for prediction
local_server.test(path=model_inference_path, body={"inputs": [[sample_id]]})

# notice the input vector is printed 3 times (once per child model) and is enriched with
↳ data from the feature store

```

```
Input -> [[60.98, 73.78999999999999, 2.0, 36.894999999999996, 134.16, 1037.48, 32.0, 32.
↪42125, 143.87, 1861.8400000000001, 59.0, 31.556610169491528, 90.0, 1.0, 2.0]]
Input -> [[60.98, 73.78999999999999, 2.0, 36.894999999999996, 134.16, 1037.48, 32.0, 32.
↪42125, 143.87, 1861.8400000000001, 59.0, 31.556610169491528, 90.0, 1.0, 2.0]]Input ->↪
↪[[60.98, 73.78999999999999, 2.0, 36.894999999999996, 134.16, 1037.48, 32.0, 32.42125,↪
↪143.87, 1861.8400000000001, 59.0, 31.556610169491528, 90.0, 1.0, 2.0]]
```

```
X does not have valid feature names, but RandomForestClassifier was fitted with feature↪
↪names
X does not have valid feature names, but AdaBoostClassifier was fitted with feature names
X does not have valid feature names, but GradientBoostingClassifier was fitted with↪
↪feature names
```

```
{'id': '5237524f362a47b78828d9d7f7f87d9a',
  'model_name': 'VotingEnsemble',
  'outputs': [0],
  'model_version': 'v1'}
```

### Accessing the real-time feature vector directly

You can also directly query the feature store values using the `get_online_feature_service` method. This method is used internally in the `EnrichmentVotingEnsemble` router class.

#### Note

The timestamp of the last event is not returned with `get_online_feature_service / svc.get`.

```
import mlrun.feature_store as fstore

# Create the online feature service
svc = fstore.get_online_feature_service(
    "transactions-fraud-short:latest", impute_policy={"*": "$mean"}
)

# Get sample feature vector
sample_fv = svc.get([{"source": sample_id}])
sample_fv
```

```
[{'amount_max_2h': 60.98,
  'amount_max_12h': 134.16,
  'amount_max_24h': 143.87,
  'amount_sum_2h': 73.78999999999999,
  'amount_sum_12h': 1037.48,
  'amount_sum_24h': 1861.8400000000001,
  'amount_count_2h': 2.0,
  'amount_count_12h': 32.0,
  'amount_count_24h': 59.0,
  'es_transportation_sum_14d': 90.0,
  'es_health_sum_14d': 1.0,
```

(continues on next page)

(continued from previous page)

```
'es_otherservices_sum_14d': 2.0,
'amount_avg_2h': 36.894999999999996,
'amount_avg_12h': 32.42125,
'amount_avg_24h': 31.556610169491528}]
```

## Deploying the function on the Kubernetes cluster

You can now deploy the function. Once deployed, you get a function with http trigger that can be called from other locations.

Model activities can be tracked into a real-time stream and time-series DB. The monitoring data is used to create real-time dashboards, detect drift, and analyze performance. To monitor a deployed model, apply `set_tracking()`.

```
import os

# Enable model monitoring
serving_fn.set_tracking()
project.set_model_monitoring_credentials(os.getenv("V3IO_ACCESS_KEY"))

# Deploy the serving function
serving_fn.deploy()
```

```
> 2023-02-15 14:48:36,931 [info] Starting remote function deploy
2023-02-15 14:48:39 (info) Deploying function
2023-02-15 14:48:39 (info) Building
2023-02-15 14:48:39 (info) Staging files and preparing base images
2023-02-15 14:48:39 (info) Building processor image
2023-02-15 14:50:15 (info) Build complete
2023-02-15 14:51:05 (info) Function deploy complete
> 2023-02-15 14:51:05,648 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080
↪'], 'external_invocation_urls': ['fraud-demo-dani-transaction-fraud-fraud-demo-dani.
↪default-tenant.app.vmdev94.lab.iguazeng.com/']}
```

```
'http://fraud-demo-dani-transaction-fraud-fraud-demo-dani.default-tenant.app.vmdev94.lab.
↪iguazeng.com/'
```

## Test the server

You can test the serving function and examine the model output.

```
# Choose an id for your test
sample_id = "C1000148617"

model_inference_path = "/v2/models/infer"

# Send your sample ID for prediction
serving_fn.invoke(path=model_inference_path, body={"inputs": [[sample_id]]})
```

```
> 2023-02-15 14:51:05,714 [info] invoking function: {'method': 'POST', 'path': 'http://
↳nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↳models/infer'}
```

```
{'id': 'c34706e4-f1c8-4aff-b226-020c2cad7e4a',
 'model_name': 'VotingEnsemble',
 'outputs': [],
 'model_version': 'v1'}
```

You can also directly query the feature store values, which are used in the enrichment.

### Simulate incoming data

```
# Load the dataset
data = mlrun.get_dataitem(
    "https://s3.wasabisys.com/iguazio/data/fraud-demo-mlrun-fs-docs/data.csv"
).as_df()

# use only first 10k
data = data.sort_values(by="source", axis=0)[:10000]

# keys
sample_ids = data["source"].to_list()
```

```
from random import choice, uniform
from time import sleep

# Sending random requests
for _ in range(10):
    data_point = choice(sample_ids)
    try:
        resp = serving_fn.invoke(
            path=model_inference_path, body={"inputs": [[data_point]]}
        )
        print(resp)
        sleep(uniform(0.2, 1.7))
    except OSError:
        pass
```

```
> 2023-02-15 14:51:47,845 [info] invoking function: {'method': 'POST', 'path': 'http://
↳nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↳models/infer'}
```

```
{'id': 'f09841c5-4427-4ea1-95a9-723bb09349bb', 'model_name': 'VotingEnsemble', 'outputs
↳': [], 'model_version': 'v1'}
```

```
> 2023-02-15 14:51:49,373 [info] invoking function: {'method': 'POST', 'path': 'http://
↳nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↳models/infer'}
```

```
{'id': 'd8dd6ca2-d448-4953-aa84-1414f6274f91', 'model_name': 'VotingEnsemble', 'outputs
↳': [], 'model_version': 'v1'}
```

```
> 2023-02-15 14:51:49,725 [info] invoking function: {'method': 'POST', 'path': 'http://
↳nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
```

(continues on next page)

(continued from previous page)

```

↪models/infer'}
{'id': '8aa2c1cb-5fdf-49e7-9b30-15c4b606bbe2', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:50,581 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '4357ee2a-c0ca-476d-a04c-add47487391a', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:51,542 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '324c5938-82b5-4a68-b61b-204530e4b8c9', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:52,476 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '523c8e5c-ab91-4c8b-83d1-3d57cfa7a5cd', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:53,067 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '3a03000a-9223-4304-948b-66b3651a38de', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:53,662 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': 'b65943ac-ffbe-4ab9-b209-36611ca2c6cb', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:54,543 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '85791d18-e959-46e6-ae5f-cdc901c2dce3', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}
> 2023-02-15 14:51:54,972 [info] invoking function: {'method': 'POST', 'path': 'http://
↪nuclio-fraud-demo-dani-transaction-fraud.default-tenant.svc.cluster.local:8080/v2/
↪models/infer'}
{'id': '73d49f78-0f0d-4a4f-a905-61d4fed44cba', 'model_name': 'VotingEnsemble', 'outputs
↪': [0], 'model_version': 'v1'}

```

**Done!**

You've completed Part 3 of the deploying the serving function. Proceed to [Part 4](#) to learn how to automate ML Pipeline.

## 8.8.4 Part 4: Automated ML pipeline

MLRun Project is a container for all your work on a particular activity: all of the associated code, functions, jobs/workflows and artifacts. Projects can be mapped to git repositories, which enable versioning, collaboration, and CI/CD. Users can create project definitions using the SDK or a yaml file and store those in MLRun DB, file, or archive. Once the project is loaded you can run jobs/workflows that refer to any project element by name, allowing separation between configuration and code.

Projects contain **workflows** that execute the registered functions in a sequence/graph (DAG), can reference project parameters, secrets and artifacts by name. This notebook demonstrates how to build an automated workflow with **feature selection, training, testing, and deployment**.

### Step 1: Setting up your project

To run a pipeline, you first need to get or create a project object and define/import the required functions for its execution. See the [Create, save, and use projects](#) for details.

The following code gets or creates a user project named "fraud-demo".

```
# Set the base project name
project_name = "fraud-demo"
```

```
import mlrun

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name, context="./", user_project=True)
```

```
> 2023-02-15 14:52:09,517 [info] loaded project fraud-demo from MLRun DB
```

### Step 2: Updating project and function definitions

You need to save the definitions for the function you use in the projects. This enables automatically converting code to functions or import external functions whenever you load new versions of your code or when you run automated CI/CD workflows. In addition, you may want to set other project attributes such as global parameters, secrets, and data.

Your code can be stored in Python files, notebooks, external repositories, packaged containers, etc. You use the `project.set_function()` method to register your code in the project. The definitions are saved to the project object, as well as in a YAML file in the root of our project. Functions can also be imported from MLRun marketplace (using the `hub://` schema).

This tutorial uses these functions:

- `feature_selection` — the first function, which determines the top features to be used for training.
- `train` — the model-training function
- `evaluate` — the model-testing function
- `mlrun-model` — the model-serving function

---

#### Note

set\_function uses the code\_to\_function and import\_function methods under the hood (used in the previous notebooks), but in addition it saves the function configurations in the project spec for use in automated workflows and CI/CD.

---

Add the function definitions to the project along with parameters and data artifacts and save the project.

```
project.set_function("hub://feature_selection", "feature_selection")
project.set_function("hub://auto_trainer", "train")
project.set_function("hub://v2_model_server", "serving")
```

Names with underscore '\_' are about to be deprecated, use dashes '-' instead. Replacing ↪ underscores with dashes.

```
<mlrun.runtimes.serving.ServingRuntime at 0x7f5701e79520>
```

```
# set project level parameters and save
project.spec.params = {"label_column": "label"}
project.save()
```

```
<mlrun.projects.project.MlrunProject at 0x7f5720229280>
```

When you save the project it stores the project definitions in the project.yaml. This allows you to load the project from the source control (GIT) and run it with a single command or API call.

The project YAML for this project can be printed using:

```
print(project.to_yaml())
```

```
kind: project
metadata:
  name: fraud-demo-dani
  created: '2023-02-15T14:40:29.807000'
spec:
  params:
    label_column: label
  functions:
  - url: hub://feature_selection
    name: feature_selection
  - url: hub://auto_trainer
    name: train
  - url: hub://v2_model_server
    name: serving
  workflows: []
  artifacts: []
  source: ''
  desired_state: online
  owner: dani
status:
  state: online
```

## Saving and loading projects from GIT

After you saved your project and its elements (functions, workflows, artifacts, etc.) you can commit all your changes to a GIT repository. This can be done using standard GIT tools or using MLRun project methods such as `pull`, `push`, `remote`, which calls the Git API for you.

Projects can then be loaded from Git using MLRun `load_project` method, for example:

```
project = mlrun.load_project("./myproj", "git://github.com/mlrun/project-demo.git",
↪ name=project_name)
```

or using MLRun CLI:

```
mlrun project -n myproj -u "git://github.com/mlrun/project-demo.git" ./myproj
```

Read [CI/CD integration](#) for more details.

## Using Kubeflow pipelines

You're now ready to create a full ML pipeline. This is done by using [Kubeflow Pipelines](#) — an open-source framework for building and deploying portable, scalable machine-learning workflows based on Docker containers. MLRun leverages this framework to take your existing code and deploy it as steps in the pipeline.

### Step 3: Defining and saving a pipeline workflow

A pipeline is created by running an MLRun **"workflow"**. The following code defines a workflow and writes it to a file in your local directory. (The file name is `workflow.py`.) The workflow describes a directed acyclic graph (DAG) for execution using Kubeflow Pipelines, and depicts the connections between the functions and the data as part of an end-to-end pipeline. The workflow file has a definition of a pipeline DSL for connecting the function inputs and outputs.

The defined pipeline includes the following steps:

- Perform feature selection (`feature_selection`).
- Train and the model (`train`).
- Test the model with its test data set (`evaluate`).
- Deploy the model as a real-time serverless function (`deploy`).

---

#### Note

A pipeline can also include continuous build integration and deployment (CI/CD) steps, such as building container images and deploying models.

---

```
%%writefile workflow.py
import mlrun
from kfp import dsl
from mlrun.model import HyperParamOptions

from mlrun import (
    build_function,
```

(continues on next page)

(continued from previous page)

```

    deploy_function,
    import_function,
    run_function,
)

@dsl.pipeline(
    name="Fraud Detection Pipeline",
    description="Detecting fraud from a transactions dataset"
)

def kfpipeline(vector_name='transactions-fraud'):

    project = mlrun.get_current_project()

    # Feature selection
    feature_selection = run_function(
        "feature_selection",
        name="feature_selection",
        params={'output_vector_name': "short",
                "label_column": project.get_param('label_column', 'label'),
                "k": 18,
                "min_votes": 2,
                'ignore_type_errors': True
               },
        inputs={'df_artifact': project.get_artifact_uri(vector_name, 'feature-vector')},
        outputs=['feature_scores', 'selected_features_count', 'top_features_vector',
        ↪ 'selected_features'])

    # train with hyper-parameters
    train = run_function(
        "train",
        name="train",
        handler="train",
        params={"sample": -1,
                "label_column": project.get_param('label_column', 'label'),
                "test_size": 0.10},
        hyperparams={"model_name": ['transaction_fraud_rf',
                                     'transaction_fraud_xgboost',
                                     'transaction_fraud_adaboost'],
                     'model_class': ["sklearn.ensemble.RandomForestClassifier",
                                      "sklearn.linear_model.LogisticRegression",
                                      "sklearn.ensemble.AdaBoostClassifier"]},
        hyper_param_options=HyperParamOptions(selector="max.accuracy"),
        inputs={"dataset": feature_selection.outputs['top_features_vector']},
        outputs=['model', 'test_set'])

    # test and visualize your model
    test = run_function(
        "train",

```

(continues on next page)

(continued from previous page)

```

name="evaluate",
handler='evaluate',
params={"label_columns": project.get_param('label_column', 'label'),
        "model": train.outputs["model"],
        "drop_columns": project.get_param('label_column', 'label')},
inputs={"dataset": train.outputs["test_set"]})

# route your serving model to use enrichment
funcs['serving'].set_topology('router',
                              'mlrun.serving.routers.EnrichmentModelRouter',
                              name='EnrichmentModelRouter',
                              feature_vector_uri="transactions-fraud-short",
                              impute_policy={"*": "$mean"},
                              exist_ok=True)

# deploy your model as a serverless function, you can pass a list of models to serve
deploy = deploy_function("serving", models=[{"key": 'fraud', "model_path": train.
↪outputs["model"]})

```

Writing workflow.py

#### Step 4: Registering the workflow

Use the `set_workflow` MLRun project method to register your workflow with MLRun. The following code sets the name parameter to the selected workflow name ("main") and the code parameter to the name of the workflow file that is found in your project directory (**workflow.py**).

```

# Register the workflow file as "main"
project.set_workflow("main", "workflow.py")

```

#### Step 5: Running a pipeline

First run the following code to save your project:

```
project.save()
```

```
<mlrun.projects.project.MlrunProject at 0x7f5720229280>
```

Use the `run` MLRun project method to execute your workflow pipeline with KubeFlow Pipelines.

You can pass **arguments** or set the **artifact\_path** to specify a unique path for storing the workflow artifacts.

```
run_id = project.run("main", arguments={}, dirty=True, watch=True)
```

```
<IPython.core.display.HTML object>
```

```
<graphviz.graphs.Digraph at 0x7f5764d051f0>
```

```
<IPython.core.display.HTML object>
```

### Step 6: Test the model endpoint

Now that your model is deployed using the pipeline, you can invoke it as usual:

```
# Define your serving function
serving_fn = project.get_function("serving")

# Choose an id for your test
sample_id = "C1000148617"
model_inference_path = "/v2/models/fraud/infer"

# Send our sample ID for predcition
serving_fn.invoke(path=model_inference_path, body={"inputs": [[sample_id]]})
```

```
> 2023-02-15 14:56:50,310 [info] invoking function: {'method': 'POST', 'path': 'http://
↳ nuclio-fraud-demo-dani-serving.default-tenant.svc.cluster.local:8080/v2/models/fraud/
↳ infer'}
```

```
{'id': 'dbc3b94e-367d-4970-8825-f99ebf76320b',
 'model_name': 'fraud',
 'outputs': [0]}
```

**Done!**

## BATCH RUNS AND WORKFLOWS

In this section

### 9.1 MLRun execution context

After running a job, you need to be able to track it. To gain the maximum value, MLRun uses the job context object inside the code. This provides access to job metadata, parameters, inputs, secrets, and API for logging and monitoring the results, as well as log text, files, artifacts, and labels.

Inside the function you can access the parameters/inputs by simply adding them as parameters to the function, or you can get them from the context object (using `get_param()` and `get_input()`).

- If `context` is specified as the first parameter in the function signature, MLRun injects the current job context into it.
- Alternatively, if it does not run inside a function handler (e.g. in Python main or Notebook) you can obtain the context object from the environment using the `get_or_create_ctx()` function.

Common context methods:

- `get_secret(key: str)` — get the value of a secret
- `logger.info("started experiment..")` — textual logs
- `log_result(key: str, value)` — log simple values
- `set_label(key, value)` — set a label tag for that task
- `log_artifact(key, body=None, local_path=None, ...)` — log an artifact (body or local file)
- `log_dataset(key, df, ...)` — log a dataframe object
- `log_model(key, ...)` — log a model object

Example function and usage of the context object:

```
from mlrun.artifacts import PlotlyArtifact
import pandas as pd

def my_job(context, p1=1, p2="x"):
    # load MLRUN runtime context (will be set by the runtime framework)

    # get parameters from the runtime context (or use defaults)

    # access input metadata, values, files, and secrets (passwords)
    print(f"Run: {context.name} (uid={context.uid})")
```

(continues on next page)

(continued from previous page)

```

print(f"Params: p1={p1}, p2={p2}")
print("accesskey = {}".format(context.get_secret("ACCESS_KEY")))
print("file\n{}\n".format(context.get_input("infile.txt", "infile.txt").get()))

# Run some useful code e.g. ML training, data prep, etc.

# log scalar result values (job result metrics)
context.log_result("accuracy", p1 * 2)
context.log_result("loss", p1 * 3)
context.set_label("framework", "sklearn")

# log various types of artifacts (file, web page, table), will be versioned and
↪ visible in the UI
context.log_artifact(
    "model",
    body=b"abc is 123",
    local_path="model.txt",
    labels={"framework": "xgboost"},
)
context.log_artifact(
    "html_result", body=b"<b> Some HTML <b>", local_path="result.html"
)

# create a plotly output (will show in the pipelines UI)
x = np.arange(10)
fig = go.Figure(data=go.Scatter(x=x, y=x**2))

# Create a PlotlyArtifact using the figure and log it
plotly_artifact = PlotlyArtifact(figure=fig, key="plotly")
context.log_artifact(plotly_artifact)

raw_data = {
    "first_name": ["Jason", "Molly", "Tina", "Jake", "Amy"],
    "last_name": ["Miller", "Jacobson", "Ali", "Milner", "Cooze"],
    "age": [42, 52, 36, 24, 73],
    "testScore": [25, 94, 57, 62, 70],
}
df = pd.DataFrame(raw_data, columns=["first_name", "last_name", "age", "testScore"])
context.log_dataset("mydf", df=df, stats=True)

```

Example of creating the context objects from the environment:

```

if __name__ == "__main__":
    context = mlrun.get_or_create_ctx('train')
    p1 = context.get_param('p1', 1)
    p2 = context.get_param('p2', 'a-string')
    # do something
    context.log_result("accuracy", p1 * 2)
    # commit the tracking results to the DB (and mark as completed)
    context.commit(completed=True)

```

Note that MLRun context is also a python context and can be used in a with statement (eliminating the need for commit).

```

if __name__ == "__main__":
    with mlrun.get_or_create_ctx('train') as context:
        p1 = context.get_param('p1', 1)
        p2 = context.get_param('p2', 'a-string')
        # do something
        context.log_result("accuracy", p1 * 2)

```

## 9.2 Decorators and auto-logging

While it is possible to log results and artifacts using *the MLRun execution context*, it is often more convenient to use the `mlrun.handler()` decorator.

### 9.2.1 Basic example

Assume you have the following code in `train.py`

```

import pandas as pd
from sklearn.svm import SVC

def train_and_predict(train_data,
                      predict_input,
                      label_column='label'):

    x = train_data.drop(label_column, axis=1)
    y = train_data[label_column]

    clf = SVC()
    clf.fit(x, y)

    return list(clf.predict(predict_input))

```

With the `mlrun.handler` the python function itself would not change, and logging of the inputs and outputs would be automatic. The resultant code is as follows:

```

import pandas as pd
from sklearn.svm import SVC
import mlrun

@mlrun.handler(labels={'framework': 'scikit-learn'},
               outputs=['prediction:dataset'],
               inputs={"train_data": pd.DataFrame,
                       "predict_input": pd.DataFrame})
def train_and_predict(train_data,
                      predict_input,
                      label_column='label'):

    x = train_data.drop(label_column, axis=1)
    y = train_data[label_column]

    clf = SVC()

```

(continues on next page)

(continued from previous page)

```
clf.fit(x, y)

return list(clf.predict(predict_input))
```

To run the code, use the following example:

```
import mlrun
project = mlrun.get_or_create_project("mlrun-example", context=".", user_project=True)

trainer = project.set_function("train.py", name="train_and_predict", kind="job", image=
    ↪ "mlrun/mlrun", handler="train_and_predict")

trainer_run = project.run_function(
    "train_and_predict",
    inputs={"train_data": mlrun.get_sample_path('data/iris/iris_dataset.csv'),
           "predict_input": mlrun.get_sample_path('data/iris/iris_to_predict.csv')}
)
```

The outcome is a run with:

1. A label with key "framework" and value "scikit-learn".
2. Two inputs "train\_data" and "predict\_input" created from Pandas DataFrame.
3. An artifact called "prediction" of type "dataset". The contents of the dataset will be the return value (in this case the prediction result).

## 9.2.2 Labels

The decorator gives you the option to set labels for the run. The `labels` parameter is a dictionary with keys and values to set for the labels.

### 9.2.3 Input type parsing

The `mlrun.handler` decorator can also parse the input types, if they are specified. An equivalent definition is as follows:

```
@mlrun.handler(labels={'framework': 'scikit-learn'},
               outputs=['prediction:dataset'])
def train_and_predict(train_data: pd.DataFrame,
                     predict_input: pd.DataFrame,
                     label_column='label'):
    ...
```

**Notice:** Type hints from the `typing` module (e.g. `typing.Optional`, `typing.Union`, `typing.List` etc.) are currently not supported but will be in the future.

**Note:** If the inputs does not have a type input, the decorator assumes the parameter type in `mlrun.datastore.DataItem`. If you specify `inputs=False`, all the run inputs are assumed to be of type `mlrun.datastore.DataItem`. You also have the option to specify a dictionary where each key is the name of the input and the value is the type.

### 9.2.4 Logging return values as artifacts

If you specify the `outputs` parameter, the return values will be logged as the run artifacts. `outputs` expects a list; the length of the list must match the number of returned values.

The simplest option is to specify a list of strings. Each string contains the name of the artifact. You can also specify the artifact type by adding a colon after the artifact name followed by the type (`'name:artifact_type'`). The following are valid artifact types:

- dataset
- directory
- file
- object
- plot
- result

If you use only the name without the type, the following mapping is used:

Python type	Artifact type
<code>pandas.DataFrame</code>	Dataset
<code>pandas.Series</code>	Dataset
<code>numpy.ndarray</code>	Dataset
<code>dict</code>	Result
<code>list</code>	Result
<code>tuple</code>	Result
<code>str</code>	Result
<code>int</code>	Result
<code>float</code>	Result
<code>bytes</code>	Object
<code>bytearray</code>	Object
<code>matplotlib.pyplot.Figure</code>	Plot
<code>plotly.graph_objs.Figure</code>	Plot

Refer to the `mlrun.handler()` for more details.

## 9.3 Running a task (job)

### In this section

- *Submit tasks (jobs) using `run_function`*
- *Run result object and UI*

### 9.3.1 Submit tasks (jobs) using `run_function`

Use the `run_function()` method for invoking a job over MLRun batch functions. The `run_function` method accepts various parameters such as `name`, `handler`, `params`, `inputs`, `schedule`, etc. Alternatively, you can pass a **Task** object that holds all of the parameters plus the advanced options. See: `new_task()`, and the example in `run_function`.

Functions can host multiple methods (handlers). You can set the default handler per function. You need to specify which handler you intend to call in the run command.

You can pass `parameters` (arguments) or data `inputs` (such as datasets, feature-vectors, models, or files) to the functions through the `run` method.

- **Parameters** (`params`) are meant for basic python objects that can be parsed from text without special handling. So, passing `int`, `float`, `str` and `dict`, `list` are all possible using `params`. MLRun takes the parameter and assigns it to the relevant handler parameter by name.

---

#### Important

Parameters that are passed to a workflow are limited to 10000 chars.

---

- **Inputs** are used for passing various local or remote data objects (files, tables, models, etc.) to the function as `DataItem` objects. You can pass data objects using the `inputs` dictionary argument, where the dictionary keys match the function's handler argument names and the MLRun data urls are provided as the values. `DataItems` have many methods like `local` (download the data item's file to a local temp directory) and `as_df` (parse the data to a `pd.DataFrame`). The `DataItem` objects handle data movement, tracking, and security in an optimal way. Read more about [data items](#).

When a type hint is available for an argument, MLRun automatically parses the `DataItem` to the hinted type (when the hinted type is supported).

Use `run_function` as a project methods. For example:

```
# run the "train" function in myproject
run_results = myproject.run_function("train", inputs={"data": data_url})
```

The first parameter in `run_function` is either the function name (in the project), or a function object if you want to use functions that you imported/created ad hoc, or modify a function spec, for example:

```
run_results = project.run_function(fn, params={"label_column": "label"}, inputs={'data': ↩
↩data_url})
```

---

#### Run/simulate functions locally:

Functions can also run and be debugged locally by using the `local` runtime or by setting the `local=True` parameter in the `run()` method (for batch functions).

---

MLRun also supports iterative jobs that can run and track multiple child jobs (for hyperparameter tasks, AutoML, etc.). See [Hyperparameter tuning optimization](#) for details and examples.

### 9.3.2 Run result object and UI

The `run_function()` command returns an MLRun `RunObject` object that you can use to track the job and its results. If you pass the parameter `watch=True` (default) the command blocks until the job completes.

Run object has the following methods/properties:

- `uid()` — returns the unique ID.
- `state()` — returns the last known state.
- `show()` — shows the latest job state and data in a visual widget (with hyperlinks and hints).
- `outputs` — returns a dictionary of the run results and artifact paths.
- `logs(watch=True)` — returns the latest logs. Use `Watch=False` to disable the interactive mode in running jobs.
- `artifact(key)` — returns an artifact for the provided key (as `DataItem` object).
- `output(key)` — returns a specific result or an artifact path for the provided key.
- `wait_for_completion()` — wait for async run to complete
- `refresh()` — refresh run state from the db/service
- `to_dict()`, `to_yaml()`, `to_json()` — converts the run object to a dictionary, YAML, or JSON format (respectively).

You can view the job details, logs, and artifacts in the UI. When you first open the **Monitor Jobs** tab it displays the last jobs that ran and their data. Click a job name to view its run history, and click a run to view more of the run's data.

Projects > getting-started-admin > Jobs

Monitor Jobs

Monitor Workflows

Schedule

Status: All

Name:

Labels: key1, key2=value,...

Start Time 01/26/2022 13:24 - 02/02/2022 13:24

Resource monitoring

Name	Type	Duration	Owner	Labels	Parameters	Results
<div>test-classifier</div> <div>Jan 26, 07:03:12 PM ...c5c449a</div>		00:00:01	admin	+6	+1	<div>accuracy : 1</div> <div>test-error : 0</div> <div>auc-micro : 1</div> <div>auc-weighted : 1</div> <div>f1-score : 1</div> <div>precision_score : 1</div> <div>recall_score : 1</div>
<div>train</div> <div>Jan 26, 07:02:54 PM ...df1bbda</div>		00:00:01	admin	+7	+1	<div>accuracy : 1</div> <div>test-error : 0</div> <div>auc-micro : 1</div> <div>auc-weighted : 1</div> <div>f1-score : 1</div> <div>precision_score : 1</div> <div>recall_score : 1</div>
<div>prep-data-prep_data</div> <div>Jan 26, 07:02:39 PM ...01d87cf</div>		00:00:00	admin	+6	+1	<div>num_rows : 150</div>
<div>test</div> <div>Jan 26, 07:01:04 PM ...bd7097f</div>		00:00:01	admin	+4	+1	<div>accuracy : 1</div> <div>test-error : 0</div> <div>auc-micro : 1</div> <div>auc-weighted : 1</div> <div>f1-score : 1</div> <div>precision_score : 1</div> <div>recall_score : 1</div>
<div>describe-summarize</div> <div>Jan 26, 07:00:44 PM ...b981326</div>		00:00:05	admin	+4	+1	
<div>train-iris-train_iris</div> <div>Jan 26, 07:00:36 PM ...87ab988</div>	<>	00:00:01	admin	+5	+1	<div>accuracy : 1</div> <div>test-error : 0</div> <div>auc-micro : 1</div> <div>auc-weighted : 1</div> <div>f1-score : 1</div> <div>precision_score : 1</div> <div>recall_score : 1</div>
<div>prep_data</div> <div>Jan 26, 06:59:24 PM ...4e86a4b</div>		00:00:00	admin	+4		<div>num_rows : 150</div>

See full details and examples in [Functions](#).

## 9.4 Running a multi-stage workflow

A workflow is a definition of execution of functions. It defines the order of execution of multiple dependent steps in a directed acyclic graph (DAG). A workflow can reference the project's params, secrets, artifacts, etc. It can also use a function execution output as a function execution input (which, of course, defines the order of execution).

MLRun supports running workflows on a `local` or `kubeflow` pipeline engine. The `local` engine runs the workflow as a local process, which is simpler for debugging and running simple/sequential tasks. The `kubeflow` ("kfp") engine runs as a task over the cluster and supports more advanced operations (conditions, branches, etc.). You can select the engine at runtime. Kubeflow-specific directives like conditions and branches are not supported by the `local` engine.

Workflows are saved/registered in the project using the `set_workflow()`.  
 Workflows are executed using the `run()` method or using the CLI command `mlrun project`.

Refer to the *Tutorials and Examples* for complete examples.

#### In this section

- *Composing workflows*
- *Saving workflows*
- *Running workflows*

### 9.4.1 Composing workflows

Workflows are written as python functions that make use of *function* operations (run, build, deploy) and can access project parameters, secrets, and artifacts using `get_param()`, `get_secret()` and `get_artifact_uri()`.

For workflows to work in Kubeflow you need to add a decorator (`@dsl.pipeline(...)`) as shown below.

Example workflow:

```
from kfp import dsl
import mlrun
from mlrun.model import HyperParamOptions

funcs = {}
DATASET = "iris_dataset"

in_kfp = True

@dsl.pipeline(name="Demo training pipeline", description="Shows how to use mlrun.")
def newpipe():

    project = mlrun.get_current_project()

    # build our ingestion function (container image)
    builder = mlrun.build_function("gen-iris")

    # run the ingestion function with the new image and params
    ingest = mlrun.run_function(
        "gen-iris",
        name="get-data",
        params={"format": "pq"},
        outputs=[DATASET],
    ).after(builder)

    # train with hyper-parameters
    train = mlrun.run_function(
        "train",
        name="train",
        params={"sample": -1, "label_column": project.get_param("label", "label"), "test_
↪size": 0.10},
        hyperparams={
            "model_pkg_class": [
```

(continues on next page)

(continued from previous page)

```

        "sklearn.ensemble.RandomForestClassifier",
        "sklearn.linear_model.LogisticRegression",
        "sklearn.ensemble.AdaBoostClassifier",
    ]
},
hyper_param_options=HyperParamOptions(selector="max.accuracy"),
inputs={"dataset": ingest.outputs[DATASET]},
outputs=["model", "test_set"],
)
print(train.outputs)

# test and visualize our model
mlrun.run_function(
    "test",
    name="test",
    params={"label_column": project.get_param("label", "label")},
    inputs={
        "models_path": train.outputs["model"],
        "test_set": train.outputs["test_set"],
    },
)

# deploy our model as a serverless function, we can pass a list of models to serve
serving = mlrun.import_function("hub://v2_model_server", new_name="serving")
deploy = mlrun.deploy_function(
    serving,
    models=[{"key": f"{DATASET}:v1", "model_path": train.outputs["model"]}],
)

# test out new model server (via REST API calls), use imported function
tester = mlrun.import_function("hub://v2_model_tester", new_name="live_tester")
mlrun.run_function(
    tester,
    name="model-tester",
    params={"addr": deploy.outputs["endpoint"], "model": f"{DATASET}:v1"},
    inputs={"table": train.outputs["test_set"]},
)

```

**Note**

For defining the steps order you can either use steps outputs as written above, or use `.after(step_1, step_2, ...)` method, that allows the user to define the order of the workflow steps without the need to forward the outputs from the previous steps.

### 9.4.2 Saving workflows

If you want to use workflows as part of an automated flow, save them and register them in the project. Use the `set_workflow()` method to register workflows, to specify a workflow name, the path to the workflow file, and the function handler name (or it looks for a handler named "pipeline"), and can set the default engine (local or kfp).

When setting the `embed` flag to `True`, the workflow code is embedded in the project file (can be used if you want to describe the entire project using a single YAML file).

You can define the schema for workflow arguments (data type, default, doc, etc.) by setting the `args_schema` with a list of **EntrypointParam** objects.

Example:

```
# define argument for the workflow
arg = mlrun.model.EntryParam(
    "model_pkg_class",
    type="str",
    default="sklearn.linear_model.LogisticRegression",
    doc="model package/algorithm",
)

# register the workflow in the project and save the project
project.set_workflow("main", "./myflow.py", handler="newpipe", args_schema=[arg])
project.save()

# run the workflow
project.run("main", arguments={"model_pkg_class": "sklearn.ensemble.
↳ RandomForestClassifier"})
```

### 9.4.3 Running workflows

Use the `run()` method to execute workflows. Specify the workflow using its name or `workflow_path` (path to the workflow file) or `workflow_handler` (the workflow function handler). You can specify the input arguments for the workflow and can override the system default `artifact_path`.

Workflows are asynchronous by default. You can set the `watch` flag to `True` and the run operation blocks until completion and prints out the workflow progress. Alternatively, you can use `.wait_for_completion()` on the run object.

The default workflow engine is `kfp`. You can override it by specifying the engine in the `run()` or `set_workflow()` methods. Using the local engine executes the workflow state machine locally (its functions still run as cluster jobs). If you set the `local` flag to `True`, the workflow uses the local engine AND the functions run as local process. This mode is used for local debugging of workflows. The `remote` engine runs the workflow from a remote pod. From the project source you can set the remote engine to run in local by setting engine to `remote:local`.

When running workflows from a git enabled context it first verifies that there are no uncommitted git changes (to guarantee that workflows that load from git do not use old code versions). You can suppress that check by setting the `dirty` flag to `True`.

Examples:

```
# simple run of workflow 'main' with arguments, block until it completes (watch=True)
run = project.run("main", arguments={"param1": 6}, watch=True)

# run workflow specified with a function handler (my_pipe)
run = project.run(workflow_handler=my_pipe)
```

(continues on next page)

(continued from previous page)

```
# wait for pipeline completion
run.wait_for_completion()

# run workflow in local debug mode
run = project.run(workflow_handler=my_pipe, local=True, arguments={"param1": 6})
```

## Notification

Instead of waiting for completion, you can set up a notification in Slack with a results summary, similar to:

Workflow e835d905-4edc-4ae3-ba42-8d1188634e72 finished, status=Succeeded

### Runs

 model-tester

 test

 summary

 train-skrf

 get-data

### Results

total\_tests=15, errors=0, match=14,  
avg\_latency=5729, min\_latency=4690,  
max\_latency=11320  
rocauc=0.3333333333333333,  
avg\_precscore=0.3673982494785104,  
accuracy=0.9333333333333333,  
f1\_score=0.9333333333333333  
scale\_pos\_weight=1.00

best\_iteration=2,  
rocauc=0.9945117845117846,  
accuracy=0.9705882352941176,  
f1\_score=0.9705882352941176  
None

Use one of:

```
project.notifiers.add_notification(notification_type="slack", params={"webhook": "<user-  
↪slack-webhook>"})
```

or in a Jupyter notebook with the %env magic command:

```
%env SLACK_WEBHOOK=<slack webhook url>
```

## 9.5 Configuring runs and functions

MLRun orchestrates serverless functions over Kubernetes. You can specify the resource requirements (CPU, memory, GPUs), preferences, and pod priorities in the logical function object. You can also configure how MLRun prevents stuck pods. All of these are used during the function deployment.

Configuring runs and functions is relevant for all supported cloud platforms.

### In this section

- *Environment variables*
- *Replicas*
- *CPU, GPU, and memory limits for user jobs*
- *Number of workers and GPUs*
- *Volumes*
- *Preemption mode: Spot vs. On-demand nodes*
- *Pod priority for user jobs*
- *Node selection*
- *Scaling and auto-scaling*
- *Mounting persistent storage*
- *Preventing stuck pods*

### 9.5.1 Environment variables

Environment variables can be added individually, from a Python dictionary, or a file:

```
# Single variable
fn.set_env(name="MY_ENV", value="MY_VAL")

# Multiple variables
fn.set_envs(env_vars={"MY_ENV" : "MY_VAL", "SECOND_ENV" : "SECOND_VAL"})

# Multiple variables from file
fn.set_envs(file_path="env.txt")
```

### 9.5.2 Replicas

Some runtimes can scale horizontally, configured either as a number of replicas: `spec.replicas` or a range (for auto scaling in Dask or Nuclio):

```
spec.min_replicas = 1
spec.max_replicas = 4
```

---

#### Note

Scaling (replication) algorithm, if a **target utilization** (Target CPU%) value is set, the replication controller calculates the utilization value as a percentage of the equivalent **resource request** (CPU request) on the replicas and based on that provides horizontal scaling. See also [Kubernetes horizontal autoscale](#)

See more details in [Dask](#), [MPIJob](#) and [Horovod](#), [Spark](#), [Nuclio](#).

### 9.5.3 CPU, GPU, and memory limits for user jobs

When you create a pod in an MLRun job or Nuclio function, the pod has default CPU and memory limits. When the job runs, it can consume resources up to the limits defined. The default limits are set at the service level. You can change the default limit for the service, and also overwrite the default when creating a job, or a function. Adding requests and limits to your function specify what compute resources are required. It is best practice to define this for each MLRun function.

```
# Requests - lower bound
fn.with_requests(mem="1G", cpu=1)

# Limits - upper bound
fn.with_limits(mem="2G", cpu=2, gpus=1)
```

See more about [Kubernetes Resource Management for Pods and Containers](#).

### UI configuration

When creating a service, set the **Memory** and **CPU** in the **Common Parameters** tab, under **User jobs defaults**. When creating a job or a function, overwrite the default **Memory**, **CPU**, or **GPU** in the **Configuration** tab, under **Resources**.

### SDK configuration

Configure the limits assigned to a function by using `with_limits`. For example:

```
training_function = mlrun.code_to_function("training.py", name="training", handler="train
↪",
                                         kind="mpijob", image="mlrun/mlrun-gpu")
training_function.spec.replicas = 2
training_function.with_requests(cpu=2)
training_function.with_limits(gpus=1)
```

### Note

When specifying GPUs, MLRun uses `nvidia.com/gpu` as default GPU type. To use a different type of GPU, specify it using the optional `gpu_type` parameter.

### 9.5.4 Number of workers and GPUs

For each Nuclio or serving function, MLRun creates an HTTP trigger with the default of 1 worker. When using GPU in remote functions you must ensure that the number of GPUs is equal to the number of workers (or manage the GPU consumption within your code). You can set the [number of GPUs for each pod using the MLRun SDK](#).

You can change the number of workers after you create the trigger (function object), then you need to redeploy the function. Examples of changing the number of workers:

```
with_http: serve.with_http(workers=8, worker_timeout=10)

add_v3io_stream_trigger:      serve.add_v3io_stream_trigger(stream_path='v3io:///projects/
myproj/stream1', maxWorkers=3,name='stream', group='serving', seek_to='earliest',
shards=1)
```

### 9.5.5 Volumes

When you create a pod in an MLRun job or Nuclio function, the pod by default has access to a file-system which is ephemeral, and gets deleted when the pod completes its execution. In many cases, a job requires access to files residing on external storage, or to files containing configurations and secrets exposed through Kubernetes config-maps or secrets. Pods can be configured to consume the following types of volumes, and to mount them as local files in the local pod file-system:


- V3IO containers: when running on the Iguazio system, pods have access to the underlying V3IO shared storage. This option mounts a V3IO container or a subpath within it to the pod through the V3IO FUSE driver.
- PVC: Mount a Kubernetes persistent volume claim (PVC) to the pod. The persistent volume and the claim need to be configured beforehand.
- Config Map: Mount a Kubernetes Config Map as local files to the pod.
- Secret: Mount a Kubernetes secret as local files to the pod.

For each of the options, a name needs to be assigned to the volume, as well as a local path to mount the volume at (using a Kubernetes Volume Mount). Depending on the type of the volume, other configuration options may be needed, such as an access-key needed for V3IO volume.

See more about [Kubernetes Volumes](#).

MLRun supports the concept of volume auto-mount which automatically mounts the most commonly used type of volume to all pods, unless disabled. See more about [MLRun auto mount](#).

### UI configuration

You can configure Volumes when creating a job, rerunning an existing job, and creating an ML function. Modify the Volumes for an ML function by pressing **ML functions**, then  of the function, **Edit | Resources | Volumes** drop-down list.

Select the volume mount type: either Auto (using auto-mount), Manual or None. If selecting Manual, fill in the details in the volumes list for each volume to mount to the pod. Multiple volumes can be configured for a single pod.

## SDK configuration

Configure volumes attached to a function by using the `apply` function modifier on the function.

For example, using v3io storage:

```
# import the training function from the Function Hub (hub://)
train = mlrun.import_function('hub://sklearn_classifier')# Import the function:
open_archive_function = mlrun.import_function("hub://open_archive")

# use mount_v3io() for iguazio volumes
open_archive_function.apply(mount_v3io())
```

You can specify a list of the v3io path to use and how they map inside the container (using `volume_mounts`). For example:

```
mlrun.mount_v3io(name='data',access_key='XYZ123..',volume_mounts=[mlrun.VolumeMount("/
↪data", "projects/proj1/data")])
```

See full details in [mount\\_v3io](#).

Alternatively, using a PVC volume:

```
mount_pvc(pvc_name="data-claim", volume_name="data", volume_mount_path="/data")
```

See full details in [mount\\_pvc](#).

## 9.5.6 Preemption mode: Spot vs. On-demand nodes

Node selector is supported for all cloud platforms. It is relevant for MLRun and Nuclio only.

When running ML functions you might want to control whether to run on spot nodes or on-demand nodes. Preemption mode controls whether pods can be scheduled on preemptible (spot) nodes. Preemption mode is supported for all functions.

Preemption mode uses Kubernetes Taints and Toleration to enforce the mode selected. Read more in [Kubernetes Taints and Toleration](#)s.

### Why preemption mode

On-demand instances provide full control over the instance lifecycle. You decide when to launch, stop, hibernate, start, reboot, or terminate it. With Spot instances, you request capacity from specific availability zones, though it is susceptible to spot capacity availability. This is a good choice if you can be flexible about when your applications run and if your applications can be interrupted.

Here are some questions to consider when choosing the type of node:

- Is the function mission critical and must be operational at all times?
- Is the function a stateful function or stateless function?
- Can the function recover from unexpected failure?
- Is this a job that should run only when there are available inexpensive resources?

---

### Important

When an MLRun job is running on a spot node and it fails, it won't get back up again. However, if Nuclio goes down due to a spot issue, it is brought up by Kubernetes.

---

Kubernetes has a few methods for configuring which nodes to run on. To get a deeper understanding, see [Pod Priority and Preemption](#). Also, you must understand the configuration of the spot nodes as specified by the cloud provider.

## Stateless and Stateful Applications

When deploying your MLRun jobs to specific nodes, take into consideration that on-demand nodes are designed to run stateful applications while spot nodes are designed for stateless applications. MLRun jobs are more stateful by nature. An MLRun job that is assigned to run on a spot node might be subject to interruption; it would have to be designed so that the job/function state will be saved when scaling to zero.

## Supported preemption modes

Preemption mode has three values:

- Allow: The function pod can run on a spot node if one is available.
- Constrain: The function pod only runs on spot nodes, and does not run if none is available.
- Prevent: Default. The function pod cannot run on a spot node.

To change the default function preemption mode, it is required to override mlrun the api configuration (and specifically "MLRUN\_FUNCTION\_DEFAULTS\_\_PREENPTION\_MODE" envvar to either one of the above modes).

## UI configuration

---

### Note

Relevant when MLRun is executed in the [Iguazio platform](#).

---

You can configure Spot node support when creating a job, rerunning an existing job, and creating an ML function. The **Run on Spot nodes** drop-down list is in the **Resources** section of jobs. Configure the Spot node support for individual Nuclio functions when creating a function in the **Configuration** tab, under **Resources**.

## SDK configuration

Configure preemption mode by adding the `with_preemption_mode` parameter in your Jupyter notebook, and specifying a mode from the list of values above. This example illustrates a function that cannot be scheduled on preemptible nodes:

```
import mlrun
import os

train_fn = mlrun.code_to_function('training',
                                  kind='job',
                                  handler='my_training_function')
train_fn.with_preemption_mode(mode="prevent")
train_fn.run(inputs={"dataset": my_data})
```

See `with_preemption_mode`.

Alternatively, you can specify the preemption using `with_priority_class` and `with_node_selection` parameters. This example specifies that the pod/function runs only on non-preemptible nodes:

```
import mlrun
import os
train_fn = mlrun.code_to_function('training',
                                kind='job',
                                handler='my_training_function')
train_fn.with_preemption_mode(mode="prevent")
train_fn.run(inputs={"dataset": my_data})

fn.with_priority_class(name="default-priority")
fn.with_node_selection(node_selector={"app.iguazio.com/lifecycle": "non-preemptible"})
```

See `with_priority_class`. See `with_node_selection`.

### 9.5.7 Pod priority for user jobs

Pods (services, or jobs created by those services) can have priorities, which indicate the relative importance of one pod to the other pods on the node. The priority is used for scheduling: a lower priority pod can be evicted to allow scheduling of a higher priority pod. Pod priority is relevant for all pods created by the service. For MLRun, it applies to the jobs created by MLRun. For Nuclio it applies to the pods of the Nuclio-created functions.

Eviction uses these values in conjunction with pod priority to determine what to evict [Pod Priority and Preemption](#).

Pod priority is specified through Priority classes, which map to a priority value. The priority values are: High, Medium, Low. The default is Medium. Pod priority is supported for:


- MLRun jobs: the default priority class for the jobs that MLRun creates.
- Nuclio functions: the default priority class for the user-created functions.
- Jupyter
- Presto (The pods priority also affects any additional services that are directly affected by Presto, for example like hive and mariadb, which are created if Enable hive is checked in the Presto service.)
- Grafana
- Shell

### UI configuration

#### Note

Relevant when MLRun is executed in the [Iguazio platform](#).

Configure the default priority for a service, which is applied to the service itself or to all subsequently created user-jobs in the service's **Common Parameters** tab, **User jobs defaults** section, **Priority class** drop-down list.

Modify the priority for an ML function by pressing **ML functions**, then  of the function, **Edit** | **Resources** | **Pods Priority** drop-down list.

## SDK configuration

Configure pod priority by adding the priority class parameter in your Jupyter notebook. For example:

```
import mlrun
import os
train_fn = mlrun.code_to_function('training',
                                  kind='job',
                                  handler='my_training_function')
train_fn.with_priority_class(name={value})
train_fn.run(inputs={"dataset": my_data})
```

See `with_priority_class`.

### 9.5.8 Node selection

Node selection can be used to specify where to run workloads (e.g. specific node groups, instance types, etc.). This is a more advanced parameter mainly used in production deployments to isolate platform services from workloads. See **Node affinity** for more information on how to configure node selection.

```
# Only run on non-spot instances
fn.with_node_selection(node_selector={"app.iguazio.com/lifecycle" : "non-preemptible"})
```

### 9.5.9 Scaling and auto-scaling

Scaling behavior can be added to real-time and distributed runtimes including nuclio, serving, spark, dask, and mpijob. See **Replicas** to see how to configure scaling behavior per runtime. This example demonstrates setting replicas for nuclio/serving runtimes:

```
# Nuclio/serving scaling
fn.spec.replicas = 2
fn.spec.min_replicas = 1
fn.spec.max_replicas = 4
```

### 9.5.10 Mount persistent storage

In some instances, you might need to mount a file-system to your container to persist data. This can be done with native K8s PVC's or the V3IO data layer for Iguazio clusters. See **Attach storage to functions** for more information on the storage options.

```
# Mount persistent storage - V3IO
fn.apply(mlrun.mount_v3io())

# Mount persistent storage - PVC
fn.apply(mlrun.platforms.mount_pvc(pvc_name="data-claim", volume_name="data", volume_
↪mount_path="/data"))
```

### 9.5.11 Preventing stuck pods

The runtimes spec has four "state\_threshold" attributes that can determine when to abort a run. Once a threshold is passed and the run is in the matching state, the API monitoring aborts the run, deletes its resources, sets the run state to aborted, and issues a "status\_text" message.

The four states and their default thresholds are:

```
'pending_scheduled': '1h', #Scheduled and pending and therefore consumes resources
'pending_not_scheduled': '-1', #Scheduled but not pending, can continue to wait for
↳resources
'image_pull_backoff': '1h', #Container running in a pod fails to pull the required image
↳from a container registry
'running': '24h' #Job is running
```

The thresholds are time strings constructed of value and scale pairs (e.g. "30 minutes 5h 1day"). To configure to infinity, use -1.

To change the state thresholds, use:

```
func.set_state_thresholds({"pending_not_scheduled": "1 min"})
```

For just the run, use:

```
func.run(state_thresholds={"running": "1 min", "image_pull_backoff": "1 minute and 30s"})
```

See:

- `set_state_thresholds()`

---

#### Note

State thresholds are not supported for Nuclio/serving runtimes (since they have their own monitoring) or for the Dask runtime (which can be monitored by the client).

---

## 9.6 Scheduled jobs and workflows

Oftentimes you may want to run a job on a regular schedule. For example, fetching from a datasource every morning, compiling an analytics report every month, or detecting model drift every hour.

### 9.6.1 Creating a job and scheduling it

MLRun makes it very simple to add a schedule to a given job. To showcase this, the following job runs the code below, which resides in a file titled `schedule.py`:

```
def hello(context):
    print("You just ran a scheduled job!")
```

To create the job, use the `code_to_function` syntax and specify the kind like below:

```
import mlrun

job = mlrun.code_to_function(
    name="my-scheduled-job",      # Name of the job (displayed in console and UI)
    filename="schedule.py",      # Python file or Jupyter notebook to run
    kind="job",                  # Run as a job
    image="mlrun/mlrun",         # Use this Docker image
    handler="hello"              # Execute the function hello() within code.py
)
```

### Running the job using a schedule

To add a schedule, run the job and specify the `schedule` parameter using Cron syntax like so:

```
job.run(schedule="0 * * * *")
```

This runs the job every hour. An excellent resource for generating Cron schedules is [Crontab.guru](https://crontab.guru).

## 9.6.2 Scheduling a workflow

After loading the project (`load_project`), run the project with the scheduled workflow:

```
project.run("main", schedule='0 * * * *')
```

---

### Note

1. Remote workflows can only be performed by a project with a **remote** source ([git://github.com/mlrun/something.git](https://github.com/mlrun/something.git), <http://some/url/file.zip> or <http://some/url/file.tar.gz>). So you need to either put your code in Git or archive it and then set a source to it.
  - To set project source use the `project.set_source` method.
  - To set workflow use the `project.set_workflow` method.
2. Example for a remote GitHub project - <https://github.com/mlrun/project-demo>

---

You can delete a scheduled workflow in the MLRun UI. To update a scheduled workflow, re-define the schedule in the workflow, for example:

```
project.run("main", schedule='0 * * * *')
```

## 9.7 Notifications

MLRun supports configuring notifications on jobs and scheduled jobs. This section describes the SDK for notifications.

- *The Notification Object*
- *Local vs Remote*
- *Notification Params and Secrets*
- *Notification Kinds*
- *Configuring Notifications For Runs*

- [Configuring Notifications For Pipelines](#)
- [Setting Notifications on Live Runs](#)
- [Setting Notifications on Scheduled Runs](#)
- [Notification Conditions](#)

### 9.7.1 The Notification Object

The notification object's schema is:

- **kind:** str - notification kind (slack, git, etc...)
- **when:** list[str] - run states on which to send the notification (completed, error, aborted)
- **name:** str - notification name
- **message:** str - notification message
- **severity:** str - notification severity (info, warning, error, debug)
- **params:** dict - notification parameters (See definitions in [Notification Kinds](#))
- **secret\_params:** dict - secret data notification parameters (See definitions in [Notification Params and Secrets](#))
- **condition:** str - jinja template for a condition that determines whether the notification is sent or not (See [Notification Conditions](#))

### 9.7.2 Local vs Remote

Notifications can be sent either locally from the SDK, or remotely from the MLRun API. Usually, a local run sends locally, and a remote run sends remotely. However, there are several special cases where the notification is sent locally either way. These cases are:

- **Local or KFP Engine Pipelines:** To conserve backwards compatibility, the SDK sends the notifications as it did before adding the run notifications mechanism. This means you need to watch the pipeline in order for its notifications to be sent. (Remote pipelines act differently. See [\[Configuring Notifications For Pipelines\]\(#configuring-notifications-for-pipelines\)](#) For Pipelines for more details.)
- **Dask:** Dask runs are always local (against a remote dask cluster), so the notifications are sent locally as well.

**Disclaimer:** Notifications of local runs aren't persisted.

### 9.7.3 Notification Params and Secrets

The notification parameters often contain sensitive information, such as Slack webhooks Git tokens, etc. To ensure the safety of this sensitive data, the parameters are split into 2 objects - **params** and **secret\_params**. Either can be used to store any notification parameter. However the **secret\_params** will be protected by project secrets. When a notification is created, its **secret\_params** are automatically masked and stored in a mlrun project secret. The name of the secret is built from the hash of the params themselves (So if multiple notifications use the same secret, it won't waste space in the project secret). Inside the notification's **secret\_params**, you'll find a reference to the secret under the **secret** key once it's been masked. For non-sensitive notification parameters, you can simply use the **params** parameter, which doesn't go through this masking process. It's essential to utilize **secret\_params** exclusively for handling sensitive information, ensuring secure data management.

## 9.7.4 Notification Kinds

Currently, the supported notification kinds and their params are as follows:

- **slack:**
  - **webhook:** The slack webhook to which to send the notification.
- **git:**
  - **token:** The git token to use for the git notification.
  - **repo:** The git repo to which to send the notification.
  - **issue:** The git issue to which to send the notification.
  - **merge\_request:** In gitlab (as opposed to github), merge requests and issues are separate entities. If using merge request, the issue will be ignored, and vice versa.
  - **server:** The git server to which to send the notification.
  - **gitlab:** (bool) Whether the git server is gitlab or not.
- **webhook:**
  - **url:** The webhook url to which to send the notification.
  - **method:** The http method to use when sending the notification (GET, POST, PUT, etc...).
  - **headers:** (dict) The http headers to send with the notification.
  - **override\_body:** (dict) The body to send with the notification. If not specified, the body will be a dict with the name, message, severity, and the runs list of the completed runs.
  - **verify\_ssl:** (bool) Whether SSL certificates are validated during HTTP requests or not, The default is set to True.
- **console** (no params, local only)
- **ipython** (no params, local only)

## 9.7.5 Configuring Notifications For Runs

In any run method you can configure the notifications via their model. For example:

```
notification = mlrun.model.Notification(  
    kind="webhook",  
    when=["completed", "error"],  
    name="notification-1",  
    message="completed",  
    severity="info",  
    secret_params={"url": "<webhook url>"},  
    params={"method": "GET", "verify_ssl": True},  
)  
function.run(handler=handler, notifications=[notification])
```

## 9.7.6 Configuring Notifications For Pipelines

To set notifications on pipelines, supply the notifications in the run method of either the project or the pipeline. For example:

```
notification = mlrun.model.Notification(
    kind="webhook",
    when=["completed", "error"],
    name="notification-1",
    message="completed",
    severity="info",
    secret_params={"url": "<webhook url>"},
    params={"method": "GET", "verify_ssl": True},
)
project.run(..., notifications=[notification])
```

### Remote Pipeline Notifications

In remote pipelines, the pipeline end notifications are sent from the MLRun API. This means you don't need to watch the pipeline in order for its notifications to be sent. The pipeline start notification is still sent from the SDK when triggering the pipeline.

### Local and KFP Engine Pipeline Notifications

In these engines, the notifications are sent locally from the SDK. This means you need to watch the pipeline in order for its notifications to be sent. This is a fallback to the old notification behavior, therefore not all of the new notification features are supported. Only the notification kind and params are taken into account. In these engines the old way of setting project notifiers is still supported:

```
project.notifiers.add_notification(notification_type="slack", params={"webhook": "<slack_
↪webhook url>"})
project.notifiers.add_notification(notification_type="git", params={"repo": "<repo>",
↪"issue": "<issue>", "token": "<token>"})
```

Instead of passing the webhook in the notification params, it is also possible in a Jupyter notebook to use the `%env` magic command:

```
%env SLACK_WEBHOOK=<slack webhook url>
```

Editing and removing notifications is done similarly with the following methods:

```
project.notifiers.edit_notification(notification_type="slack", params={"webhook": "<new_
↪slack webhook url>"})
project.notifiers.remove_notification(notification_type="slack")
```

### 9.7.7 Setting Notifications on Live Runs

You can set notifications on live runs via the `set_run_notifications` method. For example:

```
import mlrun

mlrun.get_run_db().set_run_notifications("<project-name>", "<run-uid>", [notification1,
↪notification2])
```

Using the `set_run_notifications` method overrides any existing notifications on the run. To delete all notifications, pass an empty list.

### 9.7.8 Setting Notifications on Scheduled Runs

You can set notifications on scheduled runs via the `set_schedule_notifications` method. For example:

```
import mlrun

mlrun.get_run_db().set_schedule_notifications("<project-name>", "<schedule-name>",
↪[notification1, notification2])
```

Using the `set_schedule_notifications` method overrides any existing notifications on the schedule. To delete all notifications, pass an empty list.

### 9.7.9 Notification Conditions

You can configure the notification to be sent only if the run meets certain conditions. This is done using the `condition` parameter in the notification object. The condition is a string that is evaluated using a jinja templator with the run object in its context. The jinja template should return a boolean value that determines whether the notification is sent or not. If any other value is returned or if the template is malformed, the condition is ignored and the notification is sent as normal.

Take the case of a run that calculates and outputs model drift. This example code sets a notification to fire only if the drift is above a certain threshold:

```
notification = mlrun.model.Notification(
    kind="slack",
    when=["completed", "error"],
    name="notification-1",
    message="completed",
    severity="info",
    secret_params={"webhook": "<slack webhook url>"},
    condition='{{ run["status"]["results"]["drift"] > 0.1 }}'
)
```

## REAL-TIME SERVING PIPELINES (GRAPHS)


MLRun graphs enable building and running DAGs (directed acyclic graph).

MLRun graph capabilities include:

- Easy to build and deploy distributed real-time computation graphs
- Use the real-time serverless engine (Nuclio) for auto-scaling and optimized resource utilization
- Built-in operators to handle data manipulation, IO, machine learning, deep-learning, NLP, etc.
- Built-in monitoring for performance, resources, errors, data, model behaviour, and custom metrics
- Debug in the IDE/Notebook

Graphs are composed of individual steps. The first graph element accepts an `Event` object, transforms/processes the event and passes the result to the next steps in the graph. The final result can be written out to some destination (file, DB, stream, etc.) or returned back to the caller (one of the graph steps can be marked with `.respond()`).

The serving graphs can be composed of [pre-defined graph steps](#), block-type elements (model servers, routers, ensembles, data readers and writers, data engineering tasks, validators, etc.), [custom steps](#), or from native python classes/functions. A graph can have data processing steps, model ensembles, model servers, post-processing, etc. (see the [Advanced Model Serving Graph Notebook Example](#)). Graphs can auto-scale and span multiple function containers (connected through streaming protocols).

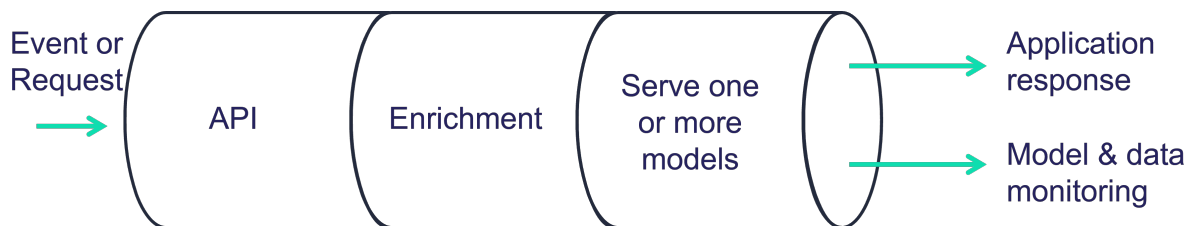

Different steps can run on the same local function, or run on a remote function. You can call existing functions from the graph and reuse them from other graphs, as well as scale up and down the different components individually.

Graphs can run inside your IDE or Notebook for test and simulation. Serving graphs are built on top of [Nuclio](#) (real-time serverless engine), [MLRun jobs](#), [MLRun Storey](#) (native Python async and stream processing engine), and other MLRun facilities.

The serving graphs are used by [MLRun's Feature Store](#) to build real-time feature engineering pipelines.

**In this section**

## 10.1 Getting started

This example uses a custom class and custom function. See [custom steps](#) for more details.

### In this section

- *Steps*
- *Create a function*
- *Build the graph*
- *Visualize the graph*
- *Test the function*
- *Deploy the function*
- *Test the deployed function*

### 10.1.1 Steps

The following code defines basic steps that illustrate building a graph. These steps are:

- **inc**: increments the value by 1.
- **mul**: multiplies the value by 2.
- **WithState**: class that increments an internal counter, prints an output, and adds the input value to the current counter.

```
# mlrun: start-code

def inc(x):
    return x + 1

def mul(x):
    return x * 2

class WithState:
    def __init__(self, name, context, init_val=0):
        self.name = name
        self.context = context
        self.counter = init_val

    def do(self, x):
        self.counter += 1
        print(f"Echo: {self.name}, x: {x}, counter: {self.counter}")
        return x + self.counter

# mlrun: end-code
```

### 10.1.2 Create a function

Now take the code above and create an MLRun function called `simple-graph`, of type `serving`.

```
import mlrun

fn = mlrun.code_to_function("simple-graph", kind="serving", image="mlrun/mlrun")
graph = fn.set_topology("flow")
```

### 10.1.3 Build the graph

Use `graph.to()` to chain steps. Use `.respond()` to mark that the output of that step is returned to the caller (as an http response). By default the graph is `async` with no response.

```
graph.to(name="+1", handler="inc").to(name="*2", handler="mul").to(
    name="(X+counter)", class_name="WithState"
).respond()
```

```
<mlrun.serving.states.TaskStep at 0x7f821e504450>
```

### 10.1.4 Visualize the graph

Using the `plot` method, you can visualize the graph.

```
graph.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7f82294f2f90>
```

### 10.1.5 Test the function

Create a mock server and test the graph locally. Since this graph accepts a numeric value as the input, that value is provided in the `body` parameter.

```
server = fn.to_mock_server()
server.test(body=5)
```

```
Echo: (X+counter), x: 12, counter: 1
```

```
13
```

Run the function again. This time, the counter should be 2 and the output should be 14.

```
server.test(body=5)
```

```
Echo: (X+counter), x: 12, counter: 2
```

```
14
```

## 10.1.6 Deploy the function

Use the `deploy` method to deploy the function.

```
fn.deploy(project="basic-graph-demo")
```

```
> 2021-11-08 07:30:21,571 [info] Starting remote function deploy
2021-11-08 07:30:21 (info) Deploying function
2021-11-08 07:30:21 (info) Building
2021-11-08 07:30:21 (info) Staging files and preparing base images
2021-11-08 07:30:21 (info) Building processor image
2021-11-08 07:30:26 (info) Build complete
2021-11-08 07:30:31 (info) Function deploy complete
> 2021-11-08 07:30:31,785 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-basic-graph-demo-simple-graph.default-tenant.svc.cluster.local:8080'],
↪ 'external_invocation_urls': ['basic-graph-demo-simple-graph-basic-graph-demo.default-
↪ tenant.app.aganefaibuzg.iguazio-cd2.com/']}
```

```
'http://basic-graph-demo-simple-graph-basic-graph-demo.default-tenant.app.aganefaibuzg.
↪ iguazio-cd2.com/'
```

## 10.1.7 Test the deployed function

Use the `invoke` method to call the function.

```
fn.invoke("", body=5)
```

```
> 2021-11-08 07:30:43,241 [info] invoking function: {'method': 'POST', 'path': 'http://
↪ nuclio-basic-graph-demo-simple-graph.default-tenant.svc.cluster.local:8080/'}
```

```
13
```

```
fn.invoke("", body=5)
```

```
> 2021-11-08 07:30:48,359 [info] invoking function: {'method': 'POST', 'path': 'http://
↪ nuclio-basic-graph-demo-simple-graph.default-tenant.svc.cluster.local:8080/'}
```

```
14
```

## 10.2 Use cases

### In this section

- *Data and feature engineering*
- *Example of a simple model serving router*
- *Example of advanced data processing and serving ensemble*
- *Example of NLP processing pipeline with real-time streaming*

In addition to the examples in this section, see the:

- [Distributed \(multi-function\) pipeline example](#) that details how to run a pipeline that consists of multiple serverless functions (connected using streams).
- [Advanced model serving graph notebook example](#) that illustrates the flow, task, model, and ensemble router states; building tasks from custom handlers; classes and storey components; using custom error handlers; testing graphs locally; deploying a graph as a real-time serverless function.
- [MLRun demos repository](#) for additional use cases and full end-to-end examples, including fraud prevention using the Iguazio feature store, a mask detection demo, and converting existing ML code to an MLRun project.

### 10.2.1 Data and feature engineering (using the feature store)

You can build a feature set transformation using serving graphs.

High-level transformation logic is automatically converted to real-time serverless processing engines that can read from any online or offline source, handle any type of structures or unstructured data, run complex computation graphs and native user code. Iguazio's solution uses a unique multi-model database, serving the computed features consistently through many different APIs and formats (like files, SQL queries, pandas, real-time REST APIs, time-series, streaming), resulting in better accuracy and simpler integration.

Read more in [Feature store](#), and [Feature set transformations](#).

### 10.2.2 Example of a simple model serving router

Graphs are used for serving models with different transformations.

To deploy a serving function, you need to import or create the serving function, add models to it, and then deploy it.

```
import mlrun
# load the sklearn model serving function and add models to it
fn = mlrun.import_function('hub://v2_model_server')
fn.add_model("model1", model_path={model1-url})
fn.add_model("model2", model_path={model2-url})

# deploy the function to the cluster
fn.deploy()

# test the live model endpoint
fn.invoke('/v2/models/model1/infer', body={"inputs": [5]})
```

The serving function supports the same protocol used in KFServing V2 and Triton Serving framework. To invoke the model, to use following url: <function-host>/v2/models/model1/infer.

See the [serving protocol specification](#) for details.

**Note:** Model url is either an MLRun model store object (starts with `store://`) or URL of a model directory (in NFS, s3, v3io, azure, for example `s3://{bucket}/{model-dir}`). Note that credentials might need to be added to the serving function via environment variables or MLRun secrets.

See the [scikit-learn classifier example](#), which explains how to create/log MLRun models.

## Writing your own serving class

You can implement your own model serving or data processing classes. All you need to do is:

1. Inherit the base model serving class.
2. Add your implementation for model load() (download the model file(s) and load the model into memory).
3. predict() (accept the request payload and return the prediction/inference results).

You can override additional methods: preprocess, validate, postprocess, explain. You can add custom API endpoints by adding the method op\_xx(event) (which can be invoked by calling the <model-url>/xx, where operation = xx). See [model class API](#).

For an example of writing the minimal serving functions, see [Minimal sklearn serving function example](#).

See the full [V2 Model Server \(SKLearn\) example](#) that tests one or more classifier models against a held-out dataset.

### 10.2.3 Example of advanced data processing and serving ensemble

MLRun serving graphs can host advanced pipelines that handle event/data processing, ML functionality, or any custom task. The following example demonstrates an asynchronous pipeline that pre-processes data, passes the data into a model ensemble, and finishes off with post processing.

**For a complete example, see the [Advanced graph example notebook](#).**

Create a new function of type serving from code and set the graph topology to async flow.

```
import mlrun
function = mlrun.code_to_function("advanced", filename="demo.py",
                                kind="serving", image="mlrun/mlrun",
                                requirements=['storey'])
graph = function.set_topology("flow", engine="async")
```

Build and connect the graph (DAG) using the custom function and classes and plot the result. Add steps using the step.to() method (adds a new step after the current one), or using the graph.add\_step() method.

Use the graph error\_handler if you want an error from the graph or a step to be fed into a specific state (catcher). See the full description in [Error handling](#).

Specify which step is the responder (returns the HTTP response) using the step.respond() method. If the responder is not specified, the graph is non-blocking.

```
# use built-in storey class or our custom Echo class to create and link Task steps. Add
# an error handling step that runs only if the "Echo" step fails
graph.to("storey.Extend", name="enrich", _fn='({"tag": "something"})') \
    .to(class_name="Echo", name="pre-process", some_arg='abc').error_handler(name=
    'catcher', handler='handle_error', full_event=True)

# add an Ensemble router with two child models (routes), the "*" prefix marks it as
# router class
router = graph.add_step("*mlrun.serving.VotingEnsemble", name="ensemble", after="pre-
    process")
router.add_route("m1", class_name="ClassifierModel", model_path=path1)
router.add_route("m2", class_name="ClassifierModel", model_path=path2)

# add the final step (after the router), which handles post-processing and response to
# the client
```

(continues on next page)

(continued from previous page)

```
graph.add_step(class_name="Echo", name="final", after="ensemble").respond()

# plot the graph (using Graphviz) and run a test
graph.plot(rankdir='LR')
```

Create a mock (test) server, and run a test. Use `wait_for_completion()` to wait for the async event loop to complete.

```
server = function.to_mock_server()
resp = server.test("/v2/models/m2/infer", body={"inputs": data})
server.wait_for_completion()
```

And deploy the graph as a real-time Nuclio serverless function with one command:

```
function.deploy()
```

**Note:** If you test a Nuclio function that has a serving graph with the async engine via the Nuclio UI, the UI might not display the logs in the output.

## 10.2.4 Example of an NLP processing pipeline with real-time streaming

In some cases it's useful to split your processing to multiple functions and use streaming protocols to connect those functions. In this example the data processing is in the first function/container and the NLP processing is in the second function. In this example the GPU contained in the second function.

See the [full notebook example](#).

```
# define a new real-time serving function (from code) with an async graph
fn = mlrun.code_to_function("multi-func", filename="./data_prep.py", kind="serving",
    image='mlrun/mlrun')
graph = fn.set_topology("flow", engine="async")

# define the graph steps (DAG)
graph.to(name="load_url", handler="load_url")\
    .to(name="to_paragraphs", handler="to_paragraphs")\
    .to("storey.FlatMap", "flatten_paragraphs", _fn="(event)")\
    .to(">>", "q1", path=internal_stream)\
    .to(name="nlp", class_name="ApplyNLP", function="enrich")\
    .to(name="extract_entities", handler="extract_entities", function="enrich")\
    .to(name="enrich_entities", handler="enrich_entities", function="enrich")\
    .to("storey.FlatMap", "flatten_entities", _fn="(event)", function="enrich")\
    .to(name="printer", handler="myprint", function="enrich")\
    .to(">>", "output_stream", path=out_stream)

# specify the "enrich" child function, add extra package requirements
child = fn.add_child_function('enrich', './nlp.py', 'mlrun/mlrun')
child.spec.build.commands = ["python -m pip install spacy",
    "python -m spacy download en_core_web_sm"]
graph.plot()
```

Currently queues support iguazio v3io and Kafka streams.

## 10.3 Graph concepts and state machine

A graph is composed of the following:

- **Step:** A step runs a function or class handler or a REST API call. MLRun comes with a list of [pre-built steps](#) that include data manipulation, readers, writers and model serving. You can also write your own steps using standard Python functions or custom functions/classes, or can be a external REST API (the special `$remote` class).
- **Router:** A special type of step is a router with routing logic and multiple child routes/models. The basic routing logic is to route to the child routes based on the event `.path`. More advanced or custom routing can be used, for example, the ensemble router sends the event to all child routes in parallel, aggregates the result and responds.
- **Queue:** A queue or stream that accepts data from one or more source steps and publishes to one or more output steps. Queues are best used to connect independent functions/containers. Queues can run in-memory or be implemented using a stream, which allows it to span processes/containers.

The graph server has two modes of operation (topologies):

- **Router topology (default):** A minimal configuration with a single router and child tasks/routes. This can be used for simple model serving or single hop configurations.
- **Flow topology:** A full graph/DAG. The flow topology is implemented using two engines: `async` (the default) is based on [Storey](#) and asynchronous event loop; and `sync`, which supports a simple sequence of steps.

### In this section

- *The event object*
- *The context object*
- *Topology*
- *Building distributed graphs*
- *Error handling*

### 10.3.1 The Event object

The graph state machine accepts an event object (similar to a Nuclio event) and passes it along the pipeline. An event object hosts the event body along with other attributes such as `path` (http request path), `method` (GET, POST, ...), and `id` (unique event ID).

In some cases the events represent a record with a unique `key`, which can be read/set through the event `.key`.

The task steps are called with the event `.body` by default. If a task step needs to read or set other event elements (`key`, `path`, `time`, ...) you should set the task `full_event` argument to `True`.

Task steps support optional `input_path` and `result_path` attributes that allow controlling which portion of the event is sent as input to the step, and where to update the returned result.

For example, for an event body `{"req": {"body": "x"}}`, `input_path="req.body"` and `result_path="resp"` the step gets `"x"` as the input. The output after the step is `{"req": {"body": "x"}, "resp": <step output>}`. Note that `input_path` and `result_path` do not work together with `full_event=True`.

### 10.3.2 The context object

The step classes are initialized with a `context` object (when they have `context` in their `__init__` args). The context is used to pass data and for interfacing with system services. The context object has the following attributes and methods.

Attributes:

- **logger**: Central logger (Nuclio logger when running in Nuclio).
- **verbose**: True if in verbose/debug mode.
- **root**: The graph object.
- **current\_function**: When running in a distributed graph, the current child function name.

Methods:

- **get\_param(key, default=None)**: Get the graph parameter by key. Parameters are set at the serving function (e.g. `function.spec.parameters = {"param1": "x"}`).
- **get\_secret(key)**: Get the value of a project/user secret.
- **get\_store\_resource(uri, use\_cache=True)**: Get the mlrun store object (data item, artifact, model, feature set, feature vector).
- **get\_remote\_endpoint(name, external=False)**: Return the remote nuclio/serving function http(s) endpoint given its [project/]function-name[:tag].
- **Response(headers=None, body=None, content\_type=None, status\_code=200)**: Create a nuclio response object, for returning detailed http responses.

Example, using the context:

```
if self.context.verbose:
    self.context.logger.info("my message", some_arg="text")
x = self.context.get_param("x", 0)
```

### 10.3.3 Topology

#### Router

Once you have a serving function, you need to choose the graph topology. The default is `router` topology. With the `router` topology you can specify different machine learning models. Each model has a logical name. This name is used to route to the correct model when calling the serving function.

```
from sklearn.datasets import load_iris

# set the topology/router
graph = fn.set_topology("router")

# Add the model
fn.add_model(
    "model1",
    class_name="ClassifierModel",
    model_path="https://s3.wasabisys.com/iguazio/models/iris/model.pkl",
)

# Add additional models
```

(continues on next page)

(continued from previous page)

```
# fn.add_model("model2", class_name="ClassifierModel", model_path="<path2>")

# create and use the graph simulator
server = fn.to_mock_server()
x = load_iris()["data"].tolist()
result = server.test("/v2/models/model1/infer", {"inputs": x})

print(result)
```

```
> 2021-11-02 04:18:36,925 [info] model model1 was loaded
> 2021-11-02 04:18:36,926 [info] Initializing endpoint records
> 2021-11-02 04:18:36,965 [info] Loaded ['model1']
{'id': '6bd11e864805484ea888f58e478d1f91', 'model_name': 'model1', 'outputs': [0, 0, 0,
→0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
→0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
→1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
→1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
→2, 2, 2, 2, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
→2, 2]}

```

## Flow

Using the flow topology, you can specify tasks, which typically manipulate the data. The most common scenario is pre-processing of data prior to the model execution.

---

**Note:** Once the topology is set, you cannot change an existing function topology.

---

In this topology, you build and connect the graph (DAG) by adding steps using the `step.to()` method, or by using the `graph.add_step()` method.

The `step.to()` is typically used to chain steps together. `graph.add_step` can add steps anywhere on the graph and has `before` and `after` parameters to specify the location of the step.

```
fn2 = mlrun.code_to_function(
    "serving_example_flow", kind="serving", image="mlrun/mlrun"
)

graph2 = fn2.set_topology("flow")

graph2_enrich = graph2.to("storey.Extend", name="enrich", _fn='({"tag": "something"})')

# add an Ensemble router with two child models (routes)
router = graph2.add_step(mlrun.serving.ModelRouter(), name="router", after="enrich")
router.add_route(
    "m1",
    class_name="ClassifierModel",
    model_path="https://s3.wasabisys.com/iguazio/models/iris/model.pkl",
)
router.respond()
```

(continues on next page)

(continued from previous page)

```
# Add additional models
# router.add_route("m2", class_name="ClassifierModel", model_path=path2)

# plot the graph (using Graphviz)
graph2.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7fd46e4dda50>
```

```
fn2_server = fn2.to_mock_server()

result = fn2_server.test("/v2/models/m1/infer", {"inputs": x})

print(result)
```

```
> 2021-11-02 04:18:42,142 [info] model m1 was loaded
> 2021-11-02 04:18:42,142 [info] Initializing endpoint records
> 2021-11-02 04:18:42,183 [info] Loaded ['m1']
{'id': 'f713fd7eedeb431eba101b13c53a15b5'}
```

### 10.3.4 Building distributed graphs

Graphs can be hosted by a single function (using zero to n containers), or span multiple functions where each function can have its own container image and resources (replicas, GPUs/CPU's, volumes, etc.). It has a **root** function, which is where you configure triggers (http, incoming stream, cron, ...), and optional downstream child functions.

You can specify the **function** attribute in **task** or **router** steps. This indicates where this step should run. When the **function** attribute is not specified it runs on the root function. **function=""** means the step can run in any of the child functions.


Steps on different functions should be connected using a queue step (a stream).

#### Adding a child function:

```
fn.add_child_function(
    "enrich",
    "./entity_extraction.ipynb",
    image="mlrun/mlrun",
    requirements=["storey", "sklearn"],
)
```

See a [full example with child functions](#).

A distributed graph looks like this:

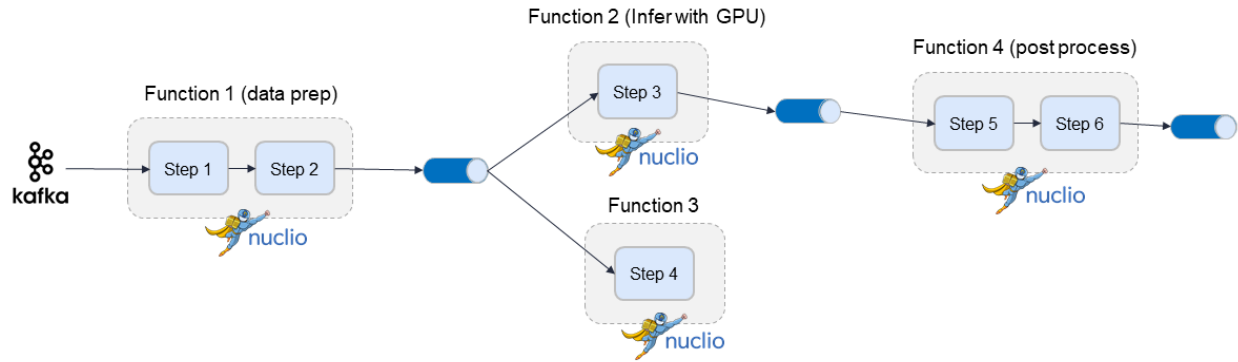

## 10.4 Model serving graph

### In this section

- *Serving Functions*
- *Topology*
- *Remote execution*
- *Examples of graph functionality*

### 10.4.1 Serving Functions

To start using a serving graph, you first need a serving function. A serving function contains the serving class code to run the model and all the code necessary to run the tasks. MLRun comes with a wide library of tasks. If you use just those, you don't have to add any special code to the serving function, you just have to provide the code that runs the model. For more information about serving classes see [Build your own model serving class](#).

For example, the following code is a basic model serving class:

```
# mlrun: start-code
```

```
from cloudpickle import load
from typing import List
import numpy as np

import mlrun

class ClassifierModel(mlrun.serving.V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model(".pkl")
        self.model = load(open(model_file, "rb"))

    def predict(self, body: dict) -> List:
        """Generate model predictions from sample."""
        feats = np.asarray(body["inputs"])
```

(continues on next page)

(continued from previous page)

```
result: np.ndarray = self.model.predict(feats)
return result.tolist()
```

```
# mlrun: end-code
```

To obtain the serving function, use the `code_to_function` and specify kind to be serving.

```
fn = mlrun.code_to_function("serving_example", kind="serving", image="mlrun/mlrun")
```

## 10.4.2 Topology

### Router

Once you have a serving function, you need to choose the graph topology. The default is router topology. With the router topology you can specify different machine learning models. Each model has a logical name. This name is used to route to the correct model when calling the serving function.

```
from sklearn.datasets import load_iris

# set the topology/router
graph = fn.set_topology("router")

# Add the model
fn.add_model(
    "model1",
    class_name="ClassifierModel",
    model_path="https://s3.wasabisys.com/iguazio/models/iris/model.pkl",
)

# Add additional models
# fn.add_model("model2", class_name="ClassifierModel", model_path="<path2>")

# create and use the graph simulator
server = fn.to_mock_server()
x = load_iris()["data"].tolist()
result = server.test("/v2/models/model1/infer", {"inputs": x})

print(result)
```

```
> 2021-11-02 04:18:36,925 [info] model model1 was loaded
> 2021-11-02 04:18:36,926 [info] Initializing endpoint records
> 2021-11-02 04:18:36,965 [info] Loaded ['model1']
{'id': '6bd11e864805484ea888f58e478d1f91', 'model_name': 'model1', 'outputs': [0, 0, 0,
→ 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
→ 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 2, 1, 1, 1, 1, 1, 1, 1, 1,
→ 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 1, 1, 1, 1, 2, 1, 1, 1, 1, 1, 2, 1, 1, 1, 1, 1,
→ 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
→ 2, 2, 2, 2, 2, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
→ 2, 2]}
```

## Flow

You can use the flow topology to specify tasks, which typically manipulates the data. The most common scenario is pre-processing of data prior to the model execution.

**Note:** Once the topology is set, you cannot change an existing function topology.

In this topology, you build and connect the graph (DAG) by adding steps using the `step.to()` method, or by using the `graph.add_step()` method.

The `step.to()` is typically used to chain steps together. `graph.add_step` can add steps anywhere on the graph and has `before` and `after` parameters to specify the location of the step.

```
fn2 = mlrun.code_to_function(
    "serving_example_flow", kind="serving", image="mlrun/mlrun"
)

graph2 = fn2.set_topology("flow")

graph2_enrich = graph2.to("storey.Extend", name="enrich", _fn='({"tag": "something"})')

# add an Ensemble router with two child models (routes)
router = graph2.add_step(mlrun.serving.ModelRouter(), name="router", after="enrich")
router.add_route(
    "m1",
    class_name="ClassifierModel",
    model_path="https://s3.wasabisys.com/iguazio/models/iris/model.pkl",
)
router.respond()

# add an error handling step, run only when/if the "pre-process" step fails
graph.to(name="pre-process", handler="raising_step").error_handler(
    name="catcher", handler="handle_error", full_event=True
)

# Add additional models
# router.add_route("m2", class_name="ClassifierModel", model_path=path2)

# plot the graph (using Graphviz)
graph2.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7fd46e4dda50>
```

```
fn2_server = fn2.to_mock_server()

result = fn2_server.test("/v2/models/m1/infer", {"inputs": x})

print(result)
```

```
> 2021-11-02 04:18:42,142 [info] model m1 was loaded
> 2021-11-02 04:18:42,142 [info] Initializing endpoint records
> 2021-11-02 04:18:42,183 [info] Loaded ['m1']
```

(continues on next page)

(continued from previous page)

```
{'id': 'f713fd7eedeb431eba101b13c53a15b5'}
```

### 10.4.3 Remote execution

You can chain functions together with remote execution. This allows you to:

- Call existing functions from the graph and reuse them from other graphs.
- Scale up and down different components individually.

Calling a remote function can either use HTTP or via a queue (streaming).

#### HTTP

Calling a function using http uses the special `$remote` class. First deploy the remote function:

```
remote_func_name = "serving-example-flow"
project_name = "graph-basic-concepts"
fn_remote = mlrun.code_to_function(
    remote_func_name, project=project_name, kind="serving", image="mlrun/mlrun"
)

fn_remote.add_model(
    "model1",
    class_name="ClassifierModel",
    model_path="https://s3.wasabisys.com/iguazio/models/iris/model.pkl",
)

remote_addr = fn_remote.deploy()
```

```
> 2022-03-17 08:20:40,674 [info] Starting remote function deploy
2022-03-17 08:20:40 (info) Deploying function
2022-03-17 08:20:40 (info) Building
2022-03-17 08:20:40 (info) Staging files and preparing base images
2022-03-17 08:20:40 (info) Building processor image
2022-03-17 08:20:42 (info) Build complete
2022-03-17 08:20:47 (info) Function deploy complete
> 2022-03-17 08:20:48,289 [info] successfully deployed function: {'internal_invocation_
→ urls': ['nuclio-graph-basic-concepts-serving-example-flow.default-tenant.svc.cluster.
→ local:8080'], 'external_invocation_urls': ['graph-basic-concepts-serving-example-flow-
→ graph-basic-concepts.default-tenant.app.maor-gcp2.iguazio-cd0.com/']}
```

Create a new function with a graph and call the remote function above:

```
fn_preprocess = mlrun.new_function("preprocess", kind="serving")
graph_preprocessing = fn_preprocess.set_topology("flow")

graph_preprocessing.to("storey.Extend", name="enrich", _fn='({"tag": "something"})').to(
    "$remote", "remote_func", url=f"{remote_addr}v2/models/model1/infer", method="put"
).respond()

graph_preprocessing.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7f57dc96a0d0>
```

```
fn3_server = fn_preprocess.to_mock_server()
my_data = """{"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]]}"""
result = fn3_server.test("/v2/models/my_model/infer", body=my_data)
print(result)
```

```
> 2022-03-17 08:20:48,374 [warning] run command, file or code were not specified
{'id': '3a1dd36c-e7de-45af-a0c4-72e3163ba92a', 'model_name': 'model1', 'outputs': [0, 2]}
```

## Queue (streaming)

You can use queues to send events from one part of the graph to another and to decouple the processing of those parts. Queues are better suited to deal with bursts of events, since all the events are stored in the queue until they are processed.

## V3IO stream example

The example below uses a V3IO stream, which is a fast real-time implementation of a stream that allows processing of events at very low latency.

```
%%writefile echo.py
def echo_handler(x):
    print(x)
    return x
```

Overwriting echo.py

Configure the streams

```
import os

streams_prefix = (
    f"v3io:///users/{os.getenv('V3IO_USERNAME')}/examples/graph-basic-concepts"
)

input_stream = streams_prefix + "/in-stream"
out_stream = streams_prefix + "/out-stream"
err_stream = streams_prefix + "/err-stream"
```

Alternatively, use Kafka to configure the streams:

```
kafka_prefix = f"kafka://{broker}/"
internal_topic = kafka_prefix + "in-topic"
out_topic = kafka_prefix + "out-topic"
err_topic = kafka_prefix + "err-topic"
```

Create the graph. In the `to` method the class name is one of `>>` or `$queue` to specify that this is a queue. To configure a consumer group for the step, include the group in the `to` method.

```
fn_preprocess2 = mlrun.new_function("preprocess", kind="serving")
fn_preprocess2.add_child_function("echo_func", "./echo.py", "mlrun/mlrun")

graph_preprocess2 = fn_preprocess2.set_topology("flow")

graph_preprocess2.to("storey.Extend", name="enrich", _fn='({"tag": "something"})').to(
    ">>", "input_stream", path=input_stream, group="mygroup"
).to(name="echo", handler="echo_handler", function="echo_func").to(
    ">>", "output_stream", path=out_stream, sharding_func="partition"
)

graph_preprocess2.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7f57c7907990>
```

```
from echo import *

fn4_server = fn_preprocess2.to_mock_server(current_function="*")

my_data = """"{"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]], "partition": 0}""""

result = fn4_server.test("/v2/models/my_model/infer", body=my_data)

print(result)
```

```
> 2022-03-17 08:20:55,182 [warning] run command, file or code were not specified
{'id': 'a6efe8217b024ec7a7e02cf0b7850b91'}
{'inputs': [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]], 'tag': 'something'}
```

## Kafka stream example

```
%%writefile echo.py
def echo_handler(x):
    print(x)
    return x
```

```
Overwriting echo.py
```

Configure the streams

```
import os

input_topic = "in-topic"
out_topic = "out-topic"
err_topic = "err-topic"

# replace this
brokers = "<broker IP>"
```

Create the graph. In the `to` method the class name is one of `>>` or `$queue` to specify that this is a queue. To configure a consumer group for the step, include the group in the `to` method.

```

import mlrun

fn_preprocess2 = mlrun.new_function("preprocess", kind="serving")
fn_preprocess2.add_child_function("echo_func", "./echo.py", "mlrun/mlrun")

graph_preprocess2 = fn_preprocess2.set_topology("flow")

graph_preprocess2.to("storey.Extend", name="enrich", _fn='({"tag": "something"})').to(
    ">>",
    "input_stream",
    path=input_topic,
    group="mygroup",
    kafka_bootstrap_servers=brokers,
).to(name="echo", handler="echo_handler", function="echo_func").to(
    ">>", "output_stream", path=out_topic, kafka_bootstrap_servers=brokers
)

graph_preprocess2.plot(rankdir="LR")

from echo import *

fn4_server = fn_preprocess2.to_mock_server(current_function="*")

fn4_server.set_error_stream(f"kafka://{brokers}/{err_topic}")

my_data = """{"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]]}"""

result = fn4_server.test("/v2/models/my_model/infer", body=my_data)

print(result)

```

## 10.4.4 Examples of graph functionality

### NLP processing pipeline with real-time streaming

In some cases it's useful to split your processing to multiple functions and use streaming protocols to connect those functions.

See the [full notebook example](#), where the data processing is in the first function/container and the NLP processing is in the second function. And the second function contains the GPU.

Currently queues support Iguazio v3io and Kafka streams.

## Graph that splits and rejoins

You can define a graph that splits into two parallel steps, and the output of both steps join back together.

In this basic example, all input goes into both stepA and stepB, and then both stepA and stepB forward the input to stepC. This means that a dataset of 5 rows generates an output of 10 rows (barring any filtering or other processing that would change the number of rows).

### Note

Use this configuration to join the graph branches and **not** to join the events into a single large one.

Example:

```
graph.to("stepB")
graph.to("stepC")
graph.add_step(name="stepD", after=["stepB", "stepC"])

graph = fn.set_topology("flow", exist_ok=True)
dbl = graph.to(name="double", handler="double")
dbl.to(name="add3", class_name="Adder", add=3)
dbl.to(name="add2", class_name="Adder", add=2)
graph.add_step("Gather").after("add2", "add3")
```

Graphs that split and rejoin can also be used for these types of scenarios:

- Steps B and C are filter steps that complement each other. For example B passes events where key < X, and C passes events where key >= X. The resulting DF contains the exact event ingested, since each event was handled once on one of the branches.
- Steps B and C modify the content of the event in different ways. B adds a column col1 with value X, and C adds a column col2 with value X. The resulting DF contains both col1 and col2. Each key is represented twice: once with col1 == X, col2 == null and once with col1 == null, col2 == X.

## 10.5 Writing custom steps

The Graph executes built-in task classes, or task classes and functions that you implement. The task parameters include the following:

- **class\_name** (str): the relative or absolute class name.
- **handler** (str): the function handler (if class\_name is not specified it is the function handler).
- **\*\*class\_args**: a set of class `__init__` arguments.

For example, see the following simple echo class:

```
import mlrun
```

```
# mlrun: start
```

```
# echo class, custom class example
class Echo:
```

(continues on next page)

(continued from previous page)

```
def __init__(self, context, name=None, **kw):
    self.context = context
    self.name = name
    self.kw = kw

def do(self, x):
    print("Echo:", self.name, x)
    return x
```

```
# mlrun: end
```

Test the graph: first convert the code to function, and then add the step to the graph:

```
fn_echo = mlrun.code_to_function("echo_function", kind="serving", image="mlrun/mlrun")
graph_echo = fn_echo.set_topology("flow")
graph_echo.to(class_name="Echo", name="pre-process", some_arg="abc")
graph_echo.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7f2d73584c90>
```

Create a mock server to test this locally:

```
echo_server = fn_echo.to_mock_server(current_function="*")
result = echo_server.test("", {"inputs": 123})
print(result)
```

```
{'id': '97397ea412334afdb5e4cb7d7c2e6dd3'}
Echo: pre-process {'inputs': 123}
```

### For more information, see the [Advanced model serving graph notebook example](#)

You can use any Python function by specifying the handler name (e.g. `handler=json.dumps`). The function is triggered with the `event.body` as the first argument, and its result is passed to the next step.

Alternatively, you can use classes that can also store some step/configuration and separate the one time init logic from the per event logic. The classes are initialized with the `class_args`. If the class init args contain `context` or `name`, they are initialized with the `graph context` and the step name.

By default, the `class_name` and handler specify a class/function name in the `globals()` (i.e. this module). Alternatively, those can be full paths to the class (module.submodule.class), e.g. `storey.WriteToParquet`. You can also pass the module as an argument to functions such as `function.to_mock_server(namespace=module)`. In this case the class or handler names are also searched in the provided module.

When using classes the class event handler is invoked on every event with the `event.body`. If the Task step `full_event` parameter is set to `True` the handler is invoked and returns the full event object. If the class event handler is not specified, it invokes the class `do()` method.

If you need to implement async behavior, then subclass `storey.MapClass`.

### 10.5.1 Create a single step

When creating a serving function with a step that is a part of the class, the graph context is created in the init, and you can use this context to get the functions' parameters.

When creating a single step (no class), the context is not created, and therefore the `get_param` does not work. The following example illustrates how to create the context and then use the parameters.

```
%%writefile serving-handler-func.py
import pandas as pd
import mlrun
import os
import json
def test(event):
    server_context = mlrun.serving.GraphServer().from_dict(json.loads(os.environ[
↪ "SERVING_SPEC_ENV"]))
    context = mlrun.serving.GraphContext(server=server_context)
    param = context.get_param("Test")
    return param
```

Overwriting `serving-handler-func.py`

```
serving_func_handler = project.set_function(
    name="serving-handler-func",
    func="serving-handler-func.py",
    image="mlrun/mlrun",
    kind="serving",
)
```

```
serving_func_handler.spec.parameters = {"Test": "test"}
```

```
graph = serving_func_handler.set_topology("flow")
```

```
graph.to(name="test", handler="test").respond()
```

```
serving_func_deploy = project.deploy_function("serving-handler-func")
```

```
> 2023-05-09 14:24:55,287 [info] Starting remote function deploy
2023-05-09 14:24:56 (info) Deploying function
2023-05-09 14:24:56 (info) Building
2023-05-09 14:24:56 (info) Staging files and preparing base images
2023-05-09 14:24:57 (info) Building processor image
2023-05-09 14:26:02 (info) Build complete
> 2023-05-09 14:26:08,232 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-serving-context-shapira-serving-handler-func.default-tenant.svc.
↪ cluster.local:8080'], 'external_invocation_urls': ['serving-context-shapira-serving-
↪ handler-func-serving-c-6v7nqbg6.default-tenant.app.cust-cs-il-3-5-2.iguazio-cd2.com/']}
```

```
serving_func_deploy.function.invoke(
    "/",
)
```

## 10.6 Built-in steps

MIRun provides you with many built-in steps that you can use when building your graph. All steps are supported by the storey engine. Support by any other engines is included in the step description, as relevant.

Click on the step names in the following sections to see the full usage.

- [Base Operators](#)
- [External IO and data enrichment](#)
- [Models](#)
- [Routers](#)
- [Other](#)

See also [Data transformations](#).

### 10.6.1 Base Operators

Class name	Description
<a href="#">storey.transformations</a>	Batches events. This step emits a batch every <code>max_events</code> events, or when <code>timeout</code> seconds have passed since the first event in the batch was received.
<a href="#">storey.transformations</a>	Redirects each input element into one of the multiple downstreams.
<a href="#">storey.Extend</a>	Adds fields to each incoming event.
<a href="#">storey.transformations</a>	Filters events based on a user-provided function.
<a href="#">storey.transformations</a>	Maps, or transforms, each incoming event into any number of events.
<a href="#">storey.steps.Flatten</a>	Flatten is equivalent to <code>FlatMap(lambda x: x)</code> .
<a href="#">storey.transformations</a>	Applies the given function on each event in the stream, and passes the original event downstream.
<a href="#">storey.transformations</a>	Similar to Map, but instead of a function argument, this class should be extended and its <code>do()</code> method overridden.
<a href="#">storey.transformations</a>	Maps, or transforms, incoming events using a stateful user-provided function, and an initial state, which can be a database table.
<a href="#">storey.transformations</a>	Partitions events by calling a predicate function on each event. Each processed event results in a Partitioned namedtuple of ( <code>left=Optional[Event]</code> , <code>right=Optional[Event]</code> ).
<a href="#">storey.Reduce</a>	Reduces incoming events into a single value that is returned upon the successful termination of the flow.
<a href="#">storey.transformations</a>	Emits a single event in a window of <code>window_size</code> events, in accordance with <code>emit_period</code> and <code>emit_before_termination</code> .

## 10.6.2 External IO and data enrichment

Class name	Description
<a href="#">BatchHttpRequests</a>	A class for calling remote endpoints in parallel.
<a href="#">mlrun.datastore.DataItem</a>	Data input/output class abstracting access to various local/remote data sources.
<a href="#">storey.transformations.JoinWithT</a>	Joins each event with data from the given table.
<a href="#">JoinWithV3IOTable</a>	Joins each event with a V3IO table. Used for event augmentation.
<a href="#">QueryByKey</a>	Similar to <a href="#">AggregateByKey</a> , but this step is for serving only and does not aggregate the event.
<a href="#">RemoteStep</a>	Class for calling remote endpoints.
<a href="#">storey.transformations.SendToHtt</a>	Joins each event with data from any HTTP source. Used for event augmentation.

## 10.6.3 Models

Class name	Description
<a href="#">mlrun.frameworks.onnx.ONNXModelS</a>	A model serving class for serving ONYX Models. A sub-class of the <a href="#">V2ModelServer</a> class.
<a href="#">mlrun.frameworks.pytorch.PyTorchMod</a>	A model serving class for serving PyTorch Models. A sub-class of the <a href="#">V2ModelServer</a> class.
<a href="#">mlrun.frameworks.sklearn.SklearnMode</a>	A model serving class for serving Sklearn Models. A sub-class of the <a href="#">V2ModelServer</a> class.
<a href="#">mlrun.frameworks.tf_keras.TFKerasMo</a>	A model serving class for serving TFKeras Models. A sub-class of the <a href="#">V2ModelServer</a> class.
<a href="#">mlrun.frameworks.xgboost.XGBModelS</a>	A model serving class for serving XGB Models. A sub-class of the <a href="#">V2ModelServer</a> class.

## 10.6.4 Routers

Class name	Description
<a href="#">ml-run.serving.Enric</a>	Auto enrich the request with data from the feature store. The router input accepts a list of inference requests (each request can be a dict or a list of incoming features/keys). It enriches the request with data from the specified feature vector ( <a href="#">feature_vector_uri</a> ).
<a href="#">ml-run.serving.Enric</a>	Auto enrich the request with data from the feature store. The router input accepts a list of inference requests (each request can be a dict or a list of incoming features/keys). It enriches the request with data from the specified feature vector ( <a href="#">feature_vector_uri</a> ).
<a href="#">ml-run.serving.Mode</a>	Basic model router, for calling different models per each model path.
<a href="#">ml-run.serving.Votin</a>	An ensemble machine learning model that combines the prediction of several models.

## 10.6.5 Other

Class name	Description
<code>ml-run.feature_store.FeaturesetValidator.ReduceToDataFrame</code>	Validate feature values according to the feature set validation policy. Supported also by the Pandas engines. Builds a pandas DataFrame from events and returns that DataFrame on flow termination.

## 10.7 Demos and tutorials

Read these tutorials to get an even better understanding of serving graphs.

### 10.7.1 Distributed (multi-function) pipeline example

This example demonstrates how to run a pipeline that consists of multiple serverless functions (connected using streams).

In the pipeline example the request contains the a URL of a file. It loads the content of the file and breaks it into paragraphs (using the FlatMap class), and pushes the results to a queue/stream. The second function picks up the paragraphs and runs the NLP flow to extract the entities and push the results to the output stream.

**Setting the stream URLs for the internal queue, the final output and error/exceptions stream:**

```
streams_prefix = "v3io:///users/admin/"
internal_stream = streams_prefix + "in-stream"
out_stream = streams_prefix + "out-stream"
err_stream = streams_prefix + "err-stream"
```

Alternatively, using Kafka:

```
kafka_prefix = f"kafka://{broker}/"
internal_topic = kafka_prefix + "in-topic"
out_topic = kafka_prefix + "out-topic"
err_topic = kafka_prefix + "err-topic"
```

In either case, continue with:

```
# set up the environment
import mlrun
```

```
project = mlrun.get_or_create_project("pipe")
```

```
> 2021-05-03 14:28:39,987 [warning] Failed resolving version info. Ignoring and using
↳ defaults
> 2021-05-03 14:28:43,801 [warning] Unable to parse server or client version. Assuming
↳ compatible: {'server_version': '0.6.3-rc4', 'client_version': 'unstable'}
```

```
('pipe', '/v3io/projects/{run.project}/artifacts')
```

```
# uncomment to install spacy requirements locally
# !pip install spacy
# !python -m spacy download en_core_web_sm
```

### In this example

- *Create the pipeline*
- *Test the pipeline locally*
- *Deploy to the cluster*

## Create the pipeline

The pipeline consists of two functions: data-prep and NLP. Each one has different package dependencies.

### Create a file with data-prep graph steps:

#### Note

The model, version and operation can also be specified in the message body to support streaming protocols (e.g. Kafka).

```
%%writefile data_prep.py
import mlrun
import json

# load struct from a json file (event points to the url)
def load_url(event):
    url = event["url"]
    data = mlrun.get_object(url).decode("utf-8")
    return {"url": url, "doc": json.loads(data)}

def to_paragraphs(event):
    paragraphs = []
    url = event["url"]
    for i, paragraph in enumerate(event["doc"]):
        paragraphs.append(
            {"url": url, "paragraph_id": i, "paragraph": paragraph}
        )
    return paragraphs
```

Overwriting data\_prep.py

### Create a file with NLP graph steps (use spacy):

```
%%writefile nlp.py
import json
import spacy

def myprint(x):
    print(x)
    return x
```

(continues on next page)

(continued from previous page)

```

class ApplyNLP:
    def __init__(self, context=None, spacy_dict="en_core_web_sm"):

        self.nlp = spacy.load(spacy_dict)

    def do(self, paragraph: dict):
        tokenized_paragraphs = []
        if isinstance(paragraph, (str, bytes)):
            paragraph = json.loads(paragraph)
        tokenized = {
            "url": paragraph["url"],
            "paragraph_id": paragraph["paragraph_id"],
            "tokens": self.nlp(paragraph["paragraph"]),
        }
        tokenized_paragraphs.append(tokenized)

        return tokenized_paragraphs

def extract_entities(tokens):
    paragraph_entities = []
    for token in tokens:
        entities = token["tokens"].ents
        for entity in entities:
            paragraph_entities.append(
                {
                    "url": token["url"],
                    "paragraph_id": token["paragraph_id"],
                    "entity": entity.ents,
                }
            )
    return paragraph_entities

def enrich_entities(entities):
    enriched_entities = []
    for entity in entities:
        enriched_entities.append(
            {
                "url": entity["url"],
                "paragraph_id": entity["paragraph_id"],
                "entity_text": entity["entity"][0].text,
                "entity_start_char": entity["entity"][0].start_char,
                "entity_end_char": entity["entity"][0].end_char,
                "entity_label": entity["entity"][0].label_,
            }
        )
    return enriched_entities

```

Overwriting nlp.py

### Build and show the graph:

Create the master function ("multi-func") with the `data_prep.py` source and an async graph topology. Add a pipeline

of steps made of custom python handlers, classes and built-in classes (like `storey.FlatMap`).

The pipeline runs across two functions which are connected by a queue/stream (q1). Use the `function=` to specify which function runs the specified step. End the flow with writing to the output stream.

```
# define a new real-time serving function (from code) with an async graph
fn = mlrun.code_to_function(
    "multi-func", filename="./data_prep.py", kind="serving", image="mlrun/mlrun"
)
graph = fn.set_topology("flow", engine="async")

# define the graph steps (DAG)
graph.to(name="load_url", handler="load_url").to(
    name="to_paragraphs", handler="to_paragraphs"
).to("storey.FlatMap", "flatten_paragraphs", _fn="(event)").to(
    ">>", "q1", path=internal_stream
).to(name="nlp", class_name="ApplyNLP", function="enrich").to(
    name="extract_entities", handler="extract_entities", function="enrich"
).to(name="enrich_entities", handler="enrich_entities", function="enrich").to(
    "storey.FlatMap", "flatten_entities", _fn="(event)", function="enrich"
).to(name="printer", handler="myprint", function="enrich").to(
    ">>", "output_stream", path=out_stream
)
```

```
<mlrun.serving.states.QueueState at 0x7f9e618f9910>
```

```
# specify the "enrich" child function, add extra package requirements
child = fn.add_child_function("enrich", "./nlp.py", "mlrun/mlrun")
child.spec.build.commands = [
    "python -m pip install spacy",
    "python -m spacy download en_core_web_sm",
]
graph.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7f9dd5dbed90>
```

## Test the pipeline locally

Create an input file:

```
%%writefile in.json
["Born and raised in Queens, New York City, Trump attended Fordham University for two
→ years and received a bachelor's degree in economics from the Wharton School of the
→ University of Pennsylvania. He became president of his father Fred Trump's real estate
→ business in 1971, renamed it The Trump Organization, and expanded its operations to
→ building or renovating skyscrapers, hotels, casinos, and golf courses. Trump later
→ started various side ventures, mostly by licensing his name. Trump and his businesses
→ have been involved in more than 4,000 state and federal legal actions, including six
→ bankruptcies. He owned the Miss Universe brand of beauty pageants from 1996 to 2015,
→ and produced and hosted the reality television series The Apprentice from 2004 to 2015.
→ ",
    "Trump's political positions have been described as populist, protectionist,"
```

(continues on next page)

(continued from previous page)

```

↪isolationist, and nationalist. He entered the 2016 presidential race as a Republican.
↪and was elected in a surprise electoral college victory over Democratic nominee.
↪Hillary Clinton while losing the popular vote.[a] He became the oldest first-term U.S.
↪president[b] and the first without prior military or government service. His election.
↪and policies have sparked numerous protests. Trump has made many false or misleading.
↪statements during his campaign and presidency. The statements have been documented by.
↪fact-checkers, and the media have widely described the phenomenon as unprecedented in.
↪American politics. Many of his comments and actions have been characterized as.
↪racially charged or racist."]
```

Overwriting in.json

**Create a mock server (simulator) and test:**

```

# toggle verbosity if needed
fn.verbose = False
```

```

to
# create a mock server (simulator), specify to simulate all the functions in the
↪pipeline ("*")
server = fn.to_mock_server(current_function="*")
```

```

# push a sample request into the pipeline and see the results print out (by the printer
↪step)
resp = server.test(body={"url": "in.json"})
```

```

{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'Queens', 'entity_start_char': 19,
↪'entity_end_char': 25, 'entity_label': 'GPE'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'New York City', 'entity_start_char':
↪27, 'entity_end_char': 40, 'entity_label': 'GPE'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'Trump', 'entity_start_char': 42,
↪'entity_end_char': 47, 'entity_label': 'ORG'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'Fordham University', 'entity_start_
↪char': 57, 'entity_end_char': 75, 'entity_label': 'ORG'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'two years', 'entity_start_char':
↪80, 'entity_end_char': 89, 'entity_label': 'DATE'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'the Wharton School of the
↪University of Pennsylvania', 'entity_start_char': 141, 'entity_end_char': 193, 'entity_
↪label': 'ORG'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'Fred Trump', 'entity_start_char':
↪229, 'entity_end_char': 239, 'entity_label': 'PERSON'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': '1971', 'entity_start_char': 266,
↪'entity_end_char': 270, 'entity_label': 'DATE'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'The Trump Organization', 'entity_
↪start_char': 283, 'entity_end_char': 305, 'entity_label': 'ORG'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'more than 4,000', 'entity_start_
↪char': 529, 'entity_end_char': 544, 'entity_label': 'CARDINAL'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'six', 'entity_start_char': 588,
↪'entity_end_char': 591, 'entity_label': 'CARDINAL'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'Universe', 'entity_start_char':
↪624, 'entity_end_char': 632, 'entity_label': 'PERSON'}
```

(continues on next page)

(continued from previous page)

```
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': '1996 to 2015', 'entity_start_char':
↳ 663, 'entity_end_char': 675, 'entity_label': 'DATE'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': 'The Apprentice', 'entity_start_char':
↳ 731, 'entity_end_char': 745, 'entity_label': 'WORK_OF_ART'}
{'url': 'in.json', 'paragraph_id': 0, 'entity_text': '2004 to 2015', 'entity_start_char':
↳ 751, 'entity_end_char': 763, 'entity_label': 'DATE'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'Trump', 'entity_start_char': 0,
↳ 'entity_end_char': 5, 'entity_label': 'ORG'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': '2016', 'entity_start_char': 122,
↳ 'entity_end_char': 126, 'entity_label': 'DATE'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'Republican', 'entity_start_char': 150,
↳ 'entity_end_char': 160, 'entity_label': 'NORP'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'Democratic', 'entity_start_char': 222,
↳ 'entity_end_char': 232, 'entity_label': 'NORP'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'Hillary Clinton', 'entity_start_
↳ char': 241, 'entity_end_char': 256, 'entity_label': 'PERSON'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'first', 'entity_start_char': 312,
↳ 'entity_end_char': 317, 'entity_label': 'ORDINAL'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'U.S.', 'entity_start_char': 323,
↳ 'entity_end_char': 327, 'entity_label': 'GPE'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'first', 'entity_start_char': 349,
↳ 'entity_end_char': 354, 'entity_label': 'ORDINAL'}
{'url': 'in.json', 'paragraph_id': 1, 'entity_text': 'American', 'entity_start_char': 671,
↳ 'entity_end_char': 679, 'entity_label': 'NORP'}
```

```
server.wait_for_completion()
```

## Deploy to the cluster

```
# add credentials to the data/streams
fn.apply(mlrun.platforms.v3io_cred())
child.apply(mlrun.platforms.v3io_cred())

# specify the error stream (to store exceptions from the functions)
fn.spec.error_stream = err_stream

# deploy as a set of serverless functions
fn.deploy()
```

```
> 2021-05-03 14:33:55,400 [info] deploy child function enrich ...
> 2021-05-03 14:33:55,427 [info] Starting remote function deploy
2021-05-03 14:33:55 (info) Deploying function
2021-05-03 14:33:55 (info) Building
2021-05-03 14:33:55 (info) Staging files and preparing base images
2021-05-03 14:33:55 (info) Building processor image
2021-05-03 14:34:02 (info) Build complete
2021-05-03 14:34:08 (info) Function deploy complete
> 2021-05-03 14:34:09,232 [info] function deployed, address=default-tenant.app.yh30.
↳ iguazio-c0.com:32356
> 2021-05-03 14:34:09,233 [info] deploy root function multi-func ...
```

(continues on next page)

(continued from previous page)

```
> 2021-05-03 14:34:09,234 [info] Starting remote function deploy
2021-05-03 14:34:09 (info) Deploying function
2021-05-03 14:34:09 (info) Building
2021-05-03 14:34:09 (info) Staging files and preparing base images
2021-05-03 14:34:09 (info) Building processor image
2021-05-03 14:34:16 (info) Build complete
2021-05-03 14:34:22 (info) Function deploy complete
> 2021-05-03 14:34:22,891 [info] function deployed, address=default-tenant.app.yh30.
↪ iguazio-c0.com:32046
```

```
'http://default-tenant.app.yh30.iguazio-c0.com:32046'
```

### Listen on the output stream

You can use the SDK or CLI to listen on the output stream. Listening should be done in a separate console/notebook. Run:

```
mlrun watch-stream v3io:///users/admin/out-stream -j
```

or use the SDK:

```
from mlrun.platforms import watch_stream
watch_stream("v3io:///users/admin/out-stream", is_json=True)
```

### Test the live function:

#### Note

The url must be a valid path to the input file.

```
fn.invoke("", body={"url": "v3io:///users/admin/pipe/in.json"})
```

```
{'id': '79354e45-a158-405f-811c-976e9cf4ab5e'}
```

## 10.7.2 Advanced model serving graph - notebook example

This example demonstrates how to use MLRun serving graphs and their advanced functionality including:

- Use of flow, task, model, and ensemble router states
- Build tasks from custom handlers, classes and storey components
- Use custom error handlers
- Test graphs locally
- Deploy the graph as a real-time serverless functions

### In this example

- *Define functions and classes used in the graph*
- *Create a new serving function and graph*
- *Test the function locally*

- *Deploy the graph as a real-time serverless function*

### Define functions and classes used in the graph

```

from cloudpickle import load
from typing import List
from sklearn.datasets import load_iris
import numpy as np

# model serving class example
class ClassifierModel(mlrun.serving.V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model(".pkl")
        self.model = load(open(model_file, "rb"))

    def predict(self, body: dict) -> List:
        """Generate model predictions from sample."""
        feats = np.asarray(body["inputs"])
        result: np.ndarray = self.model.predict(feats)
        return result.tolist()

# echo class, custom class example
class Echo:
    def __init__(self, context, name=None, **kw):
        self.context = context
        self.name = name
        self.kw = kw

    def do(self, x):
        print("Echo:", self.name, x)
        return x

# error echo function, demo catching error and using custom function
def error_catcher(x):
    x.body = {"body": x.body, "origin_state": x.origin_state, "error": x.error}
    print("EchoError:", x)
    return None

# mark the end of the code section, DO NOT REMOVE !
# mlrun: end-code

```

## Create a new serving function and graph

Use `code_to_function` to convert the above code into a serving function object and initialize a graph with async flow topology.

```
function = mlrun.code_to_function(
    "advanced", kind="serving", image="mlrun/mlrun", requirements=["storey"]
)
graph = function.set_topology("flow", engine="async")
# function.verbose = True
```

Specify the sklearn models that are used in the ensemble.

```
models_path = "https://s3.wasabisys.com/iguazio/models/iris/model.pkl"
path1 = models_path
path2 = models_path
```

Build and connect the graph (DAG) using the custom function and classes and plot the result. Add states using the `state.to()` method (adds a new state after the current one), or using the `graph.add_step()` method.

Use the graph `error_handler` if you want an error from the graph or a step to be fed into a specific state (catcher). See the full description in [Error handling](#).

You can specify which state is the responder (returns the HTTP response) using the `state.respond()` method. If you don't specify the responder, the graph is non-blocking.

```
# use built-in storey class or our custom Echo class to create and link Task steps. Add
↳ an error handling step that runs if the graph step fails
graph.to("storey.Extend", name="enrich", _fn={({tag: "something"})}).to(
    class_name="Echo", name="pre-process", some_arg="abc"
).error_handler(name="catcher", handler="handle_error", full_event=True)

# add an Ensemble router with two child models (routes). The "*" prefix mark it is a
↳ router class
router = graph.add_step(
    "*mlrun.serving.VotingEnsemble", name="ensemble", after="pre-process"
)
router.add_route("m1", class_name="ClassifierModel", model_path=path1)
router.add_route("m2", class_name="ClassifierModel", model_path=path2)

# add the final step (after the router) that handles post processing and responds to the
↳ client
graph.add_step(class_name="Echo", name="final", after="ensemble").respond()

# plot the graph (using Graphviz) and run a test
graph.plot(rankdir="LR")
```

```
<graphviz.dot.Digraph at 0x7fe03f6941d0>
```

## Test the function locally

Create a test set.

```
import random

iris = load_iris()
x = random.sample(iris["data"].tolist(), 5)
```

Create a mock server (simulator) and test the graph with the test data.

Note: The model and router objects support a common serving protocol API, see the [protocol and API section](#).

```
server = function.to_mock_server()
resp = server.test("/v2/models/infer", body={"inputs": x})
server.wait_for_completion()
resp
```

```
> 2021-01-09 22:49:26,365 [info] model m1 was loaded
> 2021-01-09 22:49:26,493 [info] model m2 was loaded
> 2021-01-09 22:49:26,494 [info] Loaded ['m1', 'm2']
Echo: pre-process {'inputs': [[6.9, 3.2, 5.7, 2.3], [6.4, 2.7, 5.3, 1.9], [4.9, 3.1, 1.5,
↪ 0.1], [7.3, 2.9, 6.3, 1.8], [5.4, 3.7, 1.5, 0.2]], 'tag': 'something'}
Echo: final {'model_name': 'ensemble', 'outputs': [2, 2, 0, 2, 0], 'id':
↪ '0ebcc5f6f4c24d4d83eb36391eaeafb98'}
```

```
{'model_name': 'ensemble',
 'outputs': [2, 2, 0, 2, 0],
 'id': '0ebcc5f6f4c24d4d83eb36391eaeafb98'}
```

## Deploy the graph as a real-time serverless function

```
function.deploy()
```

```
> 2021-01-09 22:49:40,088 [info] Starting remote function deploy
2021-01-09 22:49:40 (info) Deploying function
2021-01-09 22:49:40 (info) Building
2021-01-09 22:49:40 (info) Staging files and preparing base images
2021-01-09 22:49:40 (info) Building processor image
2021-01-09 22:49:41 (info) Build complete
2021-01-09 22:49:47 (info) Function deploy complete
> 2021-01-09 22:49:48,422 [info] function deployed, address=default-tenant.app.yh55.
↪ iguazio-cd0.com:32222
```

```
'http://default-tenant.app.yh55.iguazio-cd0.com:32222'
```

Invoke the remote function using the test data


```
function.invoke("/v2/models/infer", body={"inputs": x})
```

```
{'model_name': 'ensemble',
'outputs': [1, 2, 0, 0, 0],
'id': '0ebcc5f6f4c24d4d83eb36391eae9b98'}
```

See the [MLRun demos repository](#) for additional use cases and full end-to-end examples, including Fraud Prevention using the Iguazio feature store, a mask detection demo, and converting existing ML code to an MLRun project.

## 10.8 Serving graph high availability configuration

This figure illustrates a simplistic flow of an MLRun serving graph with remote invocation:

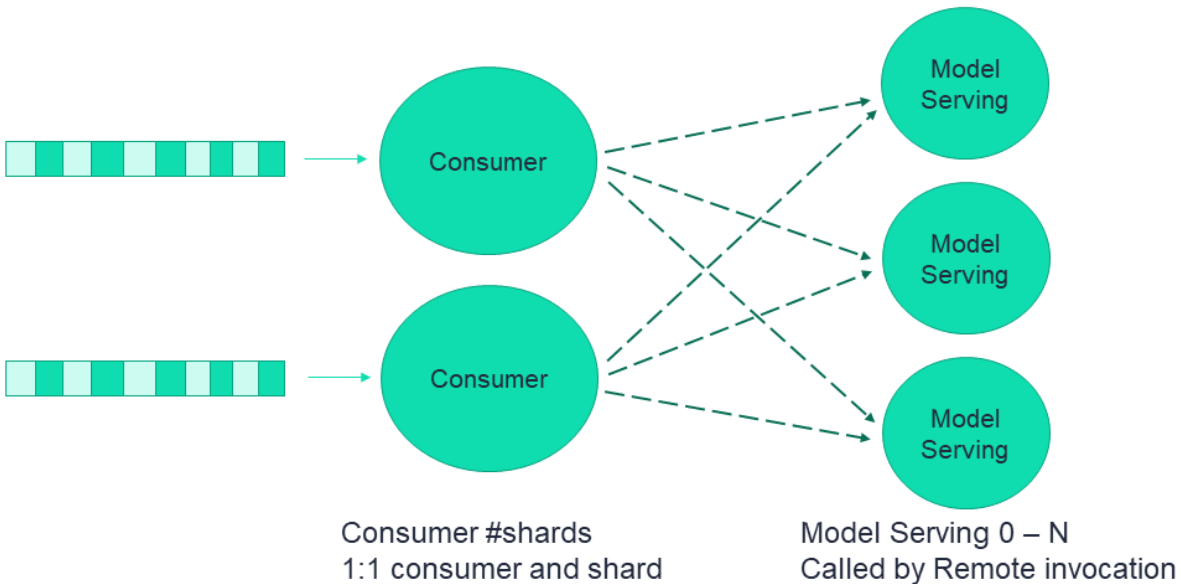

As explained in *Real-time serving pipelines (graphs)*, the serving graph is based on Nuclio functions.

### In this section

- *Using Nuclio with stream triggers*
- *Consumer function configuration*
- *Remote function retry mechanism*
- *Configuration considerations*

### 10.8.1 Using Nuclio with stream triggers

Nuclio can use different trigger types. When used with stream triggers, such as Kafka and V3IO, it uses a consumer group to continue reading from the last processed offset on function restart. This provides the "at least once" semantics for stateless functions. However, if the function does have state, such as persisting a batch of events to storage (e.g. parquet files, database) or if the function performs additional processing of events after the function handler returns, then the flow can get into situations where events seem to be lost. The mechanism of Window ACK provides a solution for such stateful event processing.

### Note

For stateful functions, each worker has its own state. See, for example, [\*MapWithState\(\)\*](#).

With Window ACK, the consumer group's committed offset is delayed by one window, committing the offset at (processed event num – window). When the function restarts (for any reason including scale-up or scale-down), it starts consuming from this last committed point.

The size of the required Window ACK is based on the number of events that could be in processing when the function terminates. You can define a window ACK per trigger (Kafka, V3IO stream, etc.). When used with a serving graph, the appropriate Window ACK size depends on the graph structure and should be calculated accordingly. The following sections explain the relevant considerations.

## 10.8.2 Consumer function configuration

A consumer function is essentially a Nuclio function with a stream trigger. As part of the trigger, you can set a consumer group.

The number of replicas per function depends on the source:

- **StreamSource:** The number of replicas is derived from the number of shards and is therefore nonconfigurable. Furthermore, the number of workers in each replica is set to 1 and also is not configurable.
- **KafkaSource:** For Nuclio earlier than 1.12.10, it is 1 and non-configurable. For 1.12.10 and later, the number of replicas is set with, for example:
  - `function.spec.min_replicas = 2`. Default = 1
  - `function.spec.max_replicas = 3`. Default = 4

and the number of workers is set with:

- `KafkaSource(attributes={"max_workers": 1})`. Default = 1

The consumer function has one buffer per worker, measured in number of messages, holding the incoming events that were received by the worker and are waiting to be processed. Once this buffer is full, events need to be processed so that the function is able to receive more events. The buffer size is configurable and is key to the overall configuration.

The buffer should be as small as possible. There is a trade-off between the buffer size and the latency. A larger buffer has lower latency but increases the recovery time after a failure, due to the high number of records that need to be reprocessed. To set the buffer size:

```
function.spec.parameters["source_args"] = {"buffer_size": 1}
```

The default `buffer_size` is 8 (messages).

## 10.8.3 Remote function retry mechanism

The required processing time of a remote function varies, depending on the function. The system assumes a processing time in the order of seconds, which affects the default configurations. However, some functions require a longer processing time. You can configure the timeout on both the caller and on the remote, as appropriate for your functions.

When an event is sent to the remote function, and no response is received by the configured (or default) timeout, or an error 500 (the remote function failed), or error 502, 503, or 504 (the remote function is too busy to handle the request at this time) is received, the caller retries the request, using the platform's exponential retry backoff mechanism. If the number of caller retries reaches the configured maximum number of retries, the event is pushed to the exception stream, indicating that this event did not complete successfully. You can look at the exception stream to see the functions that did not complete successfully.

## Remote-function caller configuration

In a simplistic flow these are the consumer function defaults:

- **Maximum retries:** The default is 6, which is equivalent to about 3-4 minutes if all of the related parameters are at their default values. If you expect that some cases will require a higher number, for example, a new node needs to be scaled up depending on your cloud vendor, the instance type, and the zone you are running in, you might want to increase the number of retries.
- **Remote step http timeout:** The time interval the caller waits for a response from the remote before retrying the request. This value is affected by the remote function processing time.
- **Max in flight:** The maximum number of requests that each caller worker can send in parallel to the remote function. If the caller has more than one worker, each worker has its own Max in flight.

To set Max in flight, timeout, and retries:

```
RemoteStep(name="remote_scale", ..., max_in_flight=2, timeout=100, retries=10)
```

## Remote-function configuration

For the remote function, you can configure the following:


- **Worker timeout:** The maximum time interval, in seconds, an incoming request waits for an available worker. The worker timeout must be shorter than the gateway timeout. The default is 10.
- **Gateway timeout:** The maximum time interval, in seconds, the gateway waits for a response to a request. This determines when the ingress times out on a request. It must be slightly longer than the expected function processing time. The default is 60.

To set the buffer gateway timeout and worker timeout:

```
my_serving_func.with_http(gateway_timeout=125, worker_timeout=60)
```

### 10.8.4 Configuration considerations

The following figure zooms in on a single consumer and its workers and illustrates the various concepts and parameters that provide high availability, using a non-default configuration.

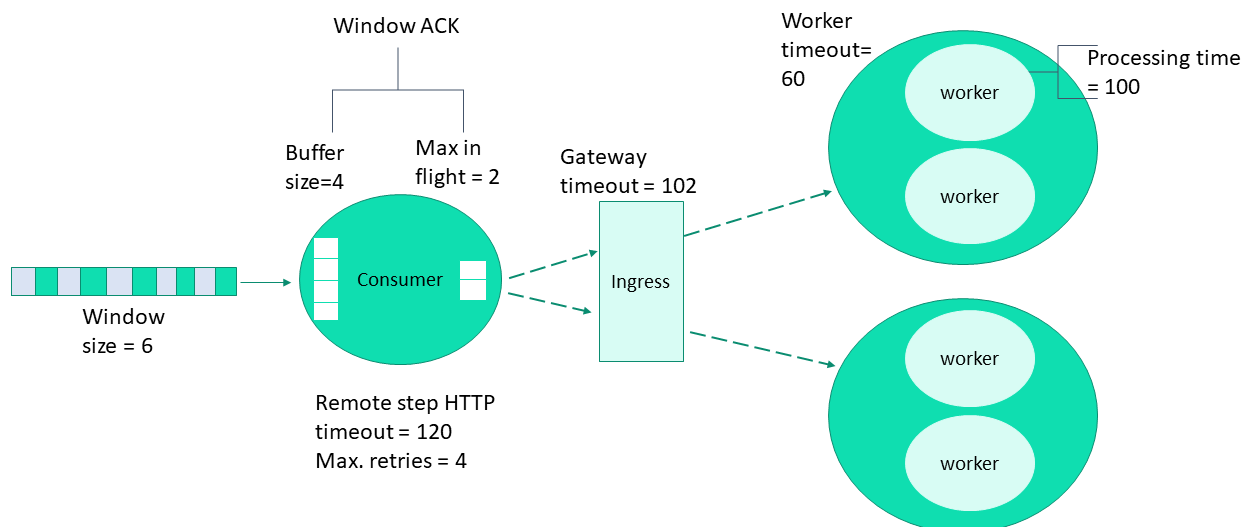

- Assume the processing time of the remote function is  $P_t$ , in seconds.
- `timeout`: Between  $\langle P_t + \text{epsilon} \rangle$  and  $\langle P_t + \text{worker\_timeout} \rangle$ .
- Serving function
  - `gateway_timeout`:  $P_t + 1$  second (usually sufficient).
  - `worker_timeout`: The general rule is the greater of  $P_t/10$  or 60 seconds. However, you should adjust the value according to your needs.
- `max_in_flight`: If the processing time is very high then `max_in_flight` should be low. Otherwise, there will be many retries.
- `ack_window_size`:
  - With 1 worker: The consumer `buffer_size + max_in_flight`, since it is per each shard and there is a single worker.
  - With  $>1$  worker: The consumer  $(\# \text{workers} \times \text{buffer\_size}) + \text{max\_in\_flight}$

Make sure you thoroughly understand your serving graph and its functions before defining the `ack_window_size`. Its value depends on the entire graph flow. You need to understand which steps are parallel (branching) vs. sequential invocation. Another key aspect is that the number of workers affects the window size.

See the [add\\_v3io\\_stream\\_trigger](#).

For example:

- If a graph includes: consumer  $\rightarrow$  remote r1  $\rightarrow$  remote r2:
  - The window should be the sum of: consumer's `buffer_size + max_in_flight` to r1 + `max_in_flight` to r2.
- If a graph includes: calling to remote r1 and r2 in parallel:
  - The window should be set to: consumer's `buffer_size + max (max_in_flight to r1, max_in_flight to r2)`.

## 10.9 Error handling

Graph steps might raise an exception. You can define exception handling (an error handling flow) that is triggered on error. The exception can be on a:

- `step`: The error handler is appended to the step that, if it fails, triggers the error handling. If you want the graph to continue after an error handler execution, specify the next step in the `before` parameter. If you want the graph to complete after an error handler execution, omit the `before` parameter.
- `graph`: When set on the graph object, the graph completes after the error handler execution.

Example of an exception on a step that only runs when/if the "pre-process" step fails:

```
graph = function.set_topology('flow', engine='async')
graph.to(name='pre-process', handler='raising_step').error_handler(name='catcher',
↪ handler='handle_error', full_event=True, before='echo')

# Add another step after pre-process step or the error handling
graph.add_step(name="echo", handler='echo', after="pre-process").respond()
graph
```

Example of an exception on a graph:

```
graph = function.set_topology('flow', engine='async')
graph.error_handler(name='error_catcher', handler='handle_error', full_event=True,
↳ before='echo')
graph.to(name='raise', handler='raising_step').to(name="echo", handler='echo', after=
↳ "raise").respond()
```

See full parameter description in [error\\_handler](#).

### 10.9.1 Exception stream

The graph errors/exceptions can be pushed into a special error stream. This is very convenient in the case of distributed and production graphs.

To set the exception stream address (using v3io streams uri):

```
fn_preprocess2.spec.error_stream = err_stream
```

## MODEL MONITORING

By definition, ML models in production make inferences on constantly changing data. Even models that have been trained on massive data sets, with the most meticulously labelled data, start to degrade over time, due to concept drift. Changes in the live environment due to changing behavioral patterns, seasonal shifts, new regulatory environments, market volatility, etc., can have a big impact on a trained model's ability to make accurate predictions.

Model performance monitoring is a basic operational task that is implemented after an AI model has been deployed. Model monitoring includes:

- **Built-in model monitoring:** Machine learning model monitoring is natively built in to the Iguazio MLOps Platform, along with a wide range of model management features and ML monitoring reports. It monitors all of your models in a single, simple, dashboard.
- **Automated drift detection:** Automatically detects concept drift, anomalies, data skew, and model drift in real-time. Even if you are running hundreds of models simultaneously, you can be sure to spot and remediate the one that has drifted.
- **Automated retraining:** When drift is detected, Iguazio automatically starts the entire training pipeline to retrain the model, including all relevant steps in the pipeline. The output is a production-ready challenger model, ready to be deployed. This keeps your models up to date, automatically.
- **Native feature store integration:** Feature vectors and labels are stored and analyzed in the Iguazio feature store and are easily compared to the trained features and labels running as part of the model development phase, making it easier for data science teams to collaborate and maintain consistency between AI projects.

See full details and examples in [Model monitoring](#).



## INGEST AND PROCESS DATA

MLRun provides a set of tools and capabilities to streamline the task of data ingestion and processing. For an end-to-end framework for data processing, management, and serving, MLRun has the feature-store capabilities, which are described in [Feature store](#). However, in many cases the full feature-store capabilities are not needed, in which cases MLRun provides a set of utilities to facilitate data ingestion, collection and processing.

**In this section**

### 12.1 Using data sources and items

**In this section**

- *Connecting to data sources*
- *Data processing*

#### 12.1.1 Connecting to data sources

Accessing data from multiple source types is possible through MLRun's `DataItem` object. This object plugs into the data-stores framework to connect to various types of data sources and download content. For example, to download data which is stored on S3 and load it into a `DataFrame`, use the following code:

```
# Access object in AWS S3, in the "input-data" bucket
import mlrun

# Access credentials
os.environ["AWS_ACCESS_KEY_ID"] = "<access key ID>"
os.environ["AWS_SECRET_ACCESS_KEY"] = "<access key>"

source_url = "s3://input-data/input_data.csv"

input_data = mlrun.get_dataitem(source_url).as_df()
```

This code runs locally (for example, in Jupyter) and relies on environment variables to supply credentials for data access. See [Data stores](#) for more info on the available data-stores, accessing them locally and remotely, and how to provide credentials for connecting.

Running the code locally is very useful for easy debugging and development of the code. When the code moves to a stable status, it is usually recommended to run it "remotely" on a pod running in the Kubernetes cluster. This allows setting up specific resources to the processing pod (such as memory, CPU and execution priority).

MLRun provides facilities to create `DataItem` objects as inputs to running code. For example, this is a basic data ingestion function:

```
def ingest_data(context, source_url: mlrun.DataItem):
    # Load the data from its source, and convert to a DataFrame
    df = source_url.as_df()

    # Perform data cleaning and processing
    # ...

    # Save the processed data to the artifact store
    context.log_dataset('cleaned_data', df=df, format='csv')
```

This code can be placed in a python file, or as a cell in the Python notebook. For example, if the code above was saved to a file, the following code creates an MLRun function from it and executes it remotely in a pod:

```
# create a function from py or notebook (ipynb) file, specify the default function_
↪ handler
ingest_func = mlrun.code_to_function(name='ingest_data', filename='./ingest_data.py',
                                   kind='job', image='mlrun/mlrun')

source_url = "s3://input-data/input_data.csv"

ingest_data_run = ingest_func.run(name='ingest_data',
                                handler=ingest_data,
                                inputs={'source_url': source_url},
                                local=False)
```

As the `source_url` is part of the function's inputs, MLRun automatically wraps it up with a `DataItem`. The output is logged to the function's `artifact_path`, and can be obtained from the run result:

```
cleaned_data_frame = ingest_data_run.artifact('cleaned_data').as_df()
```

Note that running the function remotely may require attaching storage to the function, as well as passing storage credentials through project secrets. See the following pages for more details:

1. [Attach storage to functions](#)
2. [Working with secrets](#)

### 12.1.2 Data processing

Once the data is imported from its source, it can be processed using any framework. MLRun natively supports working with Pandas DataFrames and converting from and to its `DataItem` object.

For distributed processing of very large datasets, MLRun integrates with the Spark processing engine, and provides facilities for executing pySpark code using a Spark service (which can be deployed by the platform when running MLRun as part of an Iguazio system) or through submitting the processing task to Spark-operator. The following page provides additional details and code-samples:

- [Spark operator](#)

In a similar manner, Dask can be used for parallel processing of the data. To read data as a Dask DataFrame, use the following code:

```
import dask.dataframe as dd

data_item = mlrun.get_dataitem(source_url)
dask_df: dd.DataFrame = data_item.as_df(df_module=dd)
```

## 12.2 Logging datasets

Storing datasets is important in order to have a record of the data that was used to train models, as well as storing any processed data. MLRun comes with built-in support for the DataFrame format. MLRun not only stores the DataFrame, but it also provides information about the data, such as statistics.

The simplest way to store a dataset is with the following code:

```
context.log_dataset(key='my_data', df=df)
```

Where `key` is the name of the artifact and `df` is the DataFrame. By default, MLRun stores a short preview of 20 lines. You can change the number of lines by changing the value of the `preview` parameter.

MLRun also calculates statistics on the DataFrame on all numeric fields. You can enable statistics regardless to the DataFrame size by setting the `stats` parameter to `True`.

### 12.2.1 Logging a dataset from a job

The following example shows how to work with datasets from a job:

```
from os import path
from mlrun.execution import MLClientCtx
from mlrun.datastore import DataItem

# Ingest a data set into the platform
def get_data(context: MLClientCtx, source_url: DataItem, format: str = 'csv'):

    iris_dataset = source_url.as_df()

    target_path = path.join(context.artifact_path, 'data')
    # Optionally print data to your logger
    context.logger.info('Saving Iris data set to {} ...'.format(target_path))

    # Store the data set in your artifacts database
    context.log_dataset('iris_dataset', df=iris_dataset, format=format,
                       index=False, artifact_path=target_path)
```

This code can be placed in a python file, or as a cell in the Python notebook. You can run this function locally or as a job. For example, to run it locally:

```
from os import path
from mlrun import new_project, mlconf

project_name = 'my-project'
project_path = path.abspath('conf')
project = new_project(project_name, project_path, init_git=True)
```

(continues on next page)

(continued from previous page)

```

# Target location for storing pipeline artifacts
artifact_path = path.abspath('jobs')
# MLRun DB path or API service URL
mlconf.dbpath = mlconf.dbpath or 'http://mlrun-api:8080'

source_url = 'https://s3.wasabisys.com/iguazio/data/iris/iris_dataset.csv'

# Create a function from py or notebook (ipynb) file
get_data_func = project.set_function('./get_data.py'
    name='get_data'
    kind='job',
    image='mlrun/mlrun')

# Run get-data function locally
get_data_run = get_data_func.run(handler="get_data",
    inputs={'source_url': source_url},
    artifact_path=artifact_path,
    local=True)

```

The dataset location is returned in the outputs field, therefore you can get the location by calling `get_data_run.artifact('iris_dataset')` to get the dataset itself.

```

# Read your data set
get_data_run.artifact('iris_dataset').as_df()

# Visualize an artifact in Jupyter (image, html, df, ..)
get_data_run.artifact('confusion-matrix').show()

```

The dataset returned from the run result is of the `DataItem` type. It allows access to the data itself as a Pandas Dataframe by calling the `dataset.as_df()`. It also contains the metadata of the artifact, accessed by the using `dataset.meta`. This artifact metadata object contains in it the statistics calculated, the schema of the dataset and other fields describing the dataset. For example, call `dataset.meta.stats` to obtain the data statistics.

## 12.3 Ingest data using the feature store

Define the source and material targets, and start the ingestion process (as *local process*, using an *MLRun job*, *real-time ingestion*, or *incremental ingestion*).

Data can be ingested as a batch process either by running the ingest command on demand or as a scheduled job. Batch ingestion can be done locally (i.e. running as a python process in the Jupyter pod) or as an MLRun job.

The data source can be a DataFrame or files (e.g. csv, parquet). Files can be either local files residing on a volume (e.g. v3io), or remote (e.g. S3, Azure blob). MLRun also supports Google BigQuery as a data source. If you define a transformation graph, then the ingestion process runs the graph transformations, infers metadata and stats, and writes the results to a target data store.

When targets are not specified, data is stored in the configured default targets (i.e. NoSQL for real-time and Parquet for offline).

### 12.3.1 Ingestion engines

MLRun supports a several ingestion engines:

- **storey** engine (default) is designed for real-time data (e.g. individual records) that will be transformed using Python functions and classes
- **pandas** engine is designed for batch data that can fit into memory that will be transformed using Pandas dataframes. Pandas is used for testing, and is not recommended for production deployments
- **spark** engine is designed for batch data.

---

#### Limitations

- Do not name columns starting with either `_` or `aggr_`. They are reserved for internal use. See also general limitations in [Attribute name restrictions](#).
  - Do not name columns to match the regex pattern `.*[a-z]+_[0-9]+[smhd]$,` where `[a-z]+` is an aggregation name, one of: `count`, `sum`, `sqr`, `max`, `min`, `first`, `last`, `avg`, `stdvar`, `stddev`. E.g. `x_count_1h`.
  - When using the pandas engine, do not use spaces ( ) or periods (.) in the column names. These cause errors in the ingestion.
- 

#### In this section

- *Verify a feature set with a small dataset by inferring data*
- *Ingest data locally*
- *Ingest data using an MLRun job*
- *Real-time ingestion*
- *Incremental ingestion*

#### See also:

- *Feature sets*
- *Sources and targets*

### 12.3.2 Verify a feature set with a small dataset by inferring data

Ingesting an entire dataset can take a fair amount of time. Before ingesting the entire dataset, you can check the feature set definition by simulating the creation of the feature set. This gives a preview of the results (in the returned dataframe). The simulation method is called `infer`. It infers the source data schema, and processes the graph logic (assuming there is one) on a small subset of data. The `infer` operation also learns the feature set schema and, by default, does statistical analysis on the result.

```
df = fstore.preview(quotes_set, quotes)

# print the feature statistics
print(quotes_set.get_stats_table())
```

## Inferring data

There are two ways to infer data:

- Metadata/schema: This is responsible for describing the dataset and generating its meta-data, such as deducing the data-types of the features and listing the entities that are involved. Options belonging to this type are Entities, Features and Index. The InferOptions class has the InferOptions.schema() function that returns a value containing all the options of this type.
- Stats/preview: This relates to calculating statistics and generating a preview of the actual data in the dataset. Options of this type are Stats, Histogram and Preview.

The InferOptions class has the following values: class InferOptions: Null = 0 Entities = 1 Features = 2 Index = 4 Stats = 8 Histogram = 16 Preview = 32

The InferOptions class basically translates to a value that can be a combination of the above values. For example, passing a value of 24 means Stats + Histogram.

When simultaneously ingesting data and requesting infer options, part of the data might be ingested twice: once for inferring metadata/stats and once for the actual ingest. This is normal behavior.

### 12.3.3 Ingest data locally

Use a feature set to create the basic feature-set definition and then an ingest method to run a simple ingestion "locally" in the Jupyter Notebook pod.

```
# Simple feature set that reads a csv file as a dataframe and ingests it "as is"
stocks_set = FeatureSet("stocks", entities=[Entity("ticker")])
stocks = pd.read_csv("stocks.csv")
df = ingest(stocks_set, stocks)

# Specify a csv file as source, specify a custom CSV target
source = CSVSource("mycsv", path="stocks.csv")
targets = [CSVTarget("mycsv", path="./new_stocks.csv")]
ingest(measurements, source, targets)
```

You can **update a feature set** either by overwriting its data (overwrite=true), or by appending data (overwrite=false). To append data you need to reuse the feature set that was used in previous ingestions that was saved in the DB (and not create a new feature set on every ingest). For example:

```
my_fset = fstore.get_feature_set("my_fset")
except mlrun.errors.MLRunNotFoundError:
    my_fset = FeatureSet("my_fset", entities=[Entity("key")])

my_fset.ingest(overwrite=false)
```

To learn more about ingest, go to [ingest](#).

### 12.3.4 Ingest data using an MLRun job

Use the ingest method with the `run_config` parameter for running the ingestion process using a serverless MLRun job. By doing that, the ingestion process runs on its own pod or service on the kubernetes cluster. This option is more robust since it can leverage the cluster resources, as opposed to running within the Jupyter Notebook. It also enables you to schedule the job or use bigger/faster resources.

```
# Running as a remote job
stocks_set = FeatureSet("stocks", entities=[Entity("ticker")])
config = RunConfig(image='mlrun/mlrun')
df = ingest(stocks_set, stocks, run_config=config)
```

### 12.3.5 Real-time ingestion

Real-time use cases (e.g. real-time fraud detection) require feature engineering on live data (e.g. z-score calculation) while the data is coming from a streaming engine (e.g. kafka) or a live http endpoint. The feature store enables you to start real-time ingestion service. When running the `deploy_ingestion_service` the feature store creates an elastic real-time serverless function (the nuclio function) that runs the pipeline and stores the data results in the "offline" and "online" feature store by default. There are multiple data source options including http, kafka, kinesis, v3io stream, etc. Due to the asynchronous nature of feature store's execution engine, errors are not returned, but rather logged and pushed to the defined error stream.

```
# Create a real time function that receives http requests
# the "ingest" function runs the feature engineering logic on live events
source = HTTPSource()
func = mlrun.code_to_function("ingest", kind="serving").apply(mount_v3io())
config = RunConfig(function=func)
my_set.deploy_ingestion_service(source, run_config=config)
```

To learn more about `deploy_ingestion_service` go to [deploy\\_ingestion\\_service](#).

### 12.3.6 Incremental ingestion

You can schedule an ingestion job for a feature set on an ongoing basis. The first scheduled job runs on all the data in the source and the subsequent jobs ingest only the deltas since the previous run (from the last timestamp of the previous run until `datetime.now`). Example:

```
cron_trigger = "* */1 * * *" # will run every hour
fs = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")])
fs.ingest(
    source=ParquetSource("mypq", path="stocks.parquet", time_field="time", schedule=cron_
    ↪ trigger),
    run_config=fstore.RunConfig(image='mlrun/mlrun')
)
```

The default value for the `overwrite` parameter in the `ingest` function for scheduled ingest is `False`, meaning that the target from the previous ingest is not deleted. For the storey and pandas ingestion engines, the feature is currently implemented for `ParquetSource` only (`CsvSource` will be supported in a future release). For Spark engine both `ParquetSource` and `CsvSource` are supported.

## 12.4 Ingest features with Spark

The feature store supports using Spark for ingesting, transforming, and writing results to data targets. When using Spark, the internal execution graph is executed synchronously by utilizing a Spark session to perform read and write operations, as well as potential transformations on the data. Executing synchronously means that the source data is fully read into a data-frame that is processed, writing the output to the targets defined.

To use Spark as the transformation engine in ingestion, follow these steps:

When constructing the `FeatureSet` object, pass an engine parameter and set it to `spark`. For example:

```
feature_set = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")], engine=
    ↪ "spark")
```

To use a remote execution engine, pass a `RunConfig` object as the `run_config` parameter for the `ingest` API. The actual remote function to execute depends on the object passed:

- A default `RunConfig`, in which case the ingestion code either generates a new MLRun function runtime of type `remote-spark`, or utilizes the function specified in `feature_set.spec.function` (in which case, it has to be of runtime type `remote-spark` or `spark`).
- A `RunConfig` that has a function configured within it. As mentioned, the function runtime must be of type `remote-spark` or `spark`.

Spark execution can be done locally, utilizing a local Spark session provided to the ingestion call. To use a local Spark session, pass a Spark session context when calling the `ingest()` function, as the `spark_context` parameter. This session is used for data operations and transformations.

See code examples in:

- *Local Spark ingestion example*
- *Remote Spark ingestion example*
- *Spark operator ingestion example*
- *Spark dataframe ingestion example*
- *Spark over S3 full flow example*
- *Spark ingestion from Snowflake example*
- *Spark ingestion from Azure example*

### 12.4.1 Local Spark ingestion example

A local Spark session is a session running in the Jupyter service. The following code executes data ingestion using a local Spark session.

When using a local Spark session, the `ingest` API would wait for its completion.

```
import mlrun
from mlrun.datastore.sources import CSVSource
import mlrun.feature_store as fstore
from pyspark.sql import SparkSession

mlrun.get_or_create_project(name="stocks")
feature_set = fstore.FeatureSet("stocks", entities=[fstore.Entity("ticker")], engine=
    ↪ "spark")
```

(continues on next page)

(continued from previous page)

```
# add_aggregation can be used in conjunction with Spark
feature_set.add_aggregation("price", ["min", "max"], ["1h"], "10m")

source = CSVSource("mycsv", path="v3io:///projects/stocks.csv")

# Execution using a local Spark session
spark = SparkSession.builder.appName("Spark function").getOrCreate()
feature_set.ingest(source, spark_context=spark)
```

## 12.4.2 Remote Spark ingestion example

Remote Spark refers to a session running from another service, for example, the Spark standalone service or the Spark operator service. When using remote execution the MLRun run execution details are returned, allowing tracking of its status and results.

The following code should be executed only once to build the remote spark image before running the first ingest. It may take a few minutes to prepare the image.

```
from mlrun.runtimes import RemoteSparkRuntime
RemoteSparkRuntime.deploy_default_image()
```

Remote ingestion:

```
# mlrun: start-code
```

```
from mlrun.feature_store.api import ingest
def ingest_handler(context):
    ingest(mlrun_context=context) # The handler function must call ingest with the mlrun_
    ↪ context
```

You can run your PySpark code for ingesting data into the feature store by adding:

```
def my_spark_func(df, context=None):
    return df.filter("bid>55") # PySpark code
```

```
# mlrun: end-code
```

```
from mlrun.datastore.sources import CSVSource
from mlrun import code_to_function
import mlrun.feature_store as fstore

feature_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")], ↪
    ↪ engine="spark")

source = CSVSource("mycsv", path="v3io:///projects/quotes.csv")

spark_service_name = "iguazio-spark-service" # As configured & shown in the Iguazio ↪
    ↪ dashboard

feature_set.graph.to(name="s1", handler="my_spark_func")
```

(continues on next page)

(continued from previous page)

```
my_func = code_to_function("func", kind="remote-spark")
config = fstore.RunConfig(local=False, function=my_func, handler="ingest_handler")
feature_set.ingest(source, run_config=config, spark_context=spark_service_name)
```

### 12.4.3 Spark operator ingestion example

When running with a Spark operator, the MLRun execution details are returned, allowing tracking of the job's status and results. Spark operator ingestion is always executed remotely.

The following code should be executed only once to build the spark job image before running the first ingest. It may take a few minutes to prepare the image.

```
from mlrun.runtimes import Spark3Runtime
Spark3Runtime.deploy_default_image()
```

Spark operator ingestion:

```
# mlrun: start-code

from mlrun.feature_store.api import ingest

def ingest_handler(context):
    ingest(mlrun_context=context) # The handler function must call ingest with the mlrun_
    ↪ context

# You can add your own PySpark code as a graph step:
def my_spark_func(df, context=None):
    return df.filter("bid>55") # PySpark code

# mlrun: end-code
```

```
from mlrun.datastore.sources import CSVSource
from mlrun import code_to_function
import mlrun.feature_store as fstore

feature_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")],
    ↪ engine="spark")

source = CSVSource("mycsv", path="v3io:///projects/quotes.csv")

feature_set.graph.to(name="s1", handler="my_spark_func")

my_func = code_to_function("func", kind="spark")

my_func.with_driver_requests(cpu="200m", mem="1G")
my_func.with_executor_requests(cpu="200m", mem="1G")
my_func.with_igz_spark()

# Enables using the default image (can be replace with specifying a specific image with .
    ↪ spec.image)
my_func.spec.use_default_image = True
```

(continues on next page)

(continued from previous page)

```
# Not a must - default: 1
my_func.spec.replicas = 2

# If needed, sparkConf can be modified like this:
# my_func.spec.spark_conf['spark.specific.config.key'] = 'value'

config = fstore.RunConfig(local=False, function=my_func, handler="ingest_handler")
feature_set.ingest(source, run_config=config)
```

### 12.4.4 Spark dataframe ingestion example

The following code executes local data ingestion from a spark dataframe (Spark dataframe Ingestion cannot be executed remotely.) The specified dataframe should be associated with `spark_context`.

```
from pyspark.sql import SparkSession
import mlrun.feature_store as fstore

columns = ["id", "count"]
data = [("a", "12"), ("b", "14"), ("c", "88")]

spark = SparkSession.builder.appName('example').getOrCreate()
df = spark.createDataFrame(data).toDF(*columns)

fset = fstore.FeatureSet("myset", entities=[fstore.Entity("id")], engine="spark")

fset.ingest(df, spark_context=spark)

spark.stop()
```

### 12.4.5 Spark over S3 - full flow example

For Spark to work with S3, it requires several properties to be set. Spark over S3 can be executed both remotely and locally, as long as access credentials to the S3 objects are available to it. The following example writes a feature set to S3 in the parquet format in a remote k8s job:

One-time setup:

1. Deploy the default image for your job (this takes several minutes but should be executed only once per cluster for any MLRun/Iguazio upgrade):

```
from mlrun.runtimes import RemoteSparkRuntime
RemoteSparkRuntime.deploy_default_image()
```

2. Store your S3 credentials in a k8s `secret`:

```
import mlrun
secrets = {'s3_access_key': AWS_ACCESS_KEY, 's3_secret_key': AWS_SECRET_KEY}
mlrun.get_run_db().create_project_secrets(
    project = "uhuh-proj",
    provider=mlrun.common.schemas.SecretProviderName.kubernetes,
```

(continues on next page)

(continued from previous page)

```

    secrets=secrets
)

```

Ingestion job code (to be executed in the remote pod):

```

# mlrun: start-code

from pyspark import SparkConf
from pyspark.sql import SparkSession

from mlrun.feature_store.api import ingest
def ingest_handler(context):
    conf = (SparkConf()
            .set("spark.hadoop.fs.s3a.path.style.access", True)
            .set("spark.hadoop.fs.s3a.access.key", context.get_secret('s3_access_key'))
            .set("spark.hadoop.fs.s3a.secret.key", context.get_secret('s3_secret_key'))
            .set("spark.hadoop.fs.s3a.endpoint", context.get_param("s3_endpoint"))
            .set("spark.hadoop.fs.s3a.region", context.get_param("s3_region"))
            .set("spark.hadoop.fs.s3a.impl", "org.apache.hadoop.fs.s3a.S3AFileSystem")
            .set("com.amazonaws.services.s3.enableV4", True)
            .set("spark.driver.extraJavaOptions", "-Dcom.amazonaws.services.s3.
↳enableV4=true"))
    spark = (
        SparkSession.builder.config(conf=conf).appName("S3 app").getOrCreate()
    )

    ingest(mlrun_context=context, spark_context=spark)

# mlrun: end-code

```

Ingestion invocation:

```

from mlrun.datastore.sources import CSVSource
from mlrun.datastore.targets import ParquetTarget
from mlrun import code_to_function
import mlrun.feature_store as fstore

feature_set = fstore.FeatureSet("stock-quotes", entities=[fstore.Entity("ticker")],
↳engine="spark")

source = CSVSource("mycsv", path="v3io:///projects/quotes.csv")

spark_service_name = "spark" # As configured & shown in the Iguazio dashboard

fn = code_to_function(kind='remote-spark', name='func')

run_config = fstore.RunConfig(local=False, function=fn, handler="ingest_handler")
run_config.with_secret('kubernetes', ['s3_access_key', 's3_secret_key'])
run_config.parameters = {
    "s3_endpoint" : "s3.us-east-2.amazonaws.com",
    "s3_region" : "us-east-2"
}

```

(continues on next page)

(continued from previous page)

```

}

target = ParquetTarget(
    path = "s3://my-s3-bucket/some/path",
    partitioned = False,
)

feature_set.ingest(source, targets=[target], run_config=run_config, spark_context=spark_
↪service_name)

```

### 12.4.6 Spark ingestion from Snowflake example

Spark ingestion from Snowflake can be executed both remotely and locally.

When running aggregations, they actually run on Spark and require Spark compute resources. The queries from the database are "regular" snowflake queries and they use Snowflake compute resources.

---

#### Note

Entity is case sensitive.

---

The following code executes local data ingestion from Snowflake.

```

from pyspark.sql import SparkSession

import mlrun
import mlrun.feature_store as fstore
from mlrun.datastore.sources import SnowflakeSource

spark = SparkSession.builder.appName("snowy").getOrCreate()

mlrun.get_or_create_project("feature_store")
feature_set = fstore.FeatureSet(
    name="customer", entities=[fstore.Entity("C_CUSTKEY")], engine="spark"
)

source = SnowflakeSource(
    "customer_sf",
    query="select * from customer limit 1000000",
    url="<url>",
    user="<user>",
    password="<password>",
    database="SNOWFLAKE_SAMPLE_DATA",
    schema="TPCH_SF1",
    warehouse="compute_wh",
)

feature_set.ingest(source, spark_context=spark)

```

## 12.4.7 Spark ingestion from Azure example

Spark ingestion from Azure can be executed both remotely and locally. The following code executes remote data ingestion from Azure.

```
import mlrun

# Initialize the MLRun project object
project_name = "spark-azure-test"
project = mlrun.get_or_create_project(project_name, context=".")

from mlrun.runtimes import RemoteSparkRuntime
RemoteSparkRuntime.deploy_default_image()

from mlrun.datastore.sources import CSVSource
from mlrun.datastore.targets import ParquetTarget
from mlrun import code_to_function
import mlrun.feature_store as fstore

feature_set = fstore.FeatureSet("rides7", entities=[fstore.Entity("ride_id")], engine=
    ↪ "spark", timestamp_key="key")

source = CSVSource("rides", path="wasbs://warroom@mlrunwarroom.blob.core.windows.net/ny_
    ↪ taxi_train_subset_ride_id.csv")

spark_service_name = "spark-fs" # As configured & shown in the Iguazio dashboard

fn = code_to_function(kind='remote-spark', name='func')

run_config = fstore.RunConfig(local=False, function=fn, handler="ingest_handler")

target = ParquetTarget(partitioned = True, time_partitioning_granularity="month")

feature_set.set_targets(targets=[target], with_defaults=False)

feature_set.ingest(source, run_config=run_config, spark_context=spark_service_name)
```

See also *CI/CD automation with Git*.

## DEVELOP AND TRAIN MODELS

In this section

### 13.1 Model training and tracking

In this section

#### 13.1.1 Create a basic training job

In this section, you create a simple job to train a model and log metrics, logs, and plots using MLRun's auto-logging:

- *Define the training code*
- *Create the job*
- *Run the job*
- *View job results*

#### Define the training code

The code you run is as follows. Notice, there is only a single line from MLRun to add all the MLOps capabilities:

```
%%writefile trainer.py

from sklearn import ensemble
from sklearn.model_selection import train_test_split

import mlrun
from mlrun.frameworks.sklearn import apply_mlrun

def train(
    dataset: mlrun.DataItem, # data inputs are of type DataItem (abstract the data_
    ↪source)
    label_column: str = "label",
    n_estimators: int = 100,
    learning_rate: float = 0.1,
    max_depth: int = 3,
    model_name: str = "cancer_classifier",
```

(continues on next page)

(continued from previous page)

```

):
    # Get the input dataframe (Use DataItem.as_df() to access any data source)
    df = dataset.as_df()

    # Initialize the x & y data
    X = df.drop(label_column, axis=1)
    y = df[label_column]

    # Train/Test split the dataset
    X_train, X_test, y_train, y_test = train_test_split(
        X, y, test_size=0.2, random_state=42
    )

    # Pick an ideal ML model
    model = ensemble.GradientBoostingClassifier(
        n_estimators=n_estimators, learning_rate=learning_rate, max_depth=max_depth
    )

    # ----- The only line you need to add for MLOps -----
    ↪ ---
    # Wraps the model with MLOps (test set is provided for analysis & accuracy
    ↪ measurements)
    apply_mlrun(model=model, model_name=model_name, x_test=X_test, y_test=y_test)
    # -----
    ↪ ---

    # Train the model
    model.fit(X_train, y_train)

```

Writing trainer.py

## Create the job

Next, use `code_to_function` to package up the Job to get ready to execute on the cluster:

```

import mlrun

training_job = mlrun.code_to_function(
    name="basic-training",
    filename="trainer.py",
    kind="job",
    image="mlrun/mlrun",
    handler="train",
)

```

## Run the job

Finally, run the job. The dataset is from S3, but usually it is the output from a previous step in a pipeline.

```
run = training_job.run(
    inputs={
        "dataset": "https://igz-demo-datasets.s3.us-east-2.amazonaws.com/cancer-dataset.
↪ csv"
    },
    params={"n_estimators": 100, "learning_rate": 1e-1, "max_depth": 3},
)
```

```
> 2022-07-22 22:27:15,162 [info] starting run basic-training-train_
↪ uid=bc1c6ad491c340e1a3b9b91bb520454f DB=http://mlrun-api:8080
> 2022-07-22 22:27:15,349 [info] Job is running in the background, pod: basic-training-
↪ train-kkntj
> 2022-07-22 22:27:20,927 [info] run executed, status=completed
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2022-07-22 22:27:21,640 [info] run executed, status=completed
```

## View job results

Once the job is complete, you can view the output metrics and visualize the artifacts.

```
run.outputs
```

```
{'accuracy': 0.956140350877193,
 'f1_score': 0.965034965034965,
 'precision_score': 0.9583333333333334,
 'recall_score': 0.971830985915493,
 'feature-importance': 'v3io:///projects/default/artifacts/feature-importance.html',
 'test_set': 'store://artifacts/default/basic-training-train_test_
↪ set=bc1c6ad491c340e1a3b9b91bb520454f',
 'confusion-matrix': 'v3io:///projects/default/artifacts/confusion-matrix.html',
 'roc-curves': 'v3io:///projects/default/artifacts/roc-curves.html',
 'calibration-curve': 'v3io:///projects/default/artifacts/calibration-curve.html',
 'model': 'store://artifacts/default/cancer_classifier:bc1c6ad491c340e1a3b9b91bb520454f'}
```

```
run.artifact("confusion-matrix").show()
```

```
<IPython.core.display.HTML object>
```

```
run.artifact("feature-importance").show()
```

```
<IPython.core.display.HTML object>
```

```
run.artifact("test_set").show()
```

	mean radius	mean texture	mean perimeter	mean area	mean smoothness	\
0	12.47	18.60	81.09	481.9	0.09965	
1	18.94	21.31	123.60	1130.0	0.09009	
2	15.46	19.48	101.70	748.9	0.10920	
3	12.40	17.68	81.47	467.8	0.10540	
4	11.54	14.44	74.65	402.9	0.09984	
..	...	...	...	...	...	
109	14.64	16.85	94.21	666.0	0.08641	
110	16.07	19.65	104.10	817.7	0.09168	
111	11.52	14.93	73.87	406.3	0.10130	
112	14.22	27.85	92.55	623.9	0.08223	
113	20.73	31.12	135.70	1419.0	0.09469	

	mean compactness	mean concavity	mean concave points	mean symmetry	\
0	0.10580	0.08005	0.03821	0.1925	
1	0.10290	0.10800	0.07951	0.1582	
2	0.12230	0.14660	0.08087	0.1931	
3	0.13160	0.07741	0.02799	0.1811	
4	0.11200	0.06737	0.02594	0.1818	
..	...	...	...	...	
109	0.06698	0.05192	0.02791	0.1409	
110	0.08424	0.09769	0.06638	0.1798	
111	0.07808	0.04328	0.02929	0.1883	
112	0.10390	0.11030	0.04408	0.1342	
113	0.11430	0.13670	0.08646	0.1769	

	mean fractal dimension	...	worst texture	worst perimeter	worst area	\
0	0.06373	...	24.64	96.05	677.9	
1	0.05461	...	26.58	165.90	1866.0	
2	0.05796	...	26.00	124.90	1156.0	
3	0.07102	...	22.91	89.61	515.8	
4	0.06782	...	19.68	78.78	457.8	
..	...	...	...	...	...	
109	0.05355	...	25.44	106.00	831.0	
110	0.05391	...	24.56	128.80	1223.0	
111	0.06168	...	21.19	80.88	491.8	
112	0.06129	...	40.54	102.50	764.0	
113	0.05674	...	47.16	214.00	3432.0	

	worst smoothness	worst compactness	worst concavity	\
0	0.1426	0.2378	0.2671	
1	0.1193	0.2336	0.2687	
2	0.1546	0.2394	0.3791	
3	0.1450	0.2629	0.2403	
4	0.1345	0.2118	0.1797	
..	...	...	...	

(continues on next page)

(continued from previous page)

109	0.1142	0.2070	0.2437
110	0.1500	0.2045	0.2829
111	0.1389	0.1582	0.1804
112	0.1081	0.2426	0.3064
113	0.1401	0.2644	0.3442

	worst concave points	worst symmetry	worst fractal dimension	label
0	0.10150	0.3014	0.08750	1
1	0.17890	0.2551	0.06589	0
2	0.15140	0.2837	0.08019	0
3	0.07370	0.2556	0.09359	1
4	0.06918	0.2329	0.08134	1
..	...	...	...	...
109	0.07828	0.2455	0.06596	1
110	0.15200	0.2650	0.06387	0
111	0.09608	0.2664	0.07809	1
112	0.08219	0.1890	0.07796	1
113	0.16590	0.2868	0.08218	0

[114 rows x 31 columns]

### 13.1.2 Working with data and model artifacts

When running a training job, you need to pass in the data used for training, and save the resulting model. Both the data and model can be considered *artifacts* in MLRun. In the context of an ML pipeline, the data is an input and the model is an output.

Consider the following snippet from a pipeline in the [Build and run automated ML pipelines and CI/CD](#) section of the docs:

```
# Ingest data
...

# Train a model using the auto_trainer hub function
train = mlrun.run_function(
    "hub://auto_trainer",
    inputs={"dataset": ingest.outputs["dataset"]},
    params = {
        "model_class": "sklearn.ensemble.RandomForestClassifier",
        "train_test_split_size": 0.2,
        "label_columns": "label",
        "model_name": 'cancer',
    },
    handler='train',
    outputs=["model"],
)

### Deploy model
...
```

This snippet trains a model using the data provided into inputs and passes the model to the rest of the pipeline using the outputs.

## Input data

The `inputs` parameter is a dictionary of key-value mappings. In this case, the input is the dataset (which is actually an output from a previous step). Within the training job, you can access the dataset input as an MLRun *Data items* (essentially a smart data pointer that provides convenience methods).

For example, this Python training function is expecting a parameter called `dataset` that is of type `DataItem`. Within the function, you can get the training set as a Pandas dataframe via the following:

```
import mlrun

def train(context: mlrun.MLClientCtx, dataset: mlrun.DataItem, ...):
    df = dataset.as_df()
```

Notice how this maps to the parameter `datasets` that you passed into your inputs.

## Output model

The `outputs` parameter is a list of artifacts that were logged during the job. In this case, it is your newly trained model, however it could also be a dataset or plot. These artifacts are logged using the experiment tracking hooks via the MLRun execution context.

One way to log models is via MLRun auto-logging with *apply\_mlrun*. This saves the model, test sets, visualizations, and more as outputs. Additionally, you can use manual hooks to save datasets and models. For example, this Python training function uses both auto logging and manual logging:

```
import mlrun
from mlrun.frameworks.sklearn import apply_mlrun
from sklearn import ensemble
import cloudpickle

def train(context: mlrun.MLClientCtx, dataset: mlrun.DataItem, ...):
    # Prep data using df
    df = dataset.as_df()
    X_train, X_test, y_train, y_test = ...

    # Apply auto logging
    model = ensemble.GradientBoostingClassifier(...)
    apply_mlrun(model=model, model_name=model_name, x_test=X_test, y_test=y_test)

    # Train
    model.fit(X_train, y_train)

    # Manual logging
    context.log_dataset(key="X_test_dataset", df=X_test)
    context.log_model(key="my_model", body=cloudpickle.dumps(model), model_file="model.
    ↪pkl")
```

Once your artifact is logged, it can be accessed throughout the rest of the pipeline. For example, for the pipeline snippet from the *Build and run automated ML pipelines and CI/CD* section of the docs, you can access your model like the following:

```
# Train a model using the auto_trainer hub function
train = mlrun.run_function(
```

(continues on next page)

(continued from previous page)

```

    "hub://auto_trainer",
    inputs={"dataset": ingest.outputs["dataset"]},
    ...
    outputs=["model"],
)

# Get trained model
model = train.outputs["model"]

```

Notice how this maps to the parameter `model` that you passed into your outputs.

## Model artifacts

By storing multiple models, you can experiment with them, and compare their performance, without having to worry about losing the previous results.

The simplest way to store a model named `my_model` is with the following code:

```

from pickle import dumps
model_data = dumps(model)
context.log_model(key='my_model', body=model_data, model_file='my_model.pkl')

```

You can also store any related metrics by providing a dictionary in the `metrics` parameter, such as `metrics={'accuracy': 0.9}`. Furthermore, any additional data that you would like to store along with the model can be specified in the `extra_data` parameter. For example `extra_data={'confusion': confusion.target_path}`

A convenient utility method, `eval_model_v2`, which calculates model metrics is available in `mlrun.utils`.

See example below for a simple model trained using scikit-learn (normally, you would send the data as input to the function). The last two lines evaluate the model and log the model.

```

from sklearn import linear_model
from sklearn import datasets
from sklearn.model_selection import train_test_split
from pickle import dumps

from mlrun.execution import MLClientCtx
from mlrun.mlutils import eval_model_v2

def train_iris(context: MLClientCtx):

    # Basic scikit-learn iris SVM model
    X, y = datasets.load_iris(return_X_y=True)
    X_train, X_test, y_train, y_test = train_test_split(
        X, y, test_size=0.2, random_state=42)
    model = linear_model.LogisticRegression(max_iter=10000)
    model.fit(X_train, y_train)

    # Evaluate model results and get the evaluation metrics
    eval_metrics = eval_model_v2(context, X_test, y_test, model)

    # Log model

```

(continues on next page)

(continued from previous page)

```
context.log_model("model",
                  body=dumps(model),
                  artifact_path=context.artifact_subpath("models"),
                  extra_data=eval_metrics,
                  model_file="model.pkl",
                  metrics=context.results,
                  labels={"class": "sklearn.linear_model.LogisticRegression"})
```

Save the code above to `train_iris.py`. The following code loads the function and runs it as a job. See the [Quick start tutorial](#) to learn how to create the project and set the artifact path.

```
from mlrun import code_to_function

gen_func = code_to_function(name='train_iris',
                           filename='train_iris.py',
                           handler='train_iris',
                           kind='job',
                           image='mlrun/mlrun')

train_iris_func = project.set_function(gen_func).apply(auto_mount())

train_iris = train_iris_func.run(name='train_iris',
                                handler='train_iris',
                                artifact_path=artifact_path)
```

You can now use `get_model` to read the model and run it. This function gets the model file, metadata, and extra data. The input can be either the path of the model, or the directory where the model resides. If you provide a directory, the function searches for the model file (by default it searches for `.pkl` files)

The following example gets the model from `models_path` and test data in `test_set` with the expected label provided as a column of the test data. The name of the column containing the expected label is provided in `label_column`. The example then retrieves the models, runs the model with the test data and updates the model with the metrics and results of the test data.

```
from pickle import load

from mlrun.execution import MLClientCtx
from mlrun.datastore import DataItem
from mlrun.artifacts import get_model, update_model
from mlrun.mlutils import eval_model_v2

def test_model(context: MLClientCtx,
               models_path: DataItem,
               test_set: DataItem,
               label_column: str):

    if models_path is None:
        models_path = context.artifact_subpath("models")
    xtest = test_set.as_df()
    ytest = xtest.pop(label_column)

    model_file, model_obj, _ = get_model(models_path)
    model = load(open(model_file, 'rb'))
```

(continues on next page)

(continued from previous page)

```
extra_data = eval_model_v2(context, xtest, ytest.values, model)
update_model(model_artifact=model_obj, extra_data=extra_data,
             metrics=context.results, key_prefix='validation-')
```

To run the code, place the code above in `test_model.py` and use the following snippet. The model from the previous step is provided as the `models_path`:

```
from mlrun.platforms import auto_mount
gen_func = code_to_function(name='test_model',
                           filename='test_model.py',
                           handler='test_model',
                           kind='job',
                           image='mlrun/mlrun')

func = project.set_function(gen_func).apply(auto_mount())

run = func.run(name='test_model',
              handler='test_model',
              params={'label_column': 'label'},
              inputs={'models_path': train_iris.outputs['model'],
                    'test_set': 'https://s3.wasabisys.com/iguazio/data/iris/iris_
↳ dataset.csv'}),
              artifact_path=artifact_path)
```

## Plot artifacts

Storing plots is useful to visualize the data and to show any information regarding the model performance. For example, you can store scatter plots, histograms and cross-correlation of the data, and for the model store the ROC curve and confusion matrix.

The following code creates a confusion matrix plot using `sklearn.metrics.plot_confusion_matrix` and stores the plot in the artifact repository:

```
from mlrun.artifacts import PlotArtifact
from mlrun.mlutils import gcf_clear

gcf_clear(plt)
confusion_matrix = metrics.plot_confusion_matrix(model,
                                                  xtest,
                                                  ytest,
                                                  normalize='all',
                                                  values_format = '.2g',
                                                  cmap=plt.cm.Blues)
confusion_matrix = context.log_artifact(PlotArtifact('confusion-matrix', body=confusion_
↳ matrix.figure_),
                                       local_path='plots/confusion_matrix.html')
```

You can use the `update_dataset_meta` function to associate the plot with the dataset by assigning the value of the `extra_data` parameter:

```
from mlrun.artifacts import update_dataset_meta

extra_data = {'confusion_matrix': confusion_matrix}
update_dataset_meta(dataset, extra_data=extra_data)
```

### 13.1.3 Automated experiment tracking

You can write custom training functions or use built-in hub functions for training models using common open-source frameworks and/or cloud services (such as AzureML, Sagemaker, etc.).

Inside the ML function you can use the `apply_mlrun()` method, which automates the tracking and MLOps functionality.

With `apply_mlrun()` the following outputs are generated automatically:

- Plots — loss convergence, ROC, confusion matrix, feature importance, etc.
- Metrics — accuracy, loss, etc.
- Dataset artifacts — like the dataset used for training and / or testing
- Custom code — like custom layers, metrics, and so on
- Model artifacts — enables versioning, monitoring and automated deployment

In addition it handles automation of various MLOps tasks like scaling runs over multiple containers (with Dask, Horovod, and Spark), run profiling, hyperparameter tuning, ML Pipeline, and CI/CD integration, etc.

`apply_mlrun()` accepts the model object and various optional parameters. For example:

```
apply_mlrun(model=model, model_name="my_model",
            x_test=x_test, y_test=y_test)
```

When specifying the `x_test` and `y_test` data it generates various plots and calculations to evaluate the model. Metadata and parameters are automatically recorded (from the MLRun context object) and don't need to be specified.

`apply_mlrun` is framework specific and can be imported from MLRun's **frameworks** package — a collection of commonly used machine and deep learning frameworks fully supported by MLRun.

`apply_mlrun` can be used with its default settings, but it is highly flexible and rich with different options and configurations. Reading the docs of your favorite framework to get the most out of MLRun:

- [SciKit-Learn](#)
- [TensorFlow \(and Keras\)](#)
- [PyTorch](#)
- [XGBoost](#)
- [LightGBM](#)
- [ONNX](#)

### 13.1.4 Using the built-in training function

The MLRun [Function Hub](#) includes, among other things, training functions. The most commonly used function for training is `auto_trainer`, which includes the following handlers:

- *Train*
- *Evaluate*

#### Train

The main and default handler of any training function is called `"train"`. In the Auto Trainer this handler performs an ML training function using SciKit-Learn's API, meaning the function follows the structure below:

1. **Get the data:** Get the dataset passed to a local path.
2. **Split the data into datasets:** Split the given data into a training set and a testing set.
3. **Get the model:** Initialize a model instance out of a given class or load a provided model. The supported classes are anything based on `sklearn.Estimator`, `xgboost.XGBModel`, `lightgbm.LGBMModel`, including custom code as well.
4. **Train:** Call the model's `fit` method to train it on the training set.
5. **Test:** Test the model on the testing set.
6. **Log:** Calculate the metrics and produce the artifacts to log the results and plots.

MLRun orchestrates all of the above steps. The training is done with the shortcut function `apply_mlrun` that enables the automatic logging and additional features.

To start, run `import mlrun` and create a project:

```
import mlrun

# Set the base project name
project_name_base = "training-test"

# Initialize the MLRun project object
project = mlrun.get_or_create_project(
    project_name_base, context=".", user_project=True
)
```

Next, import the Auto Trainer from the Function Hub using MLRun's `import_function` function:

```
auto_trainer = project.set_function(mlrun.import_function("hub://auto_trainer"))
```

The following example trains a Random Forest model:

```
dataset_url = "https://s3.wasabisys.com/iguazio/data/function-marketplace-data/xgb_
↪trainer/classifier-data.csv"

train_run = auto_trainer.run(
    handler="train",
    inputs={"dataset": dataset_url},
    params={
        # Model parameters:
        "model_class": "sklearn.ensemble.RandomForestClassifier",
```

(continues on next page)

(continued from previous page)

```
"model_kwargs": {
    "max_depth": 8
}, # Could be also passed as "MODEL_max_depth": 8
"model_name": "MyModel",
# Dataset parameters:
"drop_columns": ["feat_0", "feat_2"],
"train_test_split_size": 0.2,
"random_state": 42,
"label_columns": "labels",
},
)
```


## Outputs

`train_run.outputs` returns all the outputs. The outputs are:

- **Trained model:** The trained model is logged as a `ModelArtifact` with all the following artifacts registered to it.
- **Test dataset:** The test set used to test the model post training is logged as a `DatasetArtifact`.
- **Plots:** Informative plots regarding the model like confusion matrix and features importance are drawn and logged as `PlotArtifacts`.
- **Results:** List of all the calculations of metrics tested on the testing set.

For instance, calling `train_run.artifact('confusion-matrix').show()` shows the following confusion matrix:

## Confusion matrix

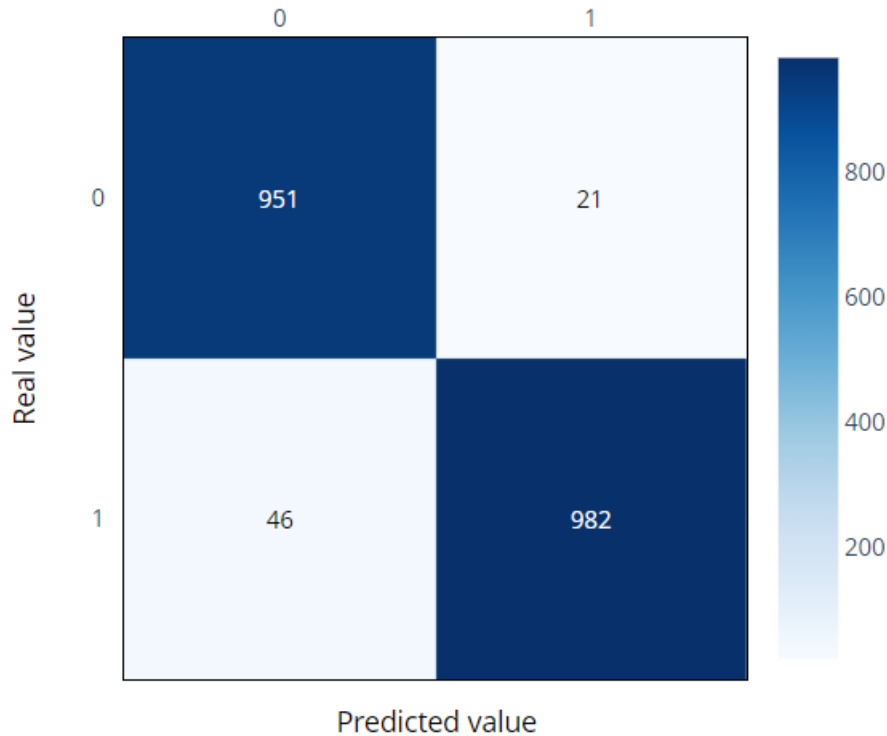

## Parameters

To view the parameters of `train`, expand the section below:

### train handler parameters:

#### Model Parameters

*Parameters to initialize a new model object or load a logged one for retraining.*

- `model_class`: str — The class of the model to initialize. Can be a module path like "sklearn.linear\_model.LogisticRegression" or a custom model passed through the custom objects parameters below. Only one of `model_class` and `model_path` can be given.
- `model_path`: str — A ModelArtifact URI to load and retrain. Only one of `model_class` and `model_path` can be given.
- `model_kwargs`: dict — Additional parameters to pass onto the initialization of the model object (the model's class `__init__` method).

#### Data parameters

*Parameters to get a dataset and prepare it for training, splitting into training and testing if required.*

- `dataset`: Union[str, list, dict] — The dataset to train the model on.
  - Can be passed as part of `inputs` to be parsed as `mlrun.DataItem`, meaning it supports either a URI or a FeatureVector.

- Can be passed as part of `params`, meaning it can be a list or a dict.
- `drop_columns`: `Union[str, int, List[str], List[int]]` — Columns to drop from the dataset. Can be passed as strings representing the column names or integers representing the column numbers.
- `test_set`: `Union[str, list, dict]` — The test set to test the model with post training. Notice only one of `test_set` or `train_test_split_size` is expected.
  - Can be passed as part of `inputs` to be parsed as `mlrun.DataItem`, meaning it supports either a URI or a `FeatureVector`.
  - Can be passed as part of `params`, meaning it can be a list or a dict.
- `train_test_split_size`: `float = 0.2` — The proportion of the dataset to include in the test split. The size of the Training set is set to the complement of this value. Must be between 0.0 and 1.0. Defaults to 0.2
- `label_columns`: `Union[str, int, List[str], List[int]]` — The target label(s) of the column(s) in the dataset. Can be passed as strings representing the column names or integers representing the column numbers.
- `random_state`: `int` - Random state (seed) for `train_test_split`.

### Train parameters

*Parameters to pass to the `fit` method of the model object.*

- `train_kwargs`: `dict` — Additional parameters to pass onto the `fit` method.

### Logging parameters

*Parameters to control the automatic logging feature of MLRun. You can adjust the logging outputs as relevant and if not passed, a default list of artifacts and metrics is produced and calculated.*

- `model_name`: `str = "model"` — The model's name to use for storing the model artifact, defaults to 'model'.
- `tag`: `str` — The model's tag to log with.
- `sample_set`: `Union[str, list, dict]` — A sample set of inputs for the model for logging its stats alongside the model in favor of model monitoring. If not given, the training set is used instead.
  - Can be passed as part of `inputs` to be parsed as `mlrun.DataItem`, meaning it supports either a URI or a `FeatureVector`.
  - Can be passed as part of `params`, meaning it can be a list or a dict.
- `_artifacts`: `Dict[str, Union[list, dict]]` — Additional artifacts to produce post training. See the `ArtifactsLibrary` of the desired framework to see the available list of artifacts.
- `_metrics`: `Union[List[str], Dict[str, Union[list, dict]]]` — Additional metrics to calculate post training. See how to pass metrics and custom metrics in the `MetricsLibrary` of the desired framework.
- `apply_mlrun_kwargs`: `dict` — Framework specific `apply_mlrun` key word arguments. Refer to the framework of choice to know more (SciKit-Learn, XGBoost or LightGBM)

### Custom objects parameters

*Parameters to include custom objects like custom model class, metric code and artifact plan. Keep in mind that the model artifact created is logged with the custom objects, so if `model_path` is used, the custom objects used to train it are not required for loading it, it happens automatically.*

- `custom_objects_map`: `Union[str, Dict[str, Union[str, List[str]]]]` — A map of all the custom objects required for loading, training and testing the model. Can be passed as a dictionary or a json file path. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. For example:

```
{
  "/../custom_model.py": "MyModel",
  "/../custom_objects.py": ["object1", "object2"]
}
```

All the paths are accessed from the given 'custom\_objects\_directory', meaning each py file is read from 'custom\_objects\_directory/'. If the model path given is of a store object, the custom objects map is read from the logged custom object map artifact of the model.

---

#### Note

The custom objects are imported in the order they came in this dictionary (or json). If a custom object is dependent on another, make sure to put it below the one it relies on.

---

- **custom\_objects\_directory:** Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (and are extracted during the start of the run).
- 

#### Note

The parameters for additional arguments `model_kwargs`, `train_kwargs` and `apply_mlrun_kwargs` can be also passed in the global `kwargs` with the matching prefixes: "MODEL\_", "TRAIN\_", "MLRUN\_".

---

## Evaluate

The "evaluate" handler is used to test the model on a given testing set and log its results. This is a common phase in every model lifecycle and should be done periodically on updated testing sets to confirm that your model is still relevant. The function uses SciKit-Learn's API for evaluation, meaning the function follows the structure below:

1. **Get the data:** Get the testing dataset passed to a local path.
2. **Get the model:** Get the model object out of the `ModelArtifact` URI.
3. **Predict:** Call the model's `predict` (and `predict_proba` if needed) method to test it on the testing set.
4. **Log:** Test the model on the testing set and log the results and artifacts.

MLRun orchestrates all of the above steps. The evaluation is done with the shortcut function `apply_mlrun` that enables the automatic logging and further features.

To evaluate the test-set, use the following command:

```
evaluate_run = auto_trainer.run(
    handler="evaluate",
    inputs={"dataset": train_run.outputs["test_set"]},
    params={
        "model": train_run.outputs["model"],
        "label_columns": "labels",
    },
)
```

## Outputs

`evaluate_run.outputs` returns all the outputs. The outputs are:

- **Evaluated model:** The evaluated model's `ModelArtifact` is updated with all the following artifacts registered to it.
- **Test dataset:** The test set used to test the model post-training is logged as a `DatasetArtifact`.
- **Plots:** Informative plots regarding the model like confusion matrix and features importance are drawn and logged as `PlotArtifacts`.
- **Results:** List of all the calculations of metrics tested on the testing set.

## Parameters

To view the parameters of `evaluate`, expand the section below:

### evaluate handler parameters:

#### Model Parameters

*Parameters to load a logged model.*

- `model_path`: `str` — A `ModelArtifact` URI to load.

#### Data parameters

*Parameters to get a dataset and prepare it for training, splitting into training and testing if required.*

- `dataset`: `Union[str, list, dict]` — The dataset to train the model on.
  - Can be passed as part of `inputs` to be parsed as `mlrun.DataItem`, meaning it supports either a URI or a `FeatureVector`.
  - Can be passed as part of `params`, meaning it can be a `list` or a `dict`.
- `drop_columns`: `Union[str, int, List[str], List[int]]` — columns to drop from the dataset. Can be passed as strings representing the column names or integers representing the column numbers.
- `label_columns`: `Union[str, int, List[str], List[int]]` — The target label(s) of the column(s) in the dataset. Can be passed as strings representing the column names or integers representing the column numbers.

#### Predict parameters

*Parameters to pass to the `predict` method of the model object.*

- `predict_kwargs`: `dict` — Additional parameters to pass onto the `predict` method.

#### Logging parameters

*Parameters to control the automatic logging feature of `MLRun`. You can adjust the logging outputs as relevant, and if not passed, a default list of artifacts and metrics is produced and calculated.*

- `_artifacts`: `Dict[str, Union[list, dict]]` — Additional artifacts to produce post training. See the `ArtifactsLibrary` of the desired framework to see the available list of artifacts.
- `_metrics`: `Union[List[str], Dict[str, Union[list, dict]]]` — Additional metrics to calculate post training. See how to pass metrics and custom metrics in the `MetricsLibrary` of the desired framework.
- `apply_mlrun_kwargs`: `dict` — Framework specific `apply_mlrun` key word arguments. Refer to the framework of choice to know more (SciKit-Learn, XGBoost or LightGBM).

## Custom objects parameters

Parameters to include custom objects for the evaluation like custom metric code and artifact plans. Keep in mind that the custom objects used to train the model are not required for loading it, it happens automatically.

- `custom_objects_map`: `Union[str, Dict[str, Union[str, List[str]]]]` — A map of all the custom objects required for loading, training and testing the model. Can be passed as a dictionary or a json file path. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. For example:

```
{
  ".../custom_metric.py": "MyMetric",
  ".../custom_plans.py": ["plan1", "plan2"]
}
```

All the paths are accessed from the given 'custom\_objects\_directory', meaning each py file is read from the 'custom\_objects\_directory/'. If the model path given is of a store object, the custom objects map is read from the logged custom object map artifact of the model.

---

### Note

The custom objects are imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

---

- `custom_objects_directory` — Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (it is extracted during the start of the run).

---

### Note

The parameters for additional arguments `predict_kwargs` and `apply_mlrun_kwargs` can be also passed in the global `kwargs` with the matching prefixes: "PREDICT\_", "MLRUN\_".

---

## 13.1.5 Hyperparameter tuning optimization

MLRun supports iterative tasks for automatic and distributed execution of many tasks with variable parameters (hyperparams). Iterative tasks can be distributed across multiple containers. They can be used for:

- Parallel loading and preparation of many data objects
- Model training with different parameter sets and/or algorithms
- Parallel testing with many test vector options
- AutoML

MLRun iterations can be viewed as child runs under the main task/run. Each child run gets a set of parameters that are computed/selected from the input hyperparameters based on the chosen strategy (*Grid*, *List*, *Random* or *Custom*).

The different iterations can run in parallel over multiple containers (using Dask or Nuclio runtimes, which manage the workers). Read more in *Parallel execution over containers*.

The hyperparameters and options are specified in the `task` or the `run()` command through the `hyperparams` (for hyperparam values) and `hyper_param_options` (for *HyperParamOptions*) properties. See the examples below.

The hyperparams are specified as a struct of `key: list` values. The values can be of any type (int, string, float, ...). The lists are used to compute the parameter combinations using one of the following strategies:

- *Grid search* (`grid`) — running all the parameter combinations. The `key: list` values structure is similar to: `{ "p1": [1,2], "p2": [2,4] }` The result is the four iterations with all the combinations of `p1` and `p2`. Hyperparameters can also be loaded directly from a JSON file (specify `param_file` in *HyperParamOptions*).
- *Random* (`random`) — running a sampled set from all the parameter combinations. Hyperparameters can also be loaded directly from a JSON file, the same as `grid`.
- *List* (`list`) — running the first parameter from each list followed by the second from each list and so on. **All the lists must be of equal length.** Hyperparameters can also be loaded directly from a JSON or CSV file containing a list of the iterations to be executed. Example JSON: `{"p1": [1], "p2": [10]}` (specify `param_file` in *HyperParamOptions*).

You can specify a selection criteria to select the best run among the different child runs by setting the `selector` option. This marks the selected result as the parent (iteration 0) result, and marks the best result in the user interface.

You can also specify the `stop_condition` to stop the execution of child runs when some criteria, based on the returned results, is met (for example `stop_condition="accuracy>=0.9"`).

#### In this section

- *Basic code*
- *Review the results*
- *Examples*
- *Parallel execution over containers*

#### Basic code

Here's a basic example of running multiple jobs in parallel for **hyperparameters tuning**, selecting the best run with respect to the `max accuracy`.

Run the hyperparameters tuning job by using the keywords arguments:

- `hyperparams` for the hyperparameters options and values of choice.
- `selector` for specifying how to select the best model.

```
hp_tuning_run = project.run_function(  
    "trainer",  
    inputs={"dataset": gen_data_run.outputs["dataset"]},  
    hyperparams={  
        "n_estimators": [100, 500, 1000],  
        "max_depth": [5, 15, 30]  
    },  
    selector="max.accuracy",  
    local=True  
)
```

The returned run object in this case represents the **parent** (and the **best** result). You can also access the individual child runs (called iterations) in the MLRun UI.

Review the results

When running a hyperparam job, the job results tab shows the list and marks the best run:

Projects > coda-2886795295 > Jobs New Job

Monitor Jobs | Monitor Workflows | Schedule

← trainer-train  
Mar 2, 01:43:19 AM


Overview | Inputs | Artifacts | Results | Logs | Pods

Iter	State	N_estimators	Max_depth	Accuracy	F1_score	Precision_score	Recall_score	Auc-micro	Auc-macro	Auc-weighted
1	completed	100	5	1	1	1	1	1	1	1
2	completed	500	5	1	1	1	1	1	1	1
3	completed	1000	5	1	1	1	1	1	1	1
4	completed	100	15	1	1	1	1	1	1	1
5	completed	500	15	1	1	1	1	1	1	1
6	completed	1000	15	1	1	1	1	1	1	1
7	completed	100	30	1	1	1	1	1	1	1
8	completed	500	30	1	1	1	1	1	1	1
9	completed	1000	30	1	1	1	1	1	1	1

You can also view results by printing the artifact iteration\_results:

```
hp_tuning_run.artifact("iteration_results").as_df()
```

MLRun also generates a parallel coordinates plot for the run, you can view it in the MLRun UI.

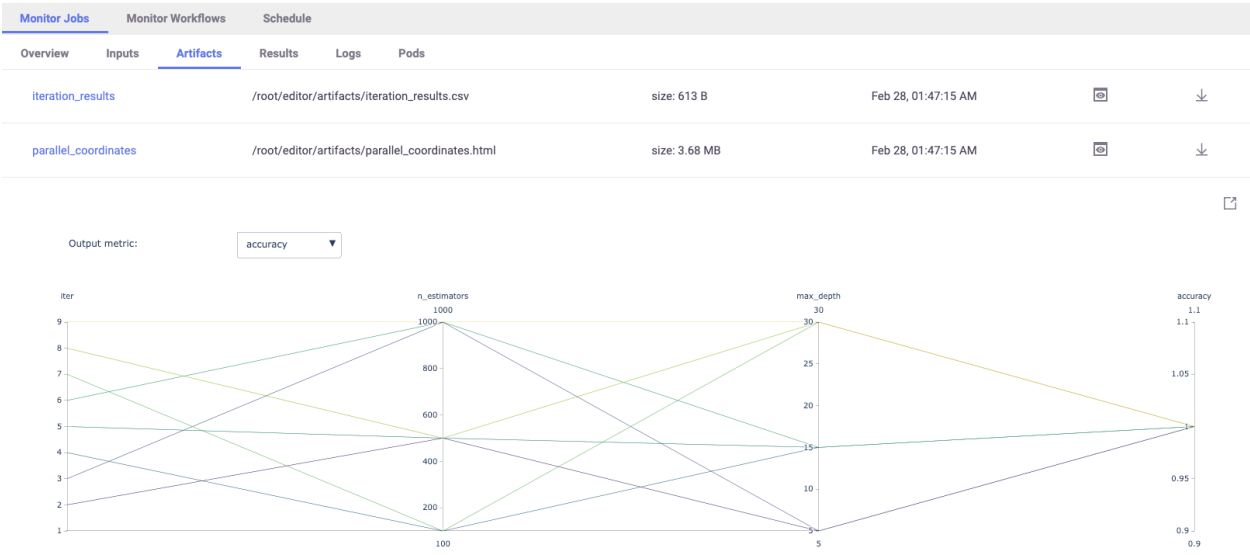

## Examples

### Base dummy function:

```
import mlrun
```

```
> 2021-10-23 12:47:39,982 [warning] Failed resolving version info. Ignoring and using
↳ defaults
> 2021-10-23 12:47:43,488 [warning] Unable to parse server or client version. Assuming
↳ compatible: {'server_version': '0.8.0-rc7', 'client_version': 'unstable'}
```

```
def hyper_func(context, p1, p2):
    print(f"p1={p1}, p2={p2}, result={p1 * p2}")
    context.log_result("multiplier", p1 * p2)
```

### Grid search (default)

```
grid_params = {"p1": [2, 4, 1], "p2": [10, 20]}
task = mlrun.new_task("grid-demo").with_hyper_params(
    grid_params, selector="max.multiplier"
)
run = mlrun.new_function().run(task, handler=hyper_func)
```

```
> 2021-10-23 12:47:43,505 [info] starting run grid-demo
↳ uid=29c9083db6774e5096a97c9b6b6c8e93 DB=http://mlrun-api:8080
p1=2, p2=10, result=20
p1=4, p2=10, result=40
p1=1, p2=10, result=10
p1=2, p2=20, result=40
p1=4, p2=20, result=80
p1=1, p2=20, result=20
> 2021-10-23 12:47:44,851 [info] best iteration=5, used criteria max.multiplier
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:47:45,071 [info] run executed, status=completed
```

### UI Screenshot:

Projects > default > Jobs > Monitor > 649337c098f64ea9a91966bed2539b95 > Results New Job

Monitor Schedule

Status: All Group By: Name Labels: key or key=value Name:

Name	grid-demo
> hyper-tst-hyper_func2 8 Mar, 01:44:15 ...3c099ae	8 Mar, 00:36:44
> hyper-tst-hyper_func 8 Mar, 01:39:12 ...d0c3e6e	
> mlrun-ff1b06-handler 8 Mar, 01:08:10 ...7eb3abf	
> mlrun-164e8-handler 8 Mar, 01:07:51 ...6f8adee	
> mlrun-6bc9ef-handler 8 Mar, 01:06:54 ...77d0c03	
> mlrun-b39b5d-handler 8 Mar, 01:05:34 ...59c2bee	
> mlrun-53d04a-handler 8 Mar, 01:04:31 ...21e5ee7	
> list-demo 8 Mar, 00:39:11 ...138a4d3	
> random-demo 8 Mar, 00:36:51 ...661234a	
> grid-demo 8 Mar, 00:36:44 ...2539b95	
> grid 8 Mar, 00:32:59 ...fa7157d	

Overview Inputs Artifacts Results Logs

Iter	State	P1	P2	Mul
1	completed	2	10	20
2	completed	4	10	40
3	completed	1	10	10
4	completed	2	20	40
5	completed	4	20	80
6	completed	1	20	20

## Random Search

MLRun chooses random parameter combinations. Limit the number of combinations using the `max_iterations` attribute.

```
grid_params = {"p1": [2, 4, 1, 3], "p2": [10, 20, 30]}
task = mlrun.new_task("random-demo")
task.with_hyper_params(
    grid_params, selector="max.multiplier", strategy="random", max_iterations=4
)
run = mlrun.new_function().run(task, handler=hyper_func)
```

```
> 2021-10-23 12:47:45,077 [info] starting run random-demo
uid=cac368c7fc33455f97ca806e5c7abf2f DB=http://mlrun-api:8080
p1=2, p2=20, result=40
p1=4, p2=10, result=40
p1=3, p2=10, result=30
p1=3, p2=20, result=60
> 2021-10-23 12:47:45,966 [info] best iteration=4, used criteria max.multiplier
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:47:46,177 [info] run executed, status=completed
```

## List search

This example also shows how to use the `stop_condition` option.

```
list_params = {"p1": [2, 3, 7, 4, 5], "p2": [15, 10, 10, 20, 30]}
task = mlrun.new_task("list-demo").with_hyper_params(
    list_params,
    selector="max.multiplier",
    strategy="list",
    stop_condition="multiplier>=70",
)
run = mlrun.new_function().run(task, handler=hyper_func)
```

```
> 2021-10-23 12:47:46,184 [info] starting run list-demo_
↳ uid=136edfb9c9404a61933c73bbbd35b18b DB=http://mlrun-api:8080
p1=2, p2=15, result=30
p1=3, p2=10, result=30
p1=7, p2=10, result=70
> 2021-10-23 12:47:47,193 [info] reached early stop condition (multiplier>=70), stopping_
↳ iterations!
> 2021-10-23 12:47:47,195 [info] best iteration=3, used criteria max.multiplier
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:47:47,385 [info] run executed, status=completed
```

## Custom iterator

You can define a child iteration context under the parent/main run. The child run is logged independently.

```
def handler(context: mlrun.MLClientCtx, param_list):
    best_multiplier = total = 0
    for param in param_list:
        with context.get_child_context(**param) as child:
            hyper_func(child, **child.parameters)
            multiplier = child.results["multiplier"]
            total += multiplier
            if multiplier > best_multiplier:
                child.mark_as_best()
                best_multiplier = multiplier

    # log result at the parent
    context.log_result("avg_multiplier", total / len(param_list))
```

```
param_list = [{"p1": 2, "p2": 10}, {"p1": 3, "p2": 30}, {"p1": 4, "p2": 7}]
run = mlrun.new_function().run(handler=handler, params={"param_list": param_list})
```

```
> 2021-10-23 12:47:47,403 [info] starting run mlrun-a79c5c-handler_
uid=c3eb08ebae02464ca4025c77b12e3c39 DB=http://mlrun-api:8080
p1=2, p2=10, result=20
p1=3, p2=30, result=90
p1=4, p2=7, result=28
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:47:48,734 [info] run executed, status=completed
```

### Parallel execution over containers

When working with compute intensive or long running tasks you'll want to run your iterations over a cluster of containers. At the same time, you don't want to bring up too many containers, and you want to limit the number of parallel tasks.

MLRun supports distribution of the child runs over Dask or Nuclio clusters. This is handled automatically by MLRun. You only need to deploy the Dask or Nuclio function used by the workers, and set the level of parallelism in the task. The execution can be controlled from the client/notebook, or can have a job (immediate or scheduled) that controls the execution.

### Code example (single task)

```
# mark the start of a code section that will be sent to the job
# mlrun: start-code
```

```
import socket
import pandas as pd

def hyper_func2(context, data, p1, p2, p3):
    print(data.as_df().head())
    context.logger.info(f"p2={p2}, p3={p3}, r1={p2 * p3} at {socket.gethostname()}")
    context.log_result("r1", p2 * p3)
    raw_data = {
        "first_name": ["Jason", "Molly", "Tina", "Jake", "Amy"],
        "age": [42, 52, 36, 24, 73],
        "testScore": [25, 94, 57, 62, 70],
    }
    df = pd.DataFrame(raw_data, columns=["first_name", "age", "testScore"])
    context.log_dataset("mydf", df=df, stats=True)
```

```
# mlrun: end-code
```

## Running the workers using Dask

This example creates a new function and executes the parent/controller as an MLRun job and the different child runs over a Dask cluster (MLRun Dask function).

### Define a Dask cluster (using MLRun serverless Dask)

```
dask_cluster = mlrun.new_function("dask-cluster", kind="dask", image="mlrun/mlrun")
dask_cluster.apply(mlrun.mount_v3io()) # add volume mounts
dask_cluster.spec.service_type = "NodePort" # open interface to the dask UI dashboard
dask_cluster.spec.replicas = 2 # define two containers
uri = dask_cluster.save()
uri
```

```
'db://default/dask-cluster'
```

```
# initialize the dask cluster and get its dashboard url
dask_cluster.client
```

```
> 2021-10-23 12:48:49,020 [info] trying dask client at: tcp://mlrun-dask-cluster-
→ eea516ff-5.default-tenant:8786
> 2021-10-23 12:48:49,049 [info] using remote dask scheduler (mlrun-dask-cluster-
→ eea516ff-5) at: tcp://mlrun-dask-cluster-eea516ff-5.default-tenant:8786
```

Mismatched versions found

Package	client	scheduler	workers
blosc	1.7.0	1.10.6	None
cloudpickle	1.6.0	2.0.0	None
distributed	2.30.0	2.30.1	None
lz4	3.1.0	3.1.3	None
msgpack	1.0.0	1.0.2	None
tornado	6.0.4	6.1	None

Notes:

- msgpack: Variation is ok, as long as everything is above 0.6

```
<IPython.core.display.HTML object>
```

```
<Client: 'tcp://10.200.0.72:8786' processes=0 threads=0, memory=0 B>
```

## Define the parallel work

Set the `parallel_runs` attribute to indicate how many child tasks to run in parallel. Set the `dask_cluster_uri` to point to the dask cluster (if it's not set the cluster uri uses dask local). You can also set the `teardown_dask` flag to free up all the dask resources after completion.

```
grid_params = {"p2": [2, 1, 4, 1], "p3": [10, 20]}
task = mlrun.new_task(
    params={"p1": 8},
    inputs={"data": "https://s3.wasabisys.com/iguazio/data/iris/iris_dataset.csv"},
)
task.with_hyper_params(
    grid_params,
    selector="r1",
    strategy="grid",
    parallel_runs=4,
    dask_cluster_uri=uri,
    teardown_dask=True,
)
```

```
<mlrun.model.RunTemplate at 0x7f673d7b1910>
```

Define a job that will take the code (using `code_to_function`) and run it over the cluster

```
fn = mlrun.code_to_function(name="hyper-tst", kind="job", image="mlrun/mlrun")
```

```
run = fn.run(task, handler=hyper_func2)
```

```
> 2021-10-23 12:49:56,388 [info] starting run hyper-tst-hyper_func2_
↳ uid=50eb72f5b0734954b8b1c57494f325bc DB=http://mlrun-api:8080
> 2021-10-23 12:49:56,565 [info] Job is running in the background, pod: hyper-tst-hyper-
↳ func2-9g6z8
> 2021-10-23 12:49:59,813 [info] trying dask client at: tcp://mlrun-dask-cluster-
↳ eea516ff-5.default-tenant:8786
> 2021-10-23 12:50:09,828 [warning] remote scheduler at tcp://mlrun-dask-cluster-
↳ eea516ff-5.default-tenant:8786 not ready, will try to restart Timed out trying to
↳ connect to tcp://mlrun-dask-cluster-eea516ff-5.default-tenant:8786 after 10 s
> 2021-10-23 12:50:15,733 [info] using remote dask scheduler (mlrun-dask-cluster-
↳ 04574796-5) at: tcp://mlrun-dask-cluster-04574796-5.default-tenant:8786
remote dashboard: default-tenant.app.yh38.iguazio-cd2.com:32577
> ----- Iteration: (1) -----
   sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0                   5.1                3.5  ...                0.2        0
1                   4.9                3.0  ...                0.2        0
2                   4.7                3.2  ...                0.2        0
3                   4.6                3.1  ...                0.2        0
4                   5.0                3.6  ...                0.2        0

[5 rows x 5 columns]
> 2021-10-23 12:50:21,353 [info] p2=2, p3=10, r1=20 at mlrun-dask-cluster-04574796-5k5lhq
> ----- Iteration: (3) -----
```

(continues on next page)

(continued from previous page)

```

    sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0      5.1             3.5  ...             0.2      0
1      4.9             3.0  ...             0.2      0
2      4.7             3.2  ...             0.2      0
3      4.6             3.1  ...             0.2      0
4      5.0             3.6  ...             0.2      0

[5 rows x 5 columns]
> 2021-10-23 12:50:21,459 [info] p2=4, p3=10, r1=40 at mlrun-dask-cluster-04574796-5k5lhq

> ----- Iteration: (4) -----
    sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0      5.1             3.5  ...             0.2      0
1      4.9             3.0  ...             0.2      0
2      4.7             3.2  ...             0.2      0
3      4.6             3.1  ...             0.2      0
4      5.0             3.6  ...             0.2      0

[5 rows x 5 columns]
> 2021-10-23 12:50:21,542 [info] p2=1, p3=10, r1=10 at mlrun-dask-cluster-04574796-5k5lhq

> ----- Iteration: (6) -----
    sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0      5.1             3.5  ...             0.2      0
1      4.9             3.0  ...             0.2      0
2      4.7             3.2  ...             0.2      0
3      4.6             3.1  ...             0.2      0
4      5.0             3.6  ...             0.2      0

[5 rows x 5 columns]
> 2021-10-23 12:50:21,629 [info] p2=1, p3=20, r1=20 at mlrun-dask-cluster-04574796-5k5lhq

> ----- Iteration: (7) -----
    sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0      5.1             3.5  ...             0.2      0
1      4.9             3.0  ...             0.2      0
2      4.7             3.2  ...             0.2      0
3      4.6             3.1  ...             0.2      0
4      5.0             3.6  ...             0.2      0

[5 rows x 5 columns]
> 2021-10-23 12:50:21,792 [info] p2=4, p3=20, r1=80 at mlrun-dask-cluster-04574796-5k5lhq

> ----- Iteration: (8) -----
    sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0      5.1             3.5  ...             0.2      0
1      4.9             3.0  ...             0.2      0
2      4.7             3.2  ...             0.2      0
3      4.6             3.1  ...             0.2      0
4      5.0             3.6  ...             0.2      0

[5 rows x 5 columns]

```

(continues on next page)

(continued from previous page)

```
> 2021-10-23 12:50:22,052 [info] p2=1, p3=20, r1=20 at mlrun-dask-cluster-04574796-5k5lhq

> ----- Iteration: (2) -----
  sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0                5.1                3.5  ...                0.2        0
1                4.9                3.0  ...                0.2        0
2                4.7                3.2  ...                0.2        0
3                4.6                3.1  ...                0.2        0
4                5.0                3.6  ...                0.2        0

[5 rows x 5 columns]
> 2021-10-23 12:50:23,134 [info] p2=1, p3=10, r1=10 at mlrun-dask-cluster-04574796-5j6v59

> ----- Iteration: (5) -----
  sepal length (cm)  sepal width (cm)  ...  petal width (cm)  label
0                5.1                3.5  ...                0.2        0
1                4.9                3.0  ...                0.2        0
2                4.7                3.2  ...                0.2        0
3                4.6                3.1  ...                0.2        0
4                5.0                3.6  ...                0.2        0

[5 rows x 5 columns]
> 2021-10-23 12:50:23,219 [info] p2=2, p3=20, r1=40 at mlrun-dask-cluster-04574796-5k5lhq

> 2021-10-23 12:50:23,261 [info] tearing down the dask cluster..
> 2021-10-23 12:50:43,363 [info] best iteration=7, used criteria r1
> 2021-10-23 12:50:43,626 [info] run executed, status=completed
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:50:53,303 [info] run executed, status=completed
```

## Running the workers using Nuclio

Nuclio is a high-performance serverless engine that can process many events in parallel. It can also separate initialization from execution. Certain parts of the code (imports, loading data, etc.) can be done once per worker vs. in any run.

Nuclio, by default, process events (http, stream, ...). There is a special Nuclio kind that runs MLRun jobs (nuclio:mlrun).

### Notes

- Nuclio tasks are relatively short (preferably under 5 minutes), use it for running many iterations where each individual run is less than 5 min.

- Use `context.logger` to drive text outputs (vs `print()`).

## Create a nuclio:mlrun function

```
fn = mlrun.code_to_function(name="hyper-tst2", kind="nuclio:mlrun", image="mlrun/mlrun")
# replicas * workers need to match or exceed parallel_runs
fn.spec.replicas = 2
fn.with_http(workers=2)
fn.deploy()
```

```
> 2021-10-23 12:51:10,152 [info] Starting remote function deploy
2021-10-23 12:51:10 (info) Deploying function
2021-10-23 12:51:10 (info) Building
2021-10-23 12:51:10 (info) Staging files and preparing base images
2021-10-23 12:51:10 (info) Building processor image
2021-10-23 12:51:11 (info) Build complete
2021-10-23 12:51:19 (info) Function deploy complete
> 2021-10-23 12:51:22,296 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-default-hyper-tst2.default-tenant.svc.cluster.local:8080'], 'external_
↪ invocation_urls': ['default-tenant.app.yh38.iguazio-cd2.com:32760']}
```

```
'http://default-tenant.app.yh38.iguazio-cd2.com:32760'
```

## Run the parallel task over the function

```
# this is required to fix Jupyter issue with asyncio (not required outside of Jupyter)
# run it only once
import nest_asyncio

nest_asyncio.apply()
```

```
grid_params = {"p2": [2, 1, 4, 1], "p3": [10, 20]}
task = mlrun.new_task(
    params={"p1": 8},
    inputs={"data": "https://s3.wasabisys.com/iguazio/data/iris/iris_dataset.csv"},
)
task.with_hyper_params(
    grid_params, selector="r1", strategy="grid", parallel_runs=4, max_errors=3
)
run = fn.run(task, handler=hyper_func2)
```

```
> 2021-10-23 12:51:31,618 [info] starting run hyper-tst2-hyper_func2_
↪ uid=97cc3e255f3c4c93822b0154d63f47f5 DB=http://mlrun-api:8080
> ----- Iteration: (4) -----
2021-10-23 12:51:32.130812 info logging run results to: http://mlrun-api:8080 worker_
↪ id=1
2021-10-23 12:51:32.401258 info p2=1, p3=10, r1=10 at nuclio-default-hyper-tst2-
↪ 5d4976b685-47dh6 worker_id=1
```

(continues on next page)

(continued from previous page)

```

> ----- Iteration: (2) -----
2021-10-23 12:51:32.130713 info    logging run results to: http://mlrun-api:8080 worker_
↪id=0
2021-10-23 12:51:32.409468 info    p2=1, p3=10, r1=10 at nuclio-default-hyper-tst2-
↪5d4976b685-47dh6 worker_id=0

> ----- Iteration: (1) -----
2021-10-23 12:51:32.130765 info    logging run results to: http://mlrun-api:8080 worker_
↪id=0
2021-10-23 12:51:32.432121 info    p2=2, p3=10, r1=20 at nuclio-default-hyper-tst2-
↪5d4976b685-2gdtc worker_id=0

> ----- Iteration: (5) -----
2021-10-23 12:51:32.568848 info    logging run results to: http://mlrun-api:8080 worker_
↪id=0
2021-10-23 12:51:32.716415 info    p2=2, p3=20, r1=40 at nuclio-default-hyper-tst2-
↪5d4976b685-47dh6 worker_id=0

> ----- Iteration: (7) -----
2021-10-23 12:51:32.855399 info    logging run results to: http://mlrun-api:8080 worker_
↪id=1
2021-10-23 12:51:33.054417 info    p2=4, p3=20, r1=80 at nuclio-default-hyper-tst2-
↪5d4976b685-2gdtc worker_id=1

> ----- Iteration: (6) -----
2021-10-23 12:51:32.970002 info    logging run results to: http://mlrun-api:8080 worker_
↪id=0
2021-10-23 12:51:33.136621 info    p2=1, p3=20, r1=20 at nuclio-default-hyper-tst2-
↪5d4976b685-47dh6 worker_id=0

> ----- Iteration: (3) -----
2021-10-23 12:51:32.541187 info    logging run results to: http://mlrun-api:8080 worker_
↪id=1
2021-10-23 12:51:33.301200 info    p2=4, p3=10, r1=40 at nuclio-default-hyper-tst2-
↪5d4976b685-47dh6 worker_id=1

> ----- Iteration: (8) -----
2021-10-23 12:51:33.419442 info    logging run results to: http://mlrun-api:8080 worker_
↪id=0
2021-10-23 12:51:33.672165 info    p2=1, p3=20, r1=20 at nuclio-default-hyper-tst2-
↪5d4976b685-47dh6 worker_id=0

> 2021-10-23 12:51:34.153 [info] best iteration=7, used criteria r1

```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2021-10-23 12:51:34,420 [info] run executed, status=completed
```

## 13.2 Training with the feature store


### In this section

- *Creating an offline dataset*
- *Training*

### 13.2.1 Creating an offline dataset

An offline dataset is a specific instance of the *feature vector definition*. To create this instance, use the feature store's `get_offline_features(<feature_vector>, <target>)` function on the feature vector using the `store://<project_name>/<feature_vector>` reference and an offline target (as in Parquet, CSV, etc.).

You can add a time-based filter condition when running `get_offline_feature` with a given vector. You can also filter with the query argument on all the other features as you like. See `get_offline_features()`.

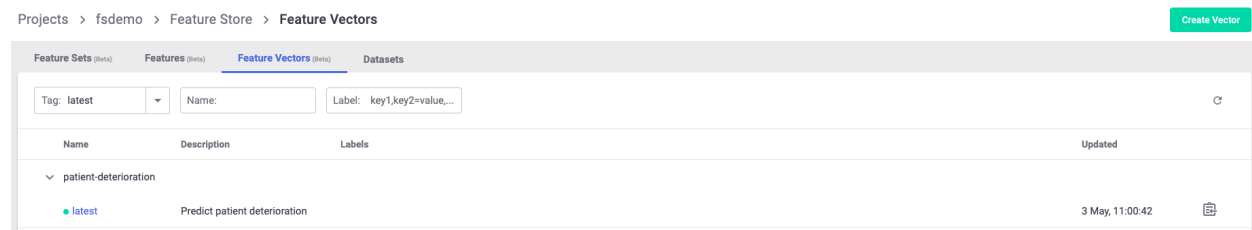

```
import mlrun.feature_store as fstore

feature_vector = '<feature_vector_name>'
offline_fv = fstore.get_offline_features(feature_vector=feature_vector,
    ↪target=ParquetTarget())
```

Behind the scenes, `get_offline_features()` runs a local or Kubernetes job (can be specific by the `run_config` parameter) to retrieve all the relevant data from the feature sets, merge them and return it to the specified `target` which can be a local parquet, AZ Blob store or any other type of available storage.

Once instantiated with a target, the feature vector holds a reference to the instantiated dataset and references it as its current offline source.

You can also use MLRun's `log_dataset()` to log the specific dataset to the project as a specific dataset resource.

### 13.2.2 Training

Training your model using the feature store is a fairly simple task. (The offline dataset can also be used for your EDA.)

To retrieve a feature vector's offline dataset, use MLRun's data item mechanism, referencing the feature vector and specifying to receive it as a `DataFrame`.

```
df = mlrun.get_dataitem(f'store://{feature-vectors}/{project}/patient-deterioration').as_
    ↪df()
```

When trying to retrieve the dataset in your training function, you can put the feature vector reference as an input to the function and use the `as_df()` function to retrieve it automatically.

```
# A sample MLRun training function
def my_training_function(context, # MLRun context
                        dataset, # our feature vector reference
                        **kwargs):

    # retrieve the dataset
    df = dataset.as_df()

    # The rest of your training code...
```

And now you can create the MLRun function and run it locally or over the kubernetes cluster:

```
# Creating the training MLRun function with the code
fn = mlrun.code_to_function('training',
                           kind='job',
                           handler='my_training_function')

# Creating the task to run the function with its dataset
task = mlrun.new_task('training',
                     inputs={'dataset': f'store://feature-vectors/{project}/{feature_
→vector_name}'}) # The feature vector is given as an input to the function

# Running the function over the kubernetes cluster
fn.run(task) # Set local=True to run locally
```



## DEPLOY MODELS AND APPLICATIONS

One of the advantages of using MLRun, is simplifying the deployment process. Deployment is more than just model deployment. Models usually run as part of a greater system which requires data processing before and after executing the model as well as being part of a business application.

Generally, there are two main modes of deployment:

1. **Real-time deployment/serving:** this is the process of having a data and models pipeline respond for real-time events. The challenge here is usually ensuring that the data processing is performed in the same way that the batch training was done and sending the response in low latency. MLRun includes a specialized serving graph that eases that creation of a data transformation pipeline as part of the model serving. Feature store support is another way of ensuring that feature calculations remain consistent between the training process and the serving process. For an end-to-end demo of model serving, refer to the [Serving pre-trained ML/DL models tutorial](#).
2. **Batch inference:** this includes a process that runs on a large dataset. The data is usually read from an offline source, such as files or databases, and the result is also written to offline targets. It is common to set up a schedule when running batch inference. For an end-to-end demo of batch inference, refer to the [batch inference and drift detection tutorial](#).

**In this section**

### 14.1 Real-time serving

MLRun can produce managed real-time serverless pipelines from various tasks, including MLRun models or standard model files. The pipelines use a real-time serverless engine, called Nuclio, which can be deployed anywhere and is capable of delivering intensive data, I/O, and compute workloads.

Serving a model begins by creating a serving function. This function can run one or more models. To load and call a model, one needs to provide a serving class. MLRun has built-in support for commonly used frameworks and therefore it is often convenient to start with *built-in classes*. You can also *create your own custom model serving class*. You can also find an [example notebook](#) that shows how to build and run a serving class.

MLRun serving supports advanced real-time data processing and model serving pipelines. For more details and examples, see the [MLRun serving pipelines](#) documentation.

**In this section**

### 14.1.1 Using built-in model serving classes

MLRun includes built-in classes for commonly used frameworks. While you can *create your own class*, it is often not necessary to write one if you use these standard classes.

The following table specifies, for each framework, the corresponding MLRun `ModelServer` serving class and its dependencies:

framework	serving class	dependencies
Scikit-learn	<code>mlrun.frameworks.sklearn.SklearnModelServer</code>	scikit-learn
TensorFlow.Keras	<code>mlrun.frameworks.tf_keras.TFKerasModelServer</code>	tensorflow
ONNX	<code>mlrun.frameworks.onnx.ONNXModelServer</code>	onnxruntime
XGBoost	<code>mlrun.frameworks.xgboost.XGBoostModelServer</code>	xgboost
LightGBM	<code>mlrun.frameworks.lgbm.LGBMModelServer</code>	lightgbm
PyTorch	<code>mlrun.frameworks.pytorch.PyTorchModelServer</code>	torch

For GPU support, use the `mlrun/mlrun-gpu` image (adding GPU drivers and support).

#### Example

The following code shows how to create a basic serving model using Scikit-learn.

```
import os
import urllib.request
import mlrun

model_path = os.path.abspath('sklearn.pkl')

# Download the model file locally
urllib.request.urlretrieve(mlrun.get_sample_path('models/serving/sklearn.pkl'), model_
↪path)

# Set the base project name
project_name_base = 'serving-test'

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name_base, context="./", user_project=True)

serving_function_image = "mlrun/mlrun"
serving_model_class_name = "mlrun.frameworks.sklearn.SklearnModelServer"

# Create a serving function
serving_fn = mlrun.new_function("serving", project=project.name, kind="serving",
↪image=serving_function_image)

# Add a model, the model key can be anything we choose. The class will be the built-in
↪scikit-learn model server class
model_key = "scikit-learn"
serving_fn.add_model(key=model_key,
                     model_path=model_path,
                     class_name=serving_model_class_name)
```

After the serving function is created, you can test it:

```
# Test data to send
my_data = {"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]]}

# Create a mock server in order to test the model
mock_server = serving_fn.to_mock_server()

# Test the serving function
mock_server.test(f"/v2/models/{model_key}/infer", body=my_data)
```

Similarly, you can deploy the serving function and test it with some data:

```
serving_fn.with_code(body=" ") # Workaround, required only for mlrun <= 1.0.2

# Deploy the serving function
serving_fn.apply(mlrun.auto_mount()).deploy()

# Check the result using the deployed serving function
serving_fn.invoke(path=f'/v2/models/{model_key}/infer', body=my_data)
```

### 14.1.2 Build your own model serving class

Model serving classes implement the full model serving functionality, which includes loading models, pre- and post-processing, prediction, explainability, and model monitoring.

Model serving classes must inherit from `mlrun.serving.V2ModelServer`, and at the minimum implement the `load()` (download the model file(s) and load the model into memory) and `predict()` (accept request payload and return prediction/inference results) methods.

The class is initialized automatically by the model server and can run locally as part of a nuclio serverless function, or as part of a real-time pipeline.

You need to implement two mandatory methods:

- **load()** — download the model file(s) and load the model into memory, note this can be done synchronously or asynchronously.
- **predict()** — accept request payload and return prediction/inference results.

You can override additional methods : `preprocess`, `validate`, `postprocess`, `explain`. You can add a custom api endpoint by adding the method `op_xx(event)`. Invoke it by calling the `/xx` (operation = `xx`).

#### In this section

- *Minimal sklearn serving function example*
- *load() method*
- *predict() method*
- *explain() method*
- *pre/post and validate hooks*
- *Models, routers and graphs*
- *Creating a model serving function (service)*
- *Model monitoring*

### Minimal sklearn serving function example

```
from cloudpickle import load
import numpy as np
import mlrun

class ClassifierModel(mlrun.serving.V2ModelServer):
    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model('.pkl')
        self.model = load(open(model_file, 'rb'))

    def predict(self, body: dict) -> list:
        """Generate model predictions from sample"""
        feats = np.asarray(body['inputs'])
        result: np.ndarray = self.model.predict(feats)
        return result.tolist()
```

Test the function locally using the mock server:

```
import mlrun
from sklearn.datasets import load_iris

fn = mlrun.new_function('my_server', kind='serving')

# set the topology/router and add models
graph = fn.set_topology("router")
fn.add_model("model1", class_name="ClassifierModel", model_path="<path1>")
fn.add_model("model2", class_name="ClassifierModel", model_path="<path2>")

# create and use the graph simulator
server = fn.to_mock_server()
x = load_iris()['data'].tolist()
result = server.test("/v2/models/model1/infer", {"inputs": x})
```

### load() method

In the load method, download the model from external store, run the algorithm/framework load() call, and do any other initialization logic.

The load runs synchronously (the deploy is stalled until load completes). This can be an issue for large models and cause a readiness timeout. You can increase the function spec.readiness\_timeout, or alternatively choose async loading (load () runs in the background) by setting the function spec.load\_mode = "async".

The function self.get\_model() downloads the model metadata object and main file (into model\_file path). Additional files can be accessed using the returned extra\_data (dict of dataitem objects).

The model metadata object is stored in self.model\_spec and provides model parameters, metrics, schema, etc. Parameters can be accessed using self.get\_param(key). The parameters can be specified in the model or during the function/model deployment.

## predict() method

The predict method is called when you access the `/infer` or `/predict` url suffix (operation). The method accepts the request object (as dict), see [Model server API](#). And it should return the specified response object.

## explain() method

The explain method provides a hook for model explainability, and is accessed using the `/explain` operation.

## pre/post and validate hooks

You can overwrite the `preprocess`, `validate`, and `postprocess` methods for additional control. The call flow is:

```
pre-process -> validate -> predict/explain -> post-process
```

## Models, routers and graphs

Every serving function can host multiple models and logical steps. Multiple functions can connect in a graph to form complex real-time pipelines.

The basic serving function has a logical **router** with routes to multiple child **models**. The url or the message determines which model is selected, e.g. using the url schema:

```
/v2/models/<model>[/versions/<ver>]/operation
```

### Note

The `model`, `version` and `operation` can also be specified in the message body to support streaming protocols (e.g. Kafka).

More complex routers can be used to support ensembles (send the request to all child models and aggregate the result), multi-armed-bandit, etc.

You can use a pre-defined Router class, or write your own custom router. Routers can route to models on the same function or access models on a separate function.

To specify the topology, router class and class args use `.set_topology()` with your function.

## Creating a model serving function (service)

To provision a serving function, you need to create an MLRun function of type `serving`. This can be done by using the `code_to_function()` call from a notebook. You can also import an existing serving function/template from the Function Hub.

Example (run inside a notebook): this code converts a notebook to a serving function and adding a model to it:

```
from mlrun import code_to_function
fn = code_to_function('my-function', kind='serving')
fn.add_model('m1', model_path=<model-artifact/dir>, class_name='MyClass', x=100)
```

See `.add_model()` docstring for help and parameters.

See the full [Model Server example](#).

If you want to use multiple versions for the same model, use `:` to separate the name from the version. For example, if the name is `mymodel:v2` it means model name `mymodel` version `v2`.

You should specify the `model_path` (url of the model artifact/dir) and the `class_name` name (or class `module.submodule.class`). Alternatively, you can set the `model_url` for calling a model that is served by another function (can be used for ensembles).

The function object(`fn`) accepts many options. You can specify replicas range (auto-scaling), cpu/gpu/mem resources, add shared volume mounts, secrets, and any other Kubernetes resource through the `fn.spec` object or `fn` methods.

For example, `fn.gpu(1)` means each replica uses one GPU.

To deploy a model, simply call:

```
fn.deploy()
```

You can also deploy a model from within an ML pipeline (check the various demos for details).

## Model monitoring

Model activities can be tracked into a real-time stream and time-series DB. The monitoring data is used to create real-time dashboards, detect drift, and analyze performance.

To monitor a deployed model, apply `set_tracking()` on your serving function and specify the function spec attributes:

```
fn.set_tracking(stream_path, batch, sample)
```

- **stream\_path** — Enterprise: the v3io stream path (e.g. `v3io:///users/..`); CE: a valid Kafka stream (e.g. `kafka://kafka.default.svc.cluster.local:9092`)
- **sample** — optional, sample every N requests
- **batch** — optional, send micro-batches every N requests
- **tracking\_policy** — optional, model tracking configurations, such as setting the scheduling policy of the model monitoring batch job

### 14.1.3 Test and deploy a model server

#### In this section

- *Testing the model*
- *Deploying the model*

## Testing the model

MLRun provides a mock server as part of the `serving` runtime. This gives you the ability to deploy your serving function in your local environment for testing purposes.

```
serving_fn = code_to_function(name='myService', kind='serving', image='mlrun/mlrun')
serving_fn.add_model('my_model', model_path=model_file_path)
server = serving_fn.to_mock_server()
```

You can use test data and programmatically invoke the `predict()` method of mock server. In this example, the model is expecting a python dictionary as input.

```
my_data = '{"inputs": [[5.1, 3.5, 1.4, 0.2], [7.7, 3.8, 6.7, 2.2]]}'
server.test("/v2/models/my_model/infer", body=my_data)
```

The data structure used in the `body` parameter depends on how the `predict()` method of the model server is defined. For examples of how to define your own model server class, see [here](#).

To review the mock server api, see [here](#).

## Deploying the model

Deploying models in MLRun uses a special function type `serving`. You can create a `serving` function using the `code_to_function()` call from a notebook. You can also import an existing serving function/template from the Function Hub.

This example converts a notebook to a serving function and adds a model to it:

```
from mlrun import code_to_function
fn = code_to_function('my-function', kind='serving')
fn.add_model('m1', model_path=<model-artifact/dir>, class_name='MyClass', x=100)
```

See `.add_model()` docstring for help and parameters.

See the full [Model Server example](#).

If you want to use multiple versions for the same model, use `:` to separate the name from the version. For example, if the name is `mymodel:v2` it means model name `mymodel` version `v2`.

You should specify the `model_path` (url of the model artifact/dir) and the `class_name` name (or class module.submodule.class). Alternatively, you can set the `model_url` for calling a model that is served by another function (can be used for ensembles).

The function object(`fn`) accepts many options. You can specify replicas range (auto-scaling), `cpu/gpu/mem` resources, add shared volume mounts, secrets, and any other Kubernetes resource through the `fn.spec` object or `fn` methods.

For example, `fn.gpu(1)` means each replica uses one GPU.

To deploy a model, simply call:

```
fn.deploy()
```

You can also deploy a model from within an ML pipeline (check the various demos for details).

### 14.1.4 Model serving API

MLRun Serving follows the same REST API defined by Triton and [KFServing v2](#).

Nuclio also supports streaming protocols (Kafka, kinesis, MQTT, etc.). When streaming, the model name and operation can be encoded inside the message body.

The APIs are:

- *explain*
- *get model health / readiness*
- *get model metadata*
- *get server info*
- *infer / predict*
- *list models*

#### explain

POST /v2/models/{model\_name}/versions/{VERSION}/explain

Request body:

```
{
  "id" : $string #optional,
  "model" : $string #optional
  "parameters" : $parameters #optional,
  "inputs" : [ $request_input, ... ],
  "outputs" : [ $request_output, ... ] #optional
}
```

Response structure:

```
{
  "model_name" : $string,
  "model_version" : $string #optional,
  "id" : $string,
  "outputs" : [ $response_output, ... ]
}
```

#### get model health / readiness

```
GET v2/models/${MODEL_NAME}/versions/${VERSION}/ready
```

Returns 200 for Ok, 40X for not ready.

### get model metadata

```
GET v2/models/${MODEL_NAME}[/versions/${VERSION}]
```

Response example: {"name": "m3", "version": "v2", "inputs": [...], "outputs": [...]}

### get server info

```
GET /  
GET /v2/health
```

Response example: {'name': 'my-server', 'version': 'v2', 'extensions': []}

### infer / predict

```
POST /v2/models/<model>[/versions/{VERSION}]/infer
```

Request body:

```
{  
  "id" : $string #optional,  
  "model" : $string #optional  
  "data_url" : $string #optional  
  "parameters" : $parameters #optional,  
  "inputs" : [ $request_input, ... ],  
  "outputs" : [ $request_output, ... ] #optional  
}
```

- **id**: Unique Id of the request, if not provided a random value is provided.
- **model**: Model to select (for streaming protocols without URLs).
- **data\_url**: Option to load the inputs from an external file/s3/v3io/... object.
- **parameters**: Optional request parameters.
- **inputs**: List of input elements (numeric values, arrays, or dicts).
- **outputs**: Optional, requested output values.

**Note:** You can also send binary data to the function, for example, a JPEG image. The serving engine pre-processor detects it based on the HTTP content-type and converts it to the above request structure, placing the image bytes array in the inputs field.

Response structure:

```
{  
  "model_name" : $string,  
  "model_version" : $string #optional,  
  "id" : $string,  
  "outputs" : [ $response_output, ... ]  
}
```

## list models

```
GET /v2/models/
```

Response example: {"models": ["m1", "m2", "m3:v1", "m3:v2"]}

## 14.2 Serving with the feature store

### In this section

- *Get online features*
- *Incorporating to the serving model*

### 14.2.1 Get online features

The online features are created ad-hoc using MLRun's feature store online feature service and are served from the **nosql** target for real-time performance needs.

To use it, first create an online feature service with the feature vector.

```
import mlrun.feature_store as fstore

svc = fstore.get_online_feature_service(<feature vector name>)
```

After creating the service, you can use the feature vector's entity to get the latest feature vector for it. Pass a list of {<key name>: <key value>} pairs to receive a batch of feature vectors.

```
fv = svc.get([<key name>: <key value>])
```

### 14.2.2 Incorporating to the serving model

You can serve your models using the *Real-time serving pipelines (graphs)*. (See a [V2 Model Server \(SKLearn\) example](#).) You define a serving model class and the computational graph required to run your entire prediction pipeline, and deploy it as a serverless function using [nuclio](#).

To embed the online feature service in your model server, just create the feature vector service once when the model initializes, and then use it to retrieve the feature vectors of incoming keys.

You can import ready-made classes and functions from the MLRun [Function Hub](#) or write your own. As example of a scikit-learn based model server:

```
from cloudpickle import load
import numpy as np
import mlrun
import os

class ClassifierModel(mlrun.serving.V2ModelServer):

    def load(self):
        """load and initialize the model and/or other elements"""
        model_file, extra_data = self.get_model('.pkl')
```

(continues on next page)

(continued from previous page)

```

self.model = load(open(model_file, 'rb'))

# Setup FS Online service
self.feature_service = mlrun.feature_store.get_online_feature_service('patient-
↳deterioration')

# Get feature vector statistics for imputing
self.feature_stats = self.feature_service.vector.get_stats_table()

def preprocess(self, body: dict, op) -> list:
    # Get patient feature vector
    # from the patient_id given in the request
    vectors = self.feature_service.get(['patient_id': patient_id} for patient_id in_
↳body['inputs']])

    # Impute infs in the data to the feature's mean value
    # using the collected statistics from the Feature store
    feature_vectors = []
    for fv in vectors:
        new_vec = []
        for f, v in fv.items():
            if np.isinf(v):
                new_vec.append(self.feature_stats.loc[f, 'mean'])
            else:
                new_vec.append(v)
        feature_vectors.append(new_vec)

    # Set the final feature vector as the inputs
    # to pass to the predict function
    body['inputs'] = feature_vectors
    return body

def predict(self, body: dict) -> list:
    """Generate model predictions from sample"""
    feats = np.asarray(body['inputs'])
    result: np.ndarray = self.model.predict(feats)
    return result.tolist()

```

Which you can deploy with:

```

# Create the serving function from the code above
fn = mlrun.code_to_function(<function_name>,
                           kind='serving')

# Add a specific model to the serving function
fn.add_model(<model_name>,
             class_name='ClassifierModel',
             model_path=<store_model_file_reference>)

# Enable MLRun's model monitoring
fn.set_tracking()

```

(continues on next page)

(continued from previous page)

```
# Add the system mount to the function so
# it will have access to the model files
fn.apply(mlrun.mount_v3io())
```

```
# Deploy the function to the cluster
fn.deploy()
```

And test using:

```
fn.invoke('/v2/models/infer', body={<key name>: <key value>})
```

## 14.3 Batch inference

Batch inference or offline inference addresses the need to run machine learning model on large datasets. It is the process of generating outputs on a batch of observations.

With batch inference, the batch runs are typically generated during some recurring schedule (e.g., hourly, or daily). These inferences are then stored in a database or a file and can be made available to developers or end users. With batch inference, the goal is usually tied to time constraints and the service-level agreement (SLA) of the job. Conversely, in real time serving, the goal is usually to optimize the number of transactions per second that the model can process. An online application displays a result to the user.

Batch inference can sometimes take advantage of big data technologies, such as Spark, to generate predictions. Big data technologies allow data scientists and machine learning engineers to take advantage of scalable compute resources to generate many predictions simultaneously. To gain a better understanding about the batch inference usage and the function parameters, see the [Batch Inference page on the Function Hub](#).

### 14.3.1 Test your model

To evaluate batch model prior to deployment, you should use the `evaluate` handler of the `auto_trainer` function.

This is typically done during model development. For more information refer to the [Evaluate](#) handler documentation. For example:

```
import mlrun

# Set the base project name
project_name_base = 'batch-inference'

# Initialize the MLRun project object
project = mlrun.get_or_create_project(project_name_base, context="./", user_project=True)

auto_trainer = project.set_function(mlrun.import_function("hub://auto_trainer"))

evaluate_run = project.run_function(
    auto_trainer,
    handler="evaluate",
    inputs={"dataset": train_run.outputs['test_set']},
    params={
        "model": train_run.outputs['model'],
        "label_columns": "labels",
```

(continues on next page)

(continued from previous page)

```
} ,
)
```

### 14.3.2 Deploy your model

Batch inference is implemented in MLRun by running the function with an input dataset. With MLRun you can easily create any custom logic in a function, including loading a model and calling it.

The Function Hub [batch inference function](#) is used for running the models in batch as well as performing drift analysis. The function supports the following frameworks:

- Scikit-learn
- XGBoost
- LightGBM
- Tensorflow/Keras
- PyTorch
- ONNX

Internally the function uses MLRun's out-of-the-box capability to load run a model via the `mlrun.frameworks.auto_mlrun.AutoMLRun` class.

#### Basic example

The simplest example to run the function is as follows:

#### Create project

Import MLRun and create a project:

```
import mlrun

project = mlrun.get_or_create_project(
    "batch-inference", context=".", user_project=True
)
batch_inference = mlrun.import_function("hub://batch_inference_v2")
```

#### Get the model

Get the model. The model is a [decision tree classifier](#) from scikit-learn. Note that if you previously trained your model using MLRun, you can reference the model artifact produced during that training process.

```
import sys

suffix = (
    mlrun.__version__.split("-")[0].replace(".", "_")
    if sys.version_info[1] > 7
    else "3.7"
```

(continues on next page)

(continued from previous page)

```

)

model_path = mlrun.get_sample_path(f"models/batch-predict/model-{{suffix}}.pkl")

model_artifact = project.log_model(
    key="model", model_file=model_path, framework="sklearn"
)

```

## Get the data

Get the dataset to perform the inference. The dataset is in parquet format.

```
prediction_set_path = mlrun.get_sample_path("data/batch-predict/prediction_set.parquet")
```

## Run the batch inference function

Run the inference. In the first example we will not perform any drift analysis

```

batch_run = project.run_function(
    batch_inference,
    inputs={"dataset": prediction_set_path, "model_path": model_artifact.uri},
)

```

## Function output

The output of the function is an artifact called prediction:

```
batch_run.artifact("prediction").as_df().head()
```

	feature_0	feature_1	feature_2	feature_3	feature_4	feature_5	\
0	-2.059506	-1.314291	2.721516	-2.132869	-0.693963	0.376643	
1	-1.190382	0.891571	3.726070	0.673870	-0.252565	-0.729156	
2	-0.996384	-0.099537	3.421476	0.162771	-1.143458	-1.026791	
3	-0.289976	-1.680019	3.126478	-0.704451	-1.149112	1.174962	
4	-0.294866	1.044919	2.924139	0.814049	-1.455054	-0.270432	

	feature_6	feature_7	feature_8	feature_9	...	feature_11	feature_12	\
0	3.017790	3.876329	-1.294736	0.030773	...	2.775699	2.361580	
1	2.646563	4.782729	0.318952	-0.781567	...	1.101721	3.723400	
2	2.114702	2.517553	-0.154620	-0.465423	...	1.729386	2.820340	
3	2.860341	3.753661	-0.326119	2.128411	...	2.328688	3.397321	
4	3.380195	2.339669	1.029101	-1.171018	...	1.283565	0.677006	

	feature_13	feature_14	feature_15	feature_16	feature_17	feature_18	\
0	0.173441	0.879510	1.141007	4.608280	-0.518388	0.129690	
1	-0.466867	-0.056224	3.344701	0.194332	0.463992	0.292268	
2	-1.041428	-0.331871	2.909172	2.138613	-0.046252	-0.732631	
3	-0.932060	-1.442370	2.058517	3.881936	2.090635	-0.045832	

(continues on next page)

(continued from previous page)

```

4      -2.147444      -0.494150      3.222041      6.219348      -1.914110      0.317786

      feature_19 predicted_label
0      2.794967           0
1      4.665876           0
2      4.716266           0
3      4.197315           1
4      4.143443           1

[5 rows x 21 columns]

```

## View the results in the UI

The output is saved as a parquet file under the project artifact path. In the UI you can go to the batch-inference-infer job --> artifact tab to view the details.

The screenshot displays the MLRun UI interface. On the left is a sidebar with navigation icons and labels: Projects, Project home, Project monitoring, Feature store, Datasets, Artifacts, Models, Jobs and workflows (highlighted), ML functions, Real-time functions, API gateways, and Project settings. The main content area shows the 'batch-inference-infer' job details. The breadcrumb navigation is 'Projects > batch-inference-iguazio > Jobs'. There are tabs for 'Monitor Jobs', 'Monitor Workflows', and 'Schedule'. The 'batch-inference-infer' job is shown with a status of 'Completed' and a timestamp of 'Sep 26, 12:20:47 PM'. Below the job name are tabs for 'Overview', 'Inputs', 'Artifacts', 'Results', 'Logs', and 'Pods'. The 'Artifacts' tab is selected, showing a table of artifacts. The table has columns for 'Index', 'feature\_0', 'feature\_1', 'feature\_2', 'feature\_3', 'feature\_4', 'feature\_5', and 'feature\_6'. The data shows 7 rows of feature values.

## Scheduling a batch run

To schedule a run, you can set the schedule parameter of the run method. The scheduling is done by using a cron format.

You can also schedule runs from the dashboard. On the Projects > Jobs and Workflows page, you can create a new job using the New Job wizard. At the end of the wizard, you can set the job scheduling. In the following example, the job is set to run every 30 minutes.

```

batch_run = project.run_function(
    batch_inference,
    inputs={"dataset": prediction_set_path, "model_path": model_artifact.uri},
    schedule="*/30 * * * *",
)

```

## Drift analysis

By default, if a model has a sample set statistics, `batch_inference` performs drift analysis and produces a data drift table artifact, as well as numerical drift metrics. In addition, this function either creates or updates an existing `model endpoint` record (depends on the provided `endpoint_id`).

In addition, you can define `"trigger_monitoring_job": True` to trigger the drift job analysis immediately.

To provide sample set statistics for the model you can either:

1. Train the model using MLRun. This allows you to create the sample set during training.
2. Log an external model using `project.log_model` method and provide the training set in the `training_set` parameter.
3. Provide the set explicitly when calling the `batch_inference` function via the `model_endpoint_sample_set` input.

In the example below, we will provide the training set as the sample set






















```
training_set_path = mlrun.get_sample_path("data/batch-predict/training_set.parquet")

batch_run = project.run_function(
    batch_inference,
    inputs={
        "dataset": prediction_set_path,
        "model_endpoint_sample_set": training_set_path,
        "model_path": model_artifact.uri,
    },
    params={
        "label_columns": "label",
        "perform_drift_analysis": True,
        "trigger_monitoring_job": True,
    },
)
```

In this case, instead of just prediction, you get drift analysis. If no label column was provided, the job function tries to retrieve the label columns from the logged model artifact. If also not defined in the model, the label columns are generated with the following format `predicted_label_{i}` where `i` is an incremental number.

The drift table plot that compares the drift between the training data and prediction data per feature:

```
batch_run.artifact("drift_table_plot").show()
```

	Count		Mean		Std		Min		25%		50%		75%		Max		Tvd	Hellinger	Kid	Histograms	
	Sample	Input	Sample	Input	Sample	Input	Sample	Input	Sample	Input	Sample	Input	Sample	Input	Sample	Input					
feature_0	2.5k	5k	-0.0040279	0.021953	0.99581	0.98944	-3.549	-3.267	-0.66448	-0.62897	-0.016297	-0.014179	0.66892	0.71356	3.4002	3.4347	0.0226	0.033574	0.0074546		●
feature_1	2.5k	5k	0.018511	0.00019738	1.0159	0.99075	-3.159	-3.086	-0.68939	-0.64698	0.013921	-0.0030061	0.72087	0.63254	3.8723	4.213	0.0434	0.046301	0.014582		●
feature_2	2.5k	5k	-0.009449	2.992	0.98855	1.1656	-3.242	-0.58678	-0.68192	2.2034	-0.015858	3.0159	0.65041	3.7892	3.697	7.0218	0.6882	0.79006	5.2144		●
feature_3	2.5k	5k	0.015564	-0.0099402	0.98579	0.99484	-3.986	-3.464	-0.64042	-0.69035	-0.017162	0.020511	0.68718	0.67222	3.5643	3.217	0.0384	0.04914	0.017332		●
feature_4	2.5k	5k	0.0043483	0.0038642	1.2859	1.2862	-3.757	-3.742	-1.176	-1.183	-0.13027	-0.10628	0.91575	0.92409	4.375	4.7429	0.0386	0.046911	0.01621		●
feature_5	2.5k	5k	-0.029516	-0.0017621	0.98998	0.99227	-3.288	-3.235	-0.6783	-0.65949	-0.021937	-0.013006	0.64101	0.65223	3.0054	3.3326	0.0496	0.054084	0.017044		●
feature_6	2.5k	5k	-0.011094	3.0164	1.0216	1.1283	-3.258	-1.085	-0.67652	2.2534	-0.019109	3.0389	0.67947	3.8002	3.4455	7.1375	0.6598	0.79261	4.6801		●
feature_7	2.5k	5k	-0.022209	3.0088	1.0213	1.1623	-3.3	-0.62968	-0.70631	2.1986	-0.011425	3.0209	0.6686	3.7956	3.4935	6.7219	0.6646	0.79498	4.9492		●
feature_8	2.5k	5k	0.014922	-0.023379	0.82918	0.84275	-2.13	-2.085	-0.75859	-0.8146	0.25014	0.23857	0.92917	0.87655	1.4455	1.6216	0.0384	0.03972	0.0094354		●
feature_9	2.5k	5k	0.023047	0.045638	0.98049	0.98333	-3.287	-4.242	-0.64952	-0.5999	0.016998	0.064991	0.67323	0.71104	3.6956	3.0063	0.0428	0.046567	0.012618		●
feature_10	2.5k	5k	0.0099619	-0.028823	1.0024	1.0149	-3.468	-3.252	-0.6435	-0.70286	-0.0090713	-0.032369	0.67275	0.62674	3.6221	3.4528	0.0404	0.044734	0.016108		●
feature_11	2.5k	5k	0.0060043	3.0076	0.97702	1.1348	-3.991	-0.61732	-0.67271	2.2412	0.0053545	2.9983	0.6674	3.7647	3.2947	6.5215	0.6384	0.80589	4.8005		●
feature_12	2.5k	5k	0.020975	3.0041	0.99692	1.1485	-3.07	-0.86306	-0.65762	2.2297	0.0099328	2.9875	0.68497	3.7809	3.0677	6.7735	0.599	0.80796	4.5742		●
feature_13	2.5k	5k	-0.005643	0.019551	1.3625	1.3554	-4.484	-4.512	-1.043	-0.99523	-0.13923	-0.12084	1.0242	1.0416	4.283	4.629	0.0396	0.045194	0.013241		●
feature_14	2.5k	5k	0.013093	-0.0087792	1.0037	1.0023	-3.563	-3.216	-0.65073	-0.70916	0.015626	-0.008021	0.67387	0.65929	3.3913	3.1733	0.038	0.054729	0.022306		●
feature_15	2.5k	5k	0.019173	2.9823	1.2	1.3554	-3.654	-1.256	-0.99057	1.9425	0.19495	3.0714	1.0131	4.0396	3.2802	6.4363	0.519	0.74682	3.7154		●
feature_16	2.5k	5k	0.017349	3.0134	0.97533	1.1671	-3.592	-0.82201	-0.64226	2.221	0.0021416	0.0237	0.664	3.8002	3.2731	7.0476	0.636	0.80032	4.6827		●
feature_17	2.5k	5k	-0.0034057	-0.018602	1.0027	0.98866	-3.481	-3.457	-0.68236	-0.68179	-0.0052077	-0.024512	0.65665	0.64268	3.2288	3.3332	0.0328	0.038956	0.0090139		●
feature_18	2.5k	5k	0.00756	0.01097	0.98851	1.0065	-3.753	-3.349	-0.66044	-0.67231	-0.0026512	0.018921	0.67857	0.67869	3.8614	3.4863	0.0424	0.046475	0.015894		●
feature_19	2.5k	5k	0.009379	2.9819	0.99404	1.1577	-3.745	-0.42378	-0.67194	2.1649	0.01106	2.98	0.70243	3.7895	4.5189	7.1048	0.7812	0.79934	6.9668		●
label	2.5k	5k	0.4952	0.5408	0.50008	0.49838	0	0	0	0	0	1	1	1	1	1	0.0456	0.032273	0.0083341		●

You also get a numerical drift metric and boolean flag denoting whether or not data drift is detected:

```
print(batch_run.status.results)
```

```
{'drift_status': False, 'drift_metric': 0.29934242566253266}
```

```
# Data/concept drift per feature (use batch_run.artifact("features_drift_results").get()
↳ to obtain the raw data)
batch_run.artifact("features_drift_results").show()
```

```
{'feature_0': 0.028086840976606773,
'feature_1': 0.04485072701663093,
'feature_2': 0.7391279921664593,
'feature_3': 0.043769819014849734,
'feature_4': 0.042755641152500176,
'feature_5': 0.05184219833790496,
'feature_6': 0.7262042202197605,
'feature_7': 0.7297906294873706,
'feature_8': 0.039060131873550404,
'feature_9': 0.04468363504674985,
'feature_10': 0.042567035578799796,
'feature_11': 0.7221431701127441,
'feature_12': 0.7034787615778625,
'feature_13': 0.04239724655474124,
'feature_14': 0.046364723781764774,
'feature_15': 0.6329075683793959,
```

(continues on next page)

(continued from previous page)

```
'feature_16': 0.7181622588902428,  
'feature_17': 0.03587785749574268,  
'feature_18': 0.04443732609382538,  
'feature_19': 0.7902698698155215,  
'label': 0.017413285340161608}
```

---

## 14.4 Canary and rolling upgrades

---

### Note

Relevant when MLRun is executed in the [Iguazio platform](#) ("**the platform**").

---

Canary rollout is a known practice to first test a software update on a small number of users before rolling it out to all users. In machine learning, the main usage is to test a new model on a small subset of users before rolling it out to all users.

Canary functions are defined using an API gateway. The API gateway is a service that exposes your function as a web service. Essentially, it is a proxy that forwards requests to your functions and returns the response. You can configure authentication on the gateway.

The API traffic is randomly directed to the two functions at the percentages you specify. Start with a low percentage for the canary function. Verify that the canary function works as expected (or modify it until it does work as desired). Then gradually increase its percentage until you turn it into a production function.

### In this section

- *Create an API gateway*
- *Create and use a canary function*


### 14.4.1 Create an API gateway

To create an API gateway in the UI:

1. In your project page, press **API Gateways** tab, then press **NEW API GATEWAY**.
2. Select an **Authentication Mode**:
  - None (default)
  - Basic
  - Access key
  - OAuth2and fill in any required values.
3. Type in the API Gateway parameters:
  - **Name**: The name of the API Gateway. Required
  - **Description**: A description of the API Gateway.
  - **Host**: The host of the API Gateway. (Relevant for open-source only.)

- **Path:** The path of the API Gateway.
4. In **Primary**, type in the function that is triggered via the API Gateway.

### 14.4.2 Create and use a canary function

1. Press **Create a canary function** and type in the function name.
2. Leave the percentages at 5% and 95% to get started, and verify that the canary function works as expected.
3. Gradually increase the percentage, each time verifying its results.
4. When the percentage is high and you are fully satisfied, turn it into a production function by pressing  **Promote**.



## MONITOR AND ALERT

---

**Note:** Monitoring is supported by Iguazio's streaming technology, and open-source integration with Kafka.

---

---

**Note:** This is currently a beta feature.

---

The MLRun's model monitoring service includes built-in model monitoring and reporting capability. With monitoring you get out-of-the-box analysis of:

- **Model performance:** machine learning models train on data. It is important you know how well they perform in production. When you analyze the model performance, it is important you monitor not just the overall model performance, but also the feature-level performance. This gives you better insights for the reasons behind a particular result
- **Data drift:** the change in model input data that potentially leads to model performance degradation. There are various statistical metrics and drift metrics that you can use in order to identify data drift.
- **Concept drift:** applies to the target. Sometimes the statistical properties of the target variable, which the model is trying to predict, change over time in unforeseen ways.
- **Operational performance:** applies to the overall health of the system. This applies to data (e.g., whether all the expected data arrives to the model) as well as the model (e.g., response time, and throughput).

You have the option to set up notifications on various channels once an issue is detected. For example, you can set-up notification to your IT via email and slack when operational performance metrics pass a threshold. You can also set-up automated actions, for example, call a CI/CD pipeline when data drift is detected and allow a data scientist to review the model with the revised data.

Refer to the [model monitoring & drift detection tutorial](#) for an end-to-end example.

**In this section**

### 15.1 Model monitoring overview

---

**Note:** This is currently a beta feature.

---

**In this section**

- *Architecture*
- *Model monitoring using the Iguazio platform interface*

- [Model monitoring using Grafana dashboards](#)

### 15.1.1 Architecture

The model monitoring process flow starts with collecting operational data. The operational data are converted to vectors, which are posted to the Model Server. The model server is then wrapped around a machine learning model that uses a function to calculate predictions based on the available vectors. Next, the model server creates a log for the input and output of the vectors, and the entries are written to the production data stream (a [v3io stream](#)). While the model server is processing the vectors, a Nuclio operation monitors the log of the data stream and is triggered when a new log entry is detected. The Nuclio function examines the log entry, processes it into statistics which are then written to the statistics databases (parquet file, time series database and key value database). The parquet files are written as a feature set under the model monitoring project. The parquet files can be read either using `pandas.read_parquet` or `feature_set.get_offline_features`, like any other feature set. In parallel, a scheduled MLRun job runs reading the parquet files, performing drift analysis. The drift analysis data is stored so that the user can retrieve it in the Iguazio UI or in a Grafana dashboard.

### Drift analysis

The model monitoring feature provides drift analysis monitoring. Model drift in machine learning is a situation where the statistical properties of the target variable (what the model is trying to predict) change over time. In other words, the production data has changed significantly over the course of time and no longer matches the input data used to train the model. So, for this new data, accuracy of the model predictions is low. Drift analysis statistics are computed once an hour. For more information see [Concept Drift](#).

### Common terminology

The following terms are used in all the model monitoring pages:

- **Total Variation Distance (TVD)** — The statistical difference between the actual predictions and the model's trained predictions.
- **Hellinger Distance** — A type of f-divergence that quantifies the similarity between the actual predictions, and the model's trained predictions.
- **Kullback–Leibler Divergence (KLD)** — The measure of how the probability distribution of actual predictions is different from the second model's trained reference probability distribution.
- **Model Endpoint** — A combination of a model and a runtime function that can be a deployed Nuclio function or a job runtime. One function can run multiple endpoints; however, statistics are saved per endpoint.

### See also

- [Model monitoring and drift detection tutorial](#)

## 15.1.2 Model monitoring using the Iguazio platform interface


Iguazio's model monitoring data is available for viewing through the regular platform interface. The platform provides four information pages with model monitoring data.

- *Model endpoint summary list*
- *Model endpoint overview*
- *Model drift analysis*
- *Model features analysis*

1. Select a project from the project tiles screen.
2. From the project dashboard, press the **Models** tile to view the models currently deployed.
3. Press **Model Endpoints** from the menu to display a list of monitored endpoints. If the Model Monitoring feature is not enabled, the endpoints list is empty.

### Model endpoint summary list

The Model Endpoints summary list provides a quick view of the model monitoring data.

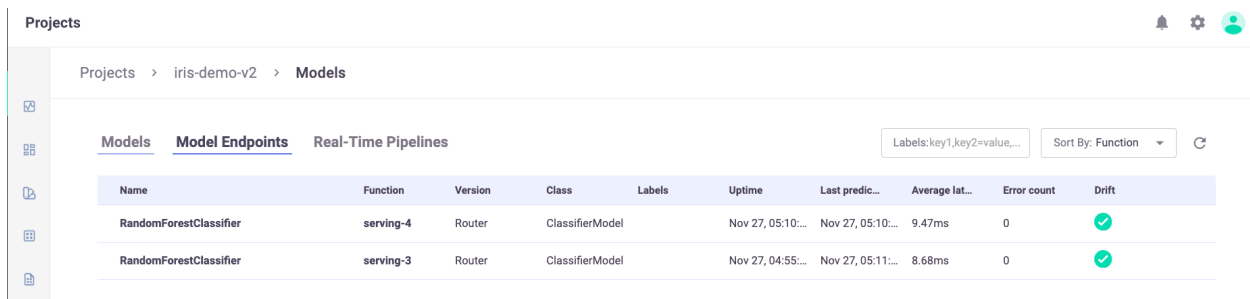

Name	Function	Version	Class	Labels	Uptime	Last predic...	Average lat...	Error count	Drift
RandomForestClassifier	serving-4	Router	ClassifierModel		Nov 27, 05:10:...	Nov 27, 05:10:...	9.47ms	0	✓
RandomForestClassifier	serving-3	Router	ClassifierModel		Nov 27, 04:55:...	Nov 27, 05:11:...	8.68ms	0	✓

The summary page contains the following fields:

- **Name** — the name of the model endpoint
- **Function** — the name of the related function
- **Version** — user configured version taken from model deployment
- **Class** — the implementation class that is used by the endpoint
- **Labels** — user configurable tags that are searchable
- **Uptime** — first request for production data
- **Last Prediction** — most recent request for production data
- **Average Latency** — Average latency time of serving a single event in the last hour
- **Error Count** — includes prediction process errors such as operational issues (For example, a function in a failed state), as well as data processing errors (For example, invalid timestamps, request ids, type mismatches etc.)
- **Drift** — indication of drift status (no drift (green), possible drift (yellow), drift detected (red))

## Model endpoint overview

The Model Endpoints overview pane displays general information about the selected model.

The screenshot shows the MLRun interface with the 'Model Endpoints' tab selected. On the left, a sidebar contains navigation icons. The main panel displays the 'RandomForestClassifier' model details. At the top, there are tabs for 'Models', 'Model Endpoints', and 'Real-Time Pipelines'. A search bar and a 'Sort By: Function' dropdown are also present. Below the model name, there's a 'latest' label and a 'Resource monitoring' button. The 'Overview' tab is active, showing a table of fields. The table is divided into two columns: 'General' and 'Drift'.

General		Drift	
UID:	0448c86cb4ee9690ec1a47b2a4e7eeae847f9945	Mean TVD:	0.17
Model class:	ClassifierModel	Mean Hellinger:	0.23
Model artifact:	store://models/iris-demo-v13/RandomForestClassifier:latest	Mean KLD:	1.19
Function URI:	iris-demo-v13/serving-15	Drift Actual Value:	0.2
Function Tag:	latest	Drift Detected Threshold:	0.7
Feature set:	store://feature-sets/iris-demo-v13/monitoring-serving-15-RandomFore...	Possible Drift Threshold:	0.5
Last prediction:	Feb 8, 11:35:27 AM		
Error count:	0		
Accuracy:	-		
Stream path:	v3io:///users/pipelines/iris-demo-v13/model-endpoints/stream		


The Overview page contains the following fields:

- **UUID** — the ID of the deployed model
- **Model Class** — the implementation class that is used by the endpoint
- **Model Artifact** — reference to the model's file location
- **Function URI** — the MLRun function to access the model
- **Function Tag** — the MLRun function tag
- **Feature set** — the monitoring feature set that points to the monitoring parquet directory
- **Last Prediction** — most recent request for production data
- **Error Count** — includes prediction process errors such as operational issues (For example, a function in a failed state), as well as data processing errors (For example, invalid timestamps, request ids, type mismatches etc.)
- **Accuracy** — a numeric value representing the accuracy of model predictions (N/A)
- **Stream path** — the input and output stream of the selected model
- **Mean TVD** — the mean value of the [Total Variance Distance](#) of the model features and labels
- **Mean Hellinger** — the mean value of the [Hellinger Distance](#) of the model features and labels
- **Mean KLD** — the mean value of the [KL Divergence](#) of the model features and labels
- **Drift Actual Value** — the resulted drift value of the latest drift analysis calculation.
- **Drift Detected Threshold** — pre-defined value to determine a drift
- **Possible Drift Threshold** — pre-defined value to determine a possible drift

**Note:** Click on **Resource monitoring** to get the relevant [Grafana Details Dashboard](#) that displays real-time performance data of the selected model in detail. In addition, use the ellipsis to view the YAML resource file for details about the monitored resource.

Model features analysis

The Features Analysis pane provides details of the drift analysis in a table format with each feature and label in the selected model on its own line.

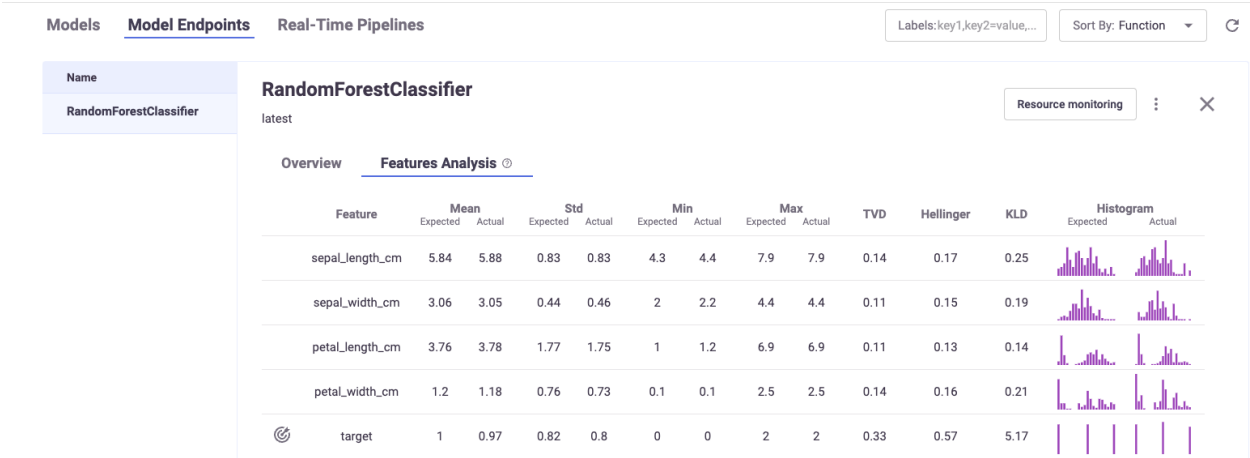

Each field has a pair of columns. The **Expected** column displays the results from the model training phase, and the **Actual** column displays the results from the live production data. The following fields are available:

- **Mean**
- **STD** (Standard deviation)
- **Min**
- **Max**
- **TVD**
- **Hellinger**
- **KLD**
- **Histograms**—the approximate representation of the distribution of the data. Hover over the bars in the graph for the details.


15.1.3 Model monitoring using Grafana dashboards

You can deploy a Grafana service in your Iguazio instance and use Grafana Dashboards to view model monitoring details. There are three dashboards available:

- *Overview Dashboard*
- *Details Dashboard*
- *Performance Dashboard*
- *Applications dashboard*

## Model Monitoring Overview dashboard

The Overview dashboard displays the model endpoint IDs of a specific project. Only deployed models with Model Monitoring enabled are displayed. Endpoint IDs are URIs used to provide access to performance data and drift detection statistics of a deployed model.

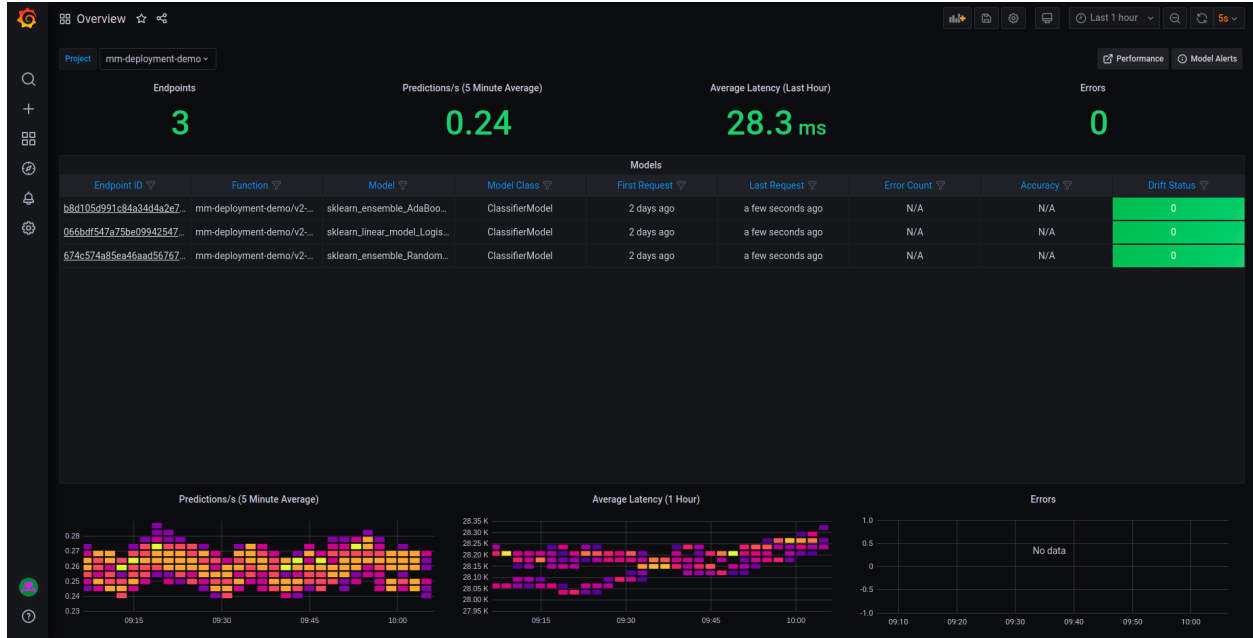

The Overview pane provides details about the performance of all the deployed and monitored models within a project. You can change projects by choosing a new project from the **Project** dropdown. The Overview dashboard displays the number of endpoints in the project, the average predictions per second (using a 5-minute rolling average), the average latency (using a 1-hour rolling average), and the total error count in the project.

Additional details include:

- **Endpoint ID** — the ID of the deployed model. Use this link to drill down to the model performance and details panes.
- **Function** — the MLRun function to access the model
- **Model** — user defined name for the model
- **Model Class** — the implementation class that is used by the endpoint
- **First Request** — first request for production data
- **Last Request** — most recent request for production data
- **Error Count** — includes prediction process errors such as operational issues (for example, a function in a failed state), as well as data processing errors (for example, invalid timestamps, request ids, type mismatches etc.)
- **Drift Status** — no drift (green), possible drift (yellow), drift detected (red)

At the bottom of the dashboard are heat maps for the Predictions per second (5 minute average), Average Latency (one hour average), and Errors. See [How to Read a Heat Map](#) for more details.

Click an endpoint ID to drill down to the performance details of that model.

## How to read a heat map

Heat maps are used to analyze trends and to instantly transform and enhance data through visualizations. This helps to quickly identify areas of interest, and empower users to explore the data in order to pinpoint where there may be potential issues. A heat map uses a matrix layout with colour and shading to show the relationship between two categories of values (x and y axes), so the darker the cell, the higher the value. The values presented along each axis correspond to a cell which is color-coded to represent the relationship between the two categories. The Predictions per second heatmap shows the relationship between time, and the predictions per second, and the Average Latency per hour shows the relationship between time and the latency.

To properly read the heap maps, follow the hierarchy of shades from the darkest (the highest values) to the lightest shades (the lowest values).

**Note:** The exact quantitative values represented by the colors may be difficult to determine. Use the *Performance Dashboard* to see detailed results.

## Model Monitoring Details dashboard

The model monitoring details dashboard displays the real-time performance data of the selected model in detail. Model performance data provided is rich and is used to fine tune or diagnose potential performance issues that may affect business goals. The data in this dashboard changes based on the selection of the project and model.

This dashboard panes are:

- *Project and model summary*
- *Overall drift analysis*
- *Features analysis*
- *Incoming features graph*



## Project and model summary

Use the dropdown to change the project and model. Results are based on the last run only. The dashboard presents the following information about the project:

- **Endpoint ID** — the ID of the deployed model
- **Model** — user defined name for the model
- **Function URI** — the MLRun function to access the model
- **Model Class** — the implementation class that is used by the endpoint
- **Prediction/s** — the average number of predictions per second over a rolling 5-minute period
- **Average Latency** — the average latency over a rolling 1-hour period
- **First Request** — first request for production data
- **Last Request** — most recent request for production data

## Overall Drift Analysis

This pane has two sections: Overall Drift Analysis and Features Analysis. Results are based on the last run only. The Overall Drift Analysis pane provides performance statistics for the currently selected model.

- **TVD** (sum and mean)
- **Hellinger** (sum and mean)
- **KLD** (sum and mean)

## Features Analysis

The Features Analysis pane provides details of the drift analysis for each feature in the selected model. Results are based on the last run only. This pane includes five types of statistics:


- **Actual** (min, mean and max) — results based on actual live data stream
- **Expected** (min, mean and max) — results based on training data
- **TVD**
- **Hellinger**
- **KLD**

## Incoming features graph

This graph displays the performance of the features that are in the selected model based on sampled data points from actual feature production data. The graph displays the values of the features in the model over time.

## Model Monitoring Performance dashboard

Model endpoint performance displays performance details in graphical format.

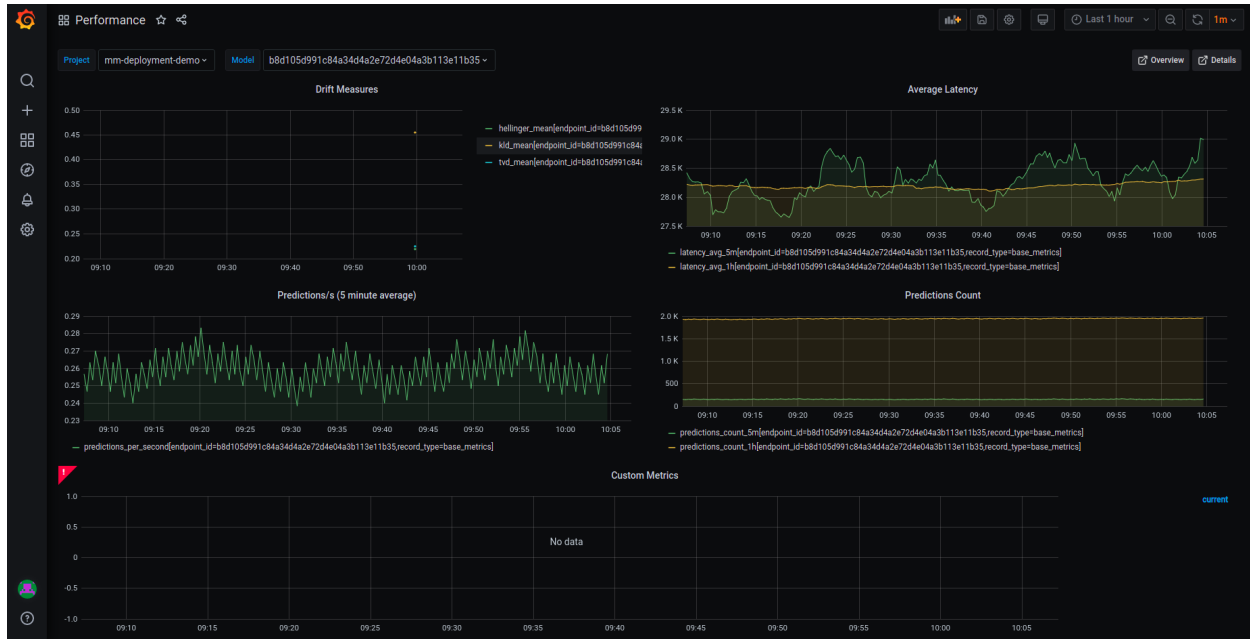


This dashboard has five graphs:

- **Drift Measures** — the overall drift over time for each of the endpoints in the selected model
- **Average Latency** — the average latency of the model in 5 minute intervals, for 5 minutes and 1 hour rolling windows
- **Predictions/s** — the model predictions per second displayed in 5 second intervals for 5 minutes (rolling)
- **Predictions Count** — the number of predictions the model makes for 5 minutes and 1 hour rolling windows
- **Custom Metrics** — user-defined custom metrics

## Model Monitoring Applications dashboard

Model monitoring of deployed applications displays drift details in graphical format.

- **Draft Status by Category** — the percentages of potential drift, no drift and detected drift
- **Average Drift Value Result** — the average of the potential and the detected drift values
- **Latest Result** — summary of the latest draft result
- **Application Summary** — table summary of the application results including the schedule time, the metric name, metric kind, result status, and result numerical value.
- **Result Value by Time** — user-defined metric by time. This value is calculated based on user defined function and represents a specific numerical result of the selected application by time.
- **Drift Detection History** — drift status by time. Using this chart you can detect different types of drifts by time such as gradual drift or incremental drift. To learn more about different types of drift, see [Model monitoring](#). Results that do not represent drift ("irrelevant") are filtered from this chart.

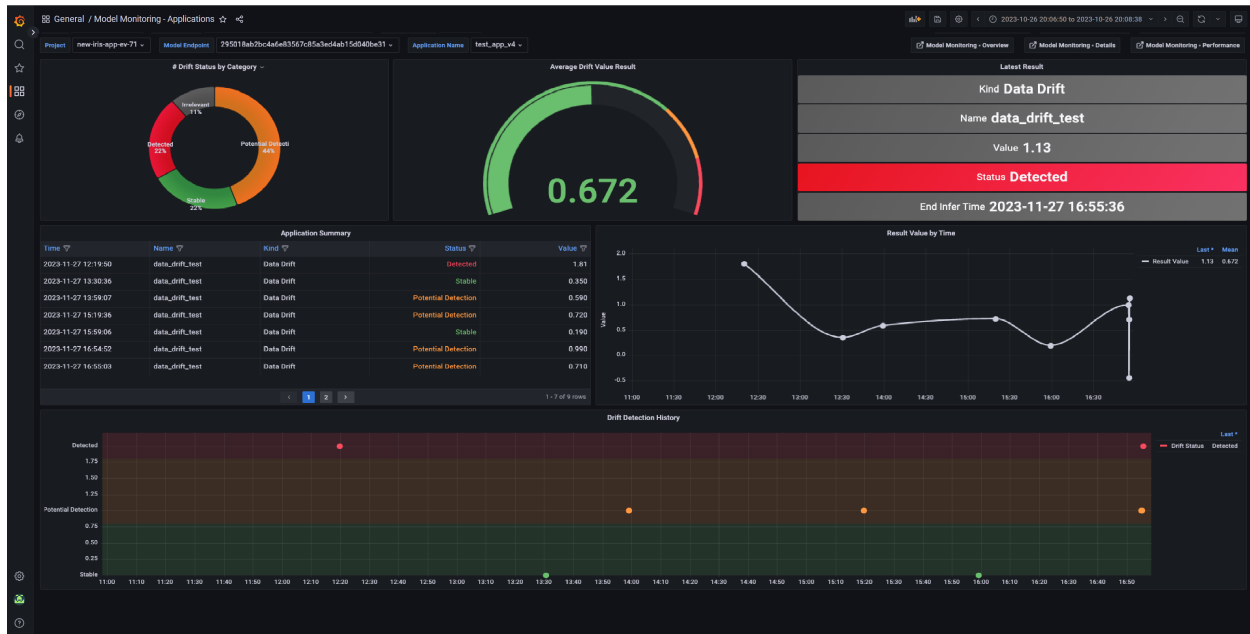


## Configuring Grafana datasources

Verify that you have a Grafana service running in your Iguazio MLOps Platform. If you do not have a Grafana service running, please follow [Creating a Service](#) to add it to your platform. When you create the service: In the **Custom Parameters** tab, **Platform data-access user** parameter, select a user with access to the `/user/pipelines` directory.

In addition, you will have to add access keys to your model-monitoring data source:

1. Open your Grafana service.
2. Navigate to **Configuration | Data Sources**.
3. Press **model-monitoring**.
4. In Custom HTTP Headers, configure the cookie parameter. Set the value of cookie to: `session=j:{"sid": "<YOUR ACCESS KEY>"}`
5. Press **Save & Test** for verification. You'll receive a confirmation with either a success or a failure message.

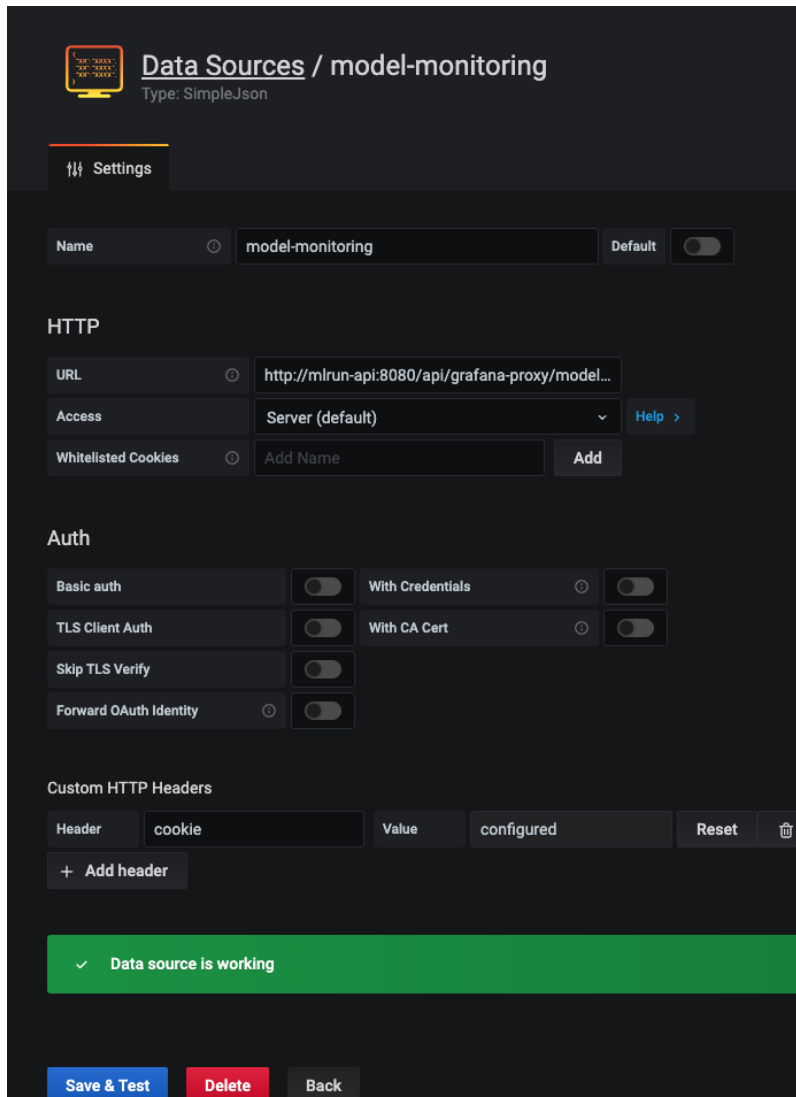

The screenshot shows the Grafana 'Data Sources' configuration page for a data source named 'model-monitoring'. The page has a dark theme. At the top, there's a header with the Grafana logo and the title 'Data Sources / model-monitoring'. Below the header, there's a 'Settings' tab. The main configuration area includes a 'Name' field set to 'model-monitoring' and a 'Default' toggle switch. Under the 'HTTP' section, there's a 'URL' field set to 'http://mlrun-api:8080/api/grafana-proxy/model...', an 'Access' dropdown set to 'Server (default)', and a 'Whitelisted Cookies' section with an 'Add Name' input and an 'Add' button. The 'Auth' section contains several toggle switches: 'Basic auth', 'TLS Client Auth', 'Skip TLS Verify', 'Forward OAuth Identity', 'With Credentials', and 'With CA Cert'. Below the auth section is a 'Custom HTTP Headers' table with columns for 'Header', 'Value', and 'Reset'. The table currently has one row with 'cookie' as the header and 'configured' as the value. At the bottom of the configuration area, there's a green status bar that says 'Data source is working'. At the very bottom, there are three buttons: 'Save & Test', 'Delete', and 'Back'.

## Configuring Grafana dashboards

From Iguazio 3.5.3, the overview, details, and performance dashboards can be found under **Dashboards | Manage | private**. You can also import the latest dashboards versions by downloading them using the following links:

### Iguazio 3.5.3 and higher

- Model Monitoring - Overview
- Model Monitoring - Details
- Model Monitoring - Performance

### Iguazio up to and including 3.5.2

- Model Monitoring - Overview
- Model Monitoring - Details
- Model Monitoring - Performance

Upload dashboards to your Grafana service by:

1. Navigate to your Grafana service in the Services list and press it.
2. Press the dashboards icon in left menu.
3. In the Dashboard Management screen, press **IMPORT**, and select one file to import. Repeat this step for each dashboard.

---

**Note:** You need to train and deploy a model to see results in the dashboards. The dashboards immediately display data if you already have a model that is trained and running with production data.

---

## 15.2 Enable model monitoring

---

**Note:** This is currently a beta feature.

---

To see tracking results, model monitoring needs to be enabled in each model.

To utilize drift measurement, supply the train set in the training step.

### In this section

- *Enabling model monitoring*
- *Model monitoring demo*
  - *Deploy model servers*
  - *Simulating requests*

### 15.2.1 Enabling model monitoring

Model activities can be tracked into a real-time stream and time-series DB. The monitoring data is used to create real-time dashboards, detect drift, and analyze performance.

To monitor a deployed model, apply `set_tracking()` on your serving function and specify the function spec attributes:

```
fn.set_tracking(stream_path, batch, sample, tracking_policy)
```

- **stream\_path**
  - Enterprise: the v3io stream path (e.g. `v3io:///users/..`)
  - CE: a valid Kafka stream (e.g. `kafka://kafka.default.svc.cluster.local:9092`)
- **sample** — optional, sample every N requests
- **batch** — optional, send micro-batches every N requests
- **tracking\_policy** — optional, model tracking configurations, such as setting the scheduling policy of the model monitoring batch job

If a serving function is configured for model-monitoring tracking, use this procedure to change the parameters of the tracking (for example changing the `default_batch_intervals` of the `tracking_policy`):

1. Delete the "model-monitoring-batch" job function (can be found under ML functions).
2. Delete the "model-monitoring-batch" schedule job (can be found under Jobs and Workflows -> Schedule).

3. Redeploy the serving function with new model-monitoring tracking parameters.

## 15.2.2 Model monitoring demo

Use the following code to test and explore model monitoring.

```
# Set project name
project_name = "demo-project"
```

### Deploy model servers

Use the following code to deploy a model server in the Iguazio instance.

```
import os
import pandas as pd
from sklearn.datasets import load_iris
import sys

import mlrun
from mlrun import import_function, get_dataitem, get_or_create_project
from mlrun.platforms import auto_mount

project = get_or_create_project(project_name, context=".")
project.set_model_monitoring_credentials(os.environ.get("V3IO_ACCESS_KEY"))

# Download the pre-trained Iris model
# We choose the correct model to avoid pickle warnings
suffix = (
    mlrun.__version__.split("-")[0].replace(".", "_")
    if sys.version_info[1] > 9
    else "3.9"
)
model_path = mlrun.get_sample_path(f"models/model-monitoring/model-{suffix}.pkl")

get_dataitem(model_path).download("model.pkl")

iris = load_iris()
train_set = pd.DataFrame(
    iris["data"],
    columns=["sepal_length_cm", "sepal_width_cm", "petal_length_cm", "petal_width_cm"],
)

# Import the serving function from the Function Hub
serving_fn = import_function("hub://v2_model_server", project=project_name).apply(
    auto_mount()
)

model_name = "RandomForestClassifier"

# Log the model through the projects API so that it is available through the feature_
# ↪ store API
project.log_model(model_name, model_file="model.pkl", training_set=train_set)
```

(continues on next page)

(continued from previous page)

```
# Add the model to the serving function's routing spec
serving_fn.add_model(
    model_name, model_path=f"store://{project_name}/{model_name}:latest"
)

# Enable model monitoring
serving_fn.set_tracking()

# Deploy the function
serving_fn.deploy()
```

## Simulating requests

Use the following code to simulate production data.

```
import json
from time import sleep
from random import choice, uniform

iris_data = iris["data"].tolist()

while True:
    data_point = choice(iris_data)
    serving_fn.invoke(
        f"v2/models/{model_name}/infer", json.dumps({"inputs": [data_point]})
    )
    sleep(uniform(0.2, 1.7))
```

## CI/CD AUTOMATION WITH GIT

In this section

### 16.1 Create a project using a Git source

This example shows how to create a project in MLRun for CI/CD automation based on a remote source, in this case Git. The process is equivalent to using tar.gz, zip archive files. This example assumes you have functions that are ready to run, and that you already cloned the files to your local file system.

The flow covers these steps to create a CI/CD project in MLRun:

1. *Before you start*
2. *Creating a project*
3. *Setting a project source: remote or archive*
4. *Setting and running functions using Git source code*
5. *Setting a workflow*
6. *Running a workflow using a Git source*
7. *Setting and registering the project artifacts*
8. *Creating and saving the project YAML*
9. *Creating and pushing changes to your Git repo or archive file*

#### 16.1.1 Before you start

Install MLRun. If MLRun is not installed use `pip install mlrun==<mlrun server version>` or `sh align_mlrun.sh` (the default MLRun installer that automatically installs the server version).

```
import mlrun
```

Before running this notebook, clone the Git repo to your local machine.

```
# delete the clone folder if exists
!rm -rf ./clone
```

```
# clone the repo to your local machine
!git clone https://github.com/mlrun/ci-cd-tutorial.git ./clone
```

```
Cloning into './clone'...
remote: Enumerating objects: 209, done.
remote: Counting objects: 100% (209/209), done.
remote: Compressing objects: 100% (150/150), done.
remote: Total 209 (delta 118), reused 129 (delta 53), pack-reused 0
Receiving objects: 100% (209/209), 162.20 KiB | 1.65 MiB/s, done.
Resolving deltas: 100% (118/118), done.
```

### 16.1.2 Creating a project

```
# Create a new project or load it from DB
project = mlrun.get_or_create_project(name="new-ci-cd-proj", context="./clone")
```

```
> 2023-05-17 09:04:46,772 [info] loaded project new-ci-cd-proj from MLRun DB
```

or for loading from a private repo:

```
# project = mlrun.get_or_create_project(name='new-ci-cd-proj', context='./', init_git=True,
↪ secrets={"GIT_TOKEN": <github-token>})
```

See more details in [get\\_or\\_create\\_project](#) and [Working with secrets](#).

When you create a new project, MLRun creates a light project YAML, for example:

```
kind: project
metadata:
  name: new-ci-cd-proj
  created: '2022-06-30T09:41:05.612000'
spec:
  functions: []
  workflows: []
  artifacts: []
  desired_state: online
status:
  state: online
```

As you proceed, more information (project metadata) is added to the project YAML.

### 16.1.3 Setting a project source, either remote or archive

Define the project source, and optionally `pull_at_runtime` flag value, and the project working dir, and add them to the `project.yaml` by using the [set\\_source](#) method.

To copy these values also to the functions spec, set `with_repo=True` in the `project.set_function` method.

- If `pull_at_runtime=True` MLRun loads the git/archive repo into the function container at run time and does not require a build. (This is simpler when developing, for production it's preferable to build the image with the code.)
- If `pull_at_runtime` is **not set to True**, you need to deploy the functions (with `function.deploy()`) to build a container.

See more about `pull_at_runtime` in [Loading the code from container vs. loading the code at runtime](#). See also [KubejobRuntime.with\\_source\\_archive](#) and [RemoteRuntime.with\\_source\\_archive](#).

```
# Add the git branch or references to the source e.g.: 'git://url/org/repo.git#<branch-
↪name or refs/heads/.. or refs/tags/..>'.
source = "git://github.com/mlrun/ci-cd-tutorial.git"
```

```
# Set the project source
project.set_source(source=source, pull_at_runtime=True)
```

### 16.1.4 Setting and running functions using Git source code

This section describes: *fetching the data*; *running the function*; *training the model using the fetched data*; and *serving the function*.

The code source files are usually stored under a folder named `./src` in the project context, for example: `./project-context/src/data_fetch.py`

#### Setting the project's functions

To set the function's definitions, use the `set_function` method. This sets the function's metadata in the project YAML, for example: function source (YAML, py, ipynb, function object), name of the function, function handler, function image, function kind, and function requirements.

See more details in `set_function`.

#### Fetching the function's data

##### Tip: Using tags

This example includes a tag value that is used as the Git tag for the release after completing the development. The tag must be added manually to the function. (This tag is internal to MLRun and is not taken from Git.)

```
# Set data_fetch function to the project.yaml file
project.set_function(
    func="./src/data_fetch.py",
    name="data-fetch",
    handler="data_fetch",
    kind="job",
    image="mlrun/mlrun",
    with_repo=True,
    tag="v4",
)
```

```
<mlrun.runtimes.kubejob.KubejobRuntime at 0x7f08d7a1ae50>
```

## Running the function

After you set the function in the project, get the function object with the `get_function` method.

---

### Tip: Change the function spec with `get_function`

You can use the `get_function` method to change the function spec. For example, if you change the function resources and then run the function, it runs with those changes and the changes are stored in the project object cache:

```
data_fetch_func = mlrun.get_function('data-fetch')
data_fetch_func.with_requests(mem='1G',cpu=3)
data_fetch_run = project.run_function('data-fetch')
```

---

Run the function using the `run_function` method both to *run jobs locally* and *remotely on the runtime/cluster*. If there are any requirements, you need to build a new image before you run a function. See more details in *Build function image*.

## Running the function locally

First, run the function using the code files from your project context folder on your local file system, for debugging the function. Once you are satisfied, continue with *Running the function remotely on your cluster*.

To run the code locally, use `local=True`.

```
data_fetch_run = project.run_function(
    function="data-fetch", returns=["train-dataset", "test-dataset"], local=True
)
```

```
> 2023-05-17 09:04:46,993 [info] Storing function: {'name': 'data-fetch-data-fetch', 'uid': 'a6e5cc8f573e41f6ae6ef1c049b6e50a', 'db': 'http://mlrun-api:8080'}
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:04:50,355 [info] run executed, status=completed: {'name': 'data-fetch-data-fetch'}
```

## Running the function remotely on your cluster

### Tip: Using a relative handler

If your code is saved to your remote source, you can run the function from a remote source by adding `with_repo=True`. You can also specify a relative handler (`folder_name.file_name.function_handler`) to point to the python code file. (This paradigm does not support running functions in local.)

```
project.set_function(name="\training\",
                    handler="\function.model_training\",
                    image="\mlrun/mlrun\", kind="\job\",with_repo=True
                    )
```

Use the code files from the remote project source (`local=False`).

```
data_fetch_run = project.run_function(
    function="data-fetch", returns=["train-dataset", "test-dataset"], local=False
)
```

```
> 2023-05-17 09:04:50,395 [info] Storing function: {'name': 'data-fetch-data-fetch', 'uid': '860b9700cd3f4724a0669cb7c9732beb', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:04:50,649 [info] Job is running in the background, pod: data-fetch-data-fetch-qd874
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:05:03,834 [info] run executed, status=completed: {'name': 'data-fetch-data-fetch'}
```

```
data_fetch_run.outputs
```

```
{'train-dataset': 'store://artifacts/new-ci-cd-proj-shapira/data-fetch-data-fetch_train-dataset:860b9700cd3f4724a0669cb7c9732beb',
'test-dataset': 'store://artifacts/new-ci-cd-proj-shapira/data-fetch-data-fetch_test-dataset:860b9700cd3f4724a0669cb7c9732beb'}
```

```
data_fetch_run.artifact("train-dataset").as_df().sample(3)
```

	0	1	2	3	4	5	6	\
14	0.655400	1.357176	-0.380252	2.236612	0.102893	-0.038678	0.101061	
27	0.834107	0.572216	-0.872751	0.519342	-1.101798	0.259935	0.398852	
79	-2.040370	3.446461	-0.269668	-0.875862	1.347329	1.412033	0.764714	
	7	8	9	...	11	12	13	14 \

(continues on next page)

(continued from previous page)

```

14  1.555770  1.116734  0.146883  ... -2.132336  0.739735  0.452615  0.299427
27 -0.299485  0.821154  0.018271  ... -1.634293 -0.618584  1.354337 -1.136238
79  2.161531  0.390874 -0.900138  ... -0.904111  2.640541 -2.483898 -1.619484

      15      16      17      18      19  label
14  0.683967 -0.089078  0.609046 -0.895865 -0.578405      1
27  1.248243 -0.593805  0.266741  1.180665  1.212383      1
79 -3.676358  0.704040 -3.192003  1.669527  0.782062      1

```

[3 rows x 21 columns]

## Training the model

```

project.set_function(
    func="./src/train.py",
    name="train",
    handler="train",
    kind="job",
    image="mlrun/mlrun",
    with_repo=True,
    tag="v4",
)

```

```
<mlrun.runtimes.kubejob.KubejobRuntime at 0x7f089febf8d0>
```

```

train_run = project.run_function(
    function="train",
    inputs={
        "train_data": data_fetch_run.outputs["train-dataset"],
        "test_data": data_fetch_run.outputs["test-dataset"],
    },
)

```

```

> 2023-05-17 09:05:04,113 [info] Storing function: {'name': 'train-train', 'uid':
  ↳ '423d664e6e684b1fb9acc9e62189d5b4', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:05:04,362 [info] Job is running in the background, pod: train-train-7z8z8
final state: completed

```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:05:25,610 [info] run executed, status=completed: {'name': 'train-train'}
```

## Serving the function

```
# Create a serving function object
serving = mlrun.new_function(
    name="serving", kind="serving", image="mlrun/mlrun", tag="v4"
)

# Add a model to the model serving function object
serving.add_model(
    key="model",
    model_path=train_run.outputs["model"],
    class_name="mlrun.frameworks.sklearn.SklearnModelServer",
    requirements=["scikit-learn"],
)

# Plot the serving graph
serving.spec.graph.plot(rankdir="LR")
```

```
<graphviz.graphs.Digraph at 0x7f089fe9fb50>
```

```
# Save the function spec into a .yaml file and register it in the project
serving.export(target=f"./{project.context}/function_spec/serving.yaml")
project.set_function(func=f"./function_spec/serving.yaml", name="serving")
```

```
> 2023-05-17 09:05:25,815 [info] function spec saved to path: ././clone/function_spec/
↪serving.yaml
```

```
<mlrun.runtimes.serving.ServingRuntime at 0x7f08a0056150>
```

## CI/CD configuration considerations

- When creating a serving function, the function spec contains metadata of the function steps or the serving function models. Therefore, you need to create a function.yaml file by using the `export` method that exports the function object to a yaml file (that is saved in the function\_spec folder). Then set the function with this yaml file. This approach saves all of the function spec for future deployments. (If you don't set the function yaml, you'll need to set the function steps or models to the function when loading the project.) For example:

```
<function object>.export('./function_spec/model_training.yaml')
project.set_function(
    func="training.yaml",name='training',with_repo=True,kind='serving')
```

- Additionally, if you want to change the default function spec values, e.g. resources, node-selector and more, and want to make this change constant, you need to create a yaml function file and use the yaml function in the `set_function` method.
- When setting a nuclio function, the function handler is a combination of the `file_name::function_handler`, for example: `project.set_function(name='nuclio',handler='multi:multi_3',kind='nuclio',image='mlrun/mlrun',with_repo=True)`

To deploy a remote function, e.g. serving and nuclio kinds, use the `deploy_function` method.

```
# Serve the function
serving_func = project.deploy_function(
    function="serving",
    models=[
        {
            "key": "model",
            "model_path": train_run.outputs["model"],
            "class_name": "mlrun.frameworks.sklearn.SklearnModelServer",
        }
    ],
)
```

```
> 2023-05-17 09:05:25,839 [info] Starting remote function deploy
2023-05-17 09:05:26 (info) Deploying function
2023-05-17 09:05:26 (info) Building
2023-05-17 09:05:26 (info) Staging files and preparing base images
2023-05-17 09:05:26 (info) Building processor image
2023-05-17 09:06:26 (info) Build complete
2023-05-17 09:06:34 (info) Function deploy complete
> 2023-05-17 09:06:37,264 [info] successfully deployed function: {'internal_invocation_
→ urls': ['nuclio-new-ci-cd-proj-shapira-serving-v3.default-tenant.svc.cluster.local:8080
→'], 'external_invocation_urls': ['new-ci-cd-proj-shapira-serving-v3-new-ci-cd-proj-
→shapira.default-tenant.app.cust-cs-il-3-5-2.iguazio-cd2.com/']}
```

```
my_data = """{"inputs": [[-0.60150011, 0.51150308, 0.25701239, -1.51777297, -1.82961288,
0.22983693, -0.40761625, 0.82325082, 1.1779216, 1.08424275,
-0.7031145, -0.40608979, -0.36305977, 1.28075006, 0.94445967,
1.19105828, 1.93498414, 0.69911167, 0.50759757, 0.91565635]]}"""
```

```
serving_func.function.invoke("/", my_data)
```

```
> 2023-05-17 09:06:37,342 [info] invoking function: {'method': 'POST', 'path': 'http://
→nuclio-new-ci-cd-proj-shapira-serving-v3.default-tenant.svc.cluster.local:8080/'}
```

```
{'id': '8ca4f4ef-7765-4d50-8a43-1e77a15e433f',
 'model_name': 'model',
 'outputs': [1]}
```

### 16.1.5 Setting a workflow

After you completed developing your functions (in this example: `data_fetch`, `training`, and `serving`), continue with creating a workflow that runs those functions serially. For more information about workflows and an example of a `workflow.py` file, see [Build and run workflows/pipelines](#).

To set a workflow to a project, use the `set_workflow` method. This method adds or updates a workflow, and specifies a name and the code path in the `project.yaml` file

This example adds a workflow named `main` that points to a file located in `./< project-context >/src/workflow.py`

```
project.set_workflow("main", "./src/workflow.py")
```

### 16.1.6 Running a workflow using a Git source

To run the workflow, use the `run` method. With `run` you can run a workflow or schedule a workflow using kubeflow pipelines by specifying the workflow name or the workflow file path.

To specify running remote, use `remote`.

```
# Run the workflow named main and wait for pipeline completion (watch=True)
project.run("main", watch=True, engine="remote:kfp")
```

```
<IPython.core.display.HTML object>
```

```
<graphviz.graphs.Digraph at 0x7f08d678ae10>
```

```
<IPython.core.display.HTML object>
```

```
626a345a-b67f-4eb0-9a3b-4850185ada10
```

### Running a scheduled workflow

For more information about scheduling workflows, see *Scheduled jobs and workflows*.

```
project.run("main", schedule="0 * * * *")
```

```
> 2023-05-17 09:09:34,482 [warning] WARNING!, you seem to have uncommitted git changes,
↪ use .push()
> 2023-05-17 09:09:34,485 [info] executing workflow scheduling 'workflow-runner-main'
↪ remotely with kfp engine
> 2023-05-17 09:09:34,489 [info] Storing function: {'name': 'main', 'uid':
↪ '88a2eecd5cd14c339529f2c7ced3a011', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:09:34,854 [info] task schedule modified: {'schedule': '0 * * * *',
↪ 'project': 'new-ci-cd-proj-shapira', 'name': 'main'}
```

### 16.1.7 Setting and registering the project artifacts

To register artifacts to a project, use the `set_artifact` method. By adding/setting an artifact in the project spec, they are registered upon loading the project. In general, use this method when you want to register an artifact when loading a project, for example:

- You developed a model artifact in the development system and you want to use this model file in production.
- There are artifacts you want to register by default when you load or create a project.

#### Tip

Do not embed the artifact object in the project yaml. This increases the size of the project yaml file and could affect the project during loading and saving.

#### Registering artifacts in multiple environments

To register artifacts in multiple environments, for example dev and production, you must upload your artifacts to a remote storage e.g. S3. You can change your project artifact path using the MLRun UI or MLRun, for example:

---

```
project.artifact_path='s3:<bucket-name/..'
```

```
# get the model object to register
model_obj = project.get_artifact("model")
```

```
# print a target path
print(model_obj.target_path)
```

```
v3io:///projects/new-ci-cd-proj-shapira/artifacts/626a345a-b67f-4eb0-9a3b-4850185ada10/
↪train/0/model/
```

```
# print model file
model_obj.model_file
```

```
'model.pkl'
```

```
# register the model artifact to the project
project.set_artifact(
    key="model-test",
    artifact=mlrun.artifacts.ModelArtifact(model_file=model_obj.model_file),
    target_path=model_obj.target_path,
)
```

---

### Artifact types

By default, the artifact type is equal to `mlrun.artifacts.Artifact()`. To specify different types, use the relevant artifact object. Then you can specify specific parameters to the artifact object type. See more details in [Artifacts](#).

---

### Registering the runtime values together with their artifacts

When MLRun creates an artifact there are values that are processed in runtime e.g. dataset preview or model metrics. These values are stored in the artifact spec. If you want to store the artifact spec for registering the artifact with those values, export the artifact object to a folder named `./artifacts` and set the artifact using the `artifact.yaml` file. For example:

```
model_obj = project.get_artifact('model')
model_obj.export('./artifact/model_artifact.yaml')
project.set_artifact(key='model', artifact='./model_artifact.yaml')
```

## 16.1.8 Creating and saving the project YAML

The project YAML contains metadata about the project, for example, all the functions set to the project, the artifacts, and the workflow. When you load the project, it loads with all of these functions, artifacts, and workflow.

In general, MLRun uses this metadata to create objects, for example, function objects, and then uses those objects to run the functions.

```
print(project.to_yaml())
```

```
kind: project
metadata:
  name: new-ci-cd-proj-shapira
  created: '2023-05-17T08:51:02.127000'
spec:
  functions:
    - url: ./src/data_fetch.py
      name: data-fetch
      kind: job
      image: mlrun/mlrun
      handler: data_fetch
      with_repo: true
      tag: v3
    - url: ./src/train.py
      name: train
      kind: job
      image: mlrun/mlrun
      handler: train
      with_repo: true
      tag: v3
    - url: ./function_spec/serving.yaml
      name: serving
  workflows:
    - path: ./src/workflow.py
      name: main
  artifacts:
    - kind: model
      metadata:
        project: new-ci-cd-proj-shapira
        key: model-test
      spec:
        target_path: v3io:///projects/new-ci-cd-proj-shapira/artifacts/626a345a-b67f-4eb0-
        ↪ 9a3b-4850185ada10/train/0/model/
        model_file: model.pkl
      status:
        state: created
  conda: ''
  source: git://github.com/GiladShapira94/example-ci-cd.git#master
  origin_url: git://github.com/GiladShapira94/example-ci-cd.git#refs/heads/master
  load_source_on_run: true
  desired_state: online
  owner: shapira
status:
  state: online
```

To export the project content to the yaml file (saved in the project context) and save the project in the database, use the `save` method.

```
# Export the yaml file and save the project
project.save()
```

```
<mlrun.projects.project.MlrunProject at 0x7f08cf86d3d0>
```

## 16.1.9 Creating and pushing changes to your Git repo or archive file

### Creating a Git remote

If you do not clone any files and you do not have any git remotes configured in your local folder you can use `create_remote`. This method creates a git remote and adds the remote to the project as the project source.

For example:

```
project.create_remote(url='https://github.com/mlrun/example-ci-cd.git',name='mlrun-remote'
↪',branch='master')
```

### Pushing changes to the Git repo

After you made changes in your code, push your project context to GitHub repo using `push`.

```
project.push(branch='master',message='update',add=['project.yaml','./src/data_fetch.py',
↪ './src/serving.yaml','./src/train.py','./src/workflow.py'])
```

## 16.2 Load project YAML from Git, Zip, Tar source

After you create your project and you have a project.yaml file with all the necessary metadata within the remote source (Git, zip or gz.tar file), you can simply load that project and run, build, and deploy your functions and workflows.

Run the project automation in *Create a project using a Git source* before you run this workbook.

This notebook presents the steps to load a CI/CD project in MLRun:

1. *Loading a project from a remote URL*
2. *Getting a function object*
3. *Running project functions*
4. *Deploying project functions*
5. *Running the project workflow*

Install mlrun using `pip install mlrun==<mlrun server version>` or `sh align_mlrun.sh` (the default mlrun installer that automatically installs the server version).

```
import mlrun
```

## 16.2.1 Loading a project from a remote URL

This method can be used for loading an MLRun project from yaml/zip/tar/git/dir or from the MLRun DB.

```
# project source to load from -'git://url/org/repo.git#<branch-name or refs/heads/.. or
↪refs/tags/..>'.
source = "git://github.com/mlrun/ci-cd-tutorial.git#refs/tags/v3"
```

**Note** - Add the git branch or refs to the source e.g.: 'git:///org/repo.git#<branch-name or refs/heads/...>'

```
# load the project
project = mlrun.load_project(
    "./clone", url=source, clone=True, name="my-load-proj", user_project=True
)
```

For example:

```
# when loading from private repo
project = mlrun.get_or_create_project(name='new-ci-cd-proj', context='./', init_git=True,
↪secrets={"GIT_TOKEN":<github-token>})
# when running functions in a project from a private repo
project.set_secrets({"GIT_TOKEN":<github-token>})
```

See `mlrun.projects.load_project`.

```
# print project yaml
print(project.to_yaml())
```

```
kind: project
metadata:
  name: my-load-proj-shapira
  created: '2023-04-17T13:27:10.756000'
spec:
  functions:
  - url: ./src/data_fetch.py
    name: data-fetch
    kind: job
    image: mlrun/mlrun
    handler: data_fetch
    with_repo: true
    tag: v2
  - url: ./src/train.py
    name: train
    kind: job
    image: mlrun/mlrun
    handler: train
    with_repo: true
    tag: v2
  - url: ./function_spec/serving.yaml
    name: serving
workflows:
  - path: ./src/workflow.py
    name: main
artifacts:
```

(continues on next page)

(continued from previous page)

```

- kind: model
  metadata:
    project: new-ci-cd-proj-shapira
    key: model-test
  spec:
    target_path: v3io:///projects/new-ci-cd-proj-shapira/artifacts/a5d545c6-fd5d-44e8-
    ↪966c-24b9261314be/train/0/model/
    model_file: model.pkl
  status:
    state: created
conda: ''
source: git://github.com/GiladShapira94/example-ci-cd.git#refs/heads/v2
origin_url: git://github.com/GiladShapira94/example-ci-cd.git#refs/heads/v2
load_source_on_run: true
desired_state: online
status:
  state: online

```

## 16.2.2 Getting a function object

Get the function object using the `get_function` method.

This method allows you to get a function object based on the metadata in your project YAML file or from MLRun DB.

```
serving_func = project.get_function('<function name>')
```

```
serving_func = project.get_function("serving")
```

```

serving_func.add_model(
    key="model",
    model_path=train_run.outputs["model"],
    class_name="mlrun.frameworks.sklearn.SklearnModelServer",
)

```

```
<mlrun.serving.states.TaskStep at 0x7f7f88ba3410>
```

### Tip: Changing the model file path

This serving function points to a model file whose path is stored in the function spec. If you want to change it (for example, to use a newer model file) you need to add the model to the function object and then deploy the function, or alternately, change the function.yaml in the remote source:

```

serving_func = project.get_function('serving')
serving_func.add_model(key='model', model_path=train_run.outputs["model"],
    class_name='mlrun.frameworks.sklearn.SklearnModelServer')
requirements = ["scikit-learn"]
serving_dep = project.deploy_function('serving')

```

Test your serving function locally before deploying it.

```
serving_server = serving_func.to_mock_server()
```

```
> 2023-05-17 09:19:19,976 [warning] run command, file or code were not specified
> 2023-05-17 09:19:20,579 [info] model model was loaded
> 2023-05-17 09:19:20,580 [info] Loaded ['model']
```

```
my_data = """{"inputs": [[-0.60150011, 0.51150308, 0.25701239, -1.51777297, -1.82961288,
0.22983693, -0.40761625, 0.82325082, 1.1779216, 1.08424275,
-0.7031145, -0.40608979, -0.36305977, 1.28075006, 0.94445967,
1.19105828, 1.93498414, 0.69911167, 0.50759757, 0.91565635]]}"""
```

```
serving_server.test("/", my_data)
```

```
X does not have valid feature names, but GradientBoostingClassifier was fitted with
↪ feature names
```

```
{'id': '70c310d8fc10420fa9887546623b0ee0',
 'model_name': 'model',
 'outputs': [1]}
```

### 16.2.3 Running project functions

Run the function using the [run\\_function](#) method both to [run jobs locally](#) and, run remotely on the [runtime/cluster](#). If there are any requirements you need to build a new image before you run a function. See more details in [Build function image](#).

```
project.run_function(
    function="data-fetch", local=True, returns=["train-dataset", "test-dataset"]
)
```

```
> 2023-05-17 09:15:38,824 [info] Storing function: {'name': 'data-fetch-data-fetch', 'uid': '5bd1b1e535894b1385ed1d6d33180741', 'db': 'http://mlrun-api:8080'}
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:15:42,712 [info] run executed, status=completed: {'name': 'data-fetch-
↪ data-fetch'}
```

```
<mlrun.model.RunObject at 0x7f7f53862790>
```

```
data_fetch_run = project.run_function(
    function="data-fetch", local=False, returns=["train-dataset", "test-dataset"]
)
```

```
> 2023-05-17 09:15:42,766 [info] Storing function: {'name': 'data-fetch-data-fetch', 'uid': 'bb814e47e2cd433b8820f19c782fb8af', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:15:43,048 [info] Job is running in the background, pod: data-fetch-data-fetch-q774n
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:15:56,204 [info] run executed, status=completed: {'name': 'data-fetch-data-fetch'}
```

```
train_run = project.run_function(
    function="train",
    inputs={
        "train_data": data_fetch_run.outputs["train-dataset"],
        "test_data": data_fetch_run.outputs["test-dataset"],
    },
)
```

```
> 2023-05-17 09:15:56,355 [info] Storing function: {'name': 'train-train', 'uid': 'b0b6137768c74af2b115b4399ee596e5', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:15:56,743 [info] Job is running in the background, pod: train-train-vzxw9
final state: completed
```

```
<IPython.core.display.HTML object>
```

```
<IPython.core.display.HTML object>
```

```
> 2023-05-17 09:16:18,044 [info] run executed, status=completed: {'name': 'train-train'}
```

### 16.2.4 Deploying project functions

To deploy a remote function e.g. nuclio or serving function, use the `deploy_function` method. You must use this method before invoking Nuclio or serving functions.

```
nuclio_func=project.deploy_function(function='<function name>')
nuclio_func.function.invoke('/', {'int':4})
```

```
serving_dep = project.deploy_function("serving")
```

```
> 2023-05-17 09:19:25,799 [info] Starting remote function deploy
2023-05-17 09:19:26 (info) Deploying function
2023-05-17 09:19:26 (info) Building
2023-05-17 09:19:26 (info) Staging files and preparing base images
2023-05-17 09:19:26 (info) Building processor image
2023-05-17 09:20:41 (info) Build complete
2023-05-17 09:21:19 (info) Function deploy complete
> 2023-05-17 09:21:27,112 [info] successfully deployed function: {'internal_invocation_
↪ urls': ['nuclio-my-load-proj-shapira-serving-v2.default-tenant.svc.cluster.local:8080
↪'], 'external_invocation_urls': ['my-load-proj-shapira-serving-v2-my-load-proj-shapira.
↪ default-tenant.app.cust-cs-il-3-5-2.iguazio-cd2.com/']}
```

```
serving_dep.function.invoke("/", my_data)
```

```
> 2023-05-17 09:21:27,192 [info] invoking function: {'method': 'POST', 'path': 'http://
↪ nuclio-my-load-proj-shapira-serving-v2.default-tenant.svc.cluster.local:8080/'}
```

```
{'id': 'efb4e274-00c2-428d-b462-92222bc64ce5',
 'model_name': 'model',
 'outputs': [1]}
```

## 16.2.5 Running the project workflow

```
# run the workflow named main and wait for the pipeline completion (watch=True)
project.run("main", watch=True, engine="remote:kfp")
```

```
<IPython.core.display.HTML object>
```

```
<graphviz.graphs.Digraph at 0x7f7f7660c310>
```

```
<IPython.core.display.HTML object>
```

```
b6ebe4fd-457e-4992-8eb5-a1b70fc44b94
```

## 16.2.6 Running a scheduled workflow

For more information about scheduling workflows, see *Scheduled jobs and workflows*.

```
project.run("main", watch=True, schedule="0 * * * *")
```

```
> 2023-05-17 09:24:14,370 [warning] WARNING!, you seem to have uncommitted git changes,
↪ use .push()
> 2023-05-17 09:24:14,373 [info] executing workflow scheduling 'workflow-runner-main'
↪ remotely with kfp engine
> 2023-05-17 09:24:14,377 [info] Storing function: {'name': 'main', 'uid':
↪ 'ff401cc316574c4ea94043ddcbab3a9e', 'db': 'http://mlrun-api:8080'}
> 2023-05-17 09:24:14,966 [info] task schedule created: {'schedule': '0 * * * *',
↪ 'project': 'my-load-proj-shapira', 'name': 'main'}
```

## 16.3 Run pipelines with Github Actions, GitLab

You can run your ML Pipelines using CI frameworks like Github Actions, GitLab CI/CD, etc. MLRun supports a simple and native integration with the CI systems.

- Build/run complex workflows composed of local/library functions or external cloud services (e.g. AutoML)
- Support various Pipeline/CI engines (Kubeflow, GitHub, Gitlab, Jenkins)
- Track & version code, data, params, results with minimal effort
- Elastic scaling of each step
- Extensive Function Hub

MLRun workflows can run inside the CI system. The most common method is to use the CLI command `mlrun project` to load the project and run a workflow as part of a code update (e.g. pull request, etc.). The pipeline tasks are executed on the Kubernetes cluster, which is orchestrated by MLRun.

When MLRun is executed inside a [GitHub Action](#) or [GitLab CI/CD](#) pipeline it detects the environment attributes automatically (e.g. repo, commit id, etc.). In addition, a few environment variables and credentials must be set:

- **MLRUN\_DBPATH** — url of the MLRun cluster.
- **V3IO\_USERNAME** — username in the remote Iguazio cluster.
- **V3IO\_ACCESS\_KEY** — access key to the remote Iguazio cluster.
- **GIT\_TOKEN** or **GITHUB\_TOKEN** — Github/Gitlab API token (set automatically in Github Actions).
- **SLACK\_WEBHOOK** — optional. Slack API key when using slack notifications.

When the workflow runs inside the Git CI system it reports the pipeline progress and results back into the Git tracking system, similar to:

**GitLab** Projects Groups More Search or jump to...

**Sample2**

Project overview  
Repository  
Issues  
Merge requests  
Requirements  
CI/CD  
Security & Compliance  
Operations  
Packages & Registries  
Analytics  
Wiki  
Snippets  
Members  
Settings

**Overview** 8 Commits 1 Pipelines 1 Changes 1

**Yaron Haviv** @yhaviv · 2 weeks ago  
Pipeline started in project ci  
[click here to check progress](#)

**Run Results**

pipeline run finished  
click the hyper links below to see detailed results

uid	start	state	name	results	artifacts
...2165b4b0	Apr 26 13:37:06	completed	prep_data	num_rows=150	cleaned_data
...9ffed9e1	Apr 26 13:37:14	completed	train	accuracy=0.9375 test-error=0.0625 auc-micro=0.9921875 auc-weighted=1.0 f1-score=0.9206349206349206 precision_score=0.9047619047619048 recall_score=0.9555555555555556	test_set confusion-matrix precision-recall-multiclass roc-multiclass model
...fc65fac4	Apr 26 13:37:25	completed	test	accuracy=0.9777777777777777 test-error=0.02222222222222223 auc-micro=0.9985185185185185 auc-weighted=0.9985392720306513 f1-score=0.9769016328156113 precision_score=0.9761904761904763 recall_score=0.9791666666666666	confusion-matrix precision-recall-multiclass roc-multiclass test_set_preds

**Yaron Haviv** @yhaviv · 2 weeks ago  
model iris is deployed at <http://default-tenant.app.yh30.iguazio-c0.com:30176>

When working with a private Git repository, you need to create **GIT\_TOKEN** secrets. For more details about creating secrets in mlrun see [MLRun-managed secrets](#).

## Contents

- [Using GitHub Actions](#)
- [Using GitLab CI/CD](#)
- [Using Jenkins Pipeline](#)

### 16.3.1 Using GitHub Actions

When running using [GitHub Actions](#) you need to set the credentials/secrets and add a script under the `.github/workflows/` directory, which is executed when the code is committed/pushed.

Example script that is invoked when you add the comment `"/run"` to your pull request:

```
name: mlrun-project-workflow
on: [issue_comment]

jobs:
  submit-project:
    if: github.event.issue.pull_request != null && startsWith(github.event.comment.body,
    ↪ '/run')
    runs-on: ubuntu-latest

    steps:
```

(continues on next page)

(continued from previous page)

```

- uses: actions/checkout@v3
- name: Set up Python 3.9
  uses: actions/setup-python@v4
  with:
    python-version: '3.9'
    architecture: 'x64'

- name: Install mlrun
  run: python -m pip install pip install mlrun
- name: Submit project
  run: python -m mlrun project ./ -w -r main ${CMD:5}
env:
  V3IO_USERNAME: ${ secrets.V3IO_USERNAME }
  V3IO_API: ${ secrets.V3IO_API }
  V3IO_ACCESS_KEY: ${ secrets.V3IO_ACCESS_KEY }
  MLRUN_DBPATH: ${ secrets.MLRUN_DBPATH }
  GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }
  SLACK_WEBHOOK: ${ secrets.SLACK_WEBHOOK }
  CMD: ${ github.event.comment.body}

```

See the full example in <https://github.com/mlrun/project-demo>

### 16.3.2 Using GitLab CI/CD

When running using [GitLab CI/CD](#) you need to set the credentials/secrets and update the script `.gitlab-ci.yml` directory, which is executed when code is committed/pushed.

Example script that is invoked when you create a pull request (merge requests):

```

image: mlrun/mlrun

run:
  script:
    - python -m mlrun project ./ -w -r ci
  only:
    - merge_requests

```

See the full example in <https://gitlab.com/yhaviv/test2>

### 16.3.3 Using Jenkins Pipeline

When using [Jenkins Pipeline](#) you need to set up the credentials/secrets in Jenkins and and update the script Jenkinsfile in your codebase. You can trigger the Jenkins pipeline either through Jenkins triggers or through the GitHub webhooks.

Example Jenkinsfile that is invoked when you start a Jenkins pipeline (via triggers or GitHub webhooks):

```

pipeline {
  agent any
  environment {
    RELEASE='1.0.0'
    PROJECT_NAME='project-demo'

```

(continues on next page)

(continued from previous page)

```

    }
    stages {
      stage('Audit tools') {
        steps{
          auditTools()
        }
      }
      stage('Build') {
        environment {
          MLRUN_DBPATH='https://mlrun-api.default-tenant.app.us-sales-341.iguazio-
↪cd1.com'
          V3IO_ACCESS_KEY=credentials('V3IO_ACCESS_KEY')
          V3IO_USERNAME='xingsheng'
        }
        agent {
          docker {
            image 'mlrun/mlrun:1.6.2'
          }
        }
        steps {
          echo "Building release ${RELEASE} for project ${PROJECT_NAME}..."
          sh 'chmod +x build.sh'
          withCredentials([string(credentialsId: 'an-api-key', variable: 'API_KEY
↪')] {
            sh '''
              ./build.sh
            '''
          }
        }
      }
      stage('Test') {
        steps {
          echo "Testing release ${RELEASE}"
        }
      }
    }
    post {
      success {
        slackSend channel: '#builds',
                  color: 'good',
                  message: "Project ${env.PROJECT_NAME}, success: ${currentBuild.
↪fullDisplayName}."
      }
      failure {
        slackSend channel: '#builds',
                  color: 'danger',
                  message: "Project ${env.PROJECT_NAME}, FAILED: ${currentBuild.
↪fullDisplayName}."
      }
    }
  }
}

```

(continues on next page)

(continued from previous page)

```
void auditTools() {  
    sh '''  
        git version  
        docker version  
    '''  
}
```

After the Jenkins pipeline is complete, you can see the MLRun job in the MLRun UI.

See the full example in <https://github.com/mlrun/project-demo>.

---

CHAPTER  
**SEVENTEEN**

---

**API INDEX**



## API BY MODULE

MLRun is organized into the following modules. The most common functions are exposed in the `mlrun` module, which is the recommended starting point.

### 18.1 mlrun.frameworks

MLRun provides a quick and easy integration into your code with `mlrun.frameworks`: a collection of sub-modules for the most commonly used machine and deep learning frameworks, providing features such as automatic logging, model management, and distributed training.

#### 18.1.1 mlrun.frameworks.auto\_mlrun

**class** `mlrun.frameworks.auto_mlrun.auto_mlrun.AutoMLRun`

Bases: object

A library of automatic functions for managing models using MLRun's frameworks package.

**static** `apply_mlrun(model: ModelType | None = None, model_name: str | None = None, tag: str = "", model_path: str | None = None, modules_map: Dict[str, None | str | List[str]] | str | None = None, custom_objects_map: Dict[str, str | List[str]] | str | None = None, custom_objects_directory: str | None = None, context: MLClientCtx | None = None, framework: str | None = None, auto_log: bool = True, **kwargs) → ModelHandler`

Use MLRun's 'apply\_mlrun' of the detected given model's framework to wrap the framework relevant methods and gain the framework's features in MLRun. A ModelHandler initialized with the model will be returned.

##### Parameters

- **model** -- The model to wrap. Can be loaded from the model path given as well.
- **model\_name** -- The model name to use for storing the model artifact. If not given will have a default name according to the framework.
- **tag** -- The model's tag to log with.
- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update). If model is not provided, it will be loaded from this path.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import
  ↪ func1, func2
  "module3.sub_module": "func3", # from module3.sub_
  ↪ module import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  ".../custom_model.py": "MyModel",
  ".../custom_objects.py": ["object1", "object2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- A MLRun context.
- **auto\_log** -- Whether to enable auto-logging capabilities of MLRun or not. Auto logging will add default artifacts and metrics besides the one you can pass here.
- **framework** -- The model's framework. If None, AutoMLRun will try to figure out the framework. From the provided model or model path. Default: None.
- **kwargs** -- Additional parameters for the specific framework's 'apply\_mlrun' function like metrics, callbacks and more (read the docs of the required framework to know more).

### Returns

The framework's model handler initialized with the given model.

```
static load_model(model_path: str, model_name: str | None = None, context: MLClientCtx | None =
None, modules_map: Dict[str, None | str | List[str]] | str | None = None,
custom_objects_map: Dict[str, str | List[str]] | str | None = None,
custom_objects_directory: str | None = None, framework: str | None = None,
**kwargs) → ModelHandler
```

Load a model using MLRun's ModelHandler. The loaded model can be accessed from the model handler returned via `model_handler.model`. If the model is a store object uri (it is logged in MLRun) then the

framework will be read automatically, otherwise (for local path and urls) it must be given. The other parameters will be automatically read in case its a logged model in MLRun.

#### Parameters

- **model\_path** -- A store object path of a logged model object in MLRun.
- **model\_name** -- The model name to use for storing the model artifact. If not given will have a default name according to the framework.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import
  ↪ func1, func2
  "module3.sub_module": "func3", # from module3.sub_
  ↪ module import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "/../custom_model.py": "MyModel",
  "/../custom_objects.py": ["object1", "object2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- A MLRun context.
- **framework** -- The model's framework. It must be provided for local paths or urls. If None, AutoMLRun will assume the model path is of a store uri model artifact and try to get the framework from it. Default: None.
- **kwargs** -- Additional parameters for the specific framework's ModelHandler class.

**Returns**

The model inside a MLRun model handler.

**Raises**

**MLRunInvalidArgumentError** -- In case the framework is incorrect or missing.

```
mlrun.frameworks.auto_mlrun.auto_mlrun.framework_to_apply_mlrun(framework: str) → Callable[[...],  
ModelHandler]
```

Get the 'apply\_mlrun' shortcut function of the given framework's name.

**Parameters**

**framework** -- The framework's name.

**Returns**

The framework's 'apply\_mlrun' shortcut function.

**Raises**

**MLRunInvalidArgumentError** -- If the given framework is not supported by AutoMLRun or if it does not have an 'apply\_mlrun' yet.

```
mlrun.frameworks.auto_mlrun.auto_mlrun.framework_to_model_handler(framework: str) →  
Type[ModelHandler]
```

Get the ModelHandler class of the given framework's name.

**Parameters**

**framework** -- The framework's name.

**Returns**

The framework's ModelHandler class.

**Raises**

**MLRunInvalidArgumentError** -- If the given framework is not supported by AutoMLRun.

```
mlrun.frameworks.auto_mlrun.auto_mlrun.get_framework_by_class_name(model: ModelType) → str
```

Get the framework name of the given model by its class name.

**Parameters**

**model** -- The model to get its framework.

**Returns**

The model's framework.

**Raises**

**MLRunInvalidArgumentError** -- If the given model's class name is not supported by AutoMLRun or not recognized.

```
mlrun.frameworks.auto_mlrun.auto_mlrun.get_framework_by_instance(model: ModelType) → str
```

Get the framework name of the given model by its instance.

**Parameters**

**model** -- The model to get his framework.

**Returns**

The model's framework.

**Raises**

**MLRunInvalidArgumentError** -- If the given model type is not supported by AutoMLRun or not recognized.

## 18.1.2 mlrun.frameworks.tf\_keras

```
mlrun.frameworks.tf_keras.apply_mlrun(model: tensorflow.keras.Model | None = None, model_name: str |
None = None, tag: str = "", model_path: str | None = None,
model_format: str = 'SavedModel', save_traces: bool = False,
modules_map: Dict[str, None | str | List[str]] | str | None = None,
custom_objects_map: Dict[str, str | List[str]] | str | None = None,
custom_objects_directory: str | None = None, context:
MLClientCtx | None = None, auto_log: bool = True,
tensorboard_directory: str | None = None,
mlrun_callback_kwargs: Dict[str, Any] | None = None,
tensorboard_callback_kwargs: Dict[str, Any] | None = None,
use_horovod: bool | None = None, **kwargs) →
TFKerasModelHandler
```

Wrap the given model with MLRun's interface providing it with mlrun's additional features.

### Parameters

- **model** -- The model to wrap. Can be loaded from the model path given as well.
- **model\_name** -- The model name to use for storing the model artifact. If not given, the `tf.keras.Model.name` will be used.
- **tag** -- The model's tag to log with.
- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update). If model is not provided, it will be loaded from this path.
- **model\_format** -- The format to use for saving and loading the model. Should be passed as a member of the class 'ModelFormats'. Default: 'ModelFormats.SAVED\_MODEL'.
- **save\_traces** -- Whether or not to use functions saving (only available for the 'Saved-Model' format) for loading the model later without the custom objects dictionary. Only from tensorflow version `>= 2.4.0`. Using this setting will increase the model saving size.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1,
  ↪ func2
  "module3.sub_module": "func3", # from module3.sub_module_
  ↪ import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  ".../custom_optimizer.py": "optimizer",
  ".../custom_layers.py": ["layer1", "layer2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- MLRun context to work with. If no context is given it will be retrieved via 'mlrun.get\_or\_create\_ctx(None)'
- **auto\_log** -- Whether or not to apply MLRun's auto logging on the model. Default: True.
- **tensorboard\_directory** -- If context is not given, or if wished to set the directory even with context, this will be the output for the event logs of tensorboard. If not given, the 'tensorboard\_dir' parameter will be tried to be taken from the provided context. If not found in the context, the default tensorboard output directory will be: /User/.tensorboard/<PROJECT\_NAME> or if working on local, the set artifacts path.
- **mlrun\_callback\_kwargs** -- Key word arguments for the MLRun callback. For further information see the documentation of the class 'MLRunLoggingCallback'. Note that both 'context' and 'auto\_log' parameters are already given here.
- **tensorboard\_callback\_kwargs** -- Key word arguments for the tensorboard callback. For further information see the documentation of the class 'TensorboardLoggingCallback'. Note that both 'context' and 'auto\_log' parameters are already given here.
- **use\_horovod** -- Whether or not to use horovod - a distributed training framework. Default: None, meaning it will be read from context if available and if not - False.

#### Returns

The model with MLRun's interface.

### 18.1.3 mlrun.frameworks.pytorch

`mlrun.frameworks.pytorch.evaluate(model_path: str, dataset: torch.utils.data.DataLoader, model: torch.nn.Module | None = None, loss_function: torch.nn.Module | None = None, metric_functions: List[Callable[[torch.Tensor, torch.Tensor], int | float | ndarray | torch.Tensor]] | torch.nn.Module | None = None, iterations: int | None = None, callbacks_list: List[Callback] | None = None, use_cuda: bool = True, use_horovod: bool = False, auto_log: bool = True, model_name: str | None = None, modules_map: Dict[str, None | str | List[str]] | str | None = None, custom_objects_map: Dict[str, str | List[str]] | str | None = None, custom_objects_directory: str | None = None, mlrun_callback_kwargs: Dict[str, Any] | None = None, context: MLClientCtx | None = None) → Tuple[PyTorchModelHandler, List[int | float | ndarray | torch.Tensor]]`

Use MLRun's PyTorch interface to evaluate the model with the given parameters. For more information and further options regarding the auto logging, see 'PyTorchMLRunInterface' documentation. Notice for auto-logging: In order to log the model to MLRun, its class (torch.Module) must be in the custom objects map or the modules map.

### Parameters

- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update).
- **dataset** -- A data loader for the validation process.
- **model** -- The model to evaluate. If None, the model will be loaded from the given store model path.
- **loss\_function** -- The loss function to use during training.
- **metric\_functions** -- The metrics to use on training and validation.
- **iterations** -- Amount of iterations (batches) to perform on the dataset. If 'None' the entire dataset will be used.
- **callbacks\_list** -- The callbacks to use on this run.
- **use\_cuda** -- Whether or not to use cuda. Only relevant if cuda is available. Default: True.
- **use\_horovod** -- Whether or not to use horovod - a distributed training framework. Default: False.
- **auto\_log** -- Whether or not to apply auto-logging to MLRun. Default: True.
- **model\_name** -- The model name to use for storing the model artifact. If not given, the model's class name will be used.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1, func2
  "module3.sub_module": "func3", # from module3.sub_module import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  ".../custom_optimizer.py": "optimizer",
```

(continues on next page)

(continued from previous page)

```
"/.../custom_layers.py": ["layer1", "layer2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **mlrun\_callback\_kwargs** -- Key word arguments for the MLRun callback. For further information see the documentation of the class 'MLRunLoggingCallback'. Note that both 'context', 'custom\_objects' and 'auto\_log' parameters are already given here.
- **context** -- The context to use for the logs.

#### Returns

A tuple of: [0] = Initialized model handler with the evaluated model. [1] = The evaluation metrics results list.

```
mlrun.frameworks.pytorch.train(model: torch.nn.Module, training_set: torch.utils.data.DataLoader,
                                loss_function: torch.nn.Module, optimizer: torch.optim.Optimizer,
                                validation_set: torch.utils.data.DataLoader | None = None,
                                metric_functions: List[Callable[[torch.Tensor, torch.Tensor], int | float |
                                                                ndarray | torch.Tensor] | torch.nn.Module] | None = None, scheduler=None,
                                scheduler_step_frequency: int | float | str = 'epoch', epochs: int = 1,
                                training_iterations: int | None = None, validation_iterations: int | None =
                                None, callbacks_list: List[Callback] | None = None, use_cuda: bool = True,
                                use_horovod: bool | None = None, auto_log: bool = True, model_name: str
                                | None = None, modules_map: Dict[str, None | str | List[str]] | str | None =
                                None, custom_objects_map: Dict[str, str | List[str]] | str | None = None,
                                custom_objects_directory: str | None = None, tensorboard_directory: str |
                                None = None, mlrun_callback_kwargs: Dict[str, Any] | None = None,
                                tensorboard_callback_kwargs: Dict[str, Any] | None = None, context:
                                MLClientCtx | None = None) → PyTorchModelHandler
```

Use MLRun's PyTorch interface to train the model with the given parameters. For more information and further options regarding the auto logging, see 'PyTorchMLRunInterface' documentation. Notice for auto-logging: In order to log the model to MLRun, its class (torch.Module) must be in the custom objects map or the modules map.

#### Parameters

- **model** -- The model to train.
- **training\_set** -- A data loader for the training process.
- **loss\_function** -- The loss function to use during training.
- **optimizer** -- The optimizer to use during the training.
- **validation\_set** -- A data loader for the validation process.
- **metric\_functions** -- The metrics to use on training and validation.

- **scheduler** -- Scheduler to use on the optimizer at the end of each epoch. The scheduler must have a 'step' method with no input.
- **scheduler\_step\_frequency** -- The frequency in which to step the given scheduler. Can be equal to one of the strings 'epoch' (for at the end of every epoch) and 'batch' (for at the end of every batch), or an integer that specify per how many iterations to step or a float percentage ( $0.0 < x < 1.0$ ) for per x / iterations to step. Default: 'epoch'.
- **epochs** -- Amount of epochs to perform. Default: a single epoch.
- **training\_iterations** -- Amount of iterations (batches) to perform on each epoch's training. If 'None' the entire training set will be used.
- **validation\_iterations** -- Amount of iterations (batches) to perform on each epoch's validation. If 'None' the entire validation set will be used.
- **callbacks\_list** -- The callbacks to use on this run.
- **use\_cuda** -- Whether or not to use cuda. Only relevant if cuda is available. Default: True.
- **use\_horovod** -- Whether or not to use horovod - a distributed training framework. Default: False.
- **auto\_log** -- Whether or not to apply auto-logging (to both MLRun and Tensorboard). Default: True. IF True, the custom objects are not optional.
- **model\_name** -- The model name to use for storing the model artifact. If not given, the model's class name will be used.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1, func2
  "module3.sub_module": "func3", # from module3.sub_module import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "../custom_optimizer.py": "optimizer",
  "../custom_layers.py": ["layer1", "layer2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom

object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **tensorboard\_directory** -- If context is not given, or if wished to set the directory even with context, this will be the output for the event logs of tensorboard. If not given, the 'tensorboard\_dir' parameter will be tried to be taken from the provided context. If not found in the context, the default tensorboard output directory will be: /User/.tensorboard/<PROJECT\_NAME> or if working on local, the set artifacts path.
- **mlrun\_callback\_kwargs** -- Key word arguments for the MLRun callback. For further information see the documentation of the class 'MLRunLoggingCallback'. Note that both 'context', 'custom\_objects' and 'auto\_log' parameters are already given here.
- **tensorboard\_callback\_kwargs** -- Key word arguments for the tensorboard callback. For further information see the documentation of the class 'TensorboardLoggingCallback'. Note that both 'context' and 'auto\_log' parameters are already given here.
- **context** -- The context to use for the logs.

#### Returns

A model handler with the provided model and parameters.

#### Raises

**ValueError** -- If 'auto\_log' is set to True and one all of the custom objects or modules parameters given is None.

### 18.1.4 mlrun.frameworks.sklearn

```
mlrun.frameworks.sklearn.apply_mlrun(model: sklearn.base.BaseEstimator | sklearn.base.BiclusterMixin |
    sklearn.base.ClassifierMixin | sklearn.base.ClusterMixin |
    sklearn.base.DensityMixin | sklearn.base.RegressorMixin |
    sklearn.base.TransformerMixin = None, model_name: str = 'model',
    tag: str = '', model_path: str = None, modules_map: Dict[str, None
    | str | List[str]] | str = None, custom_objects_map: Dict[str, str |
    List[str]] | str = None, custom_objects_directory: str = None,
    context: MLClientCtx = None, artifacts: List[MLPlan] | List[str] |
    Dict[str, dict] = None, metrics: List[Metric] | List[Tuple[Callable |
    str, dict] | Callable | str] | Dict[str, Tuple[Callable | str, dict] |
    Callable | str] = None, x_test: list | tuple | dict | ndarray |
    DataFrame | Series | scipy.sparse.base.spmatrix = None, y_test: list
    | tuple | dict | ndarray | DataFrame | Series |
    scipy.sparse.base.spmatrix = None, sample_set: list | tuple | dict |
    ndarray | DataFrame | Series | scipy.sparse.base.spmatrix | DataItem
    | str = None, y_columns: List[str] | List[int] = None, feature_vector:
    str = None, feature_weights: List[float] = None, labels: Dict[str, str
    | int | float] = None, parameters: Dict[str, str | int | float] = None,
    extra_data: Dict[str, str | bytes | Artifact | DataItem] = None,
    auto_log: bool = True, **kwargs) → SKLearnModelHandler
```

Wrap the given model with MLRun's interface providing it with mlrun's additional features.

#### Parameters

- **model** -- The model to wrap. Can be loaded from the model path given as well.

- **model\_name** -- The model name to use for storing the model artifact. Default: "model".
- **tag** -- The model's tag to log with.
- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update). If model is not provided, it will be loaded from this path.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1, func2
  "module3.sub_module": "func3", # from module3.sub_module import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "../custom_model.py": "MyModel",
  "../custom_objects.py": ["object1", "object2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- MLRun context to work with. If no context is given it will be retrieved via 'mlrun.get\_or\_create\_ctx(None)'
- **artifacts** -- A list of artifacts plans to produce during the run.
- **metrics** -- A list of metrics to calculate during the run.
- **x\_test** -- The validation data for producing and calculating artifacts and metrics post training. Without this, validation will not be performed.
- **y\_test** -- The test data ground truth for producing and calculating artifacts and metrics post training or post predict / predict\_proba.

- **sample\_set** -- A sample set of inputs for the model for logging its stats along the model in favour of model monitoring. If not given the 'x\_train' will be used by default.
- **y\_columns** -- List of names of all the columns in the ground truth labels in case its a pd.DataFrame or a list of integers in case the dataset is a np.ndarray. If not given 'y\_train' is given then the labels / indices in it will be used by default.
- **feature\_vector** -- Feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- List of feature weights, one per input column.
- **labels** -- Labels to log with the model.
- **parameters** -- Parameters to log with the model.
- **extra\_data** -- Extra data to log with the model.
- **auto\_log** -- Whether to apply MLRun's auto logging on the model. Auto logging will add the default artifacts and metrics to the lists of artifacts and metrics. Default: True.

#### Returns

The model handler initialized with the provided model.

### 18.1.5 mlrun.frameworks.xgboost

```
mlrun.frameworks.xgboost.apply_mlrun(model: xgboost.XGBModel = None, model_name: str = 'model',
tag: str = "", model_path: str = None, modules_map: Dict[str, None
| str | List[str]] | str = None, custom_objects_map: Dict[str, str |
List[str]] | str = None, custom_objects_directory: str = None,
context: MLClientCtx = None, artifacts: List[MLPlan] | List[str] |
Dict[str, dict] = None, metrics: List[Metric] | List[Tuple[Callable |
str, dict] | Callable | str] | Dict[str, Tuple[Callable | str, dict] |
Callable | str] = None, x_test: list | tuple | dict | ndarray |
DataFrame | Series | scipy.sparse.base.spmatrix | xgboost.DMatrix
= None, y_test: list | tuple | dict | ndarray | DataFrame | Series |
scipy.sparse.base.spmatrix | xgboost.DMatrix = None, sample_set:
list | tuple | dict | ndarray | DataFrame | Series |
scipy.sparse.base.spmatrix | xgboost.DMatrix | DataItem | str =
None, y_columns: List[str] | List[int] = None, feature_vector: str =
None, feature_weights: List[float] = None, labels: Dict[str, str | int |
float] = None, parameters: Dict[str, str | int | float] = None,
extra_data: Dict[str, str | bytes | Artifact | DataItem] = None,
auto_log: bool = True, **kwargs) → XGBoostModelHandler
```

Wrap the given model with MLRun's interface providing it with mlrun's additional features.

#### Parameters

- **model** -- The model to wrap. Can be loaded from the model path given as well.
- **model\_name** -- The model name to use for storing the model artifact. Default: "model".
- **tag** -- The model's tag to log with.
- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update). If model is not provided, it will be loaded from this path.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the

same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1,
  ↪func2
  "module3.sub_module": "func3", # from module3.sub_module.
  ↪import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  ".../custom_model.py": "MyModel",
  ".../custom_objects.py": ["object1", "object2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- MLRun context to work with. If no context is given it will be retrieved via 'mlrun.get\_or\_create\_ctx(None)'
- **artifacts** -- A list of artifacts plans to produce during the run.
- **metrics** -- A list of metrics to calculate during the run.
- **x\_test** -- The validation data for producing and calculating artifacts and metrics post training. Without this, validation will not be performed.
- **y\_test** -- The test data ground truth for producing and calculating artifacts and metrics post training or post predict / predict\_proba.
- **sample\_set** -- A sample set of inputs for the model for logging its stats along the model in favour of model monitoring.
- **y\_columns** -- List of names of all the columns in the ground truth labels in case its a pd.DataFrame or a list of integers in case the dataset is a np.ndarray. If not given but 'y\_train' / 'y\_test' is given then the labels / indices in it will be used by default.
- **feature\_vector** -- Feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- List of feature weights, one per input column.

- **labels** -- Labels to log with the model.
- **parameters** -- Parameters to log with the model.
- **extra\_data** -- Extra data to log with the model.
- **auto\_log** -- Whether to apply MLRun's auto logging on the model. Auto logging will add the default artifacts and metrics to the lists of artifacts and metrics. Default: True.

#### Returns

The model handler initialized with the provided model.

### 18.1.6 mlrun.frameworks.lgbm

```
mlrun.frameworks.lgbm.apply_mlrun(model: lightgbm.LGBMModel | lightgbm.Booster = None, model_name:
    str = 'model', tag: str = "", model_path: str = None, modules_map:
    Dict[str, None | str | List[str]] | str = None, custom_objects_map:
    Dict[str, str | List[str]] | str = None, custom_objects_directory: str =
    None, context: MLClientCtx = None, model_format: str = 'pkl',
    artifacts: List[MLPlan] | List[str] | Dict[str, dict] = None, metrics:
    List[Metric] | List[Tuple[Callable | str, dict] | Callable | str] | Dict[str,
    Tuple[Callable | str, dict] | Callable | str] = None, x_test: list | tuple |
    dict | ndarray | DataFrame | Series | scipy.sparse.base.spmatrix |
    lightgbm.Dataset = None, y_test: list | tuple | dict | ndarray | DataFrame
    | Series | scipy.sparse.base.spmatrix | lightgbm.Dataset = None,
    sample_set: list | tuple | dict | ndarray | DataFrame | Series |
    scipy.sparse.base.spmatrix | lightgbm.Dataset | DataItem | str = None,
    y_columns: List[str] | List[int] = None, feature_vector: str = None,
    feature_weights: List[float] = None, labels: Dict[str, str | int | float] =
    None, parameters: Dict[str, str | int | float] = None, extra_data: Dict[str,
    str | bytes | Artifact | DataItem] = None, auto_log: bool = True,
    mlrun_logging_callback_kwargs: Dict[str, Any] = None, **kwargs) →
    LGBMModelHandler | None
```

Apply MLRun's interface on top of LightGBM by wrapping the module itself or the given model, providing both with MLRun's quality of life features.

#### Parameters

- **model** -- The model to wrap. Can be loaded from the model path given as well.
- **model\_name** -- The model name to use for storing the model artifact. Default: "model".
- **tag** -- The model's tag to log with.
- **model\_path** -- The model's store object path. Mandatory for evaluation (to know which model to update). If model is not provided, it will be loaded from this path.
- **modules\_map** -- A dictionary of all the modules required for loading the model. Each key is a path to a module and its value is the object name to import from it. All the modules will be imported globally. If multiple objects needed to be imported from the same module a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  "module1": None, # import module1
  "module2": ["func1", "func2"], # from module2 import func1,
  ↪ func2
  "module3.sub_module": "func3", # from module3.sub_module
```

(continues on next page)

(continued from previous page)

```
↪import func3
}
```

If the model path given is of a store object, the modules map will be read from the logged modules map artifact of the model.

- **custom\_objects\_map** -- A dictionary of all the custom objects required for loading the model. Each key is a path to a python file and its value is the custom object name to import from it. If multiple objects needed to be imported from the same py file a list can be given. The map can be passed as a path to a json file as well. For example:

```
{
  ".../custom_model.py": "MyModel",
  ".../custom_objects.py": ["object1", "object2"]
}
```

All the paths will be accessed from the given 'custom\_objects\_directory', meaning each py file will be read from 'custom\_objects\_directory/<MAP VALUE>'. If the model path given is of a store object, the custom objects map will be read from the logged custom object map artifact of the model. Notice: The custom objects will be imported in the order they came in this dictionary (or json). If a custom object is depended on another, make sure to put it below the one it relies on.

- **custom\_objects\_directory** -- Path to the directory with all the python files required for the custom objects. Can be passed as a zip file as well (will be extracted during the run before loading the model). If the model path given is of a store object, the custom objects files will be read from the logged custom object artifact of the model.
- **context** -- MLRun context to work with. If no context is given it will be retrieved via 'mlrun.get\_or\_create\_ctx(None)'
- **artifacts** -- A list of artifacts plans to produce during the run.
- **metrics** -- A list of metrics to calculate during the run.
- **x\_test** -- The validation data for producing and calculating artifacts and metrics post training. Without this, validation will not be performed.
- **y\_test** -- The test data ground truth for producing and calculating artifacts and metrics post training or post predict / predict\_proba.
- **sample\_set** -- A sample set of inputs for the model for logging its stats along the model in favour of model monitoring.
- **y\_columns** -- List of names of all the columns in the ground truth labels in case its a pd.DataFrame or a list of integers in case the dataset is a np.ndarray. If not given but 'y\_train' / 'y\_test' is given then the labels / indices in it will be used by default.
- **feature\_vector** -- Feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- List of feature weights, one per input column.
- **labels** -- Labels to log with the model.
- **parameters** -- Parameters to log with the model.
- **extra\_data** -- Extra data to log with the model.

- **auto\_log** -- Whether to apply MLRun's auto logging on the model. Auto logging will add the default artifacts and metrics to the lists of artifacts and metrics. Default: True.
- **mlrun\_logging\_callback\_kwargs** -- Key word arguments for the MLRun callback. For further information see the documentation of the class 'MLRunLoggingCallback'. Note that 'context' is already given here.

#### Returns

If a model was provided via *model* or *model\_path* the model handler initialized with the provided model will be returned. Otherwise, None.

## 18.2 mlrun

### class mlrun.ArtifactType

Possible artifact types to pack objects as and log using a *mlrun.Packager*.

```
mlrun.code_to_function(name: str = "", project: str = "", tag: str = "", filename: str = "", handler: str = "", kind: str = "", image: str | None = None, code_output: str = "", embed_code: bool = True, description: str = "", requirements: str | List[str] | None = None, categories: List[str] | None = None, labels: Dict[str, str] | None = None, with_doc: bool = True, ignored_tags=None, requirements_file: str = "") → MpiRuntimeV1Alpha1 | MpiRuntimeV1 | RemoteRuntime | ServingRuntime | DaskCluster | KubejobRuntime | LocalRuntime | Spark3Runtime | RemoteSparkRuntime | DatabricksRuntime
```

Convenience function to insert code and configure an mlrun runtime.

Easiest way to construct a runtime type object. Provides the most often used configuration options for all runtimes as parameters.

Instantiated runtimes are considered 'functions' in mlrun, but they are anything from nuclio functions to generic kubernetes pods to spark jobs. Functions are meant to be focused, and as such limited in scope and size. Typically, a function can be expressed in a single python module with added support from custom docker images and commands for the environment. The returned runtime object can be further configured if more customization is required.

One of the most important parameters is 'kind'. This is what is used to specify the chosen runtimes. The options are:

- **local**: execute a local python or shell script
- **job**: insert the code into a Kubernetes pod and execute it
- **nuclio**: insert the code into a real-time serverless nuclio function
- **serving**: insert code into orchestrated nuclio function(s) forming a DAG
- **dask**: run the specified python code / script as Dask Distributed job
- **mpijob**: run distributed Horovod jobs over the MPI job operator
- **spark**: run distributed Spark job using Spark Kubernetes Operator
- **remote-spark**: run distributed Spark job on remote Spark service

Learn more about {Kinds of function (runtimes)}([../concepts/functions-overview.html](#)).

#### Parameters

- **name** -- function name, typically best to use hyphen-case
- **project** -- project used to namespace the function, defaults to 'default'
- **tag** -- function tag to track multiple versions of the same function, defaults to 'latest'
- **filename** -- path to .py/.ipynb file, defaults to current jupyter notebook
- **handler** -- The default function handler to call for the job or nuclio function, in batch functions (job, mpijob, ..) the handler can also be specified in the *.run()* command,

when not specified the entire file will be executed (as main). for nuclio functions the handler is in the form of module:function, defaults to 'main:handler'

- **kind** -- function runtime type string - nuclio, job, etc. (see docstring for all options)
- **image** -- base docker image to use for building the function container, defaults to None
- **code\_output** -- specify '.' to generate python module from the current jupyter notebook
- **embed\_code** -- indicates whether or not to inject the code directly into the function runtime spec, defaults to True
- **description** -- short function description, defaults to "
- **requirements** -- list of python packages or pip requirements file path, defaults to None
- **requirements** -- a list of python packages
- **requirements\_file** -- path to a python requirements file
- **categories** -- list of categories for mlrun Function Hub, defaults to None
- **labels** -- immutable name/value pairs to tag the function with useful metadata, defaults to None
- **with\_doc** -- indicates whether to document the function parameters, defaults to True
- **ignored\_tags** -- notebook cells to ignore when converting notebooks to py code (separated by ';')

#### Returns

pre-configured function object from a mlrun runtime class

example:

```
import mlrun

# create job function object from notebook code and add doc/metadata
fn = mlrun.code_to_function("file_utils", kind="job",
                           handler="open_archive", image="mlrun/mlrun",
                           description = "this function opens a zip archive into a
↳local/mounted folder",
                           categories = ["fileutils"],
                           labels = {"author": "me"})
```

example:

```
import mlrun
from pathlib import Path

# create file
Path("mover.py").touch()

# create nuclio function object from python module call mover.py
fn = mlrun.code_to_function("nuclio-mover", kind="nuclio",
                           filename="mover.py", image="python:3.7",
                           description = "this function moves files from one
↳system to another",
                           requirements = ["pandas"],
                           labels = {"author": "me"})
```

```
mlrun.get_secret_or_env(key: str, secret_provider: Dict | SecretsStore | Callable | None = None, default: str |
                        None = None, prefix: str | None = None) → str
```

Retrieve value of a secret, either from a user-provided secret store, or from environment variables. The function will retrieve a secret value, attempting to find it according to the following order:

1. If *secret\_provider* was provided, will attempt to retrieve the secret from it
2. If an MLRun *SecretsStore* was provided, query it for the secret key
3. An environment variable with the same key
4. An MLRun-generated env. variable, mounted from a project secret (to be used in MLRun runtimes)
5. The default value

Example:

```
secrets = { "KEY1": "VALUE1" }
secret = get_secret_or_env("KEY1", secret_provider=secrets)

# Using a function to retrieve a secret
def my_secret_provider(key):
    # some internal logic to retrieve secret
    return value

secret = get_secret_or_env("KEY1", secret_provider=my_secret_provider, default="TOO-
↳MANY-SECRETS")
```

#### Parameters

- **key** -- Secret key to look for
- **secret\_provider** -- Dictionary, callable or *SecretsStore* to extract the secret value from. If using a callable, it must use the signature *callable(key:str)*
- **default** -- Default value to return if secret was not available through any other means
- **prefix** -- When passed, the prefix is added to the secret key.

#### Returns

The secret value if found in any of the sources, or *default* if provided.

```
mlrun.get_version()
```

get current mlrun version

```
mlrun.handler(labels: Dict[str, str] | None = None, outputs: List[str | Dict[str, str]] | None = None, inputs: bool |
              Dict[str, str | Type] = True)
```

MLRun's handler is a decorator to wrap a function and enable setting labels, parsing inputs (*mlrun.DataItem*) using type hints and log returning outputs using log hints.

Notice: this decorator is now applied automatically with the release of *mlrun.package*. It should not be used manually.

#### Parameters

- **labels** -- Labels to add to the run. Expecting a dictionary with the labels names as keys. Default: None.
- **outputs** -- Log hints (logging configurations) for the function's returned values. Expecting a list of the following values:
  - *str* - A string in the format of '{key}:{artifact\_type}'. If a string was given without ':' it will indicate the key, and the artifact type will be according to the returned value type's default artifact type. The artifact types supported are listed in the relevant type packager.

- *Dict[str, str]* - A dictionary of logging configuration. the key 'key' is mandatory for the logged artifact key.
- None - Do not log the output.

If the list length is not equal to the total amount of returned values from the function, those without log hints will be ignored.

Default: None - meaning no outputs will be logged.

- **inputs** -- Type hints (parsing configurations) for the arguments passed as inputs via the *run* method of an MLRun function. Can be passed as a boolean value or a dictionary:
  - True - Parse all found inputs to the assigned type hint in the function's signature. If there is no type hint assigned, the value will remain an *mlrun.DataItem*.
  - False - Do not parse inputs, leaving the inputs as *mlrun.DataItem*.
  - *Dict[str, Union[Type, str]]* - A dictionary with argument name as key and the expected type to parse the *mlrun.DataItem* to. The expected type can be a string as well, indicating the full module path.

Default: True - meaning inputs will be parsed from DataItem's as long as they are type hinted.

Example:

```
import mlrun

@mlrun.handler(
    outputs=[
        "my_string",
        None,
        {"key": "my_array", "artifact_type": "file", "file_format": "npz"},
        "my_multiplier: result"
    ]
)
def my_handler(array: np.ndarray, m: int):
    m += 1
    array = array * m
    return "I will be logged", "I won't be logged", array, m

>>> mlrun_function = mlrun.code_to_function("my_code.py", kind="job")
>>> run_object = mlrun_function.run(
...     handler="my_handler",
...     inputs={"array": "store://my_array_Artifact"},
...     params={"m": 2}
... )
>>> run_object.outputs
{'my_string': 'I will be logged', 'my_array': 'store://...', 'my_multiplier': 3}
```

`mlrun.import_function(url="", secrets=None, db="", project=None, new_name=None)`

Create function object from DB or local/remote YAML file

Functions can be imported from function repositories (mlrun Function Hub (formerly Marketplace) or local db), or be read from a remote URL (http(s), s3, git, v3io, ..) containing the function YAML

special URLs:

```
function hub:      hub://{source}/{name}[:{tag}]
local mlrun db:    db://{project-name}/{name}[:{tag}]
```

examples:

```
function = mlrun.import_function("hub://auto-trainer")
function = mlrun.import_function("./func.yaml")
function = mlrun.import_function("https://raw.githubusercontent.com/org/repo/func.
↪yaml")
```

### Parameters

- **url** -- path/url to Function Hub, db or function YAML file
- **secrets** -- optional, credentials dict for DB or URL (s3, v3io, ...)
- **db** -- optional, mlrun api/db path
- **project** -- optional, target project for the function
- **new\_name** -- optional, override the imported function name

### Returns

function object

```
mlrun.set_environment(api_path: str | None = None, artifact_path: str = "", access_key: str | None = None,
                      username: str | None = None, env_file: str | None = None, mock_functions: str | None =
                      None)
```

set and test default config for: api path, artifact\_path and project

this function will try and read the configuration from the environment/api and merge it with the user provided project name, artifacts path or api path/access\_key. it returns the configured artifacts path, this can be used to define sub paths.

Note: the artifact path is an mlrun data uri (e.g. `s3://bucket/path`) and can not be used with file utils.

example:

```
from os import path
project_name, artifact_path = set_environment()
set_environment("http://localhost:8080", artifact_path=".")
set_environment(env_file="mlrun.env")
set_environment("<remote-service-url>", access_key="xyz", username="joe")
```

### Parameters

- **api\_path** -- location/url of mlrun api service
- **artifact\_path** -- path/url for storing experiment artifacts
- **access\_key** -- set the remote cluster access key (V3IO\_ACCESS\_KEY)
- **username** -- name of the user to authenticate
- **env\_file** -- path/url to .env file (holding MLRun config and other env vars), see: `set_env_from_file()`
- **mock\_functions** -- set to True to create local/mock functions instead of real containers, set to "auto" to auto determine based on the presence of k8s/Nuclio

### Returns

default project name actual artifact path/url, can be used to create subpaths per task or group of artifacts

## 18.3 mlrun.artifacts

`mlrun.artifacts.get_model(model_dir, suffix="")`

return model file, model spec object, and list of extra data items

this function will get the model file, metadata, and extra data the returned model file is always local, when using remote urls (such as v3io://, s3://, store://, ..) it will be copied locally.

returned extra data dict (of key, DataItem objects) allow reading additional model files/objects e.g. use `DataItem.get()` or `.download(target).as_df()` to read

example:

```
model_file, model_artifact, extra_data = get_model(models_path, suffix='.pkl')
model = load(open(model_file, "rb"))
categories = extra_data['categories'].as_df()
```

### Parameters

- **model\_dir** -- model dir or artifact path (store://..) or DataItem
- **suffix** -- model filename suffix (when using a dir)

### Returns

model filename, model artifact object, extra data dict

`mlrun.artifacts.update_model(model_artifact, parameters: dict | None = None, metrics: dict | None = None, extra_data: dict | None = None, inputs: List[Feature] | None = None, outputs: List[Feature] | None = None, feature_vector: str | None = None, feature_weights: list | None = None, key_prefix: str = "", labels: dict | None = None, write_spec_copy=True, store_object: bool = True)`

Update model object attributes

this method will edit or add attributes to a model object

example:

```
update_model(model_path, metrics={'speed': 100},
             extra_data={'my_data': b'some text', 'file': 's3://mybucket/..'})
```

### Parameters

- **model\_artifact** -- model artifact object or path (store://..) or DataItem
- **parameters** -- parameters dict
- **metrics** -- model metrics e.g. accuracy
- **extra\_data** -- extra data items key, value dict (value can be: path string | bytes | artifact)
- **inputs** -- list of input features (feature vector schema)
- **outputs** -- list of output features (output vector schema)
- **feature\_vector** -- feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- list of feature weights, one per input column
- **key\_prefix** -- key prefix to add to metrics and extra data items
- **labels** -- metadata labels

- **write\_spec\_copy** -- write a YAML copy of the spec to the target dir
- **store\_object** -- Whether to store the model artifact updated.

## 18.4 mlrun.config

Configuration system.

Configuration can be in either a configuration file specified by MLRUN\_CONFIG\_FILE environment variable or by environment variables.

Environment variables are in the format "MLRUN\_httpdb\_\_port=8080". This will be mapped to config.httpdb.port. Values should be in JSON format.

```
class mlrun.config.Config(cfg=None)
```

Bases: object

property dbpath

```
static decode_base64_config_and_load_to_object(attribute_path: str, expected_type=<class  
                                              'dict'>)
```

decodes and loads the config attribute to expected type :param attribute\_path: the path in the default\_config  
e.g. preemptible\_nodes.node\_selector :param expected\_type: the object type valid values are : dict, list  
etc... :return: the expected type instance

```
dump_yaml(stream=None)
```

```
classmethod from_dict(dict_)
```

```
static get_build_args()
```

```
get_default_function_node_selector() → dict
```

```
static get_default_function_pod_requirement_resources(requirement: str, with_gpu: bool =  
                                                    True)
```

### Parameters

- **requirement** -- kubernetes requirement resource one of the following : requests, limits
- **with\_gpu** -- whether to return requirement resources with nvidia.com/gpu field (e.g. you cannot specify GPU requests without specifying GPU limits) <https://kubernetes.io/docs/tasks/manage-gpus/scheduling-gpus/>

### Returns

a dict containing the defaults resources (cpu, memory, nvidia.com/gpu)

```
get_default_function_pod_resources(with_gpu_requests=False, with_gpu_limits=False)
```

```
get_default_function_security_context() → dict
```

```
static get_default_hub_source() → str
```

```
get_model_monitoring_file_target_path(project: str = "", kind: str = "", target: str = 'online',  
                                       artifact_path: str | None = None, application_name: str |  
                                       None = None) → str
```

Get the full path from the configuration based on the provided project and kind.

### Parameters

- **project** -- Project name.
- **kind** -- Kind of target path (e.g. events, log\_stream, endpoints, etc.)
- **target** -- Can be either online or offline. If the target is online, then we try to get a specific path for the provided kind. If it doesn't exist, use the default path. If the target path is offline and the offline path is already a full path in the configuration, then the result will be that path as-is. If the offline path is a relative path, then the result will be based on the project artifact path and the offline relative path. If project artifact path wasn't provided, then we use MLRun artifact path instead.
- **artifact\_path** -- Optional artifact path that will be used as a relative path. If not provided, the relative artifact path will be taken from the global MLRun artifact path.
- **application\_name** -- Application name, None for model\_monitoring\_stream.

#### Returns

Full configured path for the provided kind.

**static get\_parsed\_igz\_version()** → Version | None

**get\_preemptible\_node\_selector()** → dict

**get\_preemptible\_tolerations()** → list

**get\_s3\_storage\_options()** → Dict[str, Any]

Generate storage options dictionary as required for handling S3 path in fsspec. The model monitoring stream graph uses this method for generating the storage options for S3 parquet target path. :return: A storage options dictionary in which each key-value pair represents a particular configuration, such as endpoint\_url or aws access key.

**static get\_security\_context\_enrichment\_group\_id(user\_unix\_id: int)** → int

**static get\_storage\_auto\_mount\_params()**

**get\_v3io\_access\_key()** → str | None

**static get\_valid\_function\_priority\_class\_names()**

**is\_api\_running\_on\_k8s()**

**is\_ce\_mode()** → bool

**is\_explicit\_ack(version=None)** → bool

**is\_nuclio\_detected()**

**static is\_pip\_ca\_configured()**

**is\_preemption\_nodes\_configured()**

**static is\_running\_on\_iguazio()** → bool

**static reload()**

**resolve\_chief\_api\_url()** → str

**resolve\_kfp\_url(namespace=None)**

**resolve\_runs\_monitoring\_missing\_runtime\_resources\_debouncing\_interval()**

```
static resolve_ui_url()

to_dict()

update(cfg, skip_errors=False)

use_nuclio_mock(force_mock=None)

verify_security_context_enrichment_mode_is_allowed()

property version

mlrun.config.is_running_as_api()

mlrun.config.read_env(env=None, prefix='MLRUN_')
    Read configuration from environment
```

## 18.5 mlrun.datastore

```
class mlrun.datastore.BigQuerySource(name: str = "", table: str | None = None, max_results_for_table: int |
    None = None, query: str | None = None, materialization_dataset: str
    | None = None, chunksize: int | None = None, key_field: str | None =
    None, time_field: str | None = None, schedule: str | None = None,
    start_time=None, end_time=None, gcp_project: str | None = None,
    spark_options: dict | None = None, **kwargs)
```

Bases: BaseSourceDriver

Reads Google BigQuery query results as input source for a flow.

For authentication, set the GCP\_CREDENTIALS project secret to the credentials json string.

example:

```
# set the credentials
project.set_secrets({"GCP_CREDENTIALS": gcp_credentials_json})

# use sql query
query_string = "SELECT * FROM `the-psf.pypi.downloads20210328` LIMIT 5000"
source = BigQuerySource("bq1", query=query_string,
                        gcp_project="my_project",
                        materialization_dataset="dataviews")

# read a table
source = BigQuerySource("bq2", table="the-psf.pypi.downloads20210328", gcp_project=
    ↪ "my_project")
```

### Parameters

- **name** -- source name
- **table** -- table name/path, cannot be used together with query
- **query** -- sql query string
- **materialization\_dataset** -- for query with spark, The target dataset for the materialized view. This dataset should be in same location as the view or the queried tables. must be set to a dataset where the GCP user has table creation permission

- **chunksize** -- number of rows per chunk (default large single chunk)
- **key\_field** -- the column to be used as the key for events. Can be a list of keys.
- **time\_field** -- the column to be used for time filtering. Defaults to the feature set's `timestamp_key`.
- **schedule** -- string to configure scheduling of the ingestion job. For example `'*/30 * * * *` will cause the job to run every 30 minutes
- **start\_time** -- filters out data before this time
- **end\_time** -- filters out data after this time
- **gcp\_project** -- google cloud project name
- **spark\_options** -- additional spark read options

```
is_iterator()
```

```
kind = 'bigquery'
```

```
support_spark = True
```

```
support_storey = False
```

```
to_dataframe(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
             time_field=None)
```

```
    return the source data as dataframe
```

```
to_spark_df(session, named_view=False, time_field=None, columns=None)
```

```
class mlrun.datastore.CSVSource(name: str = "", path: str | None = None, attributes: Dict[str, str] | None =
                                None, key_field: str | None = None, schedule: str | None = None,
                                parse_dates: None | int | str | List[int] | List[str] = None, **kwargs)
```

```
Bases: BaseSourceDriver
```

```
Reads CSV file as input source for a flow.
```

#### Parameters

- **name** -- name of the source
- **path** -- path to CSV file
- **key\_field** -- the CSV field to be used as the key for events. May be an int (field index) or string (field name) if `with_header` is `True`. Defaults to `None` (no key). Can be a list of keys.
- **schedule** -- string to configure scheduling of the ingestion job.
- **attributes** -- additional parameters to pass to storey. For example: `attributes={"timestamp_format": "%Y%m%d%H"}`
- **parse\_dates** -- Optional. List of columns (names or integers) that will be attempted to parse as date column.

```
get_spark_options()
```

```
is_iterator()
```

```
kind = 'csv'
```

```
support_spark = True
```

```
support_storey = True

to_dataframe(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
             time_field=None)
    return the source data as dataframe

to_spark_df(session, named_view=False, time_field=None, columns=None)

to_step(key_field=None, time_field=None, context=None)

class mlrun.datastore.CSVTarget(name: str = "", path=None, attributes: Dict[str, str] | None = None,
                                after_step=None, columns=None, partitioned: bool = False,
                                key_bucketing_number: int | None = None, partition_cols: List[str] | None
                                = None, time_partitioning_granularity: str | None = None, max_events: int
                                | None = None, flush_after_seconds: int | None = None, storage_options:
                                Dict[str, str] | None = None, schema: Dict[str, Any] | None = None,
                                credentials_prefix=None)

    Bases: BaseStoreTarget

    add_writer_step(graph, after, features, key_columns=None, timestamp_key=None,
                    featureset_status=None)

    as_df(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
           time_column=None, **kwargs)
        return the target data as dataframe

    get_spark_options(key_column=None, timestamp_key=None, overwrite=True)

    is_offline = True

    is_single_file()

    kind: str = 'csv'

    prepare_spark_df(df, key_columns, timestamp_key=None, spark_options=None)

    suffix = '.csv'

    support_spark = True

    support_storey = True

class mlrun.datastore.DataItem(key: str, store: DataStore, subpath: str, url: str = "", meta=None,
                               artifact_url=None)
```

Bases: object

Data input/output class abstracting access to various local/remote data sources

DataItem objects are passed into functions and can be used inside the function, when a function run completes users can access the run data via the run.artifact(key) which returns a DataItem object. users can also convert a data url (e.g. s3://bucket/key.csv) to a DataItem using `mlrun.get_dataitem(url)`.

Example:

```
# using data item inside a function
def my_func(context, data: DataItem):
    df = data.as_df()
```

(continues on next page)

(continued from previous page)

```
# reading run results using DataItem (run.artifact())
train_run = train_iris_func.run(inputs={'dataset': dataset},
                                params={'label_column': 'label'})

train_run.artifact('confusion-matrix').show()
test_set = train_run.artifact('test_set').as_df()

# create and use DataItem from uri
data = mlrun.get_dataitem('http://xyz/data.json').get()
```

**property artifact\_url**

DataItem artifact url (when its an artifact) or url for simple dataitems

**as\_df**(*columns=None, df\_module=None, format=", time\_column=None, start\_time=None, end\_time=None, \*\*kwargs*)

return a dataframe object (generated from the dataitem).

**Parameters**

- **columns** -- optional, list of columns to select
- **df\_module** -- optional, py module used to create the DataFrame (e.g. pd, dd, cudf, ..)
- **format** -- file format, if not specified it will be deducted from the suffix
- **start\_time** -- filters out data before this time
- **end\_time** -- filters out data after this time
- **time\_column** -- Store timestamp\_key will be used if None. The results will be filtered by this column and start\_time & end\_time.

**delete()**

delete the object from the datastore

**download**(*target\_path*)

download to the target dir/path

**Parameters**

**target\_path** -- local target path for the downloaded item

**get**(*size=None, offset=0, encoding=None*)

read all or a byte range and return the content

**Parameters**

- **size** -- number of bytes to get
- **offset** -- fetch from offset (in bytes)
- **encoding** -- encoding (e.g. "utf-8") for converting bytes to str

**get\_artifact\_type**() → str | None

Check if the data item represents an Artifact (one of Artifact, DatasetArtifact and ModelArtifact). If it does it return the store uri prefix (artifacts, datasets or models), otherwise None.

**Returns**

The store prefix of the artifact if it is an artifact data item and None if not.

**property key**

DataItem key

**property kind**

DataItem store kind (file, s3, v3io, ..)

**listdir()**

return a list of child file names

**local()**

get the local path of the file, download to tmp first if it's a remote object

**ls()**

return a list of child file names

**property meta**

Artifact Metadata, when the DataItem is read from the artifacts store

**open(mode)**

return fsspec file handler, if supported

**put(data, append=False)**

write/upload the data, append is only supported by some datastores

**Parameters**

- **data** -- data (bytes/str) to write
- **append** -- append data to the end of the object, NOT SUPPORTED BY SOME OBJECT STORES!

**remove\_local()**

remove the local file if it exists and was downloaded from a remote object

**show(format=None)**

show the data object content in Jupyter

**Parameters**

**format** -- format to use (when there is no/wrong suffix), e.g. 'png'

**stat()**

return FileStats class (size, modified, content\_type)

**property store**

DataItem store object

**property suffix**

DataItem suffix (file extension) e.g. '.png'

**upload(src\_path)**

upload the source file (src\_path)

**Parameters**

**src\_path** -- source file path to read from and upload

**property url**

//bucket/path

**Type**

DataItem url e.g. /dir/path, s3

```
class mlrun.datastore.DatabricksFileBugFixed(fs, path, mode='rb', block_size='default',
                                             autocommit=True, cache_type='readahead',
                                             cache_options=None, **kwargs)
```

Bases: DatabricksFile

Overrides DatabricksFile to add the following fix: [https://github.com/fsspec/filesystem\\_spec/pull/1278](https://github.com/fsspec/filesystem_spec/pull/1278)

Create a new instance of the DatabricksFile.

The blocksize needs to be the default one.

```
class mlrun.datastore.DatabricksFileSystemDisableCache(*args, **kwargs)
```

Bases: DatabricksFileSystem

Create a new DatabricksFileSystem.

#### Parameters

- **instance** (*str*) -- The instance URL of the databricks cluster. For example for an Azure databricks cluster, this has the form adb-<some-number>.<two digits>.azuredatabricks.net.
- **token** (*str*) -- Your personal token. Find out more here: <https://docs.databricks.com/dev-tools/api/latest/authentication.html>

```
protocol: ClassVar[str | tuple[str, ...]] = 'dbfs'
```

```
root_marker = '/'
```

```
class mlrun.datastore.HttpSource(name: str | None = None, path: str | None = None, attributes: Dict[str,
                                                                                          object] | None = None, key_field: str | None = None, time_field: str |
                                                                                          None = None, workers: int | None = None)
```

Bases: OnlineSource

```
add_nuclio_trigger(function)
```

```
kind = 'http'
```

```
class mlrun.datastore.KafkaSource(brokers=None, topics=None, group='serving', initial_offset='earliest',
                                   partitions=None, sasl_user=None, sasl_pass=None, attributes=None,
                                   **kwargs)
```

Bases: OnlineSource

Sets kafka source for the flow

Sets kafka source for the flow

#### Parameters

- **brokers** -- list of broker IP addresses
- **topics** -- list of topic names on which to listen.
- **group** -- consumer group. Default "serving"
- **initial\_offset** -- from where to consume the stream. Default earliest
- **partitions** -- Optional, A list of partitions numbers for which the function receives events.
- **sasl\_user** -- Optional, user name to use for sasl authentications
- **sasl\_pass** -- Optional, password to use for sasl authentications
- **attributes** -- Optional, extra attributes to be passed to kafka trigger

```
add_nuclio_trigger(function)

kind = 'kafka'

to_dataframe(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
             time_field=None)
    return the source data as dataframe

to_spark_df(session, named_view=False, time_field=None, columns=None)

class mlrun.datastore.NoSqlTarget(*args, **kwargs)
    Bases: NoSqlBaseTarget
    get_spark_options(key_column=None, timestamp_key=None, overwrite=True)

    get_table_object()
        get storey Table object

    kind: str = 'nosql'

    prepare_spark_df(df, key_columns, timestamp_key=None, spark_options=None)

    support_spark = True

    writer_step_name = 'NoSqlTarget'

class mlrun.datastore.ParquetSource(name: str = "", path: str | None = None, attributes: Dict[str, str] |
                                   None = None, key_field: str | None = None, time_field: str | None =
                                   None, schedule: str | None = None, start_time: datetime | str | None =
                                   None, end_time: datetime | str | None = None)

    Bases: BaseSourceDriver

    Reads Parquet file/dir as input source for a flow.

    Parameters

    • name -- name of the source

    • path -- path to Parquet file or directory

    • key_field -- the column to be used as the key for events. Can be a list of keys.

    • time_field -- Optional. Feature set's timestamp_key will be used if None. The results
      will be filtered by this column and start_filter & end_filter.

    • start_filter -- datetime. If not None, the results will be filtered by partitions and
      'filter_column' > start_filter. Default is None

    • end_filter -- datetime. If not None, the results will be filtered by partitions 'fil-
      ter_column' <= end_filter. Default is None

    • schedule -- string to configure scheduling of the ingestion job. For example '*/30 * *
      * *' will cause the job to run every 30 minutes

    • start_time -- filters out data before this time

    • end_time -- filters out data after this time

    • attributes -- additional parameters to pass to storey.

    property end_time

    get_spark_options()
```

```

kind = 'parquet'

property start_time

support_spark = True

support_storey = True

to_dataframe(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
             time_field=None)
    return the source data as dataframe

to_step(key_field=None, time_field=None, start_time=None, end_time=None, context=None)

class mlrun.datastore.ParquetTarget(name: str = "", path=None, attributes: Dict[str, str] | None = None,
                                   after_step=None, columns=None, partitioned: bool | None = None,
                                   key_bucketing_number: int | None = None, partition_cols: List[str] |
                                   None = None, time_partitioning_granularity: str | None = None,
                                   max_events: int | None = 10000, flush_after_seconds: int | None =
                                   900, storage_options: Dict[str, str] | None = None)

Bases: BaseStoreTarget

parquet target storage driver, used to materialize feature set/vector data into parquet files

Parameters
    • name -- optional, target name. By default will be called ParquetTarget
    • path -- optional, Output path. Can be either a file or directory. This parameter is forwarded as-is to pandas.DataFrame.to_parquet(). Default location v3io:///projects/{project}/FeatureStore/{name}/parquet/
    • attributes -- optional, extra attributes for storey.ParquetTarget
    • after_step -- optional, after what step in the graph to add the target
    • columns -- optional, which columns from data to write
    • partitioned -- optional, whether to partition the file, False by default, if True without passing any other partition field, the data will be partitioned by /year/month/day/hour
    • key_bucketing_number -- optional, None by default will not partition by key, 0 will partition by the key as is, any other number X will create X partitions and hash the keys to one of them
    • partition_cols -- optional, name of columns from the data to partition by
    • time_partitioning_granularity -- optional. the smallest time unit to partition the data by. For example "hour" will yield partitions of the format /year/month/day/hour
    • max_events -- optional. Maximum number of events to write at a time. All events will be written on flow termination, or after flush_after_seconds (if flush_after_seconds is set). Default 10k events
    • flush_after_seconds -- optional. Maximum number of seconds to hold events before they are written. All events will be written on flow termination, or after max_events are accumulated (if max_events is set). Default 15 minutes

add_writer_step(graph, after, features, key_columns=None, timestamp_key=None,
               featureset_status=None)

```

```
as_df(columns=None, df_module=None, entities=None, start_time=None, end_time=None,
       time_column=None, **kwargs)
    return the target data as dataframe

get_dask_options()

get_spark_options(key_column=None, timestamp_key=None, overwrite=True)

is_offline = True

is_single_file()

kind: str = 'parquet'

prepare_spark_df(df, key_columns, timestamp_key=None, spark_options=None)

support_append = True

support_dask = True

support_spark = True

support_storey = True

class mlrun.datastore.StreamSource(name='stream', group='serving', seek_to='earliest', shards=1,
                                   retention_in_hours=24, extra_attributes: dict | None = None,
                                   **kwargs)

    Bases: OnlineSource

    Sets stream source for the flow. If stream doesn't exist it will create it

    Sets stream source for the flow. If stream doesn't exist it will create it

    Parameters

        • name -- stream name. Default "stream"

        • group -- consumer group. Default "serving"

        • seek_to -- from where to consume the stream. Default earliest

        • shards -- number of shards in the stream. Default 1

        • retention_in_hours -- if stream doesn't exist and it will be created set retention time.
          Default 24h

        • extra_attributes -- additional nuclio trigger attributes (key/value dict)

    add_nuclio_trigger(function)

    kind = 'v3ioStream'

class mlrun.datastore.StreamTarget(name: str = "", path=None, attributes: Dict[str, str] | None = None,
                                   after_step=None, columns=None, partitioned: bool = False,
                                   key_bucketing_number: int | None = None, partition_cols: List[str] |
                                   None = None, time_partitioning_granularity: str | None = None,
                                   max_events: int | None = None, flush_after_seconds: int | None =
                                   None, storage_options: Dict[str, str] | None = None, schema: Dict[str,
                                   Any] | None = None, credentials_prefix=None)

    Bases: BaseStoreTarget
```

```
add_writer_step(graph, after, features, key_columns=None, timestamp_key=None,
                 featureset_status=None)
```

```
as_df(columns=None, df_module=None, **kwargs)
```

return the target data as dataframe

```
is_online = False
```

```
is_table = False
```

```
kind: str = 'stream'
```

```
support_append = True
```

```
support_spark = False
```

```
support_storey = True
```

```
mlrun.datastore.get_store_resource(uri, db=None, secrets=None, project=None,
                                   data_store_secrets=None)
```

get store resource object by uri

```
mlrun.datastore.get_stream_pusher(stream_path: str, **kwargs)
```

get a stream pusher object from URL.

common kwargs:

```
create:          create a new stream if doesnt exist
shards:          number of shards
retention_in_hours: stream retention in hours
```

#### Parameters

**stream\_path** -- path/url of stream

```
mlrun.datastore.datastore_profile.register_temporary_client_datastore_profile(profile: DatastoreProfile)
```

Register the datastore profile. This profile is temporary and remains valid only for the duration of the caller's session. It's beneficial for testing purposes.

## 18.6 mlrun.db

```
class mlrun.db.httpdb.HTTPRunDB(url)
```

Bases: RunDBInterface

Interface for accessing and manipulating the [mlrun](#) persistent store, maintaining the full state and catalog of objects that MLRun uses. The [HTTPRunDB](#) class serves as a client-side proxy to the MLRun API service which maintains the actual data-store, accesses the server through REST APIs.

The class provides functions for accessing and modifying the various objects that are used by MLRun in its operation. The functions provided follow some standard guidelines, which are:

- Every object in MLRun exists in the context of a project (except projects themselves). When referencing an object through any API, a project name must be provided. The default for most APIs is for an empty project name, which will be replaced by the name of the default project (usually `default`). Therefore, if performing an API to list functions, for example, and not providing a project name - the result will not be functions from all projects but rather from the `default` project.

- Many objects can be assigned labels, and listed/queried by label. The label parameter for query APIs allows for listing objects that:
    - Have a specific label, by asking for `label="<label_name>"`. In this case the actual value of the label doesn't matter and every object with that label will be returned
    - Have a label with a specific value. This is done by specifying `label="<label_name>=<label_value>"`. In this case only objects whose label matches the value will be returned
  - Most objects have a `create` method as well as a `store` method. Create can only be called when such an does not exist yet, while store allows for either creating a new object or overwriting an existing object.
  - Some objects have a `versioned` option, in which case overwriting the same object with a different version of it does not delete the previous version, but rather creates a new version of the object and keeps both versions. Versioned objects usually have a `uid` property which is based on their content and allows to reference a specific version of an object (other than tagging objects, which also allows for easy referencing).
  - Many objects have both a `store` function and a `patch` function. These are used in the same way as the corresponding REST verbs - a `store` is passed a full object and will basically perform a PUT operation, replacing the full object (if it exists) while `patch` receives just a dictionary containing the differences to be applied to the object, and will merge those changes to the existing object. The `patch` operation also has a strategy assigned to it which determines how the merge logic should behave. The strategy can be either `replace` or `additive`. For further details on those strategies, refer to <https://pypi.org/project/mergedeep/>
- ```
RETRIABLE_POST_PATHS = ['\\/?projects\\/.+\\/artifacts\\/.+\\/'+
'\\/?run\\/.+\\/']
```

**abort\_run**(*uid*, *project=""*, *iter=0*, *timeout=45*, *status\_text=""*)

Abort a running run - will remove the run's runtime resources and mark its state as aborted. :returns: BackgroundTask.

**api\_call**(*method*, *path*, *error=None*, *params=None*, *body=None*, *json=None*, *headers=None*, *timeout=45*, *version=None*)

Perform a direct REST API call on the [mlrun](#) API server.

**Caution:** For advanced usage - prefer using the various APIs exposed through this class, rather than directly invoking REST calls.

### Parameters

- **method** -- REST method (POST, GET, PUT...)
- **path** -- Path to endpoint executed, for example "projects"
- **error** -- Error to return if API invocation fails
- **params** -- Rest parameters, passed as a dictionary: {"<param-name>": "<param-value>"}
- **body** -- Payload to be passed in the call. If using JSON objects, prefer using the `json` param
- **json** -- JSON payload to be passed in the call
- **headers** -- REST headers, passed as a dictionary: {"<header-name>": "<header-value>"}
- **timeout** -- API call timeout
- **version** -- API version to use, None (the default) will mean to use the default value from config, for un-versioned api set an empty string.

**Returns**

Python HTTP response object

**connect**(*secrets=None*)

Connect to the MLRun API server. Must be called prior to executing any other method. The code utilizes the URL for the API server from the configuration - `mlconf.dbpath`.

For example:

```
mlconf.dbpath = mlconf.dbpath or 'http://mlrun-api:8080'
db = get_run_db().connect()
```

**create\_feature\_set**(*feature\_set: dict | FeatureSet | FeatureSet, project="", versioned=True*) → dict

Create a new *FeatureSet* and save in the *mlrun* DB. The feature-set must not previously exist in the DB.

**Parameters**

- **feature\_set** -- The new *FeatureSet* to create.
- **project** -- Name of project this feature-set belongs to.
- **versioned** -- Whether to maintain versions for this feature-set. All versions of a versioned object will be kept in the DB and can be retrieved until explicitly deleted.

**Returns**

The *FeatureSet* object (as dict).

**create\_feature\_vector**(*feature\_vector: dict | FeatureVector | FeatureVector, project="", versioned=True*) → dict

Create a new *FeatureVector* and save in the *mlrun* DB.

**Parameters**

- **feature\_vector** -- The new *FeatureVector* to create.
- **project** -- Name of project this feature-vector belongs to.
- **versioned** -- Whether to maintain versions for this feature-vector. All versions of a versioned object will be kept in the DB and can be retrieved until explicitly deleted.

**Returns**

The *FeatureVector* object (as dict).

**create\_hub\_source**(*source: dict | IndexedHubSource*)

Add a new hub source.

MLRun maintains an ordered list of hub sources (“sources”) Each source has its details registered and its order within the list. When creating a new source, the special order -1 can be used to mark this source as last in the list. However, once the source is in the MLRun list, its order will always be >0.

The global hub source always exists in the list, and is always the last source (order = -1). It cannot be modified nor can it be moved to another order in the list.

The source object may contain credentials which are needed to access the datastore where the source is stored. These credentials are not kept in the MLRun DB, but are stored inside a kubernetes secret object maintained by MLRun. They are not returned through any API from MLRun.

Example:

```

import mlrun.common.schemas

# Add a private source as the last one (will be #1 in the list)
private_source = mlrun.common.schemas.IndexedHubSource(
    order=-1,
    source=mlrun.common.schemas.HubSource(
        metadata=mlrun.common.schemas.HubObjectMetadata(
            name="priv", description="a private source"
        ),
        spec=mlrun.common.schemas.HubSourceSpec(path="/local/path/to/source",
→ channel="development")
    )
)
db.create_hub_source(private_source)

# Add another source as 1st in the list - will push previous one to be #2
another_source = mlrun.common.schemas.IndexedHubSource(
    order=1,
    source=mlrun.common.schemas.HubSource(
        metadata=mlrun.common.schemas.HubObjectMetadata(
            name="priv-2", description="another source"
        ),
        spec=mlrun.common.schemas.HubSourceSpec(
            path="/local/path/to/source/2",
            channel="development",
            credentials={...}
        )
    )
)
db.create_hub_source(another_source)

```

**Parameters**

**source** -- The source and its order, of type `IndexedHubSource`, or in dictionary form.

**Returns**

The source object as inserted into the database, with credentials stripped.

**create\_model\_endpoint**(*project: str, endpoint\_id: str, model\_endpoint: ModelEndpoint | dict*)

Creates a DB record with the given model\_endpoint record.

**Parameters**

- **project** -- The name of the project.
- **endpoint\_id** -- The id of the endpoint.
- **model\_endpoint** -- An object representing the model endpoint.

**create\_model\_monitoring\_controller**(*project: str = "", default\_controller\_image: str = 'mlrun/mlrun', base\_period: int = 10*)

Submit model monitoring application controller job along with deploying the model monitoring writer function. While the main goal of the controller job is to handle the monitoring processing and triggering applications, the goal of the model monitoring writer function is to write all the monitoring application results to the databases. Note that the default scheduling policy of the controller job is to run every 10 min.

**Parameters**

- **project** -- Project name.

- **default\_controller\_image** -- The default image of the model monitoring controller job. Note that the writer function, which is a real time nuclio function, will be deployed with the same image. By default, the image is mlrun/mlrun.
- **base\_period** -- Minutes to determine the frequency in which the model monitoring controller job is running. By default, the base period is 5 minutes.

#### Returns

model monitoring controller job as a dictionary. You can easily convert the returned function into a runtime object by calling `~mlrun.new_function`.

**create\_project**(*project: dict* | [MlrunProject](#) | *Project*) → *MlrunProject*

Create a new project. A project with the same name must not exist prior to creation.

**create\_project\_secrets**(*project: str*, *provider: str* | [SecretProviderName](#) = [SecretProviderName.kubernetes](#), *secrets: dict* | *None* = *None*)

Create project-context secrets using either `vault` or `kubernetes` provider. When using with Vault, this will create needed Vault structures for storing secrets in project-context, and store a set of secret values. The method generates Kubernetes service-account and the Vault authentication structures that are required for function Pods to authenticate with Vault and be able to extract secret values passed as part of their context.

---

**Note:** This method used with Vault is currently in technical preview, and requires a HashiCorp Vault infrastructure properly set up and connected to the MLRun API server.

---

When used with Kubernetes, this will make sure that the project-specific k8s secret is created, and will populate it with the secrets provided, replacing their values if they exist.

#### Parameters

- **project** -- The project context for which to generate the infra and store secrets.
- **provider** -- The name of the secrets-provider to work with. Accepts a [SecretProviderName](#) enum.
- **secrets** -- A set of secret values to store. Example:

```
secrets = {'password': 'myPassw0rd', 'aws_key': '111222333'}
db.create_project_secrets(
    "project1",
    provider=mlrun.common.schemas.SecretProviderName.
    ↪kubernetes,
    secrets=secrets
)
```

**create\_schedule**(*project: str*, *schedule: ScheduleInput*)

Create a new schedule on the given project. The details on the actual object to schedule as well as the schedule itself are within the schedule object provided. The `ScheduleCronTrigger` follows the guidelines in <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html>. It also supports a `from_crontab()` function that accepts a crontab-formatted string (see <https://en.wikipedia.org/wiki/Cron> for more information on the format and note that the 0 weekday is always monday).

Example:

```
from mlrun.common import schemas

# Execute the get_data_func function every Tuesday at 15:30
schedule = schemas.ScheduleInput(
```

(continues on next page)

(continued from previous page)

```

    name="run_func_on_tuesdays",
    kind="job",
    scheduled_object=get_data_func,
    cron_trigger=schemas.ScheduleCronTrigger(day_of_week='tue', hour=15,
    ↪minute=30),
)
db.create_schedule(project_name, schedule)

```

**create\_user\_secrets**(*user: str, provider: str | SecretProviderName = SecretProviderName.vault, secrets: dict | None = None*)

Create user-context secret in Vault. Please refer to [create\\_project\\_secrets\(\)](#) for more details and status of this functionality.

---

**Note:** This method is currently in technical preview, and requires a HashiCorp Vault infrastructure properly set up and connected to the MLRun API server.

---

#### Parameters

- **user** -- The user context for which to generate the infra and store secrets.
- **provider** -- The name of the secrets-provider to work with. Currently only vault is supported.
- **secrets** -- A set of secret values to store within the Vault.

**del\_artifact**(*key, tag=None, project="", tree=None, uid=None*)

Delete an artifact.

#### Parameters

- **key** -- Identifying key of the artifact.
- **tag** -- Tag of the artifact.
- **project** -- Project that the artifact belongs to.
- **tree** -- The tree which generated this artifact.
- **uid** -- A unique ID for this specific version of the artifact (the uid that was generated in the backend)

**del\_artifacts**(*name=None, project=None, tag=None, labels=None, days\_ago=0, tree=None*)

Delete artifacts referenced by the parameters.

#### Parameters

- **name** -- Name of artifacts to delete. Note that this is a like query, and is case-insensitive. See [list\\_artifacts\(\)](#) for more details.
- **project** -- Project that artifacts belong to.
- **tag** -- Choose artifacts who are assigned this tag.
- **labels** -- Choose artifacts which are labeled.
- **days\_ago** -- This parameter is deprecated and not used.

**del\_run**(*uid, project="", iter=0*)

Delete details of a specific run from DB.

#### Parameters

- **uid** -- Unique ID for the specific run to delete.
- **project** -- Project that the run belongs to.
- **iter** -- Iteration within a specific task.

**del\_runs**(*name=None, project=None, labels=None, state=None, days\_ago=0*)

Delete a group of runs identified by the parameters of the function.

Example:

```
db.del_runs(state='completed')
```

#### Parameters

- **name** -- Name of the task which the runs belong to.
- **project** -- Project to which the runs belong.
- **labels** -- Filter runs that are labeled using these specific label values.
- **state** -- Filter only runs which are in this state.
- **days\_ago** -- Filter runs whose start time is newer than this parameter.

**delete\_artifacts\_tags**(*artifacts, project: str, tag\_name: str*)

Delete tag from a list of artifacts.

#### Parameters

- **artifacts** -- The artifacts to delete the tag from. Can be a list of `Artifact` objects or dictionaries, or a single object.
- **project** -- Project which contains the artifacts.
- **tag\_name** -- The tag to set on the artifacts.

**delete\_datastore\_profile**(*name: str, project: str*)

**delete\_feature\_set**(*name, project="", tag=None, uid=None*)

Delete a `FeatureSet` object from the DB. If `tag` or `uid` are specified, then just the version referenced by them will be deleted. Using both is not allowed. If none are specified, then all instances of the object whose name is `name` will be deleted.

**delete\_feature\_vector**(*name, project="", tag=None, uid=None*)

Delete a `FeatureVector` object from the DB. If `tag` or `uid` are specified, then just the version referenced by them will be deleted. Using both is not allowed. If none are specified, then all instances of the object whose name is `name` will be deleted.

**delete\_function**(*name: str, project: str = ""*)

Delete a function belonging to a specific project.

**delete\_hub\_source**(*source\_name: str*)

Delete a hub source from the DB. The source will be deleted from the list, and any following sources will be promoted - for example, if the 1st source is deleted, the 2nd source will become #1 in the list. The global hub source cannot be deleted.

#### Parameters

- **source\_name** -- Name of the hub source to delete.

**delete\_model\_endpoint**(*project: str, endpoint\_id: str*)

Deletes the DB record of a given model endpoint, `project` and `endpoint_id` are used for lookup

#### Parameters

- **project** -- The name of the project
- **endpoint\_id** -- The id of the endpoint

**delete\_objects\_tag**(*project: str, tag\_name: str, tag\_objects: TagObjects | dict*)

Delete a tag from a list of objects.

**Parameters**

- **project** -- Project which contains the objects.
- **tag\_name** -- The tag to delete from the objects.
- **tag\_objects** -- The objects to delete the tag from.

**delete\_project**(*name: str, deletion\_strategy: str | DeletionStrategy = DeletionStrategy.restricted*)

Delete a project.

**Parameters**

- **name** -- Name of the project to delete.
- **deletion\_strategy** -- How to treat resources related to the project. Possible values are:
  - **restrict** (default) - Project must not have any related resources when deleted. If using this mode while related resources exist, the operation will fail.
  - **cascade** - Automatically delete all related resources when deleting the project.

**delete\_project\_secrets**(*project: str, provider: str | SecretProviderName = SecretProviderName.kubernetes, secrets: List[str] | None = None*)

Delete project-context secrets from Kubernetes.

**Parameters**

- **project** -- The project name.
- **provider** -- The name of the secrets-provider to work with. Currently only `kubernetes` is supported.
- **secrets** -- A list of secret names to delete. An empty list will delete all secrets assigned to this specific project.

**delete\_runtime\_resources**(*project: str | None = None, label\_selector: str | None = None, kind: str | None = None, object\_id: str | None = None, force: bool = False, grace\_period: int | None = None*) → Dict[str, Dict[str, RuntimeResources]]

Delete all runtime resources which are in terminal state.

**Parameters**

- **project** -- Delete only runtime resources of a specific project, by default `None`, which will delete only from the projects you're authorized to delete from.
- **label\_selector** -- Delete only runtime resources matching the label selector.
- **kind** -- The kind of runtime to delete. May be one of `['dask', 'job', 'spark', 'remote-spark', 'mpijob']`
- **object\_id** -- The identifier of the mlrun object to delete its runtime resources. for most function runtimes, runtime resources are per Run, for which the identifier is the Run's UID. For dask runtime, the runtime resources are per Function, for which the identifier is the Function's name.

- **force** -- Force deletion - delete the runtime resource even if it's not in terminal state or if the grace period didn't pass.
- **grace\_period** -- Grace period given to the runtime resource before they are actually removed, counted from the moment they moved to terminal state (defaults to `mlrun.mlconf.runtime_resources_deletion_grace_period`).

**Returns**

`GroupedByProjectRuntimeResourcesOutput` listing the runtime resources that were removed.

**delete\_schedule**(*project: str, name: str*)

Delete a specific schedule by name.

**deploy\_monitoring\_batch\_job**(*project: str = "", default\_batch\_image: str = 'mlrun/mlrun', with\_schedule: bool = False*)

Submit model monitoring batch job. By default, submit only the batch job as ML function without scheduling. To submit a scheduled job as well, please set `with_schedule = True`.

**Parameters**

- **project** -- Project name.
- **default\_batch\_image** -- The default image of the model monitoring batch job. By default, the image is `mlrun/mlrun`.
- **with\_schedule** -- If true, submit the model monitoring scheduled job as well.

**Returns**

model monitoring batch job as a dictionary. You can easily convert the returned function into a runtime object by calling `~mlrun.new_function`.

**function\_status**(*project, name, kind, selector*)

Retrieve status of a function being executed remotely (relevant to dask functions).

**Parameters**

- **project** -- The project of the function
- **name** -- The name of the function
- **kind** -- The kind of the function, currently dask is supported.
- **selector** -- Selector clause to be applied to the Kubernetes status query to filter the results.

**static get\_api\_path\_prefix**(*version: str | None = None*) → str

**Parameters**

**version** -- API version to use, None (the default) will mean to use the default value from `mlconf`, for un-versioned api set an empty string.

**get\_background\_task**(*name: str*) → BackgroundTask

Retrieve updated information on a background task being executed.

**get\_base\_api\_url**(*path: str, version: str | None = None*) → str

**get\_builder\_status**(*func: BaseRuntime, offset: int = 0, logs: bool = True, last\_log\_timestamp: float = 0.0, verbose: bool = False*)

Retrieve the status of a build operation currently in progress.

**Parameters**

- **func** -- Function object that is being built.
- **offset** -- Offset into the build logs to retrieve logs from.

- **logs** -- Should build logs be retrieved.
- **last\_log\_timestamp** -- Last timestamp of logs that were already retrieved. Function will return only logs later than this parameter.
- **verbose** -- Add verbose logs into the output.

#### Returns

The following parameters:

- Text of builder logs.
- Timestamp of last log retrieved, to be used in subsequent calls to this function.

The function also updates internal members of the `func` object to reflect build process info.

**get\_datastore\_profile**(*name: str, project: str*) → DatastoreProfile | None

**get\_feature\_set**(*name: str, project: str = "", tag: str | None = None, uid: str | None = None*) → *FeatureSet*

Retrieve a `~mlrun.feature_store.FeatureSet`` object. If both `tag` and `uid` are not specified, then the object tagged `latest` will be retrieved.

#### Parameters

- **name** -- Name of object to retrieve.
- **project** -- Project the FeatureSet belongs to.
- **tag** -- Tag of the specific object version to retrieve.
- **uid** -- uid of the object to retrieve (can only be used for versioned objects).

**get\_feature\_vector**(*name: str, project: str = "", tag: str | None = None, uid: str | None = None*) → *FeatureVector*

Return a specific feature-vector referenced by its tag or uid. If none are provided, `latest` tag will be used.

**get\_function**(*name, project="", tag=None, hash\_key=""*)

Retrieve details of a specific function, identified by its name and potentially a tag or function hash.

**get\_hub\_asset**(*source\_name: str, item\_name: str, asset\_name: str, version: str | None = None, tag: str = 'latest'*)

Get hub asset from item.

#### Parameters

- **source\_name** -- Name of source.
- **item\_name** -- Name of the item which holds the asset.
- **asset\_name** -- Name of the asset to retrieve.
- **version** -- Get a specific version of the item. Default is `None`.
- **tag** -- Get a specific version of the item identified by tag. Default is `latest`.

#### Returns

http response with the asset in the content attribute

**get\_hub\_catalog**(*source\_name: str, version: str | None = None, tag: str | None = None, force\_refresh: bool = False*)

Retrieve the item catalog for a specified hub source. The list of items can be filtered according to various filters, using item's metadata to filter.

#### Parameters

- **source\_name** -- Name of the source.
- **version** -- Filter items according to their version.
- **tag** -- Filter items based on tag.
- **force\_refresh** -- Make the server fetch the catalog from the actual hub source, rather than rely on cached information which may exist from previous get requests. For example, if the source was re-built, this will make the server get the updated information. Default is `False`.

#### Returns

HubCatalog object, which is essentially a list of `HubItem` entries.

```
get_hub_item(source_name: str, item_name: str, version: str | None = None, tag: str = 'latest',
              force_refresh: bool = False)
```

Retrieve a specific hub item.

#### Parameters

- **source\_name** -- Name of source.
- **item\_name** -- Name of the item to retrieve, as it appears in the catalog.
- **version** -- Get a specific version of the item. Default is `None`.
- **tag** -- Get a specific version of the item identified by tag. Default is `latest`.
- **force\_refresh** -- Make the server fetch the information from the actual hub source, rather than rely on cached information. Default is `False`.

#### Returns

`HubItem`.

```
get_hub_source(source_name: str)
```

Retrieve a hub source from the DB.

#### Parameters

**source\_name** -- Name of the hub source to retrieve.

```
get_log(uid, project="", offset=0, size=None)
```

Retrieve 1 MB data of log.

#### Parameters

- **uid** -- Log unique ID
- **project** -- Project name for which the log belongs
- **offset** -- Retrieve partial log, get up to `size` bytes starting at offset `offset` from beginning of log (must be  $\geq 0$ )
- **size** -- If set to `-1` will retrieve and print all data to end of the log by chunks of 1MB each.

#### Returns

The following objects:

- **state** - The state of the runtime object which generates this log, if it exists. In case no known state exists, this will be `unknown`.
- **content** - The actual log content.
- in case `size = -1`, return the state and the final offset

**get\_log\_size**(*uid*, *project*="")

Retrieve log size in bytes.

**Parameters**

- **uid** -- Run UID
- **project** -- Project name for which the log belongs

**Returns**

The log file size in bytes for the given run UID.

**get\_model\_endpoint**(*project*: str, *endpoint\_id*: str, *start*: str | None = None, *end*: str | None = None, *metrics*: List[str] | None = None, *feature\_analysis*: bool = False) → ModelEndpoint

Returns a single *ModelEndpoint* object with additional metrics and feature related data.

**Parameters**

- **project** -- The name of the project
- **endpoint\_id** -- The unique id of the model endpoint.
- **start** -- The start time of the metrics. Can be represented by a string containing an RFC 3339 time, a Unix timestamp in milliseconds, a relative time ('now' or 'now-[0-9]+[mhd]'), where *m* = minutes, *h* = hours, and '*d*' = days), or 0 for the earliest time.
- **end** -- The end time of the metrics. Can be represented by a string containing an RFC 3339 time, a Unix timestamp in milliseconds, a relative time ('now' or 'now-[0-9]+[mhd]'), where *m* = minutes, *h* = hours, and '*d*' = days), or 0 for the earliest time.
- **metrics** -- A list of metrics to return for the model endpoint. There are pre-defined metrics for model endpoints such as `predictions_per_second` and `latency_avg_5m` but also custom metrics defined by the user. Please note that these metrics are stored in the time series DB and the results will be appeared under `model_endpoint.spec.metrics`.
- **feature\_analysis** -- When True, the base feature statistics and current feature statistics will be added to the output of the resulting object.

**Returns**

A *ModelEndpoint* object.

**get\_pipeline**(*run\_id*: str, *namespace*: str | None = None, *timeout*: int = 30, *format\_*: str | PipelinesFormat = PipelinesFormat.summary, *project*: str | None = None)

Retrieve details of a specific pipeline using its run ID (as provided when the pipeline was executed).

**get\_project**(*name*: str) → *MlrunProject*

Get details for a specific project.

**get\_project\_background\_task**(*project*: str, *name*: str) → BackgroundTask

Retrieve updated information on a project background task being executed.

**get\_schedule**(*project*: str, *name*: str, *include\_last\_run*: bool = False) → ScheduleOutput

Retrieve details of the schedule in question. Besides returning the details of the schedule object itself, this function also returns the next scheduled run for this specific schedule, as well as potentially the results of the last run executed through this schedule.

**Parameters**

- **project** -- Project name.
- **name** -- Name of the schedule object to query.

- **include\_last\_run** -- Whether to include the results of the schedule's last run in the response.

**get\_workflow\_id**(*project: str, name: str, run\_id: str, engine: str = ""*)

Retrieve workflow id from the uid of the workflow runner.

#### Parameters

- **project** -- project name
- **name** -- workflow name
- **run\_id** -- the id of the workflow runner - the job that runs the workflow
- **engine** -- pipeline runner

#### Returns

GetWorkflowResponse.

**invoke\_schedule**(*project: str, name: str*)

Execute the object referenced by the schedule immediately.

**kind** = 'http'

**list\_api\_gateways**(*project=None*)

Returns a list of Nuclio api gateways :param project: optional str parameter to filter by project, if not passed, default Nuclio's value is taken

#### Returns

json with the list of Nuclio Api Gateways (json example is here <https://github.com/nuclio/nuclio/blob/development/docs/reference/api/README.md#listing-all-api-gateways>)

**list\_artifact\_tags**(*project=None, category: str | ArtifactCategories | None = None*) → List[str]

Return a list of all the tags assigned to artifacts in the scope of the given project.

**list\_artifacts**(*name=None, project=None, tag=None, labels: Dict[str, str] | List[str] | None = None, since=None, until=None, iter: int | None = None, best\_iteration: bool = False, kind: str | None = None, category: str | ArtifactCategories | None = None, tree: str | None = None*) → ArtifactList

List artifacts filtered by various parameters.

Examples:

```
# Show latest version of all artifacts in project
latest_artifacts = db.list_artifacts('', tag='latest', project='iris')
# check different artifact versions for a specific artifact
result_versions = db.list_artifacts('results', tag='*', project='iris')
# Show artifacts with label filters - both uploaded and of binary type
result_labels = db.list_artifacts('results', tag='*', project='iris', labels=[
    → 'uploaded', 'type=binary'])
```

#### Parameters

- **name** -- Name of artifacts to retrieve. Name with '~' prefix is used as a like query, and is not case-sensitive. This means that querying for ~name may return artifacts named my\_Name\_1 or surname.
- **project** -- Project name.
- **tag** -- Return artifacts assigned this tag.

- **labels** -- Return artifacts that have these labels. Labels can either be a dictionary {"label": "value"} or a list of "label=value" (match label key and value) or "label" (match just label key) strings.
- **since** -- Not in use in [HTTPRunDB](#).
- **until** -- Not in use in [HTTPRunDB](#).
- **iter** -- Return artifacts from a specific iteration (where `iter=0` means the root iteration). If `None` (default) return artifacts from all iterations.
- **best\_iteration** -- Returns the artifact which belongs to the best iteration of a given run, in the case of artifacts generated from a hyper-param run. If only a single iteration exists, will return the artifact from that iteration. If using `best_iter`, the `iter` parameter must not be used.
- **kind** -- Return artifacts of the requested kind.
- **category** -- Return artifacts of the requested category.
- **tree** -- Return artifacts of the requested tree.

**list\_datastore\_profiles**(*project: str*) → List[DatastoreProfile]

**list\_entities**(*project: str, name: str | None = None, tag: str | None = None, labels: List[str] | None = None*) → List[dict]

Retrieve a list of entities and their mapping to the containing feature-sets. This function is similar to the [list\\_features\(\)](#) function, and uses the same logic. However, the entities are matched against the name rather than the features.

**list\_feature\_sets**(*project: str = "", name: str | None = None, tag: str | None = None, state: str | None = None, entities: List[str] | None = None, features: List[str] | None = None, labels: List[str] | None = None, partition\_by: FeatureStorePartitionByField | str | None = None, rows\_per\_partition: int = 1, partition\_sort\_by: SortField | str | None = None, partition\_order: OrderType | str = OrderType.desc*) → List[FeatureSet]

Retrieve a list of feature-sets matching the criteria provided.

#### Parameters

- **project** -- Project name.
- **name** -- Name of feature-set to match. This is a like query, and is case-insensitive.
- **tag** -- Match feature-sets with specific tag.
- **state** -- Match feature-sets with a specific state.
- **entities** -- Match feature-sets which contain entities whose name is in this list.
- **features** -- Match feature-sets which contain features whose name is in this list.
- **labels** -- Match feature-sets which have these labels.
- **partition\_by** -- Field to group results by. Only allowed value is *name*. When *partition\_by* is specified, the *partition\_sort\_by* parameter must be provided as well.
- **rows\_per\_partition** -- How many top rows (per sorting defined by *partition\_sort\_by* and *partition\_order*) to return per group. Default value is 1.
- **partition\_sort\_by** -- What field to sort the results by, within each partition defined by *partition\_by*. Currently the only allowed value are *created* and *updated*.
- **partition\_order** -- Order of sorting within partitions - *asc* or *desc*. Default is *desc*.

**Returns**

List of matching [FeatureSet](#) objects.

```
list_feature_vectors(project: str = "", name: str | None = None, tag: str | None = None, state: str | None = None, labels: List[str] | None = None, partition_by: FeatureStorePartitionByField | str | None = None, rows_per_partition: int = 1, partition_sort_by: SortField | str | None = None, partition_order: OrderType | str = OrderType.desc) → List[FeatureVector]
```

Retrieve a list of feature-vectors matching the criteria provided.

**Parameters**

- **project** -- Project name.
- **name** -- Name of feature-vector to match. This is a like query, and is case-insensitive.
- **tag** -- Match feature-vectors with specific tag.
- **state** -- Match feature-vectors with a specific state.
- **labels** -- Match feature-vectors which have these labels.
- **partition\_by** -- Field to group results by. Only allowed value is *name*. When *partition\_by* is specified, the *partition\_sort\_by* parameter must be provided as well.
- **rows\_per\_partition** -- How many top rows (per sorting defined by *partition\_sort\_by* and *partition\_order*) to return per group. Default value is 1.
- **partition\_sort\_by** -- What field to sort the results by, within each partition defined by *partition\_by*. Currently the only allowed values are *created* and *updated*.
- **partition\_order** -- Order of sorting within partitions - *asc* or *desc*. Default is *desc*.

**Returns**

List of matching [FeatureVector](#) objects.

```
list_features(project: str, name: str | None = None, tag: str | None = None, entities: List[str] | None = None, labels: List[str] | None = None) → List[dict]
```

List feature-sets which contain specific features. This function may return multiple versions of the same feature-set if a specific tag is not requested. Note that the various filters of this function actually refer to the feature-set object containing the features, not to the features themselves.

**Parameters**

- **project** -- Project which contains these features.
- **name** -- Name of the feature to look for. The name is used in a like query, and is not case-sensitive. For example, looking for *feat* will return features which are named *MyFeature* as well as *defeat*.
- **tag** -- Return feature-sets which contain the features looked for, and are tagged with the specific tag.
- **entities** -- Return only feature-sets which contain an entity whose name is contained in this list.
- **labels** -- Return only feature-sets which are labeled as requested.

**Returns**

A list of mapping from feature to a digest of the feature-set, which contains the feature-

set meta-data. Multiple entries may be returned for any specific feature due to multiple tags or versions of the feature-set.

**list\_functions**(*name=None, project=None, tag=None, labels=None*)

Retrieve a list of functions, filtered by specific criteria.

**Parameters**

- **name** -- Return only functions with a specific name.
- **project** -- Return functions belonging to this project. If not specified, the default project is used.
- **tag** -- Return function versions with specific tags.
- **labels** -- Return functions that have specific labels assigned to them.

**Returns**

List of function objects (as dictionary).

**list\_hub\_sources**(*item\_name: str | None = None, tag: str | None = None, version: str | None = None*) → List[IndexHubSource]

List hub sources in the MLRun DB.

**Parameters**

- **item\_name** -- Sources contain this item will be returned, If not provided all sources will be returned.
- **tag** -- Item tag to filter by, supported only if item name is provided.
- **version** -- Item version to filter by, supported only if item name is provided and tag is not.

**Returns**

List of indexed hub sources.

**list\_model\_endpoints**(*project: str, model: str | None = None, function: str | None = None, labels: List[str] | None = None, start: str = 'now-1h', end: str = 'now', metrics: List[str] | None = None, top\_level: bool = False, uids: List[str] | None = None*) → List[ModelEndpoint]

Returns a list of *ModelEndpoint* objects. Each *ModelEndpoint* object represents the current state of a model endpoint. This functions supports filtering by the following parameters: 1) model 2) function 3) labels 4) top level 5) uids By default, when no filters are applied, all available endpoints for the given project will be listed.

In addition, this functions provides a facade for listing endpoint related metrics. This facade is time-based and depends on the 'start' and 'end' parameters. By default, when the metrics parameter is None, no metrics are added to the output of this function.

**Parameters**

- **project** -- The name of the project
- **model** -- The name of the model to filter by
- **function** -- The name of the function to filter by
- **labels** -- A list of labels to filter by. Label filters work by either filtering a specific value of a label (i.e. list("key=value")) or by looking for the existence of a given key (i.e. "key")
- **metrics** -- A list of metrics to return for each endpoint, read more in 'TimeMetric'

- **start** -- The start time of the metrics. Can be represented by a string containing an RFC 3339 time, a Unix timestamp in milliseconds, a relative time ('now' or 'now-[0-9]+[mhd]'), where *m* = minutes, *h* = hours, and '*d*' = days), or 0 for the earliest time.
- **end** -- The end time of the metrics. Can be represented by a string containing an RFC 3339 time, a Unix timestamp in milliseconds, a relative time ('now' or 'now-[0-9]+[mhd]'), where *m* = minutes, *h* = hours, and '*d*' = days), or 0 for the earliest time.
- **top\_level** -- if true will return only routers and endpoint that are NOT children of any router
- **uids** -- if passed will return a list *ModelEndpoint* object with uid in uids

**list\_pipelines**(*project: str, namespace: str | None = None, sort\_by: str = "", page\_token: str = "", filter\_: str = "", format\_: str | PipelinesFormat = PipelinesFormat.metadata\_only, page\_size: int | None = None*) → PipelinesOutput

Retrieve a list of KFP pipelines. This function can be invoked to get all pipelines from all projects, by specifying *project=\**, in which case pagination can be used and the various sorting and pagination properties can be applied. If a specific project is requested, then the pagination options cannot be used and pagination is not applied.

#### Parameters

- **project** -- Project name. Can be \* for query across all projects.
- **namespace** -- Kubernetes namespace in which the pipelines are executing.
- **sort\_by** -- Field to sort the results by.
- **page\_token** -- Use for pagination, to retrieve next page.
- **filter** -- Kubernetes filter to apply to the query, can be used to filter on specific object fields.
- **format** -- Result format. Can be one of:
  - full - return the full objects.
  - metadata\_only (default) - return just metadata of the pipelines objects.
  - name\_only - return just the names of the pipeline objects.
- **page\_size** -- Size of a single page when applying pagination.

**list\_project\_background\_tasks**(*project: str | None = None, state: str | None = None, created\_from: datetime | None = None, created\_to: datetime | None = None, last\_update\_time\_from: datetime | None = None, last\_update\_time\_to: datetime | None = None*) → list[mlrun.common.schemas.background\_task.BackgroundTask]

Retrieve updated information on project background tasks being executed. If no filter is provided, will return background tasks from the last week.

#### Parameters

- **project** -- Project name (defaults to mlrun.mlconf.default\_project).
- **state** -- List only background tasks whose state is specified.
- **created\_from** -- Filter by background task created time in [created\_from, created\_to].
- **created\_to** -- Filter by background task created time in [created\_from, created\_to].

- **last\_update\_time\_from** -- Filter by background task last update time in (last\_update\_time\_from, last\_update\_time\_to).
- **last\_update\_time\_to** -- Filter by background task last update time in (last\_update\_time\_from, last\_update\_time\_to).

**list\_project\_secret\_keys**(*project: str, provider: str | SecretProviderName = SecretProviderName.kubernetes, token: str | None = None*) → SecretKeysData

Retrieve project-context secret keys from Vault or Kubernetes.

---

**Note:** This method for Vault functionality is currently in technical preview, and requires a HashiCorp Vault infrastructure properly set up and connected to the MLRun API server.

---

#### Parameters

- **project** -- The project name.
- **provider** -- The name of the secrets-provider to work with. Accepts a [SecretProviderName](#) enum.
- **token** -- Vault token to use for retrieving secrets. Only in use if **provider** is `vault`. Must be a valid Vault token, with permissions to retrieve secrets of the project in question.

**list\_project\_secrets**(*project: str, token: str | None = None, provider: str | SecretProviderName = SecretProviderName.kubernetes, secrets: List[str] | None = None*) → SecretsData

Retrieve project-context secrets from Vault.

---

**Note:** This method for Vault functionality is currently in technical preview, and requires a HashiCorp Vault infrastructure properly set up and connected to the MLRun API server.

---

#### Parameters

- **project** -- The project name.
- **token** -- Vault token to use for retrieving secrets. Must be a valid Vault token, with permissions to retrieve secrets of the project in question.
- **provider** -- The name of the secrets-provider to work with. Currently only `vault` is accepted.
- **secrets** -- A list of secret names to retrieve. An empty list `[]` will retrieve all secrets assigned to this specific project. `kubernetes` provider only supports an empty list.

**list\_projects**(*owner: str | None = None, format\_: str | ProjectsFormat = ProjectsFormat.name\_only, labels: List[str] | None = None, state: str | ProjectState | None = None*) → List[[MlrunProject](#) | str]

Return a list of the existing projects, potentially filtered by specific criteria.

#### Parameters

- **owner** -- List only projects belonging to this specific owner.
- **format** -- Format of the results. Possible values are:
  - `name_only` (default value) - Return just the names of the projects.

- **minimal** - Return minimal project objects (minimization happens in the BE).
- **full** - Return full project objects.
- **labels** -- Filter by labels attached to the project.
- **state** -- Filter by project's state. Can be either online or archived.

```
list_runs(name: str | None = None, uid: str | List[str] | None = None, project: str | None = None, labels: str
| List[str] | None = None, state: str | None = None, sort: bool = True, last: int = 0, iter: bool =
False, start_time_from: datetime | None = None, start_time_to: datetime | None = None,
last_update_time_from: datetime | None = None, last_update_time_to: datetime | None = None,
partition_by: RunPartitionByField | str | None = None, rows_per_partition: int = 1,
partition_sort_by: SortField | str | None = None, partition_order: OrderType | str =
OrderType.desc, max_partitions: int = 0, with_notifications: bool = False) → RunList
```

Retrieve a list of runs, filtered by various options. If no filter is provided, will return runs from the last week.

Example:

```
runs = db.list_runs(name='download', project='iris', labels=['owner=admin',
↪ 'kind=job'])
# If running in Jupyter, can use the .show() function to display the results
db.list_runs(name='', project=project_name).show()
```

### Parameters

- **name** -- Name of the run to retrieve.
- **uid** -- Unique ID of the run, or a list of run UIDs.
- **project** -- Project that the runs belongs to.
- **labels** -- A list of labels to filter by. Label filters work by either filtering a specific value of a label (i.e. list("key=value")) or by looking for the existence of a given key (i.e. "key").
- **state** -- List only runs whose state is specified.
- **sort** -- Whether to sort the result according to their start time. Otherwise, results will be returned by their internal order in the DB (order will not be guaranteed).
- **last** -- Deprecated - currently not used (will be removed in 1.8.0).
- **iter** -- If True return runs from all iterations. Otherwise, return only runs whose iter is 0.
- **start\_time\_from** -- Filter by run start time in [start\_time\_from, start\_time\_to].
- **start\_time\_to** -- Filter by run start time in [start\_time\_from, start\_time\_to].
- **last\_update\_time\_from** -- Filter by run last update time in (last\_update\_time\_from, last\_update\_time\_to).
- **last\_update\_time\_to** -- Filter by run last update time in (last\_update\_time\_from, last\_update\_time\_to).
- **partition\_by** -- Field to group results by. Only allowed value is *name*. When *partition\_by* is specified, the *partition\_sort\_by* parameter must be provided as well.

- **rows\_per\_partition** -- How many top rows (per sorting defined by *partition\_sort\_by* and *partition\_order*) to return per group. Default value is 1.
- **partition\_sort\_by** -- What field to sort the results by, within each partition defined by *partition\_by*. Currently the only allowed values are *created* and *updated*.
- **partition\_order** -- Order of sorting within partitions - *asc* or *desc*. Default is *desc*.
- **max\_partitions** -- Maximal number of partitions to include in the result. Default is 0 which means no limit.
- **with\_notifications** -- Return runs with notifications, and join them to the response. Default is *False*.

**list\_runtime\_resources**(*project: str | None = None, label\_selector: str | None = None, kind: str | None = None, object\_id: str | None = None, group\_by: ListRuntimeResourcesGroupByField | None = None*) → List[KindRuntimeResources] | Dict[str, Dict[str, RuntimeResources]]

List current runtime resources, which are usually (but not limited to) Kubernetes pods or CRDs. Function applies for runs of type ['dask', 'job', 'spark', 'remote-spark', 'mpijob'], and will return per runtime kind a list of the runtime resources (which may have already completed their execution).

#### Parameters

- **project** -- Get only runtime resources of a specific project, by default None, which will return only the projects you're authorized to see.
- **label\_selector** -- A label filter that will be passed to Kubernetes for filtering the results according to their labels.
- **kind** -- The kind of runtime to query. May be one of ['dask', 'job', 'spark', 'remote-spark', 'mpijob']
- **object\_id** -- The identifier of the mlrun object to query its runtime resources. For most function runtimes, runtime resources are per Run, for which the identifier is the Run's UID. For dask runtime, the runtime resources are per Function, for which the identifier is the Function's name.
- **group\_by** -- Object to group results by. Allowed values are *job* and *project*.

**list\_schedules**(*project: str, name: str | None = None, kind: ScheduleKinds | None = None, include\_last\_run: bool = False*) → SchedulesOutput

Retrieve list of schedules of specific name or kind.

#### Parameters

- **project** -- Project name.
- **name** -- Name of schedule to retrieve. Can be omitted to list all schedules.
- **kind** -- Kind of schedule objects to retrieve, can be either *job* or *pipeline*.
- **include\_last\_run** -- Whether to return for each schedule returned also the results of the last run of that schedule.

**load\_project**(*name: str, url: str, secrets: Dict | None = None, save\_secrets: bool = True*) → str

Loading a project remotely from the given source. :param name: project name :param url: git or tar.gz or .zip sources archive path e.g.: `git://github.com/mlrun/demo-xgb-project.git` `http://mysite/archived-project.zip` The git project should include the project yaml file. :param secrets: Secrets to store in project in order to load it from the provided url. For more information see `mlrun.load_project()` function. :param save\_secrets: Whether to store secrets in the loaded project. Setting to False will cause waiting for the process completion.

**Returns**

The terminal state of load project process.

**patch\_feature\_set**(*name*, *feature\_set\_update*: dict, *project*="", *tag*=None, *uid*=None, *patch\_mode*: str | PatchMode = PatchMode.replace)

Modify (patch) an existing *FeatureSet* object. The object is identified by its name (and project it belongs to), as well as optionally a *tag* or its *uid* (for versioned object). If both *tag* and *uid* are omitted then the object with tag *latest* is modified.

**Parameters**

- **name** -- Name of the object to patch.
- **feature\_set\_update** -- The modifications needed in the object. This parameter only has the changes in it, not a full object. Example:

```
feature_set_update = {"status": {"processed" : True}}
```

Will apply the field `status.processed` to the existing object.

- **project** -- Project which contains the modified object.
- **tag** -- The tag of the object to modify.
- **uid** -- uid of the object to modify.
- **patch\_mode** -- The strategy for merging the changes with the existing object. Can be either *replace* or *additive*.

**patch\_feature\_vector**(*name*, *feature\_vector\_update*: dict, *project*="", *tag*=None, *uid*=None, *patch\_mode*: str | PatchMode = PatchMode.replace)

Modify (patch) an existing *FeatureVector* object. The object is identified by its name (and project it belongs to), as well as optionally a *tag* or its *uid* (for versioned object). If both *tag* and *uid* are omitted then the object with tag *latest* is modified.

**Parameters**

- **name** -- Name of the object to patch.
- **feature\_vector\_update** -- The modifications needed in the object. This parameter only has the changes in it, not a full object.
- **project** -- Project which contains the modified object.
- **tag** -- The tag of the object to modify.
- **uid** -- uid of the object to modify.
- **patch\_mode** -- The strategy for merging the changes with the existing object. Can be either *replace* or *additive*.

**patch\_model\_endpoint**(*project*: str, *endpoint\_id*: str, *attributes*: dict)

Updates model endpoint with provided attributes.

**Parameters**

- **project** -- The name of the project.
- **endpoint\_id** -- The id of the endpoint.
- **attributes** -- Dictionary of attributes that will be used for update the model endpoint. The keys of this dictionary should exist in the target table. Note that the values should be from type string or from a valid numerical type such as int or float. More details about the model endpoint available attributes can be found under *ModelEndpoint*.

Example:

```
# Generate current stats for two features
current_stats = {'tvd_sum': 2.2,
                 'tvd_mean': 0.5,
                 'hellinger_sum': 3.6,
                 'hellinger_mean': 0.9,
                 'kld_sum': 24.2,
                 'kld_mean': 6.0,
                 'f1': {'tvd': 0.5, 'hellinger': 1.0, 'kld': 6.4},
                 'f2': {'tvd': 0.5, 'hellinger': 1.0, 'kld': 6.5}}

# Create attributes dictionary according to the required format
attributes = {'current_stats': json.dumps(current_stats),
              'drift_status': "DRIFT_DETECTED"}
```

**patch\_project**(*name: str, project: dict, patch\_mode: str | PatchMode = PatchMode.replace*) → *MlrunProject*

Patch an existing project object.

#### Parameters

- **name** -- Name of project to patch.
- **project** -- The actual changes to the project object.
- **patch\_mode** -- The strategy for merging the changes with the existing object. Can be either replace or additive.

**read\_artifact**(*key, tag=None, iter=None, project="", tree=None, uid=None*)

Read an artifact, identified by its key, tag, tree and iteration.

#### Parameters

- **key** -- Identifying key of the artifact.
- **tag** -- Tag of the artifact.
- **iter** -- The iteration which generated this artifact (where **iter=0** means the root iteration).
- **project** -- Project that the artifact belongs to.
- **tree** -- The tree which generated this artifact.
- **uid** -- A unique ID for this specific version of the artifact (the uid that was generated in the backend)

**read\_run**(*uid, project="", iter=0*)

Read the details of a stored run from the DB.

#### Parameters

- **uid** -- The run's unique ID.
- **project** -- Project name.
- **iter** -- Iteration within a specific execution.

**remote\_builder**(*func: BaseRuntime, with\_mlrun: bool, mlrun\_version\_specifier: str | None = None, skip\_deployed: bool = False, builder\_env: dict | None = None, force\_build: bool = False*)

Build the pod image for a function, for execution on a remote cluster. This is executed by the MLRun API server, and creates a Docker image out of the function provided and any specific build instructions provided within. This is a pre-requisite for remotely executing a function, unless using a pre-deployed image.

**Parameters**

- **func** -- Function to build.
- **with\_mlrun** -- Whether to add MLRun package to the built package. This is not required if using a base image that already has MLRun in it.
- **mlrun\_version\_specifier** -- Version of MLRun to include in the built image.
- **skip\_deployed** -- Skip the build if we already have an image for the function.
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials)
- **force\_build** -- Force building the image, even when no changes were made

**set\_run\_notifications**(*project: str, run\_uid: str, notifications: List[Notification] | None = None*)

Set notifications on a run. This will override any existing notifications on the run. :param project: Project containing the run. :param run\_uid: UID of the run. :param notifications: List of notifications to set on the run. Default is an empty list.

**set\_schedule\_notifications**(*project: str, schedule\_name: str, notifications: List[Notification] | None = None*)

Set notifications on a schedule. This will override any existing notifications on the schedule. :param project: Project containing the schedule. :param schedule\_name: Name of the schedule. :param notifications: List of notifications to set on the schedule. Default is an empty list.

**start\_function**(*func\_url: str | None = None, function: BaseRuntime | None = None*) → BackgroundTask

Execute a function remotely, Used for dask functions.

**Parameters**

- **func\_url** -- URL to the function to be executed.
- **function** -- The function object to start, not needed here.

**Returns**

A BackgroundTask object, with details on execution process and its status.

**store\_artifact**(*key, artifact, uid=None, iter=None, tag=None, project="", tree=None*)

Store an artifact in the DB.

**Parameters**

- **key** -- Identifying key of the artifact.
- **artifact** -- The Artifact to store.
- **uid** -- A unique ID for this specific version of the artifact (deprecated, artifact uid is generated in the backend use *tree* instead)
- **iter** -- The task iteration which generated this artifact. If *iter* is not *None* the iteration will be added to the key provided to generate a unique key for the artifact of the specific iteration.
- **tag** -- Tag of the artifact.
- **project** -- Project that the artifact belongs to.
- **tree** -- The tree (producer id) which generated this artifact.

**store\_datastore\_profile**(*profile: DatastoreProfile, project: str*)

Create or replace a datastore profile. :returns: None

```
store_feature_set(feature_set: dict | FeatureSet | FeatureSet, name=None, project="", tag=None, uid=None, versioned=True) → dict
```

Save a [FeatureSet](#) object in the [mlrun](#) DB. The feature-set can be either a new object or a modification to existing object referenced by the params of the function.

#### Parameters

- **feature\_set** -- The [FeatureSet](#) to store.
- **name** -- Name of feature set.
- **project** -- Name of project this feature-set belongs to.
- **tag** -- The tag of the object to replace in the DB, for example latest.
- **uid** -- The uid of the object to replace in the DB. If using this parameter, the modified object must have the same uid of the previously-existing object. This cannot be used for non-versioned objects.
- **versioned** -- Whether to maintain versions for this feature-set. All versions of a versioned object will be kept in the DB and can be retrieved until explicitly deleted.

#### Returns

The [FeatureSet](#) object (as dict).

```
store_feature_vector(feature_vector: dict | FeatureVector | FeatureVector, name=None, project="", tag=None, uid=None, versioned=True) → dict
```

Store a [FeatureVector](#) object in the [mlrun](#) DB. The feature-vector can be either a new object or a modification to existing object referenced by the params of the function.

#### Parameters

- **feature\_vector** -- The [FeatureVector](#) to store.
- **name** -- Name of feature vector.
- **project** -- Name of project this feature-vector belongs to.
- **tag** -- The tag of the object to replace in the DB, for example latest.
- **uid** -- The uid of the object to replace in the DB. If using this parameter, the modified object must have the same uid of the previously-existing object. This cannot be used for non-versioned objects.
- **versioned** -- Whether to maintain versions for this feature-vector. All versions of a versioned object will be kept in the DB and can be retrieved until explicitly deleted.

#### Returns

The [FeatureVector](#) object (as dict).

```
store_function(function: BaseRuntime | dict, name, project="", tag=None, versioned=False)
```

Store a function object. Function is identified by its name and tag, and can be versioned.

```
store_hub_source(source_name: str, source: dict | IndexedHubSource)
```

Create or replace a hub source. For an example of the source format and explanation of the source order logic, please see [create\\_hub\\_source\(\)](#). This method can be used to modify the source itself or its order in the list of sources.

#### Parameters

- **source\_name** -- Name of the source object to modify/create. It must match the `source.metadata.name` parameter in the source itself.

- **source** -- Source object to store in the database.

#### Returns

The source object as stored in the DB.

**store\_log**(*uid*, *project*="", *body*=None, *append*=False)

Save a log persistently.

#### Parameters

- **uid** -- Log unique ID
- **project** -- Project name for which this log belongs
- **body** -- The actual log to store
- **append** -- Whether to append the log provided in body to an existing log with the same uid or to create a new log. If set to False, an existing log with same uid will be overwritten

**store\_project**(*name*: str, *project*: dict | [MlrunProject](#) | *Project*) → *MlrunProject*

Store a project in the DB. This operation will overwrite existing project of the same name if exists.

**store\_run**(*struct*, *uid*, *project*="", *iter*=0)

Store run details in the DB. This method is usually called from within other [mlrun](#) flows and not called directly by the user.

**store\_run\_notifications**(*notification\_objects*: List[[Notification](#)], *run\_uid*: str, *project*: str | None = None, *mask\_params*: bool = True)

For internal use. The notification mechanism may run "locally" for certain runtimes. However, the updates occur in the API so nothing to do here.

**submit\_job**(*runspec*, *schedule*: str | *ScheduleCronTrigger* | None = None)

Submit a job for remote execution.

#### Parameters

- **runspec** -- The runtime object spec (Task) to execute.
- **schedule** -- Whether to schedule this job using a Cron trigger. If not specified, the job will be submitted immediately.

**submit\_pipeline**(*project*, *pipeline*, *arguments*=None, *experiment*=None, *run*=None, *namespace*=None, *artifact\_path*=None, *ops*=None, *cleanup\_ttl*=None)

Submit a KFP pipeline for execution.

#### Parameters

- **project** -- The project of the pipeline
- **pipeline** -- Pipeline function or path to .yaml/.zip pipeline file.
- **arguments** -- A dictionary of arguments to pass to the pipeline.
- **experiment** -- A name to assign for the specific experiment.
- **run** -- A name for this specific run.
- **namespace** -- Kubernetes namespace to execute the pipeline in.
- **artifact\_path** -- A path to artifacts used by this pipeline.
- **ops** -- Transformers to apply on all ops in the pipeline.
- **cleanup\_ttl** -- pipeline cleanup ttl in secs (time to wait after workflow completion, at which point the workflow and all its resources are deleted)

```
submit_workflow(project: str, name: str, workflow_spec: WorkflowSpec | WorkflowSpec | dict, arguments: Dict | None = None, artifact_path: str | None = None, source: str | None = None, run_name: str | None = None, namespace: str | None = None, notifications: List[Notification] | None = None)
```

Submitting workflow for a remote execution.

#### Parameters

- **project** -- project name
- **name** -- workflow name
- **workflow\_spec** -- the workflow spec to execute
- **arguments** -- arguments for the workflow
- **artifact\_path** -- artifact target path of the workflow
- **source** -- source url of the project
- **run\_name** -- run name to override the default: 'workflow-runner-<workflow name>'
- **namespace** -- kubernetes namespace if other than default
- **notifications** -- list of notifications to send when workflow execution is completed

#### Returns

WorkflowResponse.

```
tag_artifacts(artifacts: List[Artifact] | List[dict] | Artifact | dict, project: str, tag_name: str, replace: bool = False)
```

Tag a list of artifacts.

#### Parameters

- **artifacts** -- The artifacts to tag. Can be a list of `Artifact` objects or dictionaries, or a single object.
- **project** -- Project which contains the artifacts.
- **tag\_name** -- The tag to set on the artifacts.
- **replace** -- If True, replace existing tags, otherwise append to existing tags.

```
tag_objects(project: str, tag_name: str, objects: TagObjects | dict, replace: bool = False)
```

Tag a list of objects.

#### Parameters

- **project** -- Project which contains the objects.
- **tag\_name** -- The tag to set on the objects.
- **objects** -- The objects to tag.
- **replace** -- Whether to replace the existing tags of the objects or to add the new tag to them.

```
trigger_migrations() → BackgroundTask | None
```

Trigger migrations (will do nothing if no migrations are needed) and wait for them to finish if actually triggered :returns: BackgroundTask.

```
update_run(updates: dict, uid, project="", iter=0, timeout=45)
```

Update the details of a stored run in the DB.

**update\_schedule**(*project: str, name: str, schedule: ScheduleUpdate*)

Update an existing schedule, replace it with the details contained in the schedule object.

**verify\_authorization**(*authorization\_verification\_input: AuthorizationVerificationInput*)

Verifies authorization for the provided action on the provided resource.

**Parameters**

**authorization\_verification\_input** -- Instance of `AuthorizationVerificationInput` that includes all the needed parameters for the auth verification

**watch\_log**(*uid, project="", watch=True, offset=0*)

Retrieve logs of a running process by chunks of 1MB, and watch the progress of the execution until it completes. This method will print out the logs and continue to periodically poll for, and print, new logs as long as the state of the runtime which generates this log is either `pending` or `running`.

**Parameters**

- **uid** -- The uid of the log object to watch.
- **project** -- Project that the log belongs to.
- **watch** -- If set to `True` will continue tracking the log as described above. Otherwise this function is practically equivalent to the `get_log()` function.
- **offset** -- Minimal offset in the log to watch.

**Returns**

The final state of the log being watched and the final offset.

**class** `mlrun.common.schemas.secret.SecretProviderName`(*value*)

Bases: `StrEnum`

Enum containing names of valid providers for secrets.

**kubernetes** = `'kubernetes'`

**vault** = `'vault'`

## 18.7 mlrun.execution

**class** `mlrun.execution.MLClientCtx`(*autocommit=False, tmp="", log\_stream=None*)

Bases: `object`

ML Execution Client Context

The context is generated and injected to the function using the `function.run()` or manually using the `get_or_create_ctx()` call and provides an interface to use run params, metadata, inputs, and outputs.

Base metadata include: uid, name, project, and iteration (for hyper params). Users can set labels and annotations using `set_label()`, `set_annotation()`. Access parameters and secrets using `get_param()`, `get_secret()`. Access input data objects using `get_input()`. Store results, artifacts, and real-time metrics using the `log_result()`, `log_artifact()`, `log_dataset()` and `log_model()` methods.

See doc for the individual params and methods

**property annotations**

Dictionary with annotations (read-only)

**artifact\_subpath**(\*subpaths)

Subpaths under output path artifacts path

Example:

```
data_path=context.artifact_subpath('data')
```

**property artifacts**

Dictionary of artifacts (read-only)

**commit**(message: str = "", completed=False)

Save run state and optionally add a commit message

**Parameters**

- **message** -- Commit message to save in the run
- **completed** -- Mark run as completed

**classmethod from\_dict**(attrs: dict, rundb="", autocommit=False, tmp="", host=None, log\_stream=None, is\_api=False, store\_run=True, include\_status=False)

Create execution context from dict

**get\_cached\_artifact**(key)

Return a logged artifact from cache (for potential updates)

**get\_child\_context**(with\_parent\_params=False, \*\*params)

Get child context (iteration)

Allow sub experiments (epochs, hyper-param, ..) under a parent will create a new iteration, log\_xx will update the child only use commit\_children() to save all the children and specify the best run.

Example:

```
def handler(context: mlrun.MLClientCtx, data: mlrun.DataItem):
    df = data.as_df()
    best_accuracy = accuracy_sum = 0
    for param in param_list:
        with context.get_child_context(myparam=param) as child:
            accuracy = child_handler(child, df, **child.parameters)
            accuracy_sum += accuracy
            child.log_result('accuracy', accuracy)
            if accuracy > best_accuracy:
                child.mark_as_best()
                best_accuracy = accuracy

    context.log_result('avg_accuracy', accuracy_sum / len(param_list))
```

**Parameters**

- **params** -- Extra (or override) params to parent context
- **with\_parent\_params** -- Child will copy the parent parameters and add to them

**Returns**

Child context

**get\_dataitem**(url, secrets: dict | None = None)

Get mlrun dataitem from url

Example:

```
data = context.get_dataitem("s3://my-bucket/file.csv").as_df()
```

#### Parameters

- **url** -- Data-item uri/path
- **secrets** -- Additional secrets to use when accessing the data-item

**get\_input**(*key: str, url: str = ""*)

Get an input `DataItem` object, data objects have methods such as `.get()`, `.download()`, `.url`, .. to access the actual data. Requires access to the data store secrets if configured.

Example:

```
data = context.get_input("my_data").get()
```

#### Parameters

- **key** -- The key name for the input url entry.
- **url** -- The url of the input data (file, stream, ..) - optional, saved in the inputs dictionary if the key is not already present.

#### Returns

`DataItem` object

**get\_meta**() → dict

Reserved for internal use

**get\_param**(*key: str, default=None*)

Get a run parameter, or use the provided default if not set

Example:

```
p1 = context.get_param("p1", 0)
```

**get\_project\_object**()

Get the MLRun project object by the project name set in the context.

#### Returns

The project object or None if it couldn't be retrieved.

**get\_project\_param**(*key: str, default=None*)

Get a parameter from the run's project's parameters

**get\_secret**(*key: str*)

Get a key based secret e.g. DB password from the context. Secrets can be specified when invoking a run through vault, files, env, ..

Example:

```
access_key = context.get_secret("ACCESS_KEY")
```

**get\_store\_resource**(*url, secrets: dict | None = None*)

Get mlrun data resource (feature set/vector, artifact, item) from url.

Example:

```
feature_vector = context.get_store_resource("store://feature-vectors/default/
→myvec")
dataset = context.get_store_resource("store://artifacts/default/mydata")
```

**Parameters**

- **url** -- Store resource uri/path, store://<type>/<project>/<name>:<version>  
Types: artifacts | feature-sets | feature-vectors
- **secrets** -- Additional secrets to use when accessing the store resource

**property in\_path**

Default input path for data objects

**property inputs**

Dictionary of input data item urls (read-only)

**is\_logging\_worker()**

Check if the current worker is the logging worker.

**Returns**

True if the context belongs to the logging worker and False otherwise.

**property iteration**

Child iteration index, for hyperparameters

**kind = 'run'**

**property labels**

Dictionary with labels (read-only)

**log\_artifact**(*item*, *body=None*, *local\_path=None*, *artifact\_path=None*, *tag=""*, *viewer=None*, *target\_path=""*, *src\_path=None*, *upload=None*, *labels=None*, *format=None*, *db\_key=None*, *\*\*kwargs*)

Log an output artifact and optionally upload it to datastore

Example:

```
context.log_artifact(  
    "some-data",  
    body=b"abc is 123",  
    local_path="model.txt",  
    labels={"framework": "xgboost"},  
)
```

**Parameters**

- **item** -- Artifact key or artifact object (can be any type, such as dataset, model, feature store)
- **body** -- Will use the body as the artifact content
- **local\_path** -- Path to the local file we upload, will also be use as the destination subpath (under "artifact\_path")
- **artifact\_path** -- Target artifact path (when not using the default) To define a subpath under the default location use: *artifact\_path=context.artifact\_subpath('data')*
- **tag** -- Version tag
- **viewer** -- Kubeflow viewer type
- **target\_path** -- Absolute target path (instead of using artifact\_path + local\_path)
- **src\_path** -- Deprecated, use local\_path

- **upload** -- Upload to datastore (default is True)
- **labels** -- A set of key/value labels to tag the artifact with
- **format** -- Optional, format to use (e.g. csv, parquet, ..)
- **db\_key** -- The key to use in the artifact DB table, by default its run name + '\_' + key db\_key=False will not register it in the artifacts table

### Returns

Artifact object

```
log_dataset(key, df, tag="", local_path=None, artifact_path=None, upload=True, labels=None, format="",
             preview=None, stats=None, db_key=None, target_path="", extra_data=None, label_column:
             str | None = None, **kwargs)
```

Log a dataset artifact and optionally upload it to datastore

If the dataset exists with the same key and tag, it will be overwritten.

Example:

```
raw_data = {
    "first_name": ["Jason", "Molly", "Tina", "Jake", "Amy"],
    "last_name": ["Miller", "Jacobson", "Ali", "Milner", "Cooze"],
    "age": [42, 52, 36, 24, 73],
    "testScore": [25, 94, 57, 62, 70],
}
df = pd.DataFrame(raw_data, columns=["first_name", "last_name", "age",
    ↪ "testScore"])
context.log_dataset("mydf", df=df, stats=True)
```

### Parameters

- **key** -- Artifact key
- **df** -- Dataframe object
- **label\_column** -- Name of the label column (the one holding the target (y) values)
- **local\_path** -- Path to the local dataframe file that exists locally. The given file extension will be used to save the dataframe to a file. If the file exists, it will be uploaded to the datastore instead of the given df.
- **artifact\_path** -- Target artifact path (when not using the default) to define a subpath under the default location use: `artifact_path=context.artifact_subpath('data')`
- **tag** -- Version tag
- **format** -- Optional, format to use (e.g. csv, parquet, ..)
- **target\_path** -- Absolute target path (instead of using artifact\_path + local\_path)
- **preview** -- Number of lines to store as preview in the artifact metadata
- **stats** -- Calculate and store dataset stats in the artifact metadata
- **extra\_data** -- Key/value list of extra files/charts to link with this dataset
- **upload** -- Upload to datastore (default is True)
- **labels** -- A set of key/value labels to tag the artifact with

- **db\_key** -- The key to use in the artifact DB table, by default its run name + '\_' + key db\_key=False will not register it in the artifacts table

### Returns

Artifact object

**log\_iteration\_results**(*best, summary: list, task: dict, commit=False*)

Reserved for internal use

**property log\_level**

Get the logging level, e.g. 'debug', 'info', 'error'

**log\_model**(*key, body=None, framework="", tag="", model\_dir=None, model\_file=None, algorithm=None, metrics=None, parameters=None, artifact\_path=None, upload=True, labels=None, inputs: List[Feature] | None = None, outputs: List[Feature] | None = None, feature\_vector: str | None = None, feature\_weights: list | None = None, training\_set=None, label\_column: str | list | None = None, extra\_data=None, db\_key=None, \*\*kwargs*)

Log a model artifact and optionally upload it to datastore

Example:

```
context.log_model("model", body=dumps(model),
                  model_file="model.pkl",
                  metrics=context.results,
                  training_set=training_df,
                  label_column='label',
                  feature_vector=feature_vector_uri,
                  labels={"app": "fraud"})
```

### Parameters

- **key** -- Artifact key or artifact class ()
- **body** -- Will use the body as the artifact content
- **model\_file** -- Path to the local model file we upload (see also model\_dir) or to a model file data url (e.g. <http://host/path/model.pkl>)
- **model\_dir** -- Path to the local dir holding the model file and extra files
- **artifact\_path** -- Target artifact path (when not using the default) to define a subpath under the default location use: *artifact\_path=context.artifact\_subpath('data')*
- **framework** -- Name of the ML framework
- **algorithm** -- Training algorithm name
- **tag** -- Version tag
- **metrics** -- Key/value dict of model metrics
- **parameters** -- Key/value dict of model parameters
- **inputs** -- Ordered list of model input features (name, type, ..)
- **outputs** -- Ordered list of model output/result elements (name, type, ..)
- **upload** -- Upload to datastore (default is True)
- **labels** -- A set of key/value labels to tag the artifact with

- **feature\_vector** -- Feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- List of feature weights, one per input column
- **training\_set** -- Training set dataframe, used to infer inputs & outputs
- **label\_column** -- Which columns in the training set are the label (target) columns
- **extra\_data** -- Key/value list of extra files/charts to link with this dataset value can be absolute path | relative path (to model dir) | bytes | artifact object
- **db\_key** -- The key to use in the artifact DB table, by default its run name + '\_' + key db\_key=False will not register it in the artifacts table

**Returns**

Artifact object

**log\_result**(key: str, value, commit=False)

Log a scalar result value

Example:

```
context.log_result('accuracy', 0.85)
```

**Parameters**

- **key** -- Result key
- **value** -- Result value
- **commit** -- Commit (write to DB now vs wait for the end of the run)

**log\_results**(results: dict, commit=False)

Log a set of scalar result values

Example:

```
context.log_results({'accuracy': 0.85, 'loss': 0.2})
```

**Parameters**

- **results** -- Key/value dict or results
- **commit** -- Commit (write to DB now vs wait for the end of the run)

**property logger**

Built-in logger interface

Example:

```
context.logger.info("Started experiment..", param=5)
```

**mark\_as\_best()**

mark a child as the best iteration result, see .get\_child\_context()

**property out\_path**

Default output path for artifacts

**property parameters**

Dictionary of run parameters (read-only)

**property project**

Project name, runs can be categorized by projects

**property results**

Dictionary of results (read-only)

**set\_annotation**(*key: str, value, replace: bool = True*)

Set/record a specific annotation

Example:

```
context.set_annotation("comment", "some text")
```

**set\_hostname**(*host: str*)

Update the hostname, for internal use

**set\_label**(*key: str, value, replace: bool = True*)

Set/record a specific label

Example:

```
context.set_label("framework", "sklearn")
```

**set\_logger\_stream**(*stream*)**set\_state**(*execution\_state: str | None = None, error: str | None = None, commit=True*)

Modify and store the execution state or mark an error and update the run state accordingly. This method allows to set the run state to 'completed' in the DB which is discouraged. Completion of runs should be decided externally to the execution context.

**Parameters**

- **execution\_state** -- set execution state
- **error** -- error message (if exist will set the state to error)
- **commit** -- will immediately update the state in the DB

**property state**

Execution state

**store\_run**()

Store the run object in the DB - removes missing fields. Use `_update_run` for coherent updates. Should be called by the logging worker only (see `is_logging_worker()`).

**property tag**

Run tag (uid or workflow id if exists)

**to\_dict**()

Convert the run context to a dictionary

**to\_json**()

Convert the run context to a json buffer

**to\_yaml**()

Convert the run context to a yaml buffer

**property uid**

Unique run id

**update\_artifact**(*artifact\_object*)

Update an artifact object in the cache and the DB

**update\_child\_iterations**(*best\_run=0, commit\_children=False, completed=True*)

Update children results in the parent, and optionally mark the best.

**Parameters**

- **best\_run** -- Marks the child iteration number (starts from 1)
- **commit\_children** -- Commit all child runs to the db
- **completed** -- Mark children as completed

## 18.8 mlrun.feature\_store

**class** mlrun.feature\_store.**Entity**(*name: str | None = None, value\_type: ValueType | str | None = None, description: str | None = None, labels: Dict[str, str] | None = None*)

Bases: ModelObj

data entity (index)

data entity (index key)

**Parameters**

- **name** -- entity name
- **value\_type** -- type of the entity, e.g. ValueType.STRING, ValueType.INT (default ValueType.STRING)
- **description** -- test description of the entity
- **labels** -- a set of key/value labels (tags)

**kind** = 'entity'

**class** mlrun.feature\_store.**Feature**(*value\_type: ValueType | str | None = None, dims: List[int] | None = None, description: str | None = None, aggregate: bool | None = None, name: str | None = None, validator=None, default: str | None = None, labels: Dict[str, str] | None = None*)

Bases: ModelObj

data feature

data feature

Features can be specified manually or inferred automatically (during ingest/preview)

**Parameters**

- **value\_type** -- type of the feature. Use the ValueType constants library e.g. ValueType.STRING, ValueType.INT (default ValueType.STRING)
- **dims** -- list of dimensions for vectors/tensors, e.g. [2, 2]
- **description** -- text description of the feature
- **aggregate** -- is it an aggregated value
- **name** -- name of the feature
- **validator** -- feature validation policy
- **default** -- default value

- **labels** -- a set of key/value labels (tags)
- property validator**

```
class mlrun.feature_store.FeatureSet(name: str | None = None, description: str | None = None, entities:
    List[Entity] | str | None = None, timestamp_key: str | None = None,
    engine: str | None = None, label_column: str | None = None,
    relations: Dict[str, Entity] | str | None = None, passthrough: bool |
    None = None)
```

Bases: `ModelObj`

Feature set object, defines a set of features and their data pipeline

Feature set object, defines a set of features and their data pipeline

example:

```
import mlrun.feature_store as fstore
ticks = fstore.FeatureSet("ticks", entities=["stock"], timestamp_key="timestamp")
ticks.ingest(df)
```

#### Parameters

- **name** -- name of the feature set
- **description** -- text description
- **entities** -- list of entity (index key) names or `Entity`
- **timestamp\_key** -- timestamp column name
- **engine** -- name of the processing engine (storey, pandas, or spark), defaults to storey
- **label\_column** -- name of the label column (the one holding the target (y) values)
- **relations** -- dictionary that indicates all the relations this feature set have with another feature sets. The format of this dictionary is {"my\_column":`Entity`, ...}
- **passthrough** -- if true, ingest will skip offline targets, and `get_offline_features` will read directly from source

```
add_aggregation(column, operations, windows, period=None, name=None, step_name=None, after=None,
    before=None, emit_policy: EmitPolicy | None = None)
```

add feature aggregation rule

example:

```
myset.add_aggregation("ask", ["sum", "max"], "1h", "10m", name="asks")
```

#### Parameters

- **column** -- name of column/field aggregate. Do not name columns starting with either `_` or `aggr_`. They are reserved for internal use, and the data does not ingest correctly. When using the pandas engine, do not use spaces ( ) or periods (.) in the column names; they cause errors in the ingestion.
- **operations** -- aggregation operations. Supported operations: count, sum, sqr, max, min, first, last, avg, stdvar, stddev
- **windows** -- time windows, can be a single window, e.g. '1h', '1d', or a list of same unit windows e.g. ['1h', '6h'] windows are transformed to fixed windows or sliding windows depending whether period parameter provided.

- Sliding window is fixed-size overlapping windows that slides with time. The window size determines the size of the sliding window and the period determines the step size to slide. Period must be integral divisor of the window size. If the period is not provided then fixed windows is used.
- Fixed window is fixed-size, non-overlapping, gap-less window. The window is referred to as a tumbling window. In this case, each record on an in-application stream belongs to a specific window. It is processed only once (when the query processes the window to which the record belongs).
- **period** -- optional, sliding window granularity, e.g. '20s' '10m' '3h' '7d'
- **name** -- optional, aggregation name/prefix. Must be unique per feature set. If not passed, the column will be used as name.
- **step\_name** -- optional, graph step name
- **after** -- optional, after which graph step it runs
- **before** -- optional, comes before graph step
- **emit\_policy** -- optional, which emit policy to use when performing the aggregations. Use the derived classes of `storey.EmitPolicy`. The default is to emit every period for Spark engine and emit every event for storey. Currently the only other supported option is to use `emit_policy=storey.EmitEveryEvent()` when using the Spark engine to emit every event

**add\_entity**(*name: str, value\_type: ValueType | None = None, description: str | None = None, labels: Dict[str, str] | None = None*)

add/set an entity (dataset index)

example:

```
import mlrun.feature_store as fstore

ticks = fstore.FeatureSet("ticks",
                           entities=["stock"],
                           timestamp_key="timestamp")
ticks.add_entity("country",
                 mlrun.data_types.ValueType.STRING,
                 description="stock country")
ticks.add_entity("year", mlrun.data_types.ValueType.INT16)
ticks.save()
```

#### Parameters

- **name** -- entity name
- **value\_type** -- type of the entity (default to `ValueType.STRING`)
- **description** -- description of the entity
- **labels** -- label tags dict

**add\_feature**(*feature: Feature, name=None*)

add/set a feature

example:

```
import mlrun.feature_store as fstore
from mlrun.features import Feature

ticks = fstore.FeatureSet("ticks",
                           entities=["stock"],
                           timestamp_key="timestamp")
ticks.add_feature(Feature(value_type=mlrun.data_types.ValueType.STRING,
                           description="client consistency"), "ABC01")
ticks.add_feature(Feature(value_type=mlrun.data_types.ValueType.FLOAT,
                           description="client volatility"), "SAB")
ticks.save()
```

#### Parameters

- **feature** -- setting of Feature
- **name** -- feature name

**deploy\_ingestion\_service**(*source*: DataSource | None = None, *targets*: List[DataTargetBase] | None = None, *name*: str | None = None, *run\_config*: RunConfig | None = None, *verbose*=False) → Tuple[str, BaseRuntime]

Start real-time ingestion service using nuclio function

Deploy a real-time function implementing feature ingestion pipeline the source maps to Nuclio event triggers (http, kafka, v3io stream, etc.)

the *run\_config* parameter allow specifying the function and job configuration, see: [RunConfig](#)

example:

```
source = HTTPSource()
func = mlrun.code_to_function("ingest", kind="serving").apply(mount_v3io())
config = RunConfig(function=func)
my_set.deploy_ingestion_service(source, run_config=config)
```

#### Parameters

- **source** -- data source object describing the online or offline source
- **targets** -- list of data target objects
- **name** -- name for the job/function
- **run\_config** -- service runtime configuration (function object/uri, resources, etc..)
- **verbose** -- verbose log

#### Returns

URL to access the deployed ingestion service, and the function that was deployed (which will differ from the function passed in via the *run\_config* parameter).

**extract\_relation\_keys**(*other\_feature\_set*, *relations*: Dict[str, Entity | str] | None = None) → list[str]

Checks whether a feature set can be merged to the right of this feature set.

#### Parameters

- **other\_feature\_set** -- The feature set to be merged to the right of this feature set.
- **relations** -- The relations that were defined on this feature set.

**Returns**

If the two feature sets can be merged, a list of the left join keys is returned. Otherwise, an empty list is returned. (The right join keys are always the entities of the other feature set)

**property fullname:** `str`

full name in the form {project}/{name}[:{tag}]

**get\_stats\_table()**

get feature statistics table (as dataframe)

**get\_target\_path**(*name=None*)

get the url/path for an offline or specified data target

**property graph:** `RootFlowStep`

feature set transformation graph/DAG

**has\_valid\_source()**

check if object's spec has a valid (non empty) source definition

**ingest**(*source=None, targets: List[DataTargetBase] | None = None, namespace=None, return\_df: bool = True, infer\_options: InferOptions = 63, run\_config: RunConfig | None = None, mlrun\_context=None, spark\_context=None, overwrite=None*) → `DataFrame | None`

Read local DataFrame, file, URL, or source into the feature store Ingest reads from the source, run the graph transformations, infers metadata and stats and writes the results to the default of specified targets

when targets are not specified data is stored in the configured default targets (will usually be NoSQL for real-time and Parquet for offline).

the *run\_config* parameter allow specifying the function and job configuration, see: [RunConfig](#)

example:

```
stocks_set = FeatureSet("stocks", entities=[Entity("ticker")])
stocks = pd.read_csv("stocks.csv")
df = stocks_set.ingest(stocks, infer_options=fstore.InferOptions.default())

# for running as remote job
config = RunConfig(image='mlrun/mlrun')
df = ingest(stocks_set, stocks, run_config=config)

# specify source and targets
source = CSVSource("mycsv", path="measurements.csv")
targets = [CSVTarget("mycsv", path="./mycsv.csv")]
ingest(measurements, source, targets)
```

**Parameters**

- **source** -- source dataframe or other sources (e.g. [parquet source](#) see: [ParquetSource](#) and other classes in `mlrun.datastore` with suffix `Source`)
- **targets** -- optional list of data target objects
- **namespace** -- namespace or module containing graph classes
- **return\_df** -- indicate if to return a dataframe with the graph results
- **infer\_options** -- schema (for discovery of entities, features in featureset), index, stats, histogram and preview infer options (`InferOptions`)

- **run\_config** -- function and/or run configuration for remote jobs, see [RunConfig](#)
- **mlrun\_context** -- mlrun context (when running as a job), for internal use !
- **spark\_context** -- local spark session for spark ingestion, example for creating the spark context: `spark = SparkSession.builder.appName("Spark function").getOrCreate()` For remote spark ingestion, this should contain the remote spark service name
- **overwrite** -- delete the targets' data prior to ingestion (default: True for non scheduled ingest - deletes the targets that are about to be ingested. False for scheduled ingest - does not delete the target)

**Returns**

if `return_df` is True, a dataframe will be returned based on the graph

**is\_connectable\_to\_df**(*df\_columns: list[str]*) → bool

This method checks if the dataframe can be left-joined with this feature set

**Parameters**

**df\_columns** -- The columns of the data frame you want to merge to the left of this feature set

**Returns**

True if it can be left-joined and False otherwise

**kind** = 'FeatureSet'

**link\_analysis**(*name, uri*)

add a linked file/artifact (chart, data, ..)

**property metadata:** VersionedObjMetadata

**plot**(*filename=None, format=None, with\_targets=False, \*\*kw*)

plot/save graph using graphviz

example:

```
import mlrun.feature_store as fstore
...
ticks = fstore.FeatureSet("ticks",
                          entities=["stock"],
                          timestamp_key="timestamp")
ticks.add_aggregation(name='priceN',
                      column='price',
                      operations=['avg'],
                      windows=['1d'],
                      period='1h')
ticks.plot(rankdir="LR", with_targets=True)
```

**Parameters**

- **filename** -- target filepath for the graph image (None for the notebook)
- **format** -- the output format used for rendering ('pdf', 'png', etc.)
- **with\_targets** -- show targets in the graph image
- **kw** -- kwargs passed to graphviz, e.g. `rankdir="LR"` (see <https://graphviz.org/doc/info/attrs.html>)

**Returns**

graphviz graph object

**preview**(*source*, *entity\_columns*: list | None = None, *namespace*=None, *options*: InferOptions | None = None, *verbose*: bool = False, *sample\_size*: int | None = None) → DataFrame

run the ingestion pipeline with local DataFrame/file data and infer features schema and stats

example:

```
quotes_set = FeatureSet("stock-quotes", entities=[Entity("ticker")])
quotes_set.add_aggregation("ask", ["sum", "max"], ["1h", "5h"], "10m")
quotes_set.add_aggregation("bid", ["min", "max"], ["1h"], "10m")
df = quotes_set.preview(
    quotes_df,
    entity_columns=["ticker"],
)
```

**Parameters**

- **source** -- source dataframe or csv/parquet file path
- **entity\_columns** -- list of entity (index) column names
- **namespace** -- namespace or module containing graph classes
- **options** -- schema (for discovery of entities, features in featureset), index, stats, histogram and preview infer options (InferOptions)
- **verbose** -- verbose log
- **sample\_size** -- num of rows to sample from the dataset (for large datasets)

**purge\_targets**(*target\_names*: List[str] | None = None, *silent*: bool = False)

Delete data of specific targets :param target\_names: List of names of targets to delete (default: delete all ingested targets) :param silent: Fail silently if target doesn't exist in featureset status

**reload**(*update\_spec*=True)

reload/sync the feature vector status and spec from the DB

**save**(*tag*="", *versioned*=False)

save to mlrun db

**set\_targets**(*targets*=None, *with\_defaults*=True, *default\_final\_step*=None, *default\_final\_state*=None)

set the desired target list or defaults

**Parameters**

- **targets** -- list of target type names ('csv', 'nosql', ..) or target objects CSVTarget(), ParquetTarget(), NoSqlTarget(), StreamTarget(), ..
- **with\_defaults** -- add the default targets (as defined in the central config)
- **default\_final\_step** -- the final graph step after which we add the target writers, used when the graph branches and the end cant be determined automatically
- **default\_final\_state** -- *Deprecated* - use default\_final\_step instead

property spec: [FeatureSetSpec](#)

property status: [FeatureSetStatus](#)

```
to_dataframe(columns=None, df_module=None, target_name=None, start_time=None, end_time=None,
              time_column=None, **kwargs)
```

return featureset (offline) data as dataframe

#### Parameters

- **columns** -- list of columns to select (if not all)
- **df\_module** -- py module used to create the DataFrame (pd for Pandas, dd for Dask, ..)
- **target\_name** -- select a specific target (material view)
- **start\_time** -- filter by start time
- **end\_time** -- filter by end time
- **time\_column** -- specify the time column name in the file
- **kwargs** -- additional reader (csv, parquet, ..) args

#### Returns

DataFrame

```
update_targets_for_ingest(targets: List[DataTargetBase], overwrite: bool | None = None)
```

#### property uri

fully qualified feature set uri

```
validate_steps(namespace)
```

```
class mlrun.feature_store.FeatureVector(name=None, features=None, label_feature=None,
   description=None, with_indexes=None, join_graph: JoinGraph
   | None = None, relations: Dict[str, Dict[str, Entity | str]] | None
   = None)
```

Bases: ModelObj

Feature vector, specify selected features, their metadata and material views

Feature vector, specify selected features, their metadata and material views

example:

```
import mlrun.feature_store as fstore
features = ["quotes.bid", "quotes.asks_sum_5h as asks_5h", "stocks.*"]
vector = fstore.FeatureVector("my-vec", features)

# get the vector as a dataframe
df = fstore.get_offline_features(vector).to_dataframe()

# return an online/real-time feature service
svc = fstore.get_online_feature_service(vector, impute_policy={"*": "$mean"})
resp = svc.get([{"stock": "GOOG"}])
```

#### Parameters

- **name** -- List of names of targets to delete (default: delete all ingested targets)
- **features** -- list of feature to collect to this vector. Format [ <project>/<feature\_set>.<feature\_name or \*> [as <alias>]
- **label\_feature** -- feature name to be used as label data

- **description** -- text description of the vector
- **with\_indexes** -- whether to keep the entity and timestamp columns in the response
- **join\_graph** -- An optional JoinGraph object representing the graph of data joins between feature sets for this feature vector, specified the order and the join types.
- **relations** -- {<feature\_set name>: {<column\_name>: <other entity object/name>, ...}...} An optional dictionary specifying the relations between feature sets in the feature vector. The keys of the dictionary are feature set names, and the values are dictionaries where the keys represent column names(of the feature set), and the values represent the target entities to join with. The relations provided here will take precedence over the relations that were specified on the feature sets themselves. In case a specific feature set is not mentioned as a key here, the function will fall back to using the default relations defined in the feature set.

**get\_feature\_aliases()**

**get\_feature\_set\_relations**(feature\_set: str | FeatureSet)

**get\_offline\_features**(entity\_rows=None, entity\_timestamp\_column: str | None = None, target: DataTargetBase | None = None, run\_config: RunConfig | None = None, drop\_columns: List[str] | None = None, start\_time: str | datetime | None = None, end\_time: str | datetime | None = None, with\_indexes: bool = False, update\_stats: bool = False, engine: str | None = None, engine\_args: dict | None = None, query: str | None = None, order\_by: str | List[str] | None = None, spark\_service: str | None = None, timestamp\_for\_filtering: str | Dict[str, str] | None = None)

retrieve offline feature vector results

specify a feature vector object/uri and retrieve the desired features, their metadata and statistics. returns *OfflineVectorResponse*, results can be returned as a dataframe or written to a target

The start\_time and end\_time attributes allow filtering the data to a given time range, they accept string values or pandas *Timestamp* objects, string values can also be relative, for example: "now", "now - 1d2h", "now+5m", where a valid pandas Timedelta string follows the verb "now", for time alignment you can use the verb "floor" e.g. "now -1d floor 1H" will align the time to the last hour (the floor string is passed to pandas.Timestamp.floor(), can use D, H, T, S for day, hour, min, sec alignment). Another option to filter the data is by the *query* argument - can be seen in the example. example:

```
features = [
    "stock-quotes.bid",
    "stock-quotes.asks_sum_5h",
    "stock-quotes.ask as mycol",
    "stocks.*",
]
vector = FeatureVector(features=features)
vector.get_offline_features(entity_rows=trades, entity_timestamp_column="time",
    → query="ticker in ['GOOG']
    and bid>100")
print(resp.to_dataframe())
print(vector.get_stats_table())
resp.to_parquet("./out.parquet")
```

#### Parameters

- **entity\_rows** -- dataframe with entity rows to join with
- **target** -- where to write the results to

- **drop\_columns** -- list of columns to drop from the final result
- **entity\_timestamp\_column** -- timestamp column name in the entity rows dataframe. can be specified only if param entity\_rows was specified.
- **run\_config** -- function and/or run configuration see [RunConfig](#)
- **start\_time** -- datetime, low limit of time needed to be filtered. Optional.
- **end\_time** -- datetime, high limit of time needed to be filtered. Optional.
- **with\_indexes** -- Return vector with/without the entities and the timestamp\_key of the feature sets and with/without entity\_timestamp\_column and timestamp\_for\_filtering columns. This property can be specified also in the feature vector spec (feature\_vector.spec.with\_indexes) (default False)
- **update\_stats** -- update features statistics from the requested feature sets on the vector. (default False).
- **engine** -- processing engine kind ("local", "dask", or "spark")
- **engine\_args** -- kwargs for the processing engine
- **query** -- The query string used to filter rows on the output
- **spark\_service** -- Name of the spark service to be used (when using a remote-spark runtime)
- **order\_by** -- Name or list of names to order by. The name or the names in the list can be the feature name or the alias of the feature you pass in the feature list.
- **timestamp\_for\_filtering** -- name of the column to filter by, can be str for all the feature sets or a dictionary ({<feature set name>: <timestamp column name>, ...}) that indicates the timestamp column name for each feature set. Optional. By default, the filter executes on the timestamp\_key of each feature set. Note: the time filtering is performed on each feature set before the merge process using start\_time and end\_time params.

**get\_online\_feature\_service**(run\_config: [RunConfig](#) | None = None, fixed\_window\_type: [FixedWindowType](#) = [FixedWindowType.LastClosedWindow](#), impute\_policy: dict | None = None, update\_stats: bool = False, entity\_keys: List[str] | None = None)

initialize and return online feature vector service api, returns [OnlineVectorService](#)

#### Usage

There are two ways to use the function:

1. As context manager

Example:

```
with vector_uri.get_online_feature_service() as svc:
    resp = svc.get([{"ticker": "GOOG"}, {"ticker":
→ "MSFT"}])
    print(resp)
    resp = svc.get([{"ticker": "AAPL"}], as_list=True)
    print(resp)
```

Example with imputing:

```

with vector_uri.get_online_feature_service(entity_
→keys=['id'],
                                     impute_policy={"*": "
→$mean", "amount": 0)) as svc:
    resp = svc.get([{"id": "C123487"}])

```

2. as simple function, note that in that option you need to close the session.

Example:

```

svc = vector_uri.get_online_feature_service(entity_
→keys=['ticker'])
try:
    resp = svc.get([{"ticker": "GOOG"}, {"ticker":
→"MSFT"}])
    print(resp)
    resp = svc.get([{"ticker": "AAPL"}], as_list=True)
    print(resp)

finally:
    svc.close()

```

Example with imputing:

```

svc = vector_uri.get_online_feature_service(entity_
→keys=['id'],
                                     impute_policy={"*": "
→$mean", "amount": 0))
try:
    resp = svc.get([{"id": "C123487"}])
except Exception as e:
    handling exception...
finally:
    svc.close()

```

### Parameters

- **run\_config** -- function and/or run configuration for remote jobs/services
- **impute\_policy** -- a dict with *impute\_policy* per feature, the dict key is the feature name and the dict value indicate which value will be used in case the feature is NaN/empty, the replaced value can be fixed number for constants or \$mean, \$max, \$min, \$std, \$count for statistical values. "\*" is used to specify the default for all features, example: {"\*": "\$mean"}
- **fixed\_window\_type** -- determines how to query the fixed window values which were previously inserted by ingest
- **update\_stats** -- update features statistics from the requested feature sets on the vector. Default: False.
- **entity\_keys** -- Entity list of the first feature\_set in the vector. The indexes that are used to query the online service.

### Returns

Initialize the *OnlineVectorService*. Will be used in subclasses where *support\_online=True*.

```
get_stats_table()
    get feature statistics table (as dataframe)

get_target_path(name=None)

kind = 'FeatureVector'

link_analysis(name, uri)
    add a linked file/artifact (chart, data, ..)

property metadata: VersionedObjMetadata

parse_features(offline=True, update_stats=False)
    parse and validate feature list (from vector) and add metadata from feature sets
:returns
    feature_set_objects: cache of used feature set objects feature_set_fields: list of field (name, alias)
    per featureset

reload(update_spec=True)
    reload/sync the feature set status and spec from the DB

save(tag="", versioned=False)
    save to mlrun db

property spec: FeatureVectorSpec

property status: FeatureVectorStatus

to_dataframe(df_module=None, target_name=None)
    return feature vector (offline) data as dataframe

property uri
    fully qualified feature vector uri

class mlrun.feature_store.FixedWindowType(value)
    Bases: Enum
    An enumeration.
    CurrentOpenWindow = 1
    LastClosedWindow = 2
    to_qbk_fixed_window_type()

class mlrun.feature_store.OfflineVectorResponse(merger)
    Bases: object
    get_offline_features response object
property status
    vector prep job status (ready, running, error)
to_csv(target_path, **kw)
    return results as csv file
to_dataframe(to_pandas=True)
    return result as dataframe
```

**to\_parquet**(*target\_path*, *\*\*kw*)

return results as parquet file

**class** mlrun.feature\_store.**OnlineVectorService**(*vector*, *graph*, *index\_columns*, *impute\_policy*: *dict* | *None* = *None*, *requested\_columns*: *List*[*str*] | *None* = *None*)

Bases: object

get\_online\_feature\_service response object

**close**()

terminate the async loop

**get**(*entity\_rows*: *List*[*dict* | *list*], *as\_list*=*False*)

get feature vector given the provided entity inputs

take a list of input vectors/rows and return a list of enriched feature vectors each input and/or output vector can be a list of values or a dictionary of field names and values, to return the vector as a list of values set the *as\_list* to True.

if the input is a list of list (vs a list of dict), the values in the list will correspond to the index/entity values, i.e. [{"GOOG"}, {"MSFT"}] means "GOOG" and "MSFT" are the index/entity fields.

example:

```
# accept list of dict, return list of dict
svc = fstore.get_online_feature_service(vector)
resp = svc.get([{"name": "joe"}, {"name": "mike"}])

# accept list of list, return list of list
svc = fstore.get_online_feature_service(vector, as_list=True)
resp = svc.get(["joe"], ["mike"]])
```

#### Parameters

- **entity\_rows** -- list of list/dict with input entity data/rows
- **as\_list** -- return a list of list (list input is required by many ML frameworks)

**initialize**()

internal, init the feature service and prep the imputing logic

**property status**

vector merger function status (ready, running, error)

**class** mlrun.feature\_store.**RunConfig**(*function*: *str* | *FunctionReference* | [BaseRuntime](#) | *None* = *None*, *local*: *bool* | *None* = *None*, *image*: *str* | *None* = *None*, *kind*: *str* | *None* = *None*, *handler*: *str* | *None* = *None*, *parameters*: *dict* | *None* = *None*, *watch*: *bool* | *None* = *None*, *owner*=*None*, *credentials*: *Credentials* | *None* = *None*, *code*: *str* | *None* = *None*, *requirements*: *str* | *List*[*str*] | *None* = *None*, *extra\_spec*: *dict* | *None* = *None*, *auth\_info*=*None*)

Bases: object

class for holding function and run specs for jobs and serving functions

class for holding function and run specs for jobs and serving functions

when running feature ingestion or merging tasks we use the RunConfig class to pass the desired function and job configuration. the apply() method is used to set resources like volumes, the with\_secret() method adds secrets

Most attributes are optional, if not specified a proper default value will be set

examples:

```
# config for local run emulation
config = RunConfig(local=True)

# config for using empty/default code
config = RunConfig()

# config for using .py/.ipynb file with image and extra package requirements
config = RunConfig("mycode.py", image="mlrun/mlrun", requirements=["spacy"])

# config for using function object
function = mlrun.import_function("hub://some-function")
config = RunConfig(function)
```

### Parameters

- **function** -- this can be function uri or function object or path to function code (.py/.ipynb) or a `FunctionReference` the function define the code, dependencies, and resources
- **local** -- use True to simulate local job run or mock service
- **image** -- function container image
- **kind** -- function runtime kind (job, serving, spark, ..), required when function points to code
- **handler** -- the function handler to execute (for jobs or nuclio)
- **parameters** -- job parameters
- **watch** -- in batch jobs will wait for the job completion and print job logs to the console. Default (None) is True.
- **owner** -- job owner
- **credentials** -- job credentials
- **code** -- function source code (as string)
- **requirements** -- python requirements file path or list of packages
- **extra\_spec** -- additional dict with function spec fields/values to add to the function
- **auth\_info** -- authentication info. *For internal use* when running on server

### `apply(modifier)`

apply a modifier to add/set function resources like volumes

example:

```
run_config.apply(mlrun.platforms.auto_mount())
```

### `copy()`

### property function

`to_function(default_kind=None, default_image=None)`

internal, generate function object

**with\_secret**(*kind, source*)

register a secrets source (file, env or dict)

read secrets from a source provider to be used in jobs, example:

```
run_config.with_secrets('file', 'file.txt')
run_config.with_secrets('inline', {'key': 'val'})
run_config.with_secrets('env', 'ENV1,ENV2')
run_config.with_secrets('vault', ['secret1', 'secret2'...])
```

**Parameters**

- **kind** -- secret type (file, inline, env, vault)
- **source** -- secret data or link (see example)

**Returns**

This (self) object

`mlrun.feature_store.delete_feature_set(name, project="", tag=None, uid=None, force=False)`

Delete a [FeatureSet](#) object from the DB.

**Parameters**

- **name** -- Name of the object to delete
- **project** -- Name of the object's project
- **tag** -- Specific object's version tag
- **uid** -- Specific object's uid
- **force** -- Delete feature set without purging its targets

**If tag or uid are specified, then just the version referenced by them will be deleted. Using both** is not allowed. If none are specified, then all instances of the object whose name is name will be deleted.

`mlrun.feature_store.delete_feature_vector(name, project="", tag=None, uid=None)`

Delete a [FeatureVector](#) object from the DB.

**Parameters**

- **name** -- Name of the object to delete
- **project** -- Name of the object's project
- **tag** -- Specific object's version tag
- **uid** -- Specific object's uid

**If tag or uid are specified, then just the version referenced by them will be deleted. Using both** is not allowed. If none are specified, then all instances of the object whose name is name will be deleted.

`mlrun.feature_store.deploy_ingestion_service(featureset: FeatureSet | str, source: DataSource | None = None, targets: List[DataTargetBase] | None = None, name: str | None = None, run_config: RunConfig | None = None, verbose=False) → str`

Start real-time ingestion service using nuclio function

Deploy a real-time function implementing feature ingestion pipeline the source maps to Nuclio event triggers (http, kafka, v3io stream, etc.)

the `run_config` parameter allow specifying the function and job configuration, see: [RunConfig](#)

example:

```
source = HTTPSource()
func = mlrun.code_to_function("ingest", kind="serving").apply(mount_v3io())
config = RunConfig(function=func)
my_set.deploy_ingestion_service(source, run_config=config)
```

#### Parameters

- **featureset** -- feature set object or uri
- **source** -- data source object describing the online or offline source
- **targets** -- list of data target objects
- **name** -- name for the job/function
- **run\_config** -- service runtime configuration (function object/uri, resources, etc..)
- **verbose** -- verbose log

#### Returns

URL to access the deployed ingestion service

```
mlrun.feature_store.deploy_ingestion_service_v2(featureset: FeatureSet | str, source: DataSource |
None = None, targets: List[DataTargetBase] | None =
None, name: str | None = None, run_config:
RunConfig | None = None, verbose=False) →
Tuple[str, BaseRuntime]
```

Start real-time ingestion service using nuclio function

Deploy a real-time function implementing feature ingestion pipeline the source maps to Nuclio event triggers (http, kafka, v3io stream, etc.)

the *run\_config* parameter allow specifying the function and job configuration, see: [RunConfig](#)

example:

```
source = HTTPSource()
func = mlrun.code_to_function("ingest", kind="serving").apply(mount_v3io())
config = RunConfig(function=func)
deploy_ingestion_service_v2(my_set, source, run_config=config)
```

#### Parameters

- **featureset** -- feature set object or uri
- **source** -- data source object describing the online or offline source
- **targets** -- list of data target objects
- **name** -- name for the job/function
- **run\_config** -- service runtime configuration (function object/uri, resources, etc..)
- **verbose** -- verbose log

#### Returns

URL to access the deployed ingestion service, and the function that was deployed (which will differ from the function passed in via the *run\_config* parameter).

```
mlrun.feature_store.get_feature_set(uri, project=None)
```

get feature set object from the db

#### Parameters

- **uri** -- a feature set uri({project}/{name}[:version])

- **project** -- project name if not specified in uri or not using the current/default

`mlrun.feature_store.get_feature_vector(uri, project=None)`

get feature vector object from the db

#### Parameters

- **uri** -- a feature vector uri({project}/{name}[:version])
- **project** -- project name if not specified in uri or not using the current/default

`mlrun.feature_store.get_offline_features(feature_vector: str | FeatureVector, entity_rows=None, entity_timestamp_column: str | None = None, target: DataTargetBase | None = None, run_config: RunConfig | None = None, drop_columns: List[str] | None = None, start_time: str | datetime | None = None, end_time: str | datetime | None = None, with_indexes: bool = False, update_stats: bool = False, engine: str | None = None, engine_args: dict | None = None, query: str | None = None, order_by: str | List[str] | None = None, spark_service: str | None = None, timestamp_for_filtering: str | Dict[str, str] | None = None)`

retrieve offline feature vector results

specify a feature vector object/uri and retrieve the desired features, their metadata and statistics. returns `OfflineVectorResponse`, results can be returned as a dataframe or written to a target

The `start_time` and `end_time` attributes allow filtering the data to a given time range, they accept string values or pandas `Timestamp` objects, string values can also be relative, for example: "now", "now - 1d2h", "now+5m", where a valid pandas Timedelta string follows the verb "now", for time alignment you can use the verb "floor" e.g. "now-1d floor 1H" will align the time to the last hour (the floor string is passed to `pandas.Timestamp.floor()`), can use D, H, T, S for day, hour, min, sec alignment). Another option to filter the data is by the `query` argument - can be seen in the example. example:

```
features = [
    "stock-quotes.bid",
    "stock-quotes.asks_sum_5h",
    "stock-quotes.ask as mycol",
    "stocks.*",
]
vector = FeatureVector(features=features)
resp = get_offline_features(
    vector, entity_rows=trades, entity_timestamp_column="time", query="ticker in [
    ↪ 'GOOG'] and bid>100"
)
print(resp.to_dataframe())
print(vector.get_stats_table())
resp.to_parquet("./out.parquet")
```

#### Parameters

- **feature\_vector** -- feature vector uri or FeatureVector object. passing feature vector obj requires update permissions
- **entity\_rows** -- dataframe with entity rows to join with
- **target** -- where to write the results to
- **drop\_columns** -- list of columns to drop from the final result

- **entity\_timestamp\_column** -- timestamp column name in the entity rows dataframe. can be specified only if param `entity_rows` was specified.
- **run\_config** -- function and/or run configuration see [RunConfig](#)
- **start\_time** -- datetime, low limit of time needed to be filtered. Optional.
- **end\_time** -- datetime, high limit of time needed to be filtered. Optional.
- **with\_indexes** -- Return vector with/without the entities and the timestamp\_key of the feature sets and with/without `entity_timestamp_column` and `timestamp_for_filtering` columns. This property can be specified also in the feature vector spec (`feature_vector.spec.with_indexes`) (default False)
- **update\_stats** -- update features statistics from the requested feature sets on the vector. (default False).
- **engine** -- processing engine kind ("local", "dask", or "spark")
- **engine\_args** -- kwargs for the processing engine
- **query** -- The query string used to filter rows on the output
- **spark\_service** -- Name of the spark service to be used (when using a remote-spark runtime)
- **order\_by** -- Name or list of names to order by. The name or the names in the list can be the feature name or the alias of the feature you pass in the feature list.
- **timestamp\_for\_filtering** -- name of the column to filter by, can be str for all the feature sets or a dictionary (`{<feature set name>: <timestamp column name>, ...}`) that indicates the timestamp column name for each feature set. Optional. By default, the filter executes on the `timestamp_key` of each feature set. Note: the time filtering is performed on each feature set before the merge process using `start_time` and `end_time` params.

```
mlrun.feature_store.get_online_feature_service(feature_vector: str | FeatureVector, run_config:
   RunConfig | None = None, fixed_window_type:
   FixedWindowType =
   FixedWindowType.LastClosedWindow, impute_policy:
   dict | None = None, update_stats: bool = False,
   entity_keys: List[str] | None = None)
```

initialize and return online feature vector service api, returns [OnlineVectorService](#)

#### Usage

There are two ways to use the function:

1. As context manager

Example:

```
with get_online_feature_service(vector_uri) as svc:
    resp = svc.get([{"ticker": "GOOG"}, {"ticker": "MSFT"}])
    print(resp)
    resp = svc.get([{"ticker": "AAPL"}], as_list=True)
    print(resp)
```

Example with imputing:

```

with get_online_feature_service(vector_uri, entity_keys=[
    ↪ 'id'],
                                impute_policy={"*": "
    ↪ $mean", "amount": 0)) as svc:
    resp = svc.get([{"id": "C123487"}])

```

2. as simple function, note that in that option you need to close the session.

Example:

```

svc = get_online_feature_service(vector_uri, entity_
    ↪ keys=['ticker'])
try:
    resp = svc.get([{"ticker": "GOOG"}, {"ticker": "MSFT
    ↪"}])
    print(resp)
    resp = svc.get([{"ticker": "AAPL"}], as_list=True)
    print(resp)

finally:
    svc.close()

```

Example with imputing:

```

svc = get_online_feature_service(vector_uri, entity_
    ↪ keys=['id'],
                                impute_policy={"*": "
    ↪ $mean", "amount": 0))
try:
    resp = svc.get([{"id": "C123487"}])
except Exception as e:
    handling exception...
finally:
    svc.close()

```

### Parameters

- **feature\_vector** -- feature vector uri or FeatureVector object. passing feature vector obj requires update permissions.
- **run\_config** -- function and/or run configuration for remote jobs/services
- **impute\_policy** -- a dict with *impute\_policy* per feature, the dict key is the feature name and the dict value indicate which value will be used in case the feature is NaN/empty, the replaced value can be fixed number for constants or \$mean, \$max, \$min, \$std, \$count for statistical values. "\*" is used to specify the default for all features, example: {"\*": "\$mean"}
- **fixed\_window\_type** -- determines how to query the fixed window values which were previously inserted by ingest
- **update\_stats** -- update features statistics from the requested feature sets on the vector. Default: False.
- **entity\_keys** -- Entity list of the first feature\_set in the vector. The indexes that are used to query the online service.

### Returns

Initialize the *OnlineVectorService*. Will be used in subclasses where *support\_online=True*.

```
mlrun.feature_store.ingest(featureset: FeatureSet | str | None = None, source=None, targets:
    List[DataTargetBase] | None = None, namespace=None, return_df: bool = True,
    infer_options: InferOptions = 63, run_config: RunConfig | None = None,
    mlrun_context=None, spark_context=None, overwrite=None) → DataFrame |
    None
```

Read local DataFrame, file, URL, or source into the feature store Ingest reads from the source, run the graph transformations, infers metadata and stats and writes the results to the default of specified targets

when targets are not specified data is stored in the configured default targets (will usually be NoSQL for real-time and Parquet for offline).

the `run_config` parameter allow specifying the function and job configuration, see: [RunConfig](#)

example:

```
stocks_set = FeatureSet("stocks", entities=[Entity("ticker")])
stocks = pd.read_csv("stocks.csv")
df = ingest(stocks_set, stocks, infer_options=fstore.InferOptions.default())

# for running as remote job
config = RunConfig(image='mlrun/mlrun')
df = ingest(stocks_set, stocks, run_config=config)

# specify source and targets
source = CSVSource("mycsv", path="measurements.csv")
targets = [CSVTarget("mycsv", path="./mycsv.csv")]
ingest(measurements, source, targets)
```

### Parameters

- **featureset** -- feature set object or featureset.uri. (uri must be of a feature set that is in the DB, call `.save()` if it's not)
- **source** -- source dataframe or other sources (e.g. parquet source see: [ParquetSource](#) and other classes in `mlrun.datastore` with suffix `Source`)
- **targets** -- optional list of data target objects
- **namespace** -- namespace or module containing graph classes
- **return\_df** -- indicate if to return a dataframe with the graph results
- **infer\_options** -- schema (for discovery of entities, features in featureset), index, stats, histogram and preview infer options (`InferOptions`)
- **run\_config** -- function and/or run configuration for remote jobs, see [RunConfig](#)
- **mlrun\_context** -- mlrun context (when running as a job), for internal use !
- **spark\_context** -- local spark session for spark ingestion, example for creating the spark context: `spark = SparkSession.builder.appName("Spark function").getOrCreate()` For remote spark ingestion, this should contain the remote spark service name
- **overwrite** -- delete the targets' data prior to ingestion (default: True for non scheduled ingest - deletes the targets that are about to be ingested. False for scheduled ingest - does not delete the target)

### Returns

if `return_df` is True, a dataframe will be returned based on the graph

```
mlrun.feature_store.preview(featureset: FeatureSet, source, entity_columns: list | None = None,
                             namespace=None, options: InferOptions | None = None, verbose: bool = False,
                             sample_size: int | None = None) → DataFrame
```

run the ingestion pipeline with local DataFrame/file data and infer features schema and stats

example:

```
quotes_set = FeatureSet("stock-quotes", entities=[Entity("ticker")])
quotes_set.add_aggregation("ask", ["sum", "max"], ["1h", "5h"], "10m")
quotes_set.add_aggregation("bid", ["min", "max"], ["1h"], "10m")
df = preview(
    quotes_set,
    quotes_df,
    entity_columns=["ticker"],
)
```

### Parameters

- **featureset** -- feature set object or uri
- **source** -- source dataframe or csv/parquet file path
- **entity\_columns** -- list of entity (index) column names
- **namespace** -- namespace or module containing graph classes
- **options** -- schema (for discovery of entities, features in featureset), index, stats, histogram and preview infer options (InferOptions)
- **verbose** -- verbose log
- **sample\_size** -- num of rows to sample from the dataset (for large datasets)

```
class mlrun.feature_store.feature_set.FeatureSetSpec(owner=None, description=None,
  entities=None, features=None,
  partition_keys=None, timestamp_key=None,
  label_column=None, relations=None,
  source=None, targets=None, graph=None,
  function=None, analysis=None, engine=None,
  output_path=None, passthrough=None)
```

Feature set spec object, defines the feature-set's configuration.

**Warning:** This class should not be modified directly. It is managed by the parent feature-set object or using feature-store APIs. Modifying the spec manually may result in unpredictable behaviour.

### Parameters

- **description** -- text description (copied from parent feature-set)
- **entities** -- list of entity (index key) names or Entity
- **features** -- list of features - Feature
- **partition\_keys** -- list of fields to partition results by (other than the default timestamp key)
- **timestamp\_key** -- timestamp column name
- **label\_column** -- name of the label column (the one holding the target (y) values)
- **targets** -- list of data targets

- **graph** -- the processing graph
- **function** -- MLRun runtime to execute the feature-set in
- **engine** -- name of the processing engine (storey, pandas, or spark), defaults to storey
- **output\_path** -- default location where to store results (defaults to MLRun's artifact path)
- **passthrough** -- if true, ingest will skip offline targets, and `get_offline_features` will read directly from source

```
class mlrun.feature_store.feature_set.FeatureSetStatus(state=None, targets=None, stats=None,
   preview=None, function_uri=None,
   run_uri=None)
```

Feature set status object, containing the current feature-set's status.

**Warning:** This class should not be modified directly. It is managed by the parent feature-set object or using feature-store APIs. Modifying the status manually may result in unpredictable behaviour.

#### Parameters

- **state** -- object's current state
- **targets** -- list of the data targets used in the last ingestion operation
- **stats** -- feature statistics calculated in the last ingestion (if stats calculation was requested)
- **preview** -- preview of the feature-set contents (if preview generation was requested)
- **function\_uri** -- function used to execute the feature-set graph
- **run\_uri** -- last run used for ingestion

```
class mlrun.feature_store.steps.MLRunStep(**kwargs)
```

Abstract class for mlrun step. Can be used in pandas/storey/spark feature set ingestion. Extend this class and implement the relevant `_do_XXX` methods to support the required execution engines.

**\_do\_pandas(event)**

The execution method for pandas engine.

#### Parameters

**event** -- Incoming event, a *pandas.DataFrame* object.

**\_do\_spark(event)**

The execution method for spark engine.

#### Parameters

**event** -- Incoming event, a *pyspark.sql.DataFrame* object.

**\_do\_storey(event)**

The execution method for storey engine.

#### Parameters

**event** -- Incoming event, a dictionary or *storey.Event* object, depending on the *full\_event* value.

**do(event)**

This method defines the do method of this class according to the first event type.

**Warning:** When extending this class, do not override this method; only override the `_do_XXX` methods.

```
class mlrun.feature_store.steps.DateExtractor(parts: Dict[str, str] | List[str], timestamp_col: str | None
   = None, **kwargs)
```

Date Extractor allows you to extract a date-time component

Date Extractor extract a date-time component into new columns

The extracted date part will appear as `<timestamp_col>_<date_part>` feature.

Supports part values:

- `asm8`: Return numpy datetime64 format in nanoseconds.
- `day_of_week`: Return day of the week.
- `day_of_year`: Return the day of the year.
- `dayofweek`: Return day of the week.
- `dayofyear`: Return the day of the year.
- `days_in_month`: Return the number of days in the month.
- `daysinmonth`: Return the number of days in the month.
- `freqstr`: Return the total number of days in the month.
- `is_leap_year`: Return True if year is a leap year.
- `is_month_end`: Return True if date is last day of month.
- `is_month_start`: Return True if date is first day of month.
- `is_quarter_end`: Return True if date is last day of the quarter.
- `is_quarter_start`: Return True if date is first day of the quarter.
- `is_year_end`: Return True if date is last day of the year.
- `is_year_start`: Return True if date is first day of the year.
- `quarter`: Return the quarter of the year.
- `tz`: Alias for `tzinfo`.
- `week`: Return the week number of the year.
- `weekofyear`: Return the week number of the year.

example:

```
# (taken from the fraud-detection end-to-end feature store demo)
# Define the Transactions FeatureSet
transaction_set = fstore.FeatureSet("transactions",
                                    entities=[fstore.Entity("source")],
                                    timestamp_key='timestamp',
                                    description="transactions feature set")

# Get FeatureSet computation graph
transaction_graph = transaction_set.graph

# Add the custom `DateExtractor` step
# to the computation graph
transaction_graph.to(
    class_name='DateExtractor',
    name='Extract Dates',
    parts = ['hour', 'day_of_week'],
    timestamp_col = 'timestamp',
)
```

#### Parameters

- **parts** -- list of pandas style date-time parts you want to extract.

- **timestamp\_col** -- The name of the column containing the timestamps to extract from, by default "timestamp"

**\_\_init\_\_**(parts: Dict[str, str] | List[str], timestamp\_col: str | None = None, \*\*kwargs)

Date Extractor extract a date-time component into new columns

The extracted date part will appear as `<timestamp_col>_<date_part>` feature.

Supports part values:

- `asm8`: Return numpy datetime64 format in nanoseconds.
- `day_of_week`: Return day of the week.
- `day_of_year`: Return the day of the year.
- `dayofweek`: Return day of the week.
- `dayofyear`: Return the day of the year.
- `days_in_month`: Return the number of days in the month.
- `daysinmonth`: Return the number of days in the month.
- `freqstr`: Return the total number of days in the month.
- `is_leap_year`: Return True if year is a leap year.
- `is_month_end`: Return True if date is last day of month.
- `is_month_start`: Return True if date is first day of month.
- `is_quarter_end`: Return True if date is last day of the quarter.
- `is_quarter_start`: Return True if date is first day of the quarter.
- `is_year_end`: Return True if date is last day of the year.
- `is_year_start`: Return True if date is first day of the year.
- `quarter`: Return the quarter of the year.
- `tz`: Alias for `tzinfo`.
- `week`: Return the week number of the year.
- `weekofyear`: Return the week number of the year.

example:

```
# (taken from the fraud-detection end-to-end feature store demo)
# Define the Transactions FeatureSet
transaction_set = fstore.FeatureSet("transactions",
                                    entities=[fstore.Entity("source")],
                                    timestamp_key='timestamp',
                                    description="transactions feature set")

# Get FeatureSet computation graph
transaction_graph = transaction_set.graph

# Add the custom `DateExtractor` step
# to the computation graph
transaction_graph.to(
    class_name='DateExtractor',
    name='Extract Dates',
    parts = ['hour', 'day_of_week'],
    timestamp_col = 'timestamp',
)
```

### Parameters

- **parts** -- list of pandas style date-time parts you want to extract.
- **timestamp\_col** -- The name of the column containing the timestamps to extract from, by default "timestamp"

```
class mlrun.feature_store.steps.DropFeatures(features: List[str], **kwargs)
```

Drop all the features from feature list

**Parameters**

**features** -- string list of the features names to drop

example:

```
feature_set = fstore.FeatureSet("fs-new",
                                entities=[fstore.Entity("id")],
                                description="feature set",
                                engine="pandas",
                                )
# Pre-processing graph steps
feature_set.graph.to(DropFeatures(features=["age"]))
df_pandas = feature_set.ingest(data)
```

```
__init__(features: List[str], **kwargs)
```

Drop all the features from feature list

**Parameters**

**features** -- string list of the features names to drop

example:

```
feature_set = fstore.FeatureSet("fs-new",
                                entities=[fstore.Entity("id")],
                                description="feature set",
                                engine="pandas",
                                )
# Pre-processing graph steps
feature_set.graph.to(DropFeatures(features=["age"]))
df_pandas = feature_set.ingest(data)
```

```
class mlrun.feature_store.steps.FeaturesetValidator(featureset=None, columns=None, name=None,
  **kwargs)
```

Validate feature values according to the feature set validation policy

Validate feature values according to the feature set validation policy

**Parameters**

- **featureset** -- feature set uri (or "." for current feature set pipeline)
- **columns** -- names of the columns/fields to validate
- **name** -- step name
- **kwargs** -- optional kwargs (for storey)

```
__init__(featureset=None, columns=None, name=None, **kwargs)
```

Validate feature values according to the feature set validation policy

**Parameters**

- **featureset** -- feature set uri (or "." for current feature set pipeline)
- **columns** -- names of the columns/fields to validate
- **name** -- step name
- **kwargs** -- optional kwargs (for storey)

```
class mlrun.feature_store.steps.Imputer(method: str = 'avg', default_value=None, mapping: Dict[str,
  Any] | None = None, **kwargs)
```

Replace None values with default values

#### Parameters

- **method** -- for future use
- **default\_value** -- default value if not specified per column
- **mapping** -- a dict of per column default value
- **kwargs** -- optional kwargs (for storey)

`__init__(method: str = 'avg', default_value=None, mapping: Dict[str, Any] | None = None, **kwargs)`

Replace None values with default values

#### Parameters

- **method** -- for future use
- **default\_value** -- default value if not specified per column
- **mapping** -- a dict of per column default value
- **kwargs** -- optional kwargs (for storey)

```
class mlrun.feature_store.steps.MapValues(mapping: Dict[str, Dict[str | int | bool, Any]],
   with_original_features: bool = False, suffix: str = 'mapped',
   **kwargs)
```

Map column values to new values

Map column values to new values

example:

```
# replace the value "U" with '0' in the age column
graph.to(MapValues(mapping={'age': {'U': '0'}}, with_original_features=True))

# replace integers, example
graph.to(MapValues(mapping={'not': {0: 1, 1: 0}}))

# replace by range, use -inf and inf for extended range
graph.to(MapValues(mapping={'numbers': {'ranges': {'negative': [-inf, 0], 'positive
↪': [0, inf]}}}))
```

#### Parameters

- **mapping** -- a dict with entry per column and the associated old/new values map
- **with\_original\_features** -- set to True to keep the original features
- **suffix** -- the suffix added to the column name <column>\_<suffix> (default is "mapped")
- **kwargs** -- optional kwargs (for storey)

`__init__(mapping: Dict[str, Dict[str | int | bool, Any]], with_original_features: bool = False, suffix: str = 'mapped', **kwargs)`

Map column values to new values

example:

```
# replace the value "U" with '0' in the age column
graph.to(MapValues(mapping={'age': {'U': '0'}}, with_original_features=True))

# replace integers, example
graph.to(MapValues(mapping={'not': {0: 1, 1: 0}}))

# replace by range, use -inf and inf for extended range
graph.to(MapValues(mapping={'numbers': {'ranges': {'negative': [-inf, 0],
→ 'positive': [0, inf]}}}))
```

#### Parameters

- **mapping** -- a dict with entry per column and the associated old/new values map
- **with\_original\_features** -- set to True to keep the original features
- **suffix** -- the suffix added to the column name <column>\_<suffix> (default is "mapped")
- **kwargs** -- optional kwargs (for storey)

**class** mlrun.feature\_store.steps.**OneHotEncoder**(mapping: Dict[str, List[str | int]], \*\*kwargs)

Create new binary fields, one per category (one hot encoded)

example:

```
mapping = {'category': ['food', 'health', 'transportation'],
           'gender': ['male', 'female']}
graph.to(OneHotEncoder(mapping=one_hot_encoder_mapping))
```

#### Parameters

- **mapping** -- a dict of per column categories (to map to binary fields)
- **kwargs** -- optional kwargs (for storey)

**\_\_init\_\_**(mapping: Dict[str, List[str | int]], \*\*kwargs)

Create new binary fields, one per category (one hot encoded)

example:

```
mapping = {'category': ['food', 'health', 'transportation'],
           'gender': ['male', 'female']}
graph.to(OneHotEncoder(mapping=one_hot_encoder_mapping))
```

#### Parameters

- **mapping** -- a dict of per column categories (to map to binary fields)
- **kwargs** -- optional kwargs (for storey)

**class** mlrun.feature\_store.steps.**SetEventMetadata**(id\_path: str | None = None, key\_path: str | None = None, random\_id: bool | None = None, \*\*kwargs)

Set the event metadata (id and key) from the event body

Set the event metadata (id, key) from the event body

set the event metadata fields (id and key) from the event body data structure the xx\_path attribute defines the key or path to the value in the body dict, "." in the path string indicate the value is in a nested dict e.g. "x.y" means {"x": {"y": value}}

example:

```
flow = function.set_topology("flow")
# build a graph and use the SetEventMetadata step to extract the id, key and path
↳ from the event body
# ("myid" and "mykey" fields), the metadata will be used for following data
↳ processing steps
# (e.g. feature store ops, key aggregations, write to databases/streams, etc.)
flow.to(SetEventMetadata(id_path="myid", key_path="mykey"))
    .to(...) # additional steps

server = function.to_mock_server()
event = {"myid": "34", "mykey": "123"}
resp = server.test(body=event)
```

#### Parameters

- **id\_path** -- path to the id value
- **key\_path** -- path to the key value
- **random\_id** -- if True will set the event.id to a random value

**\_\_init\_\_** (*id\_path: str | None = None, key\_path: str | None = None, random\_id: bool | None = None, \*\*kwargs*) → None

Set the event metadata (id, key) from the event body

set the event metadata fields (id and key) from the event body data structure the `xx_path` attribute defines the key or path to the value in the body dict, "." in the path string indicate the value is in a nested dict e.g. "x.y" means {"x": {"y": value}}

example:

```
flow = function.set_topology("flow")
# build a graph and use the SetEventMetadata step to extract the id, key and
↳ path from the event body
# ("myid" and "mykey" fields), the metadata will be used for following data
↳ processing steps
# (e.g. feature store ops, key aggregations, write to databases/streams, etc.)
flow.to(SetEventMetadata(id_path="myid", key_path="mykey"))
    .to(...) # additional steps

server = function.to_mock_server()
event = {"myid": "34", "mykey": "123"}
resp = server.test(body=event)
```

#### Parameters

- **id\_path** -- path to the id value
- **key\_path** -- path to the key value
- **random\_id** -- if True will set the event.id to a random value

## 18.9 mlrun.model

```
class mlrun.model.DataSource(name: str | None = None, path: str | None = None, attributes: Dict[str, object]
                             | None = None, key_field: str | None = None, time_field: str | None = None,
                             schedule: str | None = None, start_time: datetime | str | None = None,
                             end_time: datetime | str | None = None)
```

Bases: `ModelObj`

online or offline data source spec

```
class mlrun.model.DataTarget(kind: str | None = None, name: str = "", path=None, online=None)
```

Bases: `DataTargetBase`

data target with extra status information (used in the feature-set/vector status)

```
class mlrun.model.DataTargetBase(kind: str | None = None, name: str = "", path=None, attributes: Dict[str,
str] | None = None, after_step=None, partitioned: bool = False,
key_bucketing_number: int | None = None, partition_cols: List[str] |
None = None, time_partitioning_granularity: str | None = None,
max_events: int | None = None, flush_after_seconds: int | None = None,
storage_options: Dict[str, str] | None = None, schema: Dict[str, Any] |
None = None, credentials_prefix=None)
```

Bases: `ModelObj`

data target spec, specify a destination for the feature set data

```
classmethod from_dict(struct=None, fields=None, deprecated_fields: dict | None = None)
```

create an object from a python dictionary

```
class mlrun.model.FeatureSetProducer(kind=None, name=None, uri=None, owner=None, sources=None)
```

Bases: `ModelObj`

information about the task/job which produced the feature set data

```
class mlrun.model.HyperParamOptions(param_file=None, strategy: HyperParamStrategies | None = None,
selector=None, stop_condition=None, parallel_runs=None,
dask_cluster_uri=None, max_iterations=None, max_errors=None,
teardown_dask=None)
```

Bases: `ModelObj`

Hyper Parameter Options

**Parameters**

- **param\_file** (*str*) -- hyper params input file path/url, instead of inline
- **strategy** (*HyperParamStrategies*) -- hyper param strategy - grid, list or random
- **selector** (*str*) -- selection criteria for best result ([min|max.]<result>), e.g. max.accuracy
- **stop\_condition** (*str*) -- early stop condition e.g. "accuracy > 0.9"
- **parallel\_runs** (*int*) -- number of param combinations to run in parallel (over Dask)
- **dask\_cluster\_uri** (*str*) -- db uri for a deployed dask cluster function, e.g. db://myproject/dask
- **max\_iterations** (*int*) -- max number of runs (in random strategy)
- **max\_errors** (*int*) -- max number of child runs errors for the overall job to fail

- **teardown\_dask** (*bool*) -- kill the dask cluster pods after the runs

```
class mlrun.model.Notification(kind=None, name=None, message=None, severity=None, when=None,  
                               condition=None, secret_params=None, params=None, status=None,  
                               sent_time=None, reason=None)
```

Bases: `ModelObj`

Notification specification

```
static validate_notification_uniqueness(notifications: List[Notification])
```

Validate that all notifications in the list are unique by name

```
class mlrun.model.RunMetadata(uid=None, name=None, project=None, labels=None, annotations=None,  
                              iteration=None)
```

Bases: `ModelObj`

Run metadata

```
class mlrun.model.RunObject(spec: RunSpec | None = None, metadata: RunMetadata | None = None, status:  
                           RunStatus | None = None)
```

Bases: `RunTemplate`

A run

```
artifact(key) → DataItem
```

return artifact `DataItem` by key

```
property error: str
```

error string if failed

```
logs(watch=True, db=None, offset=0)
```

return or watch on the run logs

```
output(key)
```

return the value of a specific result or artifact by key

```
property outputs
```

return a dict of outputs, result values and artifact uris

```
refresh()
```

refresh run state from the db

```
show()
```

show the current status widget, in jupyter notebook

```
state()
```

current run state

```
to_json(exclude=None, **kwargs)
```

convert the object to json

**Parameters**

**exclude** -- list of fields to exclude from the json

```
property ui_url: str
```

UI URL (for relevant runtimes)

```
uid()
```

run unique id

**wait\_for\_completion**(*sleep=3, timeout=0, raise\_on\_failure=True, show\_logs=None, logs\_interval=None*)

Wait for remote run to complete. Default behavior is to wait until reached terminal state or timeout passed, if timeout is 0 then wait forever. It pulls the run status from the db every sleep seconds. If show\_logs is not False and logs\_interval is not None, it will print the logs when run reached terminal state. If show\_logs is not False and logs\_interval is defined, it will print the logs every logs\_interval seconds. If show\_logs is False it will not print the logs, will still pull the run state until it reaches terminal state.

```
class mlrun.model.RunSpec(parameters=None, hyperparams=None, param_file=None, selector=None,
                           handler=None, inputs=None, outputs=None, input_path=None,
                           output_path=None, function=None, secret_sources=None, data_stores=None,
                           strategy=None, verbose=None, scrape_metrics=None,
                           hyper_param_options=None, allow_empty_resources=None,
                           inputs_type_hints=None, returns=None, notifications=None,
                           state_thresholds=None)
```

Bases: `ModelObj`

Run specification

**extract\_type\_hints\_from\_inputs()**

This method extracts the type hints from the input keys in the input dictionary.

As a result, after the method ran the inputs dictionary - a dictionary of parameter names as keys and paths as values, will be cleared from type hints and the extracted type hints will be saved in the spec's inputs type hints dictionary - a dictionary of parameter names as keys and their type hints as values. If a parameter is not in the type hints dictionary, its type hint will be `mlrun.DataItem` by default.

**property inputs:** `Dict[str, str]`

Get the inputs dictionary. A dictionary of parameter names as keys and paths as values.

**Returns**

The inputs dictionary.

**property inputs\_type\_hints:** `Dict[str, str]`

Get the input type hints. A dictionary of parameter names as keys and their type hints as values.

**Returns**

The input type hints dictionary.

**static join\_outputs\_and\_returns**(*outputs: List[str], returns: List[str | Dict[str, str]]*) → `List[str]`

Get the outputs set in the spec. The outputs are constructed from both the 'outputs' and 'returns' properties that were set by the user.

**Parameters**

- **outputs** -- A spec outputs property - list of output keys.
- **returns** -- A spec returns property - list of key and configuration of how to log returning values.

**Returns**

The joined 'outputs' and 'returns' list.

**property outputs:** `List[str]`

Get the expected outputs. The list is constructed from keys of both the *outputs* and *returns* properties.

**Returns**

The expected outputs list.

**property returns**

Get the returns list. A list of log hints for returning values.

**Returns**

The returns list.

**to\_dict**(*fields=None, exclude=None*)

convert the object to a python dictionary

**Parameters**

- **fields** -- list of fields to include in the dict
- **exclude** -- list of fields to exclude from the dict

**class** mlrun.model.**RunStatus**(*state=None, error=None, host=None, commit=None, status\_text=None, results=None, artifacts=None, start\_time=None, last\_update=None, iterations=None, ui\_url=None, reason: str | None = None, notifications: Dict[str, Notification] | None = None*)

Bases: ModelObj

Run status

**class** mlrun.model.**RunTemplate**(*spec: RunSpec | None = None, metadata: RunMetadata | None = None*)

Bases: ModelObj

Run template

**set\_label**(*key, value*)

set a key/value label for the task

**with\_hyper\_params**(*hyperparams, selector=None, strategy: HyperParamStrategies | None = None, \*\*options*)

set hyper param values and configurations, see parameters in: [HyperParamOptions](#)

example:

```
grid_params = {"p1": [2,4,1], "p2": [10,20]}
task = mlrun.new_task("grid-search")
task.with_hyper_params(grid_params, selector="max.accuracy")
```

**with\_input**(*key, path*)

set task data input, path is an Mlrun global DataItem uri

examples:

```
task.with_input("data", "/file-dir/path/to/file")
task.with_input("data", "s3://<bucket>/path/to/file")
task.with_input("data", "v3io://[<remote-host>]/<data-container>/path/to/file")
```

**with\_param\_file**(*param\_file, selector=None, strategy: HyperParamStrategies | None = None, \*\*options*)

set hyper param values (from a file url) and configurations, see parameters in: [HyperParamOptions](#)

example:

```
grid_params = "s3://<my-bucket>/path/to/params.json"
task = mlrun.new_task("grid-search")
task.with_param_file(grid_params, selector="max.accuracy")
```

**with\_params**(*\*\*kwargs*)

set task parameters using key=value, key2=value2, ..

**with\_secrets**(*kind, source*)

register a secrets source (file, env or dict)

read secrets from a source provider to be used in workflows, example:

```

task.with_secrets('file', 'file.txt')
task.with_secrets('inline', {'key': 'val'})
task.with_secrets('env', 'ENV1,ENV2')

task.with_secrets('vault', ['secret1', 'secret2'...])

# If using with k8s secrets, the k8s secret is managed by MLRun, through the
→project-secrets
# mechanism. The secrets will be attached to the running pod as environment
→variables.
task.with_secrets('kubernetes', ['secret1', 'secret2'])

# If using an empty secrets list [] then all accessible secrets will be
→available.
task.with_secrets('vault', [])

# To use with Azure key vault, a k8s secret must be created with the following
→keys:
# kubectl -n <namespace> create secret generic azure-key-vault-secret \
#   --from-literal=tenant_id=<service principal tenant ID> \
#   --from-literal=client_id=<service principal client ID> \
#   --from-literal=secret=<service principal secret key>

task.with_secrets('azure_vault', {
    'name': 'my-vault-name',
    'k8s_secret': 'azure-key-vault-secret',
    # An empty secrets list may be passed ('secrets': []) to access all vault
→secrets.
    'secrets': ['secret1', 'secret2'...]
})

```

### Parameters

- **kind** -- secret type (file, inline, env)
- **source** -- secret data or link (see example)

### Returns

The RunTemplate object

**class** mlrun.model.TargetPathObject(base\_path=None, run\_id=None, is\_single\_file=False)

Bases: object

Class configuring the target path This class will take consideration of a few parameters to create the correct end result path:

- **run\_id**  
if run\_id is provided target will be considered as run\_id mode which require to contain a {run\_id} place holder in the path.
- **is\_single\_file**  
if true then run\_id must be the directory containing the output file or generated before the file name (run\_id/output.file).
- **base\_path**  
if contains the place holder for run\_id, run\_id must not be None. if run\_id passed and place holder doesn't exist the place holder will be generated in the correct place.

```
mlrun.model.new_task(name=None, project=None, handler=None, params=None, hyper_params=None,
                    param_file=None, selector=None, hyper_param_options=None, inputs=None,
                    outputs=None, in_path=None, out_path=None, artifact_path=None, secrets=None,
                    base=None, returns=None) → RunTemplate
```

Creates a new task

#### Parameters

- **name** -- task name
- **project** -- task project
- **handler** -- code entry-point/handler name
- **params** -- input parameters (dict)
- **hyper\_params** -- dictionary of hyper parameters and list values, each hyper param holds a list of values, the run will be executed for every parameter combination (Grid-Search)
- **param\_file** -- a csv file with parameter combinations, first row hold the parameter names, following rows hold param values
- **selector** -- selection criteria for hyper params e.g. "max.accuracy"
- **hyper\_param\_options** -- hyper parameter options, see: [HyperParamOptions](#)
- **inputs** -- dictionary of input objects + optional paths (if path is omitted the path will be the in\_path/key)
- **outputs** -- dictionary of input objects + optional paths (if path is omitted the path will be the out\_path/key)
- **in\_path** -- default input path/url (prefix) for inputs
- **out\_path** -- default output path/url (prefix) for artifacts
- **artifact\_path** -- default artifact output path
- **secrets** -- extra secrets specs, will be injected into the runtime e.g. ['file=<filename>', 'env=ENV\_KEY1,ENV\_KEY2']
- **base** -- task instance to use as a base instead of a fresh new task instance
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in `mlrun.ArtifactType`. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".

## 18.10 mlrun.package

MLRun package enables fully-automated experiment and pipeline tracking and reproducibility, and easy passing of python objects between remote jobs, while not requiring any form of editing to the actual function original code. Simply set the function code in a project and run it, MLRun takes care of the rest.

MLRun uses packagers: classes that perform 2 tasks:

1. **Parsing inputs** - automatically cast the runtime's inputs (user's input passed to the function via the `inputs` parameter of the `run` method) to the relevant hinted type. (Does not require handling of data items.)
2. **Logging outputs** - automatically save, log, and upload the function's returned objects by the provided log hints (user's input passed to the function via the `returns` parameter of the `run` method). (Does not require handling of files and artifacts.)

|                                                           |                                                                                                            |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <code>packager.Packager()</code>                          | The abstract base class for a packager.                                                                    |
| <code>packagers.default_packager.DefaultPackager()</code> | A default packager that handles all types and packs them as pickle files.                                  |
| <code>packagers_manager.PackagersManager([...])</code>    | A packager manager holds the project's packagers and sends them objects to pack, and data items to unpack. |

### 18.10.1 mlrun.package.packager.Packager

**class** `mlrun.package.packager.Packager`

Bases: ABC

The abstract base class for a packager. Packager has two main duties:

1. **Packing** - get an object that was returned from a function and log it to MLRun. The user can specify packing configurations to the packager using log hints. The packed object can be an artifact or a result.
2. **Unpacking** - get an `mlrun.DataItem` (an input to a MLRun function) and parse it to the desired hinted type. The packager uses the instructions it noted itself when originally packing the object.

#### Custom Implementation (Inherit Packager)

The Packager has one class variable and five class methods that must be implemented:

- `PACKABLE_OBJECT_TYPE` - A class variable to specify the object type this packager handles. Used for the `is_packable` and `repr` methods. An ellipses (...) means any type.
- `PRIORITY` - The priority of this packager among the rest of the packagers. Valid values are integers between 1-10 where 1 is the highest priority and 10 is the lowest. If not set, a default priority of 5 is set for MLRun builtin packagers and 3 for user custom packagers.
- `get_default_packing_artifact_type()` - A class method to get the default artifact type for packing an object when it is not provided by the user.
- `get_default_unpacking_artifact_type()` - A class method to get the default artifact type for unpacking a data item when it is not representing a package, but a simple url or an old / manually logged artifact.
- `get_supported_artifact_types()` - A class method to get the supported artifact types this packager can pack an object as. Used for the `is_packable` and `repr` methods.
- `pack()` - A class method to pack a returned object using the provided log hint configurations while noting itself instructions for how to unpack it once needed (only relevant for packed artifacts since results do not need unpacking).
- `unpack()` - A class method to unpack an MLRun `DataItem`, parsing it to its desired hinted type using the instructions noted while originally packing it.

The class methods `is_packable` and `is_unpackable` are implemented with the following basic logic:

- `is_packable()` - a class method to know whether to use this packager to pack an object by its type and artifact type. It compares the object's type with the `PACKABLE_OBJECT_TYPE` and checks that the artifact type is in the returned supported artifacts list from `get_supported_artifact_types`.
- `is_unpackable()` - a class method to know whether to use this packager to unpack a data item by the user- noted type hint and optionally stored artifact type in the data item (in case it was packaged before). It matches the `PACKABLE_OBJECT_TYPE` to the type hint given (same logic as IDE matchups, meaning subclasses are considered as unpackable) and checks if the artifact type is in the returned supported artifacts list from `get_supported_artifact_types`.

Preferably, each packager should handle a single type of object.

### Linking Artifacts (extra data)

To link between packages (using the extra data or metrics spec attributes of an artifact), use the key as if it exists and as value ellipses (...). The manager links all packages once it is done packing.

For example, given extra data keys in the log hint as *extra\_data*, setting them to an artifact would be:

```
artifact = Artifact(key="my_artifact")
artifact.spec.extra_data = {key: ... for key in extra_data}
```

### Clearing Outputs

Some of the packagers may produce files and temporary directories that should be deleted once the artifacts are logged. The packager can mark paths of files and directories to delete after logging using the class method `add_future_clearing_path()`.

For example, in the following packager's `pack` method, you can write a text file, create an `Artifact`, and then mark the text file to be deleted once the artifact is logged:

```
with open("./some_file.txt", "w") as file:
    file.write("Pack me")
artifact = Artifact(key="my_artifact")
self.add_future_clearing_path(path="./some_file.txt")
return artifact, None
```

### Attributes

|                                        |                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------|
| <code>PACKABLE_OBJECT_TYPE</code>      | The type of object this packager can pack and unpack.                                       |
| <code>PRIORITY</code>                  | The priority of this packager in the packagers collection of the manager (lower is better). |
| <code>future_clearing_path_list</code> | Get the packager's future clearing path list.                                               |
| <code>priority</code>                  | Get the packager's priority.                                                                |

#### **PACKABLE\_OBJECT\_TYPE: Type = Ellipsis**

The type of object this packager can pack and unpack.

#### **PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type used for packing.                                                                  |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is

temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**abstract get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type used for packing. The method is used when an object is sent for packing without an artifact type noted by the user.

**Parameters**

**obj** -- The about to be packed object.

**Returns**

The default artifact type.

**abstract get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**abstract get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The default implementation checks if the packable object type of this packager is equal to the given object's type. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**abstract pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**abstract unpack**(*data\_item*: [DataItem](#), *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

#### Returns

The unpacked data item's object.

## 18.10.2 mlrun.package.packagers.default\_packager.DefaultPackager

**class** mlrun.package.packagers.default\_packager.DefaultPackager

Bases: [Packager](#)

A default packager that handles all types and packs them as pickle files.

The default packager implements all the required methods and has a default logic that should satisfy most use cases. To work with this class, don't override the abstract class methods, but instead follow the guidelines below:

- **The class variable** [PACKABLE\\_OBJECT\\_TYPE](#): The type of object this packager can pack and unpack (used in the `is_packable` method).
- **The class variable** [PACK\\_SUBCLASSES](#): A flag that indicates whether to pack all subclasses of the `PACKABLE_OBJECT_TYPE` (used in the `is_packable` method). Default is False.
- **The class variable** [DEFAULT\\_PACKING\\_ARTIFACT\\_TYPE](#): The default artifact type to pack as. It is returned from the method `get_default_packing_artifact_type`.
- **The class variable** [DEFAULT\\_UNPACKING\\_ARTIFACT\\_TYPE](#): The default artifact type to unpack from. It is returned from the method `get_default_unpacking_artifact_type`.
- **The abstract class method** [pack\(\)](#): This method is implemented to get the object and send it to the relevant packing method by the given artifact type using the following naming: "pack\_<artifact\_type>". (If the artifact type was not provided, it uses the default). For example: if the artifact type is *x* then the class method `pack_x` must be implemented. The signature of each pack class method must be:

```
def pack_x(self, obj: Any, key: str, ...) -> Union[Tuple[Artifact, dict], dict]:
    dict]:
    pass
```

Where 'x' is the artifact type, 'obj' is the object to pack, *key* is the key to name the artifact and ... are additional, custom, log hint configurations. The returned values are the packed artifact and the instructions for unpacking it, or in the case of result, the dictionary of the result with its key and value. configurations are sent by the user and shouldn't be mandatory, meaning they should have a default value (otherwise, the user has to add them to every log hint).

- **The abstract class method `unpack()`:** The method is implemented to get a `DataItem` and send it to the relevant unpacking method by the artifact type using the following naming: `"unpack_<artifact_type>"`. (If the artifact type was not provided, it uses the default). For example: if the artifact type stored within the `DataItem` is `x` then the class method `unpack_x` must be implemented. The signature of each unpack class method must be:

```
def unpack_x(self, data_item: mlrun.DataItem, ...) -> Any:
    pass
```

Where 'x' is the artifact type, 'data\_item' is the artifact's data item to unpack, ... are the instructions that were originally returned from `pack_x`. (Each instruction must be optional (have a default value) to support objects from this type that were not packaged but custom-logged.) The returned value is the unpacked object.

- **The abstract class method `is_packable()`:** The method is implemented to automatically validate the object type and artifact type by the following rules:
  - **Object type validation:** Checks if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable.
  - **Artifact type validation:** Checks if the given artifact type is in the list returned from `get_supported_artifact_types`.
- **The abstract class method `is_unpackable()`:** The method is left as implemented in `Packager`.
- **The abstract class method `get_supported_artifact_types()`:** The method is implemented to look for all `pack` + `unpack` class methods implemented to collect the supported artifact types. If `PackagerX` has `pack_y`, `unpack_y` and `pack_z`, `unpack_z` that means the artifact types supported are `y` and `z`.
- **The abstract class method `get_default_packing_artifact_type()`:** The method is implemented to return the new class variable `DEFAULT_PACKING_ARTIFACT_TYPE`. You can still override the method if the default artifact type you need could change according to the object that's about to be packed.
- **The abstract class method `get_default_unpacking_artifact_type()`:** The method is implemented to return the new class variable `DEFAULT_UNPACKING_ARTIFACT_TYPE`. You can still override the method if the default artifact type you need could change according to the data item that's about to be unpacked.

## Important to remember

From the `Packager` docstring:

- **Linking artifacts** ("extra data"): In order to link between packages (using the extra data or metrics spec attributes of an artifact), use the key as if it exists and as value ellipses (...). The manager links all packages once it is done packing.

For example, given extra data keys in the log hint as `extra_data`, set them to an artifact as follows:

```
artifact = Artifact(key="my_artifact")
artifact.spec.extra_data = {key: ... for key in extra_data}
```

- **Clearing outputs:** Some packagers may produce files and temporary directories that should be deleted after the artifact is logged. The packager can mark paths of files and directories to delete after logging using the class method `add_future_clearing_path`.

For example, in the following packager's `pack` method, you can write a text file, create an artifact, and then mark the text file to be deleted once the artifact is logged:

```

with open("./some_file.txt", "w") as file:
    file.write("Pack me")
artifact = Artifact(key="my_artifact")
self.add_future_clearing_path(path="./some_file.txt")
return artifact, None

```

## Packager Summary

**Packing Type:** Any type

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** object
- **Unpacking:** object

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an object as a result.

## Attributes

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACKABLE_OBJECT_TYPE</i>            | The type of object this packager can pack and unpack.                                           |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACKABLE\_OBJECT\_TYPE: Type = Ellipsis**

The type of object this packager can pack and unpack.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is

temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

#### Returns

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*)  
→ Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Any, key: str*) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: DataItem, artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |
None = None, python_version: str | None = None, pickle_module_version: str | None =
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### 18.10.3 mlrun.package.packagers\_manager.PackagersManager

```
class mlrun.package.packagers_manager.PackagersManager(default_packager: Type[Packager] | None =
None)
```

Bases: object

A packager manager holds the project's packagers and sends them objects to pack, and data items to unpack.

It prepares the instructions / log hint configurations and then looks for the first packager that fits the task.

Initialize a packagers manager.

#### Parameters

**default\_packager** -- The default packager should be a packager that fits all types. It should fit any packagers that are managed by the manager that do not fit an object or data item. Default to mlrun.DefaultPackager.

#### Attributes

|                        |                                                    |
|------------------------|----------------------------------------------------|
| <code>artifacts</code> | Get the artifacts that were packed by the manager. |
| <code>results</code>   | Get the results that were packed by the manager.   |

#### artifacts

Get the artifacts that were packed by the manager.

**Returns**

A list of artifacts.

**results**

Get the results that were packed by the manager.

**Returns**

A results dictionary.

**Methods**

|                                                               |                                                                                         |
|---------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <code>__init__([default_packager])</code>                     | Initialize a packagers manager.                                                         |
| <code>clear_packagers_outputs()</code>                        | Clear the outputs of all packagers.                                                     |
| <code>collect_packagers(packagers[, default_priority])</code> | Collect the provided packagers.                                                         |
| <code>link_packages(additional_artifacts, ...)</code>         | Link packages to each other according to the provided extra data and metrics spec keys. |
| <code>pack(obj, log_hint)</code>                              | Pack an object using one of the manager's packagers.                                    |
| <code>unpack(data_item, type_hint)</code>                     | Unpack an object using one of the manager's packagers.                                  |

`__init__(default_packager: Type[Packager] | None = None)`

Initialize a packagers manager.

**Parameters**

**default\_packager** -- The default packager should be a packager that fits all types. It should fit any packagers that are managed by the manager that do not fit an object or data item. Default to `mlrun.DefaultPackager`.

**clear\_packagers\_outputs()**

Clear the outputs of all packagers. This method should be called at the end of the run, only after logging all artifacts, to ensure that files that require uploading have already been uploaded.

`collect_packagers(packagers: List[Type[Packager] | str], default_priority: int = 5)`

Collect the provided packagers. Packagers passed as module paths are imported and validated to be of type `Packager`. If it's needed to import all packagers from a module, use the module path with an asterisk `"*"` at the end. (A packager with a name that starts with an underscore `'_'` is not collected.)

Notice: Only packagers that are declared in the module are collected (packagers imported in the module scope aren't collected). For example:

```
from mlrun import Packager
from x import XPackager

class YPackager(Packager):
    pass
```

Only "YPackager" is collected since it is declared in the module, but not "XPackager", which is only imported.

**Parameters**

- **packagers** -- List of packagers to add.
- **default\_priority** -- The default priority for the packagers that don't have a set priority (equals to ...).

**Raises**

**MLRunPackageCollectingError** -- In case the packager could not be collected.

**link\_packages**(*additional\_artifacts*: List[Artifact], *additional\_results*: dict)

Link packages to each other according to the provided extra data and metrics spec keys. A future link is marked with ellipses (...). If no link is found, None is used and a warning is printed.

**Parameters**

- **additional\_artifacts** -- Additional artifacts to link (should come from an *mlrun.MLClientCtx*).
- **additional\_results** -- Additional results to link (should come from an *mlrun.MLClientCtx*).

**pack**(*obj*: Any, *log\_hint*: Dict[str, str]) → Artifact | dict | None | List[Artifact | dict | None]

Pack an object using one of the manager's packagers. A *dict* ("\*\*") or *list* ("\*") unpacking syntax in the log hint key packs the objects within them in separate packages.

**Parameters**

- **obj** -- The object to pack as an artifact.
- **log\_hint** -- The log hint to use.

**Returns**

The packaged artifact or result. None is returned if there was a problem while packing the object. If a prefix of dict or list unpacking was provided in the log hint key, a list of all the arbitrary number of packaged objects is returned.

**Raises**

- **MLRunInvalidArgumentError** -- If the key in the log hint instructs to log an arbitrary number of artifacts but the object type does not match the "\*" or "\*\*" used in the key.
- **MLRunPackagePackingError** -- If there was an error during the packing.

**unpack**(*data\_item*: DataItem, *type\_hint*: Type) → Any

Unpack an object using one of the manager's packagers. The data item can be unpacked in two ways:

- As a package: If the data item contains a package and the type hint provided is equal to the object type noted in the package. Or, if it's a package and a type hint was not provided.
- As a data item: If the data item is not a package or the type hint provided is not equal to the one noted in the package.

If the type hint is a *mlrun.DataItem* then it won't be unpacked.

Notice: It is not recommended to use a different packager than the one that originally packed the object to unpack it. A warning displays in that case.

**Parameters**

- **data\_item** -- The data item holding the package.
- **type\_hint** -- The type hint to parse the data item as.

**Returns**

The unpacked object parsed as type hinted.

## errors

## 18.10.4 mlrun.package.errors

### Exceptions

|                                          |                                                                                               |
|------------------------------------------|-----------------------------------------------------------------------------------------------|
| <code>MLRunPackageCollectionError</code> | An error that may be raised during the collection of packagers the manager is assigned to do. |
| <code>MLRunPackageError</code>           | General error from <i>mlrun.package</i> .                                                     |
| <code>MLRunPackagePackingError</code>    | An error that may be raised during a <i>ml-run.Packager.pack</i> method.                      |
| <code>MLRunPackageUnpackingError</code>  | An error that may be raised during a <i>ml-run.Packager.unpack</i> method.                    |

### Packagers

MLRun comes with the following list of modules, out of the box. All of the packagers listed here use the implementation of *DefaultPackager* and are available by default at the start of each run.

*packagers.python\_standard\_library\_packagers*

*packagers.numpy\_packagers*

*packagers.pandas\_packagers*

## 18.10.5 mlrun.package.packagers.python\_standard\_library\_packagers

### Classes

|                            |                                           |
|----------------------------|-------------------------------------------|
| <i>BoolPackager()</i>      | <code>builtins.bool</code> packager.      |
| <i>BytearrayPackager()</i> | <code>builtins.bytearray</code> packager. |
| <i>BytesPackager()</i>     | <code>builtins.bytes</code> packager.     |
| <i>DictPackager()</i>      | <code>builtins.dict</code> packager.      |
| <i>FloatPackager()</i>     | <code>builtins.float</code> packager.     |
| <i>FrozensetPackager()</i> | <code>builtins.frozenset</code> packager. |
| <i>IntPackager()</i>       | <code>builtins.int</code> packager.       |
| <i>ListPackager()</i>      | <code>builtins.list</code> packager.      |
| <i>NonePackager()</i>      | <code>None</code> packager.               |
| <i>PathPackager()</i>      | <code>pathlib.Path</code> packager.       |
| <i>SetPackager()</i>       | <code>builtins.set</code> packager.       |
| <i>StrPackager()</i>       | <code>builtins.str</code> packager.       |
| <i>TuplePackager()</i>     | <code>builtins.tuple</code> packager.     |

**mlrun.package.packagers.python\_standard\_library\_packagers.BoolPackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.**BoolPackager**

Bases: *DefaultPackager*

builtins.bool packager.

**Packager Summary**

**Packing Type:** builtins.bool

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** object

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an object as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is

temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

#### Returns

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*)  
→ Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Any, key: str*) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: [DataItem](#), artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |
None = None, python_version: str | None = None, pickle_module_version: str | None =
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### mlrun.package.packagers.python\_standard\_library\_packagers.ByteArrayPackager

```
class mlrun.package.packagers.python_standard_library_packagers.ByteArrayPackager
```

Bases: *BytesPackager*

builtins bytearray packager.

#### Packager Summary

**Packing Type:** builtins bytearray

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a bytearray as a file by the given format.
  - file\_format - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - pickle\_module\_name - The pickle module name to use for serializing the object.
- *result* - Pack a bytearray as a result.

## Attributes

|                                              |                                                                                                |
|----------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                          |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                      |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all subclasses of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).    |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                  |
| <code>priority</code>                        | Get the packager's priority.                                                                   |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a bytearray as a file by the given format.                                                                  |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a bytearray as a result.                                                                                    |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a bytearray from file.                                                                                    |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: bytearray, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a bytearray as a file by the given format.

#### Parameters

- **obj** -- The bytearray to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

#### Returns

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_result**(*obj*: bytearray, *key*: str) → dict

Pack a bytearray as a result.

#### Parameters

- **obj** -- The bytearray to pack and log.
- **key** -- The result's key.

#### Returns

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.

- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → *bytearray*

Unpack a bytearray from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the bytearray. Default is *None* - will be read by the file extension.

**Returns**

The unpacked bytearray.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.python\_standard\_library\_packagers.BytesPackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.**BytesPackager**

Bases: *ListPackager*

builtins.bytes packager.

**Packager Summary**

**Packing Type:** builtins.bytes

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a bytes as a file by the given format.
  - *file\_format* - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack bytes as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a bytes as a file by the given format.                                                                      |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack bytes as a result.                                                                                          |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a bytes from file.                                                                                        |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item

is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: bytes, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a bytes as a file by the given format.

**Parameters**

- **obj** -- The bytes to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: bytes, *key*: str) → dict

Pack bytes as a result.

**Parameters**

- **obj** -- The bytearray to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: [DataItem](#), *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → bytes

Unpack a bytes from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the bytes. Default is *None* - will be read by the file extension.

**Returns**

The unpacked bytes.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.python\_standard\_library\_packagers.DictPackager**

```
class mlrun.package.packagers.python_standard_library_packagers.DictPackager
```

```
    Bases: _BuiltinCollectionPackager
```

```
    builtins.dict packager.
```

**Packager Summary**

**Packing Type:** builtins.dict

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a builtin collection as a file by the given format.
  - *file\_format* - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an object as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a builtin collection as a file by the given format.                                                         |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a dictionary from file.                                                                                   |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item

is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: dict | list, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a builtin collection as a file by the given format.

**Parameters**

- **obj** -- The builtin collection to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: Any, *key*: str) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → dict

Unpack a dictionary from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the dictionary. Default is *None* - will be read by the file extension.

**Returns**

The unpacked dictionary.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.python\_standard\_library\_packagers.FloatPackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.**FloatPackager**

Bases: *DefaultPackager*

builtins.float packager.

**Packager Summary**

**Packing Type:** builtins.float

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** object

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an object as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is

temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

#### Returns

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*)  
→ Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Any, key: str*) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: DataItem, artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |
None = None, python_version: str | None = None, pickle_module_version: str | None =
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### mlrun.package.packagers.python\_standard\_library\_packagers.FrozensetPackager

```
class mlrun.package.packagers.python_standard_library_packagers.FrozensetPackager
```

Bases: *SetPackager*

builtins.frozenset packager.

#### Packager Summary

**Packing Type:** builtins.frozenset

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a frozenset as a file by the given format.
  - file\_format - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - pickle\_module\_name - The pickle module name to use for serializing the object.
- *result* - Pack a set as a result.

## Attributes

|                                              |                                                                                                |
|----------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                          |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                      |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all subclasses of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).    |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                  |
| <code>priority</code>                        | Get the packager's priority.                                                                   |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a frozenset as a file by the given format.                                                                  |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a set as a result.                                                                                          |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a frozenset from file.                                                                                    |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: frozenset, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a frozenset as a file by the given format.

#### Parameters

- **obj** -- The frozenset to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

#### Returns

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_result**(*obj*: set, *key*: str) → dict

Pack a set as a result.

#### Parameters

- **obj** -- The set to pack and log.
- **key** -- The result's key.

#### Returns

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.

- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → frozenset

Unpack a frozenset from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the frozenset. Default is *None* - will be read by the file extension.

**Returns**

The unpacked frozenset.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

## mlrun.package.packagers.python\_standard\_library\_packagers.IntPackager

**class** mlrun.package.packagers.python\_standard\_library\_packagers.**IntPackager**

Bases: *DefaultPackager*

builtins.int packager.

### Packager Summary

**Packing Type:** builtins.int

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** object

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an object as a result.

### Attributes

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is

temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

#### Returns

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*)  
→ Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Any, key: str*) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: [DataItem](#), artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |
None = None, python_version: str | None = None, pickle_module_version: str | None =
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager

```
class mlrun.package.packagers.python_standard_library_packagers.ListPackager
```

```
    Bases: _BuiltinCollectionPackager
```

```
    builtins.list packager.
```

#### Packager Summary

**Packing Type:** builtins.list

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- **file** - Pack a builtin collection as a file by the given format.
  - file\_format - The file format to save as. Default is json.
- **object** - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - pickle\_module\_name - The pickle module name to use for serializing the object.
- **result** - Pack an object as a result.

## Attributes

|                                              |                                                                                                |
|----------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                          |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                      |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all subclasses of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).    |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                  |
| <code>priority</code>                        | Get the packager's priority.                                                                   |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a builtin collection as a file by the given format.                                                         |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a list from file.                                                                                         |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: dict | list, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a builtin collection as a file by the given format.

#### Parameters

- **obj** -- The builtin collection to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

#### Returns

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_result**(*obj*: Any, *key*: str) → dict

Pack an object as a result.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The result's key.

#### Returns

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.

- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → list

Unpack a list from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the list. Default is *None* - will be read by the file extension.

**Returns**

The unpacked list.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.python\_standard\_library\_packagers.NonePackager****class** mlrun.package.packagers.python\_standard\_library\_packagers.**NonePackager**Bases: *DefaultPackager*

None packager.

**Packager Summary****Packing Type:** builtins.NoneType**Packing Sub-Classes:** False**Priority:** Default priority (5)**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** object

**Artifact Types:**

- *result* - Pack an object as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

##### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager. It will be the same as *DefaultPackager* but without the 'object' artifact type support (None cannot be pickled, only from Python 3.10, and it should not be pickled anyway as it is simply None - a result will do).

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*)  
→ Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Any, key: str*) → dict

Pack an object as a result.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: DataItem, artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |
None = None, python_version: str | None = None, pickle_module_version: str | None =
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### mlrun.package.packagers.python\_standard\_library\_packagers.PathPackager

```
class mlrun.package.packagers.python_standard_library_packagers.PathPackager
```

Bases: *StrPackager*

pathlib.Path packager. It is also used for all *Path* inheriting pathlib objects (*PosixPath* and *WindowsPath*).

#### Packager Summary

**Packing Type:** pathlib.Path

**Packing Sub-Classes:** True

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** path
- **Unpacking:** path

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *path* - Pack a *Path* value (pack the file or directory in that path).
  - *archive\_format* - The archive format to use in case the path is of a directory. Default is zip.
- *result* - Pack the *Path* as a string result.

## Attributes

|                                              |                                                                                                |
|----------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                          |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                      |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all subclasses of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).    |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                  |
| <code>priority</code>                        | Get the packager's priority.                                                                   |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'path'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'path'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = True**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_path(obj, key[, archive_format])</code>             | Pack a <i>Path</i> value (pack the file or directory in that path).                                              |
| <code>pack_result(obj, key)</code>                             | Pack the <i>Path</i> as a string result.                                                                         |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |
| <code>unpack_path(data_item[, is_directory, ...])</code>       | Unpack a data item representing a <i>Path</i> .                                                                  |

`__init__()`

**`add_future_clearing_path(path: str | Path)`**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**`get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: Any) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: Any, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: Type, *artifact\_type*: str | None = None) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_path**(*obj*: Path, *key*: str, *archive\_format*: str = 'zip') → Tuple[Artifact, dict]

Pack a *Path* value (pack the file or directory in that path).

#### Parameters

- **obj** -- The *Path* to pack.
- **key** -- The key to use for the artifact.
- **archive\_format** -- The archive format to use in case the path is of a directory. Default is zip.

#### Returns

The packed artifact and instructions.

**pack\_result**(*obj*: Path, *key*: str) → dict

Pack the *Path* as a string result.

#### Parameters

- **obj** -- The *Path* to pack.
- **key** -- The key to use in the results dictionary.

#### Returns

The packed result.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.

- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**unpack\_path**(*data\_item*: [DataItem](#), *is\_directory*: *bool* = *False*, *archive\_format*: *str* | *None* = *None*) → *Path*

Unpack a data item representing a *Path*. If the path is of a file, the file is downloaded to a local temporary directory and its path is returned. If the path is of a directory, the archive is extracted and the directory path extracted is returned.

**Parameters**

- **data\_item** -- The data item to unpack.
- **is\_directory** -- Whether the path should be treated as a file or a directory. Files (even archives like zip) won't be extracted.
- **archive\_format** -- The archive format to use in case the path is of a directory. Default is *None* - will be read by the archive file extension.

**Returns**

The unpacked *Path*.

**mlrun.package.packagers.python\_standard\_library\_packagers.SetPackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.**SetPackager**

Bases: *ListPackager*

builtins.set packager.

**Packager Summary**

**Packing Type:** builtins.set

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a set as a file by the given format.
  - *file\_format* - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack a set as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a set as a file by the given format.                                                                        |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a set as a result.                                                                                          |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a set from file.                                                                                          |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item

is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

#### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

#### Parameters

**obj** -- The about-to-be packed object.

#### Returns

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

#### Parameters

**data\_item** -- The about-to-be unpacked data item.

#### Returns

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

#### Returns

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

#### Parameters

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

#### Returns

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

#### Parameters

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: set, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a set as a file by the given format.

**Parameters**

- **obj** -- The set to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: set, *key*: str) → dict

Pack a set as a result.

**Parameters**

- **obj** -- The set to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → *set*

Unpack a set from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the set. Default is *None* - will be read by the file extension.

**Returns**

The unpacked set.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.python\_standard\_library\_packagers.StrPackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.StrPackager

Bases: *DefaultPackager*

builtins.str packager.

**Packager Summary**

**Packing Type:** builtins.str

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** path

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *path* - Pack a path string value content (pack the file or directory in that path).
  - *archive\_format* - The archive format to use in case the path is of a directory. Default is zip.
- *result* - Pack an object as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'path'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

**Methods**

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_path(obj, key[, archive_format])</code>             | Pack a path string value content (pack the file or directory in that path).                                      |
| <code>pack_result(obj, key)</code>                             | Pack an object as a result.                                                                                      |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |
| <code>unpack_path(data_item[, is_directory, ...])</code>       | Unpack a data item representing a path string.                                                                   |

**\_\_init\_\_()****add\_future\_clearing\_path(path: str | Path)**

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path(data\_item: DataItem, add\_to\_future\_clearing\_path: bool | None = None) → str**

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.

- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).

- **artifact\_type** -- The artifact type to unpack the object as.

#### Returns

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_path**(*obj*: str, *key*: str, *archive\_format*: str = 'zip') → Tuple[Artifact, dict]

Pack a path string value content (pack the file or directory in that path).

#### Parameters

- **obj** -- The string path value to pack.
- **key** -- The key to use for the artifact.
- **archive\_format** -- The archive format to use in case the path is of a directory. Default is zip.

#### Returns

The packed artifact and instructions.

**pack\_result**(*obj*: Any, *key*: str) → dict

Pack an object as a result.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The result's key.

#### Returns

The result dictionary.

**unpack**(*data\_item*: [DataItem](#), *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: str = 'cloudpickle', *object\_module\_name*: str | None = None, *python\_version*: str | None = None, *pickle\_module\_version*: str | None = None, *object\_module\_version*: str | None = None) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**unpack\_path**(*data\_item*: [DataItem](#), *is\_directory*: bool = False, *archive\_format*: str | None = None) → str

Unpack a data item representing a path string. If the path is of a file, the file is downloaded to a local temporary directory and its path is returned. If the path is of a directory, the archive is extracted and the directory path extracted is returned.

**Parameters**

- **data\_item** -- The data item to unpack.
- **is\_directory** -- Whether the path should be treated as a file or a directory. Files (even archives like zip) won't be extracted.

- **archive\_format** -- The archive format to use in case the path is of a directory. Default is None - will be read by the archive file extension.

**Returns**

The unpacked string.

**mlrun.package.packagers.python\_standard\_library\_packagers.TuplePackager**

**class** mlrun.package.packagers.python\_standard\_library\_packagers.TuplePackager

Bases: *ListPackager*

builtins.tuple packager.

Notice: a tuple returned from a function is usually treated as multiple returned objects, and so MLRun will try to pack each of them separately and not as a single tuple. For example:

```
def example_func_1():
    return 10, [1, 2, 3], "Hello MLRun"
```

Will be returned as a tuple of 3 items: (10, [1, 2, 3], "Hello MLRun") but the items will be packaged separately one by one and not as a single tuple.

In order to pack tuples (not recommended), use the configuration:

```
mlrun.mlconf.packagers.pack_tuple = True
```

Or more correctly, cast your returned tuple to a list like so:

```
def example_func_2():
    my_tuple = (2, 4)
    return list(my_tuple)
```

**Packager Summary**

**Packing Type:** builtins.tuple

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack a tuple as a file by the given format.
  - file\_format - The file format to save as. Default is json.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - pickle\_module\_name - The pickle module name to use for serializing the object.
- *result* - Pack a tuple as a result.

## Attributes

|                                              |                                                                                                      |
|----------------------------------------------|------------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                                |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                            |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all subclasses of the <code>PACKABLE_OBJECT_TYPE</code> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).          |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                        |
| <code>priority</code>                        | Get the packager's priority.                                                                         |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the `PACKABLE_OBJECT_TYPE`.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack a tuple as a file by the given format.                                                                      |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a tuple as a result.                                                                                        |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format])</code>             | Unpack a tuple from file.                                                                                        |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

#### Parameters

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

#### Returns

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: tuple, *key*: str, *file\_format*: str = 'json') → Tuple[Artifact, dict]

Pack a tuple as a file by the given format.

#### Parameters

- **obj** -- The tuple to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is json.

#### Returns

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

#### Parameters

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

#### Returns

The artifacts and its pickling instructions.

**pack\_result**(*obj*: tuple, *key*: str) → dict

Pack a tuple as a result.

#### Parameters

- **obj** -- The tuple to pack and log.
- **key** -- The result's key.

#### Returns

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

#### Parameters

- **data\_item** -- The data input to unpack.

- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*) → tuple

Unpack a tuple from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the tuple. Default is *None* - will be read by the file extension.

**Returns**

The unpacked tuple.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

## 18.10.6 mlrun.package.packagers.numpy\_packagers

### Classes

|                                   |                                                                              |
|-----------------------------------|------------------------------------------------------------------------------|
| <i>NumPyNDArrayDictPackager()</i> | dict[str, numpy.ndarray] packager.                                           |
| <i>NumPyNDArrayListPackager()</i> | list[numpy.ndarray] packager.                                                |
| <i>NumPyNDArrayPackager()</i>     | numpy.ndarray packager.                                                      |
| <i>NumPyNumberPackager()</i>      | numpy.number packager.                                                       |
| <i>NumPySupportedFormat()</i>     | Library of numpy formats (file extensions) supported by the NumPy packagers. |

### mlrun.package.packagers.numpy\_packagers.NumPyNDArrayDictPackager

**class** mlrun.package.packagers.numpy\_packagers.**NumPyNDArrayDictPackager**

Bases: `_NumPyNDArrayCollectionPackager`

dict[str, numpy.ndarray] packager.

#### Packager Summary

**Packing Type:** typing.Dict[str, numpy.ndarray]

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** file
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack an array collection as a file by the given format.
  - *file\_format* - The file format to save as. Default is npy.
  - *save\_kwargs* - Additional keyword arguments to pass to the numpy save functions.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack a dictionary of numpy arrays as a result.

#### Attributes

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACKABLE_OBJECT_TYPE</i>            | The type of object this packager can pack and unpack.                                           |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACKABLE\_OBJECT\_TYPE**

The type of object this packager can pack and unpack.

alias of Dict[str, ndarray]

alias of Dict[str, ndarray] .. autoattribute:: PACKABLE\_OBJECT\_TYPE .. autoattribute::  
PACK\_SUBCLASSES .. autoattribute:: PRIORITY .. autoattribute:: future\_clearing\_path\_list .. autoattribute::  
priority

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if the object provided is a dictionary of numpy arrays.                                                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack an array collection as a file by the given format.                                                          |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a dictionary of numpy arrays as a result.                                                                   |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format, ...])</code>        | Unpack a numpy array dictionary from file.                                                                       |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

`__init__()`

**add\_future\_clearing\_path**(*path*: str | Path)

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

### Parameters

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path**(*data\_item*: [DataItem](#), *add\_to\_future\_clearing\_path*: *bool* | *None* = *None*) → *str*

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If *None*, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: *Any*) → *str*

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: [DataItem](#)) → *str*

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → *List*[*str*]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: *Any*, *artifact\_type*: *str* | *None* = *None*, *configurations*: *dict* | *None* = *None*) → *bool*

Check if the object provided is a dictionary of numpy arrays.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: *Type*, *artifact\_type*: *str* | *None* = *None*) → *bool*

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: List[ndarray] | Dict[str, ndarray], *key*: str, *file\_format*: str = 'npz', *\*\*save\_kwargs*) → Tuple[Artifact, dict]

Pack an array collection as a file by the given format.

**Parameters**

- **obj** -- The array collection to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is npy.
- **save\_kwargs** -- Additional keyword arguments to pass to the numpy save functions.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: Dict[str, ndarray], *key*: str) → dict

Pack a dictionary of numpy arrays as a result.

**Parameters**

- **obj** -- The arrays dictionary to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: DataItem, *file\_format*: str | None = None, *allow\_pickle*: bool = False) → Dict[str, ndarray]

Unpack a numpy array dictionary from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the arrays dictionary. Default is None - will be read by the file extension.
- **allow\_pickle** -- Whether to allow loading pickled arrays in case of object type arrays. Only relevant to 'npz' format. Default is False for security reasons.

**Returns**

The unpacked array.

**unpack\_object**(*data\_item*: DataItem, *pickle\_module\_name*: str = 'cloudpickle', *object\_module\_name*: str | None = None, *python\_version*: str | None = None, *pickle\_module\_version*: str | None = None, *object\_module\_version*: str | None = None) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.

- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

### mlrun.package.packagers.numpy\_packagers.NumPyNDArrayListPackager

**class** mlrun.package.packagers.numpy\_packagers.NumPyNDArrayListPackager

Bases: `_NumPyNDArrayCollectionPackager`

`list[numpy.ndarray]` packager.

#### Packager Summary

**Packing Type:** `typing.List[numpy.ndarray]`

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** file
- **Unpacking:** file

**Artifact Types:**

- *file* - Pack an array collection as a file by the given format.
  - `file_format` - The file format to save as. Default is `npz`.
  - `save_kwargs` - Additional keyword arguments to pass to the numpy save functions.
- *object* - Pack a python object, pickling it into a `pkl` file and store it in an artifact.
  - `pickle_module_name` - The pickle module name to use for serializing the object.
- *result* - Pack a list of numpy arrays as a result.

#### Attributes

|                                              |                                                                                                       |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <code>DEFAULT_PACKING_ARTIFACT_TYPE</code>   | The default artifact type to pack as.                                                                 |
| <code>DEFAULT_UNPACKING_ARTIFACT_TYPE</code> | The default artifact type to unpack from.                                                             |
| <code>PACKABLE_OBJECT_TYPE</code>            | The type of object this packager can pack and unpack.                                                 |
| <code>PACK_SUBCLASSES</code>                 | A flag for indicating whether to also pack all sub-classes of the <code>PACKABLE_OBJECT_TYPE</code> . |
| <code>PRIORITY</code>                        | The priority of this packager in the packagers collection of the manager (lower is better).           |
| <code>future_clearing_path_list</code>       | Get the packager's future clearing path list.                                                         |
| <code>priority</code>                        | Get the packager's priority.                                                                          |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to unpack from.

**PACKABLE\_OBJECT\_TYPE**

The type of object this packager can pack and unpack.

alias of List[ndarray]

alias of List[ndarray] .. autoattribute:: PACKABLE\_OBJECT\_TYPE .. autoattribute::  
PACK\_SUBCLASSES .. autoattribute:: PRIORITY .. autoattribute:: future\_clearing\_path\_list .. autoat-  
tribute:: priority

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if the object provided is a list of numpy arrays.                                                          |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_file(obj, key[, file_format])</code>                | Pack an array collection as a file by the given format.                                                          |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a list of numpy arrays as a result.                                                                         |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_file(data_item[, file_format, ...])</code>        | Unpack a numpy array list from file.                                                                             |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

`__init__()`

**add\_future\_clearing\_path**(*path*: str | Path)

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

### Parameters

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path**(*data\_item*: DataItem, *add\_to\_future\_clearing\_path*: bool | None = None) → str

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if the object provided is a list of numpy arrays.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_file**(*obj*: List[ndarray] | Dict[str, ndarray], *key*: str, *file\_format*: str = 'npz', *\*\*save\_kwargs*) → Tuple[Artifact, dict]

Pack an array collection as a file by the given format.

**Parameters**

- **obj** -- The array collection to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is npy.
- **save\_kwargs** -- Additional keyword arguments to pass to the numpy save functions.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: List[ndarray], *key*: str) → dict

Pack a list of numpy arrays as a result.

**Parameters**

- **obj** -- The arrays list to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: [DataItem](#), *artifact\_type*: *str* | *None* = *None*, *instructions*: *dict* | *None* = *None*) → *Any*

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*, *allow\_pickle*: *bool* = *False*) →

*List*[*ndarray*]

Unpack a numpy array list from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the arrays list. Default is *None* - will be read by the file extension.
- **allow\_pickle** -- Whether to allow loading pickled arrays in case of object type arrays. Only relevant to 'npz' format. Default is *False* for security reasons.

**Returns**

The unpacked array.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pickle file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.

- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.numpy\_packagers.NumPyNDArrayPackager**

**class** mlrun.package.packagers.numpy\_packagers.NumPyNDArrayPackager

Bases: *DefaultPackager*

numpy.ndarray packager.

**Packager Summary**

**Packing Type:** numpy.ndarray

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** Refer to the packager's *get\_default\_packing\_artifact\_type()* method.
- **Unpacking:** Refer to the packager's *get\_default\_unpacking\_artifact\_type()* method.

**Artifact Types:**

- *dataset* - Pack an array as a dataset.
  - *file\_format* - The file format to save as. Default is parquet.
- *file* - Pack an array as a file by the given format.
  - *file\_format* - The file format to save as. Default is npy.
  - *save\_kwargs* - Additional keyword arguments to pass to the numpy save functions.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack an array as a result.

**Attributes**

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type.                                                                                   |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking.                                                                |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_dataset(obj, key[, file_format])</code>             | Pack an array as a dataset.                                                                                      |
| <code>pack_file(obj, key[, file_format])</code>                | Pack an array as a file by the given format.                                                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack an array as a result.                                                                                       |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_dataset(data_item)</code>                         | Unpack a numpy array from a dataset artifact.                                                                    |
| <code>unpack_file(data_item[, file_format, ...])</code>        | Unpack a numpy array from file.                                                                                  |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

`__init__()`

**add\_future\_clearing\_path**(*path*: *str* | *Path*)

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path**(*data\_item*: *DataItem*, *add\_to\_future\_clearing\_path*: *bool* | *None* = *None*) → *str*

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If *None*, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: *ndarray*) → *str*

Get the default artifact type. Will be a result if the array size is less than 10, otherwise file.

**Parameters**

**obj** -- The about to be packed array.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: *DataItem*) → *str*

Get the default artifact type used for unpacking. Returns dataset if the data item represents a *DatasetArtifact* and otherwise, file.

**Parameters**

**data\_item** -- The about to be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → *List*[*str*]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: *Any*, *artifact\_type*: *str* | *None* = *None*, *configurations*: *dict* | *None* = *None*) → *bool*

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: [DataItem](#), *type\_hint*: *Type*, *artifact\_type*: *str* | *None* = *None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: *Any*, *key*: *str* | *None* = *None*, *artifact\_type*: *str* | *None* = *None*, *configurations*: *dict* | *None* = *None*) → *Tuple*[*Artifact*, *dict*] | *dict*

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_dataset**(*obj*: *ndarray*, *key*: *str*, *file\_format*: *str* = "") → *Tuple*[*Artifact*, *dict*]

Pack an array as a dataset.

**Parameters**

- **obj** -- The array to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is parquet.

**Returns**

The packed artifact and instructions.

**Raises**

**MLRunInvalidArgumentError** -- IF the shape of the array is not 1D / 2D.

**pack\_file**(*obj*: *ndarray*, *key*: *str*, *file\_format*: *str* = 'npz', *\*\*save\_kwargs*) → *Tuple*[*Artifact*, *dict*]

Pack an array as a file by the given format.

**Parameters**

- **obj** -- The array to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is npy.

- **save\_kwargs** -- Additional keyword arguments to pass to the numpy save functions.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: ndarray, *key*: str) → dict

Pack an array as a result.

**Parameters**

- **obj** -- The array to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_dataset**(*data\_item*: DataItem) → ndarray

Unpack a numpy array from a dataset artifact.

**Parameters**

**data\_item** -- The data item to unpack.

**Returns**

The unpacked array.

**unpack\_file**(*data\_item*: DataItem, *file\_format*: str | None = None, *allow\_pickle*: bool = False) → ndarray

Unpack a numpy array from file.

**Parameters**

- **data\_item** -- The data item to unpack.

- **file\_format** -- The file format to use for reading the array. Default is None - will be read by the file extension.
- **allow\_pickle** -- Whether to allow loading pickled arrays in case of object type arrays. Only relevant to 'npz' format. Default is False for security reasons.

**Returns**

The unpacked array.

**unpack\_object**(*data\_item: DataItem, pickle\_module\_name: str = 'cloudpickle', object\_module\_name: str | None = None, python\_version: str | None = None, pickle\_module\_version: str | None = None, object\_module\_version: str | None = None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

## mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager

**class** mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager

Bases: *DefaultPackager*

numpy.number packager. It is also used for all *number* inheriting numpy objects (*float32*, *uint8*, etc.).

### Packager Summary

**Packing Type:** numpy.number

**Packing Sub-Classes:** True

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** result
- **Unpacking:** object

**Artifact Types:**

- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack a numpy number as a result.

## Attributes

|                                        |                                                                                                |
|----------------------------------------|------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                          |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                      |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all subclasses of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).    |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                  |
| <i>priority</i>                        | Get the packager's priority.                                                                   |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'result'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = True**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking a data item holding an object of this packager.                 |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a numpy number as a result.                                                                                 |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

### `__init__()`

#### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

##### Parameters

**path** -- The path to clear post logging the artifacts.

#### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

##### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

##### Returns

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking a data item holding an object of this packager. The method is used when a data item is sent for unpacking without it being a package, but is a simple url or an old / manually logged artifact.

**Parameters**

**data\_item** -- The about-to-be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj: Any, key: str | None = None, artifact\_type: str | None = None, configurations: dict | None = None*) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_object**(*obj: Any, key: str, pickle\_module\_name: str = 'cloudpickle'*) → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: number, key: str*) → dict

Pack a numpy number as a result.

**Parameters**

- **obj** -- The number to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: DataItem, artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_object**(*data\_item: DataItem, pickle\_module\_name: str = 'cloudpickle', object\_module\_name: str | None = None, python\_version: str | None = None, pickle\_module\_version: str | None = None, object\_module\_version: str | None = None*) → Any

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat

**class** mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat

Bases: SupportedFormat[\_Formatter]

Library of numpy formats (file extensions) supported by the NumPy packagers.

#### Attributes

|     |
|-----|
| CSV |
| GZ  |
| NPY |
| NPZ |
| TXT |

CSV = 'csv'

GZ = 'gz'

NPY = 'npz'

NPZ = 'npz'

TXT = 'txt'

## Methods

|                                         |                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------|
| <code>__init__()</code>                 |                                                                                  |
| <code>get_all_formats()</code>          | Get all supported formats.                                                       |
| <code>get_format_handler(fmt)</code>    | Get the format handler to the provided format (file extension):                  |
| <code>get_multi_array_formats()</code>  | Get the supported formats for saving a collection (multiple) numpy arrays - e.g. |
| <code>get_single_array_formats()</code> | Get the supported formats for saving one numpy array.                            |
| <code>match_format(path)</code>         | Try to match one of the available formats this class holds to a given path.      |

`__init__()`

**classmethod** `get_all_formats()` → List[str]

Get all supported formats.

**Returns**

A list of all the supported formats.

**classmethod** `get_format_handler(fmt: str)` → Type[FileHandlerType]

Get the format handler to the provided format (file extension):

**Parameters**

**fmt** -- The file extension to get the corresponding handler.

**Returns**

The handler class.

**classmethod** `get_multi_array_formats()` → List[str]

Get the supported formats for saving a collection (multiple) numpy arrays - e.g. list of arrays or dictionary of arrays.

**Returns**

A list of all the supported formats for saving multiple numpy arrays.

**classmethod** `get_single_array_formats()` → List[str]

Get the supported formats for saving one numpy array.

**Returns**

A list of all the supported formats for saving one numpy array.

**classmethod** `match_format(path: str)` → str | None

Try to match one of the available formats this class holds to a given path.

**Parameters**

**path** -- The path to match the format to.

**Returns**

The matched format if found and None otherwise.

## 18.10.7 mlrun.package.packagers.pandas\_packagers

### Classes

|                                  |                                                                                |
|----------------------------------|--------------------------------------------------------------------------------|
| <i>PandasDataFramePackager()</i> | pd.DataFrame packager.                                                         |
| <i>PandasSeriesPackager()</i>    | pd.Series packager.                                                            |
| <i>PandasSupportedFormat()</i>   | Library of Pandas formats (file extensions) supported by the Pandas packagers. |

### mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager

**class** mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager

Bases: *DefaultPackager*

pd.DataFrame packager.

### Packager Summary

**Packing Type:** pandas.core.frame.DataFrame

**Packing Sub-Classes:** False

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** dataset
- **Unpacking:** Refer to the packager's *get\_default\_unpacking\_artifact\_type()* method.

**Artifact Types:**

- *dataset* - Pack a pandas dataframe as a dataset.
  - *file\_format* - The file format to save as. Default is parquet.
- *file* - Pack a dataframe as a file by the given format.
  - *file\_format* - The file format to save as. Default is parquet or csv (depends on the column names asparquet cannot be used for non string column names).
  - *flatten* - Whether to flatten the dataframe before saving. For some formats it is mandatory to enable-flattening, otherwise saving and loading the dataframe will cause unexpected behavior especially in case it is multi-level or multi-index. Default to True.
  - *to\_kwargs* - Additional keyword arguments to pass to the pandas *to\_x* functions.
- *object* - Pack a python object, pickling it into a pkl file and store it in an artifact.
  - *pickle\_module\_name* - The pickle module name to use for serializing the object.
- *result* - Pack a dataframe as a result.

### Attributes

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'dataset'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking.                                                                |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_dataset(obj, key[, file_format])</code>             | Pack a pandas dataframe as a dataset.                                                                            |
| <code>pack_file(obj, key[, file_format, flatten])</code>       | Pack a dataframe as a file by the given format.                                                                  |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a dataframe as a result.                                                                                    |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_dataset(data_item)</code>                         | Unpack a pandas dataframe from a dataset artifact.                                                               |
| <code>unpack_file(data_item[, file_format, ...])</code>        | Unpack a pandas dataframe from file.                                                                             |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

**\_\_init\_\_()**

**add\_future\_clearing\_path**(*path*: *str* | *Path*)

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

**Parameters**

**path** -- The path to clear post logging the artifacts.

**get\_data\_item\_local\_path**(*data\_item*: *DataItem*, *add\_to\_future\_clearing\_path*: *bool* | *None* = *None*) → *str*

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

**Parameters**

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If *None*, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj*: *Any*) → *str*

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item*: *DataItem*) → *str*

Get the default artifact type used for unpacking. Returns dataset if the data item represents a *DatasetArtifact* and otherwise, file.

**Parameters**

**data\_item** -- The about to be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → *List*[*str*]

Get all the supported artifact types on this packager.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj*: *Any*, *artifact\_type*: *str* | *None* = *None*, *configurations*: *dict* | *None* = *None*) → *bool*

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.

- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item*: *DataItem*, *type\_hint*: *Type*, *artifact\_type*: *str* | *None* = *None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from *get\_supported\_artifact\_types*.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: *Any*, *key*: *str* | *None* = *None*, *artifact\_type*: *str* | *None* = *None*, *configurations*: *dict* | *None* = *None*) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_dataset**(*obj*: *DataFrame*, *key*: *str*, *file\_format*: *str* = 'parquet')

Pack a pandas dataframe as a dataset.

**Parameters**

- **obj** -- The dataframe to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is parquet.

**Returns**

The packed artifact and instructions.

**pack\_file**(*obj*: *DataFrame*, *key*: *str*, *file\_format*: *str* | *None* = *None*, *flatten*: *bool* = *True*, *\*\*to\_kwargs*) → Tuple[Artifact, dict]

Pack a dataframe as a file by the given format.

**Parameters**

- **obj** -- The series to pack.
- **key** -- The key to use for the artifact.

- **file\_format** -- The file format to save as. Default is parquet or csv (depends on the column names as parquet cannot be used for non string column names).
- **flatten** -- Whether to flatten the dataframe before saving. For some formats it is mandatory to enable flattening, otherwise saving and loading the dataframe will cause unexpected behavior especially in case it is multi-level or multi-index. Default to True.
- **to\_kwargs** -- Additional keyword arguments to pass to the pandas *to\_x* functions.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.
- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj*: DataFrame, *key*: str) → dict

Pack a dataframe as a result.

**Parameters**

- **obj** -- The dataframe to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item*: DataItem, *artifact\_type*: str | None = None, *instructions*: dict | None = None) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_dataset**(*data\_item*: DataItem)

Unpack a padnas dataframe from a dataset artifact.

**Parameters**

**data\_item** -- The data item to unpack.

**Returns**

The unpacked dataframe.

**unpack\_file**(*data\_item*: [DataItem](#), *file\_format*: *str* | *None* = *None*, *read\_kwargs*: *dict* | *None* = *None*) → [DataFrame](#)

Unpack a pandas dataframe from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the series. Default is *None* - will be read by the file extension.
- **read\_kwargs** -- Keyword arguments to pass to the read of the formatter.

**Returns**

The unpacked series.

**unpack\_object**(*data\_item*: [DataItem](#), *pickle\_module\_name*: *str* = 'cloudpickle', *object\_module\_name*: *str* | *None* = *None*, *python\_version*: *str* | *None* = *None*, *pickle\_module\_version*: *str* | *None* = *None*, *object\_module\_version*: *str* | *None* = *None*) → *Any*

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

**Parameters**

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

**Returns**

The un-pickled python object.

**mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager**

**class** mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager

Bases: [PandasDataFramePackager](#)

pd.Series packager.

## Packager Summary

**Packing Type:** `pandas.core.series.Series`

**Packing Sub-Classes:** `False`

**Priority:** Default priority (5)

**Default Artifact Types:**

- **Packing:** `file`
- **Unpacking:** `object`

**Artifact Types:**

- *file* - Pack a series as a file by the given format.
  - `file_format` - The file format to save as. Default is `parquet` or `csv` (depends on the column names `asparquet` cannot be used for non string column names).
  - `flatten` - Whether to flatten the dataframe before saving. For some formats it is mandatory to enable-flattening, otherwise saving and loading the dataframe will cause unexpected behavior especially in case it is multi-level or multi-index. Default to `True`.
  - `to_kwargs` - Additional keyword arguments to pass to the pandas *to\_x* functions.
- *object* - Pack a python object, pickling it into a `pkl` file and store it in an artifact.
  - `pickle_module_name` - The pickle module name to use for serializing the object.
- *result* - Pack a series as a result.

## Attributes

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| <i>DEFAULT_PACKING_ARTIFACT_TYPE</i>   | The default artifact type to pack as.                                                           |
| <i>DEFAULT_UNPACKING_ARTIFACT_TYPE</i> | The default artifact type to unpack from.                                                       |
| <i>PACK_SUBCLASSES</i>                 | A flag for indicating whether to also pack all sub-classes of the <i>PACKABLE_OBJECT_TYPE</i> . |
| <i>PRIORITY</i>                        | The priority of this packager in the packagers collection of the manager (lower is better).     |
| <i>future_clearing_path_list</i>       | Get the packager's future clearing path list.                                                   |
| <i>priority</i>                        | Get the packager's priority.                                                                    |

**DEFAULT\_PACKING\_ARTIFACT\_TYPE = 'file'**

The default artifact type to pack as.

**DEFAULT\_UNPACKING\_ARTIFACT\_TYPE = 'object'**

The default artifact type to unpack from.

**PACK\_SUBCLASSES = False**

A flag for indicating whether to also pack all subclasses of the *PACKABLE\_OBJECT\_TYPE*.

**PRIORITY: int = Ellipsis**

The priority of this packager in the packagers collection of the manager (lower is better).

**future\_clearing\_path\_list**

Get the packager's future clearing path list.

**Returns**

The clearing path list.

**priority**

Get the packager's priority.

**Returns**

The packager's priority.

## Methods

|                                                                |                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <code>__init__()</code>                                        |                                                                                                                  |
| <code>add_future_clearing_path(path)</code>                    | Mark a path to be cleared by this packager's manager after logging the packaged artifacts.                       |
| <code>get_data_item_local_path(data_item[, ...])</code>        | Get the local path to the item handled by the data item provided.                                                |
| <code>get_default_packing_artifact_type(obj)</code>            | Get the default artifact type for packing an object of this packager.                                            |
| <code>get_default_unpacking_artifact_type(data_item)</code>    | Get the default artifact type used for unpacking.                                                                |
| <code>get_supported_artifact_types()</code>                    | Get all the supported artifact types on this packager.                                                           |
| <code>is_packable(obj[, artifact_type, configurations])</code> | Check if this packager can pack an object of the provided type as the provided artifact type.                    |
| <code>is_unpackable(data_item, type_hint[, ...])</code>        | Check if this packager can unpack an input according to the user-given type hint and the provided artifact type. |
| <code>pack(obj[, key, artifact_type, configurations])</code>   | Pack an object as the given artifact type using the provided configurations.                                     |
| <code>pack_dataset(obj, key[, file_format])</code>             | Pack a pandas dataframe as a dataset.                                                                            |
| <code>pack_file(obj, key[, file_format, flatten])</code>       | Pack a series as a file by the given format.                                                                     |
| <code>pack_object(obj, key[, pickle_module_name])</code>       | Pack a python object, pickling it into a pkl file and store it in an artifact.                                   |
| <code>pack_result(obj, key)</code>                             | Pack a series as a result.                                                                                       |
| <code>unpack(data_item[, artifact_type, instructions])</code>  | Unpack the data item's artifact by the provided type using the given instructions.                               |
| <code>unpack_dataset(data_item)</code>                         | Unpack a pandas dataframe from a dataset artifact.                                                               |
| <code>unpack_file(data_item[, file_format, ...])</code>        | Unpack a pandas series from file.                                                                                |
| <code>unpack_object(data_item[, ...])</code>                   | Unpack the data item's object, unpickle it using the instructions, and return.                                   |

## `__init__()`

### `add_future_clearing_path(path: str | Path)`

Mark a path to be cleared by this packager's manager after logging the packaged artifacts.

#### Parameters

**path** -- The path to clear post logging the artifacts.

### `get_data_item_local_path(data_item: DataItem, add_to_future_clearing_path: bool | None = None) → str`

Get the local path to the item handled by the data item provided. The local path can be the same as the data item in case the data item points to a local path, or will be downloaded to a temporary directory and return this newly created temporary local path.

#### Parameters

- **data\_item** -- The data item to get its item local path.
- **add\_to\_future\_clearing\_path** -- Whether to add the local path to the future clearing paths list. If None, it will add the path to the list only if the data item is not of kind 'file', meaning it represents a local file and hence we don't want to delete it post running automatically. We wish to delete it only if the local path is temporary (and that will be in case kind is not 'file', so it is being downloaded to a temporary directory).

**Returns**

The data item local path.

**get\_default\_packing\_artifact\_type**(*obj: Any*) → str

Get the default artifact type for packing an object of this packager.

**Parameters**

**obj** -- The about-to-be packed object.

**Returns**

The default artifact type.

**get\_default\_unpacking\_artifact\_type**(*data\_item: DataItem*) → str

Get the default artifact type used for unpacking. Returns dataset if the data item represents a *DatasetArtifact* and otherwise, file.

**Parameters**

**data\_item** -- The about to be unpacked data item.

**Returns**

The default artifact type.

**get\_supported\_artifact\_types**() → List[str]

Get all the supported artifact types on this packager. It will be the same as *PandasDataFramePackager* but without the 'dataset' artifact type support.

**Returns**

A list of all the supported artifact types.

**is\_packable**(*obj: Any, artifact\_type: str | None = None, configurations: dict | None = None*) → bool

Check if this packager can pack an object of the provided type as the provided artifact type.

The method is implemented to validate the object's type and artifact type by checking if the given object type matches the variable `PACKABLE_OBJECT_TYPE` with respect to the `PACK_SUBCLASSES` class variable. If it does, it checks if the given artifact type is in the list returned from `get_supported_artifact_types`.

**Parameters**

- **obj** -- The object to pack.
- **artifact\_type** -- The artifact type to log the object as.
- **configurations** -- The log hint configurations passed by the user.

**Returns**

True if packable and False otherwise.

**is\_unpackable**(*data\_item: DataItem, type\_hint: Type, artifact\_type: str | None = None*) → bool

Check if this packager can unpack an input according to the user-given type hint and the provided artifact type.

The default implementation tries to match the packable object type of this packager to the given type hint. If it matches, it looks for the artifact type in the list returned from `get_supported_artifact_types`.

**Parameters**

- **data\_item** -- The input data item to check if unpackable.
- **type\_hint** -- The type hint of the input to unpack (the object type to be unpacked).
- **artifact\_type** -- The artifact type to unpack the object as.

**Returns**

True if unpackable and False otherwise.

**pack**(*obj*: Any, *key*: str | None = None, *artifact\_type*: str | None = None, *configurations*: dict | None = None) → Tuple[Artifact, dict] | dict

Pack an object as the given artifact type using the provided configurations.

**Parameters**

- **obj** -- The object to pack.
- **key** -- The key of the artifact.
- **artifact\_type** -- Artifact type to log to MLRun. If passing *None*, the default artifact type is used.
- **configurations** -- Log hints configurations to pass to the packing method.

**Returns**

If the packed object is an artifact, a tuple of the packed artifact and unpacking instructions dictionary. If the packed object is a result, a dictionary containing the result key and value.

**pack\_dataset**(*obj*: DataFrame, *key*: str, *file\_format*: str = 'parquet')

Pack a pandas dataframe as a dataset.

**Parameters**

- **obj** -- The dataframe to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is parquet.

**Returns**

The packed artifact and instructions.

**pack\_file**(*obj*: Series, *key*: str, *file\_format*: str | None = None, *flatten*: bool = True, *\*\*to\_kwargs*) → Tuple[Artifact, dict]

Pack a series as a file by the given format.

**Parameters**

- **obj** -- The series to pack.
- **key** -- The key to use for the artifact.
- **file\_format** -- The file format to save as. Default is parquet or csv (depends on the column names as parquet cannot be used for non string column names).
- **flatten** -- Whether to flatten the dataframe before saving. For some formats it is mandatory to enable flattening, otherwise saving and loading the dataframe will cause unexpected behavior especially in case it is multi-level or multi-index. Default to True.
- **to\_kwargs** -- Additional keyword arguments to pass to the pandas *to\_x* functions.

**Returns**

The packed artifact and instructions.

**pack\_object**(*obj*: Any, *key*: str, *pickle\_module\_name*: str = 'cloudpickle') → Tuple[Artifact, dict]

Pack a python object, pickling it into a pkl file and store it in an artifact.

**Parameters**

- **obj** -- The object to pack and log.
- **key** -- The artifact's key.

- **pickle\_module\_name** -- The pickle module name to use for serializing the object.

**Returns**

The artifacts and its pickling instructions.

**pack\_result**(*obj: Series, key: str*) → dict

Pack a series as a result.

**Parameters**

- **obj** -- The series to pack and log.
- **key** -- The result's key.

**Returns**

The result dictionary.

**unpack**(*data\_item: DataItem, artifact\_type: str | None = None, instructions: dict | None = None*) → Any

Unpack the data item's artifact by the provided type using the given instructions.

**Parameters**

- **data\_item** -- The data input to unpack.
- **artifact\_type** -- The artifact type to unpack the data item as. If passing *None*, the default artifact type is used.
- **instructions** -- Additional instructions noted in the package to pass to the unpacking method.

**Returns**

The unpacked data item's object.

**Raises**

**MLRunPackageUnpackingError** -- In case the packager could not unpack the data item.

**unpack\_dataset**(*data\_item: DataItem*)

Unpack a padnas dataframe from a dataset artifact.

**Parameters**

**data\_item** -- The data item to unpack.

**Returns**

The unpacked dataframe.

**unpack\_file**(*data\_item: DataItem, file\_format: str | None = None, read\_kwargs: dict | None = None, column\_name: str | int | None = None*) → Series

Unpack a pandas series from file.

**Parameters**

- **data\_item** -- The data item to unpack.
- **file\_format** -- The file format to use for reading the series. Default is *None* - will be read by the file extension.
- **read\_kwargs** -- Keyword arguments to pass to the read of the formatter.
- **column\_name** -- The name of the series column.

**Returns**

The unpacked series.

```
unpack_object(data_item: DataItem, pickle_module_name: str = 'cloudpickle', object_module_name: str |  
None = None, python_version: str | None = None, pickle_module_version: str | None =  
None, object_module_version: str | None = None) → Any
```

Unpack the data item's object, unpickle it using the instructions, and return.

Warnings of mismatching python and module versions between the original pickling interpreter and this one may be raised.

#### Parameters

- **data\_item** -- The data item holding the pkl file.
- **pickle\_module\_name** -- Module to use for unpickling the object.
- **object\_module\_name** -- The original object's module. Used to verify that the current interpreter object module version matches the pickled object version before unpickling the object.
- **python\_version** -- The python version in which the original object was pickled. Used to verify that the current interpreter python version matches the pickled object version before unpickling the object.
- **pickle\_module\_version** -- The pickle module version. Used to verify that the current interpreter module version matches the one that pickled the object before unpickling it.
- **object\_module\_version** -- The original object's module version to match to the interpreter's module version.

#### Returns

The un-pickled python object.

### **mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat**

```
class mlrun.package.packagers.pandas_packagers.PandasSupportedFormat
```

```
    Bases: SupportedFormat[_Formatter]
```

Library of Pandas formats (file extensions) supported by the Pandas packagers.

Attributes

|                |
|----------------|
| <i>CSV</i>     |
| <i>FEATHER</i> |
| <i>H5</i>      |
| <i>HTML</i>    |
| <i>JSON</i>    |
| <i>ORC</i>     |
| <i>PARQUET</i> |
| <i>XLSX</i>    |
| <i>XML</i>     |

```
CSV = 'csv'
FEATHER = 'feather'
H5 = 'h5'
HTML = 'html'
JSON = 'json'
ORC = 'orc'
PARQUET = 'parquet'
XLSX = 'xlsx'
XML = 'xml'
```

Methods

|                                 |                                                                             |
|---------------------------------|-----------------------------------------------------------------------------|
| <i>__init__()</i>               |                                                                             |
| <i>get_all_formats()</i>        | Get all supported formats.                                                  |
| <i>get_format_handler</i> (fmt) | Get the format handler to the provided format (file extension):             |
| <i>match_format</i> (path)      | Try to match one of the available formats this class holds to a given path. |

```
__init__()
```

**classmethod** `get_all_formats()` → List[str]  
Get all supported formats.  
**Returns**  
A list of all the supported formats.

**classmethod** `get_format_handler(fmt: str)` → Type[FileHandlerType]  
Get the format handler to the provided format (file extension):  
**Parameters**  
**fmt** -- The file extension to get the corresponding handler.  
**Returns**  
The handler class.

**classmethod** `match_format(path: str)` → str | None  
Try to match one of the available formats this class holds to a given path.  
**Parameters**  
**path** -- The path to match the format to.  
**Returns**  
The matched format if found and None otherwise.

## 18.11 mlrun.platforms

`mlrun.platforms.VolumeMount`

alias of Mount

`mlrun.platforms.auto_mount(pvc_name="", volume_mount_path="", volume_name=None)`

choose the mount based on env variables and params

volume will be selected by the following order: - k8s PVC volume when both pvc\_name and volume\_mount\_path are set - k8s PVC volume when env var is set: MLRUN\_PVC\_MOUNT=<pvc-name>:<mount-path> - k8s PVC volume if it's configured as the auto mount type - iguazio v3io volume when V3IO\_ACCESS\_KEY and V3IO\_USERNAME env vars are set

`mlrun.platforms.mount_configmap(configmap_name, mount_path, volume_name='configmap', items=None)`

Modifier function to mount kubernetes configmap as files(s)

**Parameters**

- **configmap\_name** -- k8s configmap name
- **mount\_path** -- path to mount inside the container
- **volume\_name** -- unique volume name
- **items** -- If unspecified, each key-value pair in the Data field of the referenced Configmap will be projected into the volume as a file whose name is the key and content is the value. If specified, the listed keys will be projected into the specified paths, and unlisted keys will not be present.

`mlrun.platforms.mount_hostpath(host_path, mount_path, volume_name='hostpath')`

Modifier function to mount kubernetes configmap as files(s)

**Parameters**

- **host\_path** -- host path
- **mount\_path** -- path to mount inside the container
- **volume\_name** -- unique volume name

```
mlrun.platforms.mount_pvc(pvc_name=None, volume_name='pipeline', volume_mount_path='/mnt/pipeline')
```

Modifier function to apply to a Container Op to simplify volume, volume mount addition and enable better reuse of volumes, volume claims across container ops.

Usage:

```
train = train_op(...)
train.apply(mount_pvc('claim-name', 'pipeline', '/mnt/pipeline'))
```

```
mlrun.platforms.mount_s3(secret_name=None, aws_access_key="", aws_secret_key="", endpoint_url=None,
                        prefix="", aws_region=None, non_anonymous=False)
```

Modifier function to add s3 env vars or secrets to container

**Warning:** Using this function to configure AWS credentials will expose these credentials in the pod spec of the runtime created. It is recommended to use the *secret\_name* parameter, or set the credentials as project-secrets and avoid using this function.

#### Parameters

- **secret\_name** -- kubernetes secret name (storing the access/secret keys)
- **aws\_access\_key** -- AWS\_ACCESS\_KEY\_ID value. If this parameter is not specified and AWS\_ACCESS\_KEY\_ID env. variable is defined, the value will be taken from the env. variable
- **aws\_secret\_key** -- AWS\_SECRET\_ACCESS\_KEY value. If this parameter is not specified and AWS\_SECRET\_ACCESS\_KEY env. variable is defined, the value will be taken from the env. variable
- **endpoint\_url** -- s3 endpoint address (for non AWS s3)
- **prefix** -- string prefix to add before the env var name (for working with multiple s3 data stores)
- **aws\_region** -- amazon region
- **non\_anonymous** -- force the S3 API to use non-anonymous connection, even if no credentials are provided (for authenticating externally, such as through IAM instance-roles)

```
mlrun.platforms.mount_secret(secret_name, mount_path, volume_name='secret', items=None)
```

Modifier function to mount kubernetes secret as files(s)

#### Parameters

- **secret\_name** -- k8s secret name
- **mount\_path** -- path to mount inside the container
- **volume\_name** -- unique volume name
- **items** -- If unspecified, each key-value pair in the Data field of the referenced Secret will be projected into the volume as a file whose name is the key and content is the value. If specified, the listed keys will be projected into the specified paths, and unlisted keys will not be present.

```
mlrun.platforms.mount_v3io(name='v3io', remote="", access_key="", user="", secret=None,
                          volume_mounts=None)
```

Modifier function to apply to a Container Op to volume mount a v3io path

#### Parameters

- **name** -- the volume name

- **remote** -- the v3io path to use for the volume. ~/ prefix will be replaced with /users/<username>/
- **access\_key** -- the access key used to auth against v3io. if not given V3IO\_ACCESS\_KEY env var will be used
- **user** -- the username used to auth against v3io. if not given V3IO\_USERNAME env var will be used
- **secret** -- k8s secret name which would be used to get the username and access key to auth against v3io.
- **volume\_mounts** -- list of VolumeMount. empty volume mounts & remote will default to mount /v3io & /User.

`mlrun.platforms.pprint(object, stream=None, indent=1, width=80, depth=None, *, compact=False, sort_dicts=True)`

Pretty-print a Python object to a stream [default is sys.stdout].

`mlrun.platforms.set_env_variables(env_vars_dict: Dict[str, str] | None = None, **kwargs)`

Modifier function to apply a set of environment variables to a runtime. Variables may be passed as either a dictionary of name-value pairs, or as arguments to the function. See *KubeResource.apply* for more information on modifiers.

Usage:

```
function.apply(set_env_variables({"ENV1": "value1", "ENV2": "value2"}))
or
function.apply(set_env_variables(ENV1=value1, ENV2=value2))
```

#### Parameters

- **env\_vars\_dict** -- dictionary of env. variables
- **kwargs** -- environment variables passed as args

`mlrun.platforms.sleep(seconds)`

Delay execution for a given number of seconds. The argument may be a floating point number for subsecond precision.

`mlrun.platforms.v3io_cred(api="", user="", access_key="")`

Modifier function to copy local v3io env vars to container

Usage:

```
train = train_op(...)
train.apply(use_v3io_cred())
```

`mlrun.platforms.watch_stream(url, shard_ids: list | None = None, seek_to: str | None = None, interval=None, is_json=False, **kwargs)`

watch on a v3io stream and print data every interval

example:

```
watch_stream('v3io:///users/admin/mystream')
```

#### Parameters

- **url** -- stream url
- **shard\_ids** -- range or list of shard IDs

- **seek\_to** -- where to start/seek ('EARLIEST', 'LATEST', 'TIME', 'SEQUENCE')
- **interval** -- watch interval time in seconds, 0 to run once and return
- **is\_json** -- indicate the payload is json (will be deserialized)

## 18.12 mlrun.projects

```
class mlrun.projects.MlrunProject(metadata: ProjectMetadata | Dict | None = None, spec: ProjectSpec | Dict | None = None)
```

Bases: `ModelObj`

**add\_custom\_packager**(packager: str, is\_mandatory: bool)

Add a custom packager from the custom packagers list. All project's custom packagers are added to each project function.

**Notice** that in order to run a function with the custom packagers included, you must set a source for the project (using the `project.set_source` method) with the parameter `pull_at_runtime=True` so the source code of the packagers will be able to be imported.

### Parameters

- **packager** -- The packager module path to add. For example, if a packager *My-Packager* is in the project's source at `my_module.py`, then the module path is: `"my_module.MyPackager"`.
- **is\_mandatory** -- Whether this packager must be collected during a run. If False, failing to collect it won't raise an error during the packagers collection phase.

**property artifact\_path:** str

```
build_config(image: str | None = None, set_as_default: bool = False, with_mlrun: bool | None = None,
             base_image: str | None = None, commands: list | None = None, secret_name: str | None =
             None, requirements: str | List[str] | None = None, overwrite_build_params: bool = False,
             requirements_file: str | None = None, builder_env: dict | None = None, extra_args: str | None
             = None)
```

specify builder configuration for the project

### Parameters

- **image** -- target image name/path. If not specified the project's existing `default_image` name will be used. If not set, the `mlconf.default_project_image_name` value will be used
- **set\_as\_default** -- set `image` to be the project's default image (default False)
- **with\_mlrun** -- add the current mlrun package to the container build
- **base\_image** -- base image name/path
- **commands** -- list of docker build (RUN) commands e.g. `['pip install pandas']`
- **secret\_name** -- k8s secret for accessing the docker registry
- **requirements** -- a list of packages to install on the built image
- **requirements\_file** -- requirements file to install on the built image
- **overwrite\_build\_params** -- Overwrite existing build configuration (currently applies to requirements and commands) \* False: The new params are merged with the existing \* True: The existing params are replaced by the new ones

- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`, does not work yet in KFP
- **extra\_args** -- A string containing additional builder arguments in the format of command-line options, e.g. `extra_args="--skip-tls-verify --build-arg A=val"`

**build\_function**(*function: str* | *BaseRuntime*, *with\_mlrun: bool* | *None* = *None*, *skip\_deployed: bool* = *False*, *image: str* | *None* = *None*, *base\_image: str* | *None* = *None*, *commands: list* | *None* = *None*, *secret\_name: str* | *None* = *None*, *requirements: str* | *List[str]* | *None* = *None*, *mlrun\_version\_specifier: str* | *None* = *None*, *builder\_env: dict* | *None* = *None*, *overwrite\_build\_params: bool* = *False*, *requirements\_file: str* | *None* = *None*, *extra\_args: str* | *None* = *None*, *force\_build: bool* = *False*) → *BuildStatus* | *ContainerOp*

deploy ML function, build container with its dependencies

#### Parameters

- **function** -- name of the function (in the project) or function object
- **with\_mlrun** -- add the current mlrun package to the container build
- **skip\_deployed** -- skip the build if we already have an image for the function
- **image** -- target image name/path
- **base\_image** -- base image name/path (commands and source code will be added to it)
- **commands** -- list of docker build (RUN) commands e.g. `['pip install pandas']`
- **secret\_name** -- k8s secret for accessing the docker registry
- **requirements** -- list of python packages, defaults to *None*
- **requirements\_file** -- pip requirements file path, defaults to *None*
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`, does not work yet in KFP
- **overwrite\_build\_params** -- Overwrite existing build configuration (currently applies to requirements and commands) \* *False*: The new params are merged with the existing \* *True*: The existing params are replaced by the new ones
- **extra\_args** -- A string containing additional builder arguments in the format of command-line options, e.g. `extra_args="--skip-tls-verify --build-arg A=val"`
- **force\_build** -- force building the image, even when no changes were made

**build\_image**(*image: str* | *None* = *None*, *set\_as\_default: bool* = *True*, *with\_mlrun: bool* | *None* = *None*, *skip\_deployed: bool* = *False*, *base\_image: str* | *None* = *None*, *commands: list* | *None* = *None*, *secret\_name: str* | *None* = *None*, *requirements: str* | *List[str]* | *None* = *None*, *mlrun\_version\_specifier: str* | *None* = *None*, *builder\_env: dict* | *None* = *None*, *overwrite\_build\_params: bool* = *False*, *requirements\_file: str* | *None* = *None*, *extra\_args: str* | *None* = *None*, *target\_dir: str* | *None* = *None*) → *BuildStatus* | *ContainerOp*

Builder docker image for the project, based on the project's build config. Parameters allow to override the build config. If the project has a source configured and `pull_at_runtime` is not configured, this source will be cloned to the image built. The `target_dir` parameter allows specifying the target path where the code will be extracted.

#### Parameters

- **image** -- target image name/path. If not specified the project's existing *default\_image* name will be used. If not set, the *mlconf.default\_project\_image\_name* value will be used
- **set\_as\_default** -- set *image* to be the project's default image (default False)
- **with\_mlrun** -- add the current mlrun package to the container build
- **skip\_deployed** -- *Deprecated* parameter is ignored
- **base\_image** -- base image name/path (commands and source code will be added to it) defaults to *mlrun.mlconf.default\_base\_image*
- **commands** -- list of docker build (RUN) commands e.g. ['pip install pandas']
- **secret\_name** -- k8s secret for accessing the docker registry
- **requirements** -- list of python packages, defaults to None
- **requirements\_file** -- pip requirements file path, defaults to None
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`, does not work yet in KFP
- **overwrite\_build\_params** -- Overwrite existing build configuration (currently applies to requirements and commands) \* False: The new params are merged with the existing \* True: The existing params are replaced by the new ones
- **extra\_args** -- A string containing additional builder arguments in the format of command-line options, e.g. `extra_args="--skip-tls-verify --build-arg A=val"`
- **target\_dir** -- Path on the image where source code would be extracted (by default */home/mlrun\_code*)

property context: **str**

```
create_model_monitoring_function(func: str | None = None, application_class: str |
                                ModelMonitoringApplicationBase | None = None, name: str | None
                                = None, image: str | None = None, handler: str | None = None,
                                with_repo: bool | None = None, tag: str | None = None,
                                requirements: str | List[str] | None = None, requirements_file: str =
                                "", **application_kwargs) → BaseRuntime
```

Create a monitoring function object without setting it to the project

**examples::**

```
project.create_model_monitoring_function(application_class_name="MyApp",
   image="mlrun/mlrun", name="myApp")
```

#### Parameters

- **func** -- Code url, None refers to current Notebook
- **name** -- Name of the function, can be specified with a tag to support versions (e.g. `myfunc:v1`) Default: `job`
- **image** -- Docker image to be used, can also be specified in the function object/yaml
- **handler** -- Default function handler to invoke (can only be set with `.py/.ipynb` files)

- **with\_repo** -- Add (clone) the current repo to the build source
- **tag** -- Function version tag (none for 'latest', can only be set with .py/.ipynb files) if tag is specified and name is empty, the function key (under the project) will be enriched with the tag value. (i.e. 'function-name:tag')
- **requirements** -- A list of python packages
- **requirements\_file** -- Path to a python requirements file
- **application\_class** -- Name or an Instance of a class that implementing the monitoring application.
- **application\_kwargs** -- Additional keyword arguments to be passed to the monitoring application's constructor.

**create\_remote**(url, name='origin', branch=None)

create remote for the project git

**Parameters**

- **url** -- remote git url
- **name** -- name for the remote (default is 'origin')
- **branch** -- Git branch to use as source

**property default\_image:** str

**delete\_datastore\_profile**(profile: str)

**deploy\_function**(function: str | BaseRuntime, models: list | None = None, env: dict | None = None, tag: str | None = None, verbose: bool | None = None, builder\_env: dict | None = None, mock: bool | None = None) → DeployStatus | ContainerOp

deploy real-time (nuclio based) functions

**Parameters**

- **function** -- name of the function (in the project) or function object
- **models** -- list of model items
- **env** -- dict of extra environment variables
- **tag** -- extra version tag
- **verbose** -- add verbose prints/logs
- **builder\_env** -- env vars dict for source archive config/credentials e.g. `builder_env={"GIT_TOKEN": token}`
- **mock** -- deploy mock server vs a real Nuclio function (for local simulations)

**property description:** str

**disable\_model\_monitoring**()

**enable\_model\_monitoring**(default\_controller\_image: str = 'mlrun/mlrun', base\_period: int = 10) → dict

Submit model monitoring application controller job along with deploying the model monitoring writer function. While the main goal of the controller job is to handle the monitoring processing and triggering applications, the goal of the model monitoring writer function is to write all the monitoring application results to the databases. Note that the default scheduling policy of the controller job is to run every 10 min.

**Parameters**

- **default\_controller\_image** -- The default image of the model monitoring controller job. Note that the writer function, which is a real time nuclio functino, will be deployed with the same image. By default, the image is mlrun/mlrun.
- **base\_period** -- The time period in minutes in which the model monitoring controller job runs. By default, the base period is 10 minutes. The schedule for the job will be the following cron expression: `"*/{base_period} * * * *"`.

**Returns**

model monitoring controller job as a dictionary.

**export**(*filepath=None, include\_files: str | None = None*)

save the project object into a yaml file or zip archive (default to project.yaml)

By default the project object is exported to a yaml file, when the filepath suffix is '.zip' the project context dir (code files) are also copied into the zip, the archive path can include DataItem urls (for remote object storage, e.g. `s3://<bucket>/<path>`).

**Parameters**

- **filepath** -- path to store project .yaml or .zip (with the project dir content)
- **include\_files** -- glob filter string for selecting files to include in the zip archive

**get\_artifact**(*key, tag=None, iter=None, tree=None*)

Return an artifact object

**Parameters**

- **key** -- artifact key
- **tag** -- version tag
- **iter** -- iteration number (for hyper-param tasks)
- **tree** -- the producer id (tree)

**Returns**

Artifact object

**get\_artifact\_uri**(*key: str, category: str = 'artifact', tag: str | None = None, iter: int | None = None*) → str

return the project artifact uri (store://..) from the artifact key

example:

```
uri = project.get_artifact_uri("my_model", category="model", tag="prod",
→ iter=0)
```

**Parameters**

- **key** -- artifact key/name
- **category** -- artifact category (artifact, model, feature-vector, ..)
- **tag** -- artifact version tag, default to latest version
- **iter** -- iteration number, default to no iteration

**get\_custom\_packagers**() → List[Tuple[str, bool]]

Get the custom packagers registered in the project.

**Returns**

A list of the custom packagers module paths.

**get\_datastore\_profile**(*profile: str*) → DatastoreProfile

**get\_function**(key, sync=False, enrich=False, ignore\_cache=False, copy\_function=True, tag: str = "") → *BaseRuntime*

get function object by name

**Parameters**

- **key** -- name of key for search
- **sync** -- will reload/reinit the function from the project spec
- **enrich** -- add project info/config/source info to the function object
- **ignore\_cache** -- read the function object from the DB (ignore the local cache)
- **copy\_function** -- return a copy of the function object
- **tag** -- provide if the function key is tagged under the project (function was set with a tag)

**Returns**

function object

**get\_function\_names**() → List[str]

get a list of all the project function names

**get\_function\_objects**() → FunctionsDict

"get a virtual dict with all the project functions ready for use in a pipeline"

**get\_item\_absolute\_path**(url: str, check\_path\_in\_context: bool = False) → Tuple[str, bool]

Get the absolute path of the artifact or function file :param url: remote url, absolute path or relative path  
:param check\_path\_in\_context: if True, will check if the path exists when in the context (temporary parameter to allow for backwards compatibility)

**Returns**

absolute path / url, whether the path is in the project context

**get\_param**(key: str, default=None)

get project param by key

**get\_run\_status**(run, timeout=None, expected\_statuses=None, notifiers: CustomNotificationPusher | None = None)

**get\_secret**(key: str)

get a key based secret e.g. DB password from the context secrets can be specified when invoking a run through files, env, ..

**get\_store\_resource**(uri)

get store resource object by uri

**import\_artifact**(item\_path: str, new\_key=None, artifact\_path=None, tag=None)

Import an artifact object/package from .yaml, .json, or .zip file

**Parameters**

- **item\_path** -- dataitem url or file path to the file/package
- **new\_key** -- overwrite the artifact key/name
- **artifact\_path** -- target artifact path (when not using the default)
- **tag** -- artifact tag to set

**Returns**

artifact object

```
kind = 'project'
```

```
list_artifacts(name=None, tag=None, labels: Dict[str, str] | List[str] | None = None, since=None,
               until=None, iter: int | None = None, best_iteration: bool = False, kind: str | None = None,
               category: str | ArtifactCategories | None = None, tree: str | None = None) → ArtifactList
```

List artifacts filtered by various parameters.

The returned result is an *ArtifactList* (list of dict), use *.to\_objects()* to convert it to a list of *RunObjects*, *.show()* to view graphically in Jupyter, and *.to\_df()* to convert to a *DataFrame*.

Examples:

```
# Get latest version of all artifacts in project
latest_artifacts = project.list_artifacts('', tag='latest')
# check different artifact versions for a specific artifact, return as objects,
→ list
result_versions = project.list_artifacts('results', tag='*').to_objects()
```

### Parameters

- **name** -- Name of artifacts to retrieve. Name with '~' prefix is used as a like query, and is not case-sensitive. This means that querying for ~name may return artifacts named my\_Name\_1 or surname.
- **tag** -- Return artifacts assigned this tag.
- **labels** -- Return artifacts that have these labels. Labels can either be a dictionary {"label": "value"} or a list of "label=value" (match label key and value) or "label" (match just label key) strings.
- **since** -- Not in use in HTTPRunDB.
- **until** -- Not in use in HTTPRunDB.
- **iter** -- Return artifacts from a specific iteration (where iter=0 means the root iteration). If None (default) return artifacts from all iterations.
- **best\_iteration** -- Returns the artifact which belongs to the best iteration of a given run, in the case of artifacts generated from a hyper-param run. If only a single iteration exists, will return the artifact from that iteration. If using best\_iter, the iter parameter must not be used.
- **kind** -- Return artifacts of the requested kind.
- **category** -- Return artifacts of the requested category.
- **tree** -- Return artifacts of the requested tree.

```
list_datastore_profiles() → List[DatastoreProfile]
```

Returns a list of datastore profiles associated with the project. The information excludes private details, showcasing only public data.

```
list_functions(name=None, tag=None, labels=None)
```

Retrieve a list of functions, filtered by specific criteria.

example:

```
functions = project.list_functions(tag="latest")
```

### Parameters

- **name** -- Return only functions with a specific name.

- **tag** -- Return function versions with specific tags.
- **labels** -- Return functions that have specific labels assigned to them.

#### Returns

List of function objects.

```
list_model_monitoring_functions(name: str | None = None, tag: str | None = None, labels: list[str] | None = None) → list | None
```

Retrieve a list of all the model monitoring functions. Example:

```
functions = project.list_model_monitoring_functions()
```

#### Parameters

- **name** -- Return only functions with a specific name.
- **tag** -- Return function versions with specific tags.
- **labels** -- Return functions that have specific labels assigned to them.

#### Returns

List of function objects.

```
list_models(name=None, tag=None, labels: Dict[str, str] | List[str] | None = None, since=None, until=None, iter: int | None = None, best_iteration: bool = False, tree: str | None = None)
```

List models in project, filtered by various parameters.

Examples:

```
# Get latest version of all models in project
latest_models = project.list_models('', tag='latest')
```

#### Parameters

- **name** -- Name of artifacts to retrieve. Name with '~' prefix is used as a like query, and is not case-sensitive. This means that querying for ~name may return artifacts named my\_Name\_1 or surname.
- **tag** -- Return artifacts assigned this tag.
- **labels** -- Return artifacts that have these labels. Labels can either be a dictionary {"label": "value"} or a list of "label=value" (match label key and value) or "label" (match just label key) strings.
- **since** -- Not in use in HTTPRunDB.
- **until** -- Not in use in HTTPRunDB.
- **iter** -- Return artifacts from a specific iteration (where iter=0 means the root iteration). If None (default) return artifacts from all iterations.
- **best\_iteration** -- Returns the artifact which belongs to the best iteration of a given run, in the case of artifacts generated from a hyper-param run. If only a single iteration exists, will return the artifact from that iteration. If using best\_iter, the iter parameter must not be used.
- **tree** -- Return artifacts of the requested tree.

```
list_runs(name: str | None = None, uid: str | List[str] | None = None, labels: str | List[str] | None = None, state: str | None = None, sort: bool = True, last: int = 0, iter: bool = False, start_time_from: datetime | None = None, start_time_to: datetime | None = None, last_update_time_from: datetime | None = None, last_update_time_to: datetime | None = None, **kwargs) → RunList
```

Retrieve a list of runs, filtered by various options.

The returned result is a `` (list of dict), use `.to_objects()` to convert it to a list of `RunObjects`, `.show()` to view graphically in Jupyter, `.to_df()` to convert to a `DataFrame`, and `compare()` to generate comparison table and PCP plot.

Example:

```
# return a list of runs matching the name and label and compare
runs = project.list_runs(name='download', labels='owner=admin')
runs.compare()

# multi-label filter can also be provided
runs = project.list_runs(name='download', labels=["kind=job", "owner=admin"])

# If running in Jupyter, can use the .show() function to display the results
project.list_runs(name='').show()
```

### Parameters

- **name** -- Name of the run to retrieve.
- **uid** -- Unique ID of the run.
- **labels** -- A list of labels to filter by. Label filters work by either filtering a specific value of a label (i.e. `list("key=value")`) or by looking for the existence of a given key (i.e. `"key"`).
- **state** -- List only runs whose state is specified.
- **sort** -- Whether to sort the result according to their start time. Otherwise, results will be returned by their internal order in the DB (order will not be guaranteed).
- **last** -- Deprecated - currently not used (will be removed in 1.8.0).
- **iter** -- If True return runs from all iterations. Otherwise, return only runs whose iter is 0.
- **start\_time\_from** -- Filter by run start time in `[start_time_from, start_time_to]`.
- **start\_time\_to** -- Filter by run start time in `[start_time_from, start_time_to]`.
- **last\_update\_time\_from** -- Filter by run last update time in `(last_update_time_from, last_update_time_to)`.
- **last\_update\_time\_to** -- Filter by run last update time in `(last_update_time_from, last_update_time_to)`.

**log\_artifact**(*item*, *body=None*, *tag=""*, *local\_path=""*, *artifact\_path=None*, *format=None*, *upload=None*, *labels=None*, *target\_path=None*, *\*\*kwargs*)

Log an output artifact and optionally upload it to datastore

If the artifact already exists with the same key and tag, it will be overwritten.

example:

```
project.log_artifact(
    "some-data",
```

(continues on next page)

(continued from previous page)

```
body=b"abc is 123",
local_path="model.txt",
labels={"framework": "xgboost"},
)
```

### Parameters

- **item** -- artifact key or artifact object (can be any type, such as dataset, model, feature store)
- **body** -- will use the body as the artifact content
- **local\_path** -- path to the local file we upload, will also be use as the destination subpath (under "artifact\_path")
- **artifact\_path** -- target artifact path (when not using the default) to define a subpath under the default location use: *artifact\_path=context.artifact\_subpath('data')*
- **format** -- artifact file format: csv, png, ..
- **tag** -- version tag
- **target\_path** -- absolute target path (instead of using artifact\_path + local\_path)
- **upload** -- upload to datastore (default is True)
- **labels** -- a set of key/value labels to tag the artifact with

### Returns

artifact object

**log\_dataset**(key, df, tag="", local\_path=None, artifact\_path=None, upload=None, labels=None, format="", preview=None, stats=None, target\_path="", extra\_data=None, label\_column: str | None = None, \*\*kwargs) → DatasetArtifact

Log a dataset artifact and optionally upload it to datastore.

If the dataset already exists with the same key and tag, it will be overwritten.

example:

```
raw_data = {
    "first_name": ["Jason", "Molly", "Tina", "Jake", "Amy"],
    "last_name": ["Miller", "Jacobson", "Ali", "Milner", "Cooze"],
    "age": [42, 52, 36, 24, 73],
    "testScore": [25, 94, 57, 62, 70],
}
df = pd.DataFrame(raw_data, columns=["first_name", "last_name", "age",
    ↪ "testScore"])
project.log_dataset("mydf", df=df, stats=True)
```

### Parameters

- **key** -- artifact key
- **df** -- dataframe object
- **label\_column** -- name of the label column (the one holding the target (y) values)

- **local\_path** -- path to the local dataframe file that exists locally. The given file extension will be used to save the dataframe to a file. If the file exists, it will be uploaded to the datastore instead of the given df.
- **artifact\_path** -- target artifact path (when not using the default). to define a subpath under the default location use: *artifact\_path=context.artifact\_subpath('data')*
- **tag** -- version tag
- **format** -- optional, format to use (*csv, parquet, pq, tsdb, kv*)
- **target\_path** -- absolute target path (instead of using artifact\_path + local\_path)
- **preview** -- number of lines to store as preview in the artifact metadata
- **stats** -- calculate and store dataset stats in the artifact metadata
- **extra\_data** -- key/value list of extra files/charts to link with this dataset
- **upload** -- upload to datastore (default is True)
- **labels** -- a set of key/value labels to tag the artifact with

### Returns

artifact object

**log\_model**(key, body=None, framework="", tag="", model\_dir=None, model\_file=None, algorithm=None, metrics=None, parameters=None, artifact\_path=None, upload=None, labels=None, inputs: List[Feature] | None = None, outputs: List[Feature] | None = None, feature\_vector: str | None = None, feature\_weights: list | None = None, training\_set=None, label\_column=None, extra\_data=None, \*\*kwargs)

Log a model artifact and optionally upload it to datastore

If the model already exists with the same key and tag, it will be overwritten.

example:

```
project.log_model("model", body=dumps(model),
                  model_file="model.pkl",
                  metrics=context.results,
                  training_set=training_df,
                  label_column='label',
                  feature_vector=feature_vector_uri,
                  labels={"app": "fraud"})
```

### Parameters

- **key** -- artifact key or artifact class ()
- **body** -- will use the body as the artifact content
- **model\_file** -- path to the local model file we upload (see also model\_dir) or to a model file data url (e.g. <http://host/path/model.pkl>)
- **model\_dir** -- path to the local dir holding the model file and extra files
- **artifact\_path** -- target artifact path (when not using the default) to define a subpath under the default location use: *artifact\_path=context.artifact\_subpath('data')*
- **framework** -- name of the ML framework
- **algorithm** -- training algorithm name

- **tag** -- version tag
- **metrics** -- key/value dict of model metrics
- **parameters** -- key/value dict of model parameters
- **inputs** -- ordered list of model input features (name, type, ..)
- **outputs** -- ordered list of model output/result elements (name, type, ..)
- **upload** -- upload to datastore (if not specified, defaults to True (uploads artifact))
- **labels** -- a set of key/value labels to tag the artifact with
- **feature\_vector** -- feature store feature vector uri (store://feature-vectors/<project>/<name>[:tag])
- **feature\_weights** -- list of feature weights, one per input column
- **training\_set** -- training set dataframe, used to infer inputs & outputs
- **label\_column** -- which columns in the training set are the label (target) columns
- **extra\_data** -- key/value list of extra files/charts to link with this dataset value can be absolute path | relative path (to model dir) | bytes | artifact object

**Returns**

artifact object

**property metadata:** *ProjectMetadata*

**property mountdir:** *str*

**property name:** *str*

Project name, this is a property of the project metadata

**property notifiers**

**property params:** *dict*

**pull**(*branch: str | None = None, remote: str | None = None, secrets: SecretsStore | dict | None = None*)

pull/update sources from git or tar into the context dir

**Parameters**

- **branch** -- git branch, if not the current one
- **remote** -- git remote, if other than origin
- **secrets** -- dict or SecretsStore with Git credentials e.g. secrets={"GIT\_TOKEN": token}

**push**(*branch, message=None, update=True, remote: str | None = None, add: list | None = None, author\_name: str | None = None, author\_email: str | None = None, secrets: SecretsStore | dict | None = None*)

update spec and push updates to remote git repo

**Parameters**

- **branch** -- target git branch
- **message** -- git commit message
- **update** -- update files (git add update=True)
- **remote** -- git remote, default to origin
- **add** -- list of files to add

- **author\_name** -- author's git user name to be used on this commit
- **author\_email** -- author's git user email to be used on this commit
- **secrets** -- dict or SecretsStore with Git credentials e.g. `secrets={"GIT_TOKEN": token}`

**register\_artifacts()**

register the artifacts in the MLRun DB (under this project)

**register\_datastore\_profile**(*profile: DatastoreProfile*)**reload**(*sync=False, context=None*) → *MLrunProject*

reload the project and function objects from the project yaml/specs

**Parameters**

- **sync** -- set to True to load functions objects
- **context** -- context directory (where the yaml and code exist)

**Returns**

project object

**remove\_custom\_packager**(*packager: str*)

Remove a custom packager from the custom packagers list.

**Parameters**

**packager** -- The packager module path to remove.

**Raises**

**MLRunInvalidArgumentError** -- In case the packager was not in the list.

**remove\_function**(*name*)

remove the specified function from the project

**Parameters**

**name** -- name of the function (under the project)

**remove\_model\_monitoring\_function**(*name*)

remove the specified model-monitoring-app function from the project and from the db

**Parameters**

**name** -- name of the model-monitoring-app function (under the project)

**run**(*name: str | None = None, workflow\_path: str | None = None, arguments: Dict[str, Any] | None = None, artifact\_path: str | None = None, workflow\_handler: str | Callable | None = None, namespace: str | None = None, sync: bool = False, watch: bool = False, dirty: bool = False, engine: str | None = None, local: bool | None = None, schedule: str | ScheduleCronTrigger | bool | None = None, timeout: int | None = None, source: str | None = None, cleanup\_ttl: int | None = None, notifications: List[Notification] | None = None*) → *\_PipelineRunStatus*

run a workflow using kubeflow pipelines

**Parameters**

- **name** -- name of the workflow
- **workflow\_path** -- url to a workflow file, if not a project workflow
- **arguments** -- kubeflow pipelines arguments (parameters)
- **artifact\_path** -- target path/url for workflow artifacts, the string '{workflow.uid}' will be replaced by workflow id
- **workflow\_handler** -- workflow function handler (for running workflow function directly)

- **namespace** -- kubernetes namespace if other than default
- **sync** -- force functions sync before run
- **watch** -- wait for pipeline completion
- **dirty** -- allow running the workflow when the git repo is dirty
- **engine** -- workflow engine running the workflow. supported values are 'kfp' (default), 'local' or 'remote'. for setting engine for remote running use 'remote:local' or 'remote:kfp'.
- **local** -- run local pipeline with local functions (set local=True in function.run())
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron> for using the pre-defined workflow's schedule, set *schedule=True*
- **timeout** -- timeout in seconds to wait for pipeline completion (watch will be activated)
- **source** -- remote source to use instead of the actual *project.spec.source* (used when engine is remote). for other engines the source is to validate that the code is up-to-date
- **cleanup\_ttl** -- pipeline cleanup ttl in secs (time to wait after workflow completion, at which point the workflow and all its resources are deleted)
- **notifications** -- list of notifications to send for workflow completion

### Returns

run id

```
run_function(function: str | BaseRuntime, handler: str | None = None, name: str = "", params: dict | None = None, hyperparams: dict | None = None, hyper_param_options: HyperParamOptions | None = None, inputs: dict | None = None, outputs: List[str] | None = None, workdir: str = "", labels: dict | None = None, base_task: RunTemplate | None = None, watch: bool = True, local: bool | None = None, verbose: bool | None = None, selector: str | None = None, auto_build: bool | None = None, schedule: str | ScheduleCronTrigger | None = None, artifact_path: str | None = None, notifications: List[Notification] | None = None, returns: List[str | Dict[str, str]] | None = None, builder_env: dict | None = None) → RunObject | ContainerOp
```

Run a local or remote task as part of a local/kubeflow pipeline

example (use with project):

```
# create a project with two functions (local and from hub)
project = mlrun.new_project(project_name, "./proj")
project.set_function("mycode.py", "myfunc", image="mlrun/mlrun")
project.set_function("hub://auto-trainer", "train")

# run functions (refer to them by name)
run1 = project.run_function("myfunc", params={"x": 7})
run2 = project.run_function("train", params={"label_columns": LABELS},
                             inputs={"dataset": run1.outputs["data"]})
```

### Parameters

- **function** -- name of the function (in the project) or function object

- **handler** -- name of the function handler
- **name** -- execution name
- **params** -- input parameters (dict)
- **hyperparams** -- hyper parameters
- **selector** -- selection criteria for hyper params e.g. "max.accuracy"
- **hyper\_param\_options** -- hyper param options (selector, early stop, strategy, ..)  
see: [HyperParamOptions](#)
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from *mlrun.DataItem* to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key> : <type\_hint>".
- **outputs** -- list of outputs which can pass in the workflow
- **workdir** -- default input artifacts path
- **labels** -- labels to tag the job/run with ({key:val, ..})
- **base\_task** -- task object to use as base
- **watch** -- watch/follow run log, True by default
- **local** -- run the function locally vs on the runtime/cluster
- **verbose** -- add verbose prints/logs
- **auto\_build** -- when set to True and the function require build it will be built on the first function run, use only if you dont plan on changing the build config between runs
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron>
- **artifact\_path** -- path to store artifacts, when running in a workflow this will be set automatically
- **notifications** -- list of notifications to push when the run is completed
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in *mlrun.ArtifactType*. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".
- **builder\_env** -- env vars dict for source archive config/credentials e.g.  
builder\_env={"GIT\_TOKEN": token}

#### Returns

MLRun RunObject or KubeFlow containerOp

**save**(*filepath=None, store=True*)

export project to yaml file and save project in database

**Store**

if True, allow updating in case project already exists

**save\_to\_db**(*store=True*)

save project to database

**Store**

if True, allow updating in case project already exists

**save\_workflow**(*name, target, artifact\_path=None, ttl=None*)

create and save a workflow as a yaml or archive file

**Parameters**

- **name** -- workflow name
- **target** -- target file path (can end with .yaml or .zip)
- **artifact\_path** -- target path/url for workflow artifacts, the string '{work-flow.uid}' will be replaced by workflow id
- **ttl** -- pipeline ttl (time to live) in secs (after that the pods will be removed)

**set\_artifact**(*key, artifact: str | dict | Artifact | None = None, target\_path: str | None = None, tag: str | None = None*)

add/set an artifact in the project spec (will be registered on load)

example:

```
# register a simple file artifact
project.set_artifact('data', target_path=data_url)
# register a model artifact
project.set_artifact('model', ModelArtifact(model_file="model.pkl"), target_
    ↪path=model_dir_url)

# register a path to artifact package (will be imported on project load)
# to generate such package use `artifact.export(target_path)`
project.set_artifact('model', 'https://mystuff.com/models/mymodel.zip')
```

**Parameters**

- **key** -- artifact key/name
- **artifact** -- mlrun Artifact object/dict (or its subclasses) or path to artifact file to import (yaml/json/zip), relative paths are relative to the context path
- **target\_path** -- absolute target path url (point to the artifact content location)
- **tag** -- artifact tag

**set\_default\_image**(*default\_image: str*)

Set the default image to be used for running runtimes (functions) in this project. This image will be used if an image was not provided for a runtime. In case the default image is replaced, functions already registered with the project that used the previous default image will have their image replaced on next execution.

**Parameters**

**default\_image** -- Default image to use

**set\_function**(*func: str | BaseRuntime | None = None, name: str = "", kind: str = "", image: str | None = None, handler: str | None = None, with\_repo: bool | None = None, tag: str | None = None, requirements: str | List[str] | None = None, requirements\_file: str = "") → BaseRuntime*

update or add a function object to the project

function can be provided as an object (func) or a .py/.ipynb/.yaml url support url prefixes:

```
object (s3://, v3io://, ..)
MLRun DB e.g. db://project/func:ver
functions hub/market: e.g. hub://auto-trainer:master
```

examples:

```
proj.set_function(func_object)
proj.set_function('./src/mycode.py', 'ingest',
                  image='myrepo/ing:latest', with_repo=True)
proj.set_function('http://.../mybn.ipynb', 'train')
proj.set_function('./func.yaml')
proj.set_function('hub://get_toy_data', 'getdata')

# set function requirements

# by providing a list of packages
proj.set_function('my.py', requirements=["requests", "pandas"])

# by providing a path to a pip requirements file
proj.set_function('my.py', requirements="requirements.txt")
```

### Parameters

- **func** -- Function object or spec/code url, None refers to current Notebook
- **name** -- Name of the function (under the project), can be specified with a tag to support Versions (e.g. myfunc:v1). If the *tag* parameter is provided, the tag in the name must match the tag parameter. Specifying a tag in the name will update the project's tagged function (myfunc:v1)
- **kind** -- Runtime kind e.g. job, nuclio, spark, dask, mpijob Default: job
- **image** -- Docker image to be used, can also be specified in the function object/yaml
- **handler** -- Default function handler to invoke (can only be set with .py/.ipynb files)
- **with\_repo** -- Add (clone) the current repo to the build source
- **tag** -- Function version tag to set (none for current or 'latest') Specifying a tag as a parameter will update the project's tagged function (myfunc:v1) and the untagged function (myfunc)
- **requirements** -- A list of python packages
- **requirements\_file** -- Path to a python requirements file

### Returns

function object

**set\_model\_monitoring\_credentials**(*access\_key: str | None = None, endpoint\_store\_connection: str | None = None, stream\_path: str | None = None*)

Set the credentials that will be used by the project's model monitoring infrastructure functions.

### Parameters

- **access\_key** -- Model Monitoring access key for managing user permissions
- **access\_key** -- Model Monitoring access key for managing user permissions
- **endpoint\_store\_connection** -- Endpoint store connection string
- **stream\_path** -- Path to the model monitoring stream

```
set_model_monitoring_function(func: str | BaseRuntime | None = None, application_class: str |
    ModelMonitoringApplicationBase | None = None, name: str | None =
    None, image: str | None = None, handler=None, with_repo: bool |
    None = None, tag: str | None = None, requirements: str | List[str] |
    None = None, requirements_file: str = "", **application_kwargs) →
    BaseRuntime
```

Update or add a monitoring function to the project.

**examples::**

```
project.set_model_monitoring_function(application_class_name="MyApp",
    image="mlrun/mlrun", name="myApp")
```

#### Parameters

- **func** -- Function object or spec/code url, None refers to current Notebook
- **name** -- Name of the function (under the project), can be specified with a tag to support versions (e.g. myfunc:v1) Default: job
- **image** -- Docker image to be used, can also be specified in the function object/yaml
- **handler** -- Default function handler to invoke (can only be set with .py/.ipynb files)
- **with\_repo** -- Add (clone) the current repo to the build source
- **tag** -- Function version tag (none for 'latest', can only be set with .py/.ipynb files) if tag is specified and name is empty, the function key (under the project) will be enriched with the tag value. (i.e. 'function-name:tag')
- **requirements** -- A list of python packages
- **requirements\_file** -- Path to a python requirements file
- **application\_class** -- Name or an Instance of a class that implementing the monitoring application.
- **application\_kwargs** -- Additional keyword arguments to be passed to the monitoring application's constructor.

```
set_secrets(secrets: dict | None = None, file_path: str | None = None, provider: str | SecretProviderName |
    None = None)
```

set project secrets from dict or secrets env file when using a secrets file it should have lines in the form KEY=VALUE, comment line start with "#" V3IO paths/credentials and MLrun service API address are dropped from the secrets

example secrets file:

```
# this is an env file
AWS_ACCESS_KEY_ID=XXXX
AWS_SECRET_ACCESS_KEY=YYYY
```

usage:

```
# read env vars from dict or file and set as project secrets
project.set_secrets({"SECRET1": "value"})
project.set_secrets(file_path="secrets.env")
```

#### Parameters

- **secrets** -- dict with secrets key/value
- **file\_path** -- path to secrets file
- **provider** -- MLRun secrets provider

**set\_source**(source: str = "", pull\_at\_runtime: bool = False, workdir: str | None = None)

set the project source code path(can be git/tar/zip archive)

#### Parameters

- **source** -- valid absolute path or URL to git, zip, or tar file, (or None for current) e.g. git://github.com/mlrun/something.git http://some/url/file.zip note path source must exist on the image or exist locally when run is local (it is recommended to use 'workdir' when source is a filepath instead)
- **pull\_at\_runtime** -- load the archive into the container at job runtime vs on build/deploy
- **workdir** -- workdir path relative to the context dir or absolute

**set\_workflow**(name, workflow\_path: str, embed=False, engine=None, args\_schema: List[EntrypointParam] | None = None, handler=None, schedule: str | ScheduleCronTrigger | None = None, ttl=None, image: str | None = None, \*\*args)

Add or update a workflow, specify a name and the code path

#### Parameters

- **name** -- Name of the workflow
- **workflow\_path** -- URL (remote) / Path (absolute or relative to the project code path i.e. <project.spec.get\_code\_path()>/<workflow\_path>) for the workflow file.
- **embed** -- Add the workflow code into the project.yaml
- **engine** -- Workflow processing engine ("kfp", "local", "remote" or "remote:local")
- **args\_schema** -- List of arg schema definitions (:py:class`~mlrun.model.EntrypointParam`)
- **handler** -- Workflow function handler
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron> Note that "local" engine does not support this argument
- **ttl** -- Pipeline ttl in secs (after that the pods will be removed)
- **image** -- Image for workflow runner job, only for scheduled and remote workflows
- **args** -- Argument values (key=value, ..)

**setup**(*save: bool = True*) → *MlrunProject*

Run the project setup file if found

When loading a project MLRun will look for a `project_setup.py` file, if it is found it will execute the `setup(project)` handler, which can enrich the project with additional objects, functions, artifacts, etc.

**Parameters**

**save** -- save the project after the setup

**property source:** **str**

**property spec:** *ProjectSpec*

**property status:** *ProjectStatus*

**sync\_functions**(*names: list | None = None, always=True, save=False*)

reload function objects from specs and files

**with\_secrets**(*kind, source, prefix=""*)

register a secrets source (file, env or dict)

read secrets from a source provider to be used in workflows, example:

```
proj.with_secrets('file', 'file.txt')
proj.with_secrets('inline', {'key': 'val'})
proj.with_secrets('env', 'ENV1,ENV2', prefix='PFX_')
```

Vault secret source has several options:

```
proj.with_secrets('vault', {'user': <user name>, 'secrets': ['secret1',
→ 'secret2' ...]})
proj.with_secrets('vault', {'project': <proj.name>, 'secrets': ['secret1',
→ 'secret2' ...]})
proj.with_secrets('vault', ['secret1', 'secret2' ...])
```

The 2nd option uses the current project name as context. Can also use empty secret list:

```
proj.with_secrets('vault', [])
```

This will enable access to all secrets in vault registered to the current project.

**Parameters**

- **kind** -- secret type (file, inline, env, vault)
- **source** -- secret data or link (see example)
- **prefix** -- add a prefix to the keys in this source

**Returns**

project object

**property workflows:** **list**

**class** `mlrun.projects.ProjectMetadata`(*name=None, created=None, labels=None, annotations=None*)

Bases: `ModelObj`

**property name:** **str**

Project name

**static validate\_project\_labels**(labels: dict, raise\_on\_failure: bool = True) → bool

This <https://kubernetes.io/docs/concepts/overview/working-with-objects/labels/#syntax-and-character-set>

**static validate\_project\_name**(name: str, raise\_on\_failure: bool = True) → bool

```
class mlrun.projects.ProjectSpec(description=None, params=None, functions=None, workflows=None,
                                artifacts=None, artifact_path=None, conda=None, source=None,
                                subpath=None, origin_url=None, goals=None,
                                load_source_on_run=None, default_requirements: str | List[str] | None =
                                None, desired_state='online', owner=None, disable_auto_mount=None,
                                workdir=None, default_image=None, build=None, custom_packagers:
                                List[Tuple[str, bool]] | None = None)
```

Bases: ModelObj

**add\_custom\_packager**(packager: str, is\_mandatory: bool)

Add a custom packager from the custom packagers list.

#### Parameters

- **packager** -- The packager module path to add. For example, if a packager *MyPackager* is in the project's source at *my\_module.py*, then the module path is: "my\_module.MyPackager".
- **is\_mandatory** -- Whether this packager must be collected during a run. If False, failing to collect it won't raise an error during the packagers collection phase.

**property artifacts:** list

list of artifacts used in this project

**property build:** ImageBuilder

**property functions:** list

list of function object/specs used in this project

**get\_code\_path**()

Get the path to the code root/workdir

**property mountdir:** str

specify to mount the context dir inside the function container use '.' to use the same path as in the client e.g. Jupyter

**remove\_artifact**(key)

**remove\_custom\_packager**(packager: str)

Remove a custom packager from the custom packagers list.

#### Parameters

- **packager** -- The packager module path to remove.

#### Raises

- **MLRunInvalidArgumentError** -- In case the packager was not in the list.

**remove\_function**(name)

**remove\_workflow**(name)

**set\_artifact**(key, artifact)

**set\_function**(name, function\_object, function\_dict)

**set\_workflow**(*name*, *workflow*)

**property source:** **str**

source url or git repo

**property workflows:** **List[dict]**

list of workflows specs dicts used in this project

**Type**

returns

**class** mlrun.projects.**ProjectStatus**(*state=None*)

Bases: `ModelObj`

**mlrun.projects.build\_function**(*function: str* | `BaseRuntime`, *with\_mlrun: bool* | `None = None`, *skip\_deployed: bool* | `False`, *image=None*, *base\_image=None*, *commands: list* | `None = None`, *secret\_name=None*, *requirements: str* | `List[str]` | `None = None`, *requirements\_file: str* | `None = None`, *mlrun\_version\_specifier=None*, *builder\_env: dict* | `None = None`, *project\_object=None*, *overwrite\_build\_params: bool* | `False`, *extra\_args: str* | `None = None`, *force\_build: bool* | `False`) → `BuildStatus` | `ContainerOp`

deploy ML function, build container with its dependencies

#### Parameters

- **function** -- Name of the function (in the project) or function object
- **with\_mlrun** -- Add the current mlrun package to the container build
- **skip\_deployed** -- Skip the build if we already have an image for the function
- **image** -- Target image name/path
- **base\_image** -- Base image name/path (commands and source code will be added to it)
- **commands** -- List of docker build (RUN) commands e.g. ['pip install pandas']
- **secret\_name** -- K8s secret for accessing the docker registry
- **requirements** -- List of python packages, defaults to None
- **requirements\_file** -- pip requirements file path, defaults to None
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`, does not work yet in KFP
- **project\_object** -- Override the project object to use, will default to the project set in the runtime context.
- **overwrite\_build\_params** -- Overwrite existing build configuration (currently applies to requirements and commands) \* `False`: The new params are merged with the existing \* `True`: The existing params are replaced by the new ones
- **extra\_args** -- A string containing additional builder arguments in the format of command-line options, e.g. `extra_args="--skip-tls-verify --build-arg A=val"`
- **force\_build** -- Force building the image, even when no changes were made

**mlrun.projects.deploy\_function**(*function: str* | `BaseRuntime`, *models: list* | `None = None`, *env: dict* | `None = None`, *tag: str* | `None = None`, *verbose: bool* | `None = None`, *builder\_env: dict* | `None = None`, *project\_object=None*, *mock: bool* | `None = None`) → `DeployStatus` | `ContainerOp`

deploy real-time (nuclio based) functions

#### Parameters

- **function** -- name of the function (in the project) or function object
- **models** -- list of model items
- **env** -- dict of extra environment variables
- **tag** -- extra version tag
- **verbose** -- add verbose prints/logs
- **builder\_env** -- env vars dict for source archive config/credentials e.g.  
builder\_env={"GIT\_TOKEN": token}
- **mock** -- deploy mock server vs a real Nuclio function (for local simulations)
- **project\_object** -- override the project object to use, will default to the project set in the runtime context.

```
mlrun.projects.get_or_create_project(name: str, context: str = './', url: str | None = None, secrets: dict |
    None = None, init_git=False, subpath: str | None = None, clone:
    bool = False, user_project: bool = False, from_template: str | None
    = None, save: bool = True, parameters: dict | None = None) →
    MlrunProject
```

Load a project from MLRun DB, or create/import if it does not exist

MLRun looks for a project.yaml file with project definition and objects in the project root path and use it to initialize the project, in addition it runs the project\_setup.py file (if it exists) for further customization.

Usage example:

```
# load project from the DB (if exist) or the source repo
project = get_or_create_project("myproj", "./", "git://github.com/mlrun/demo-xgb-
↪project.git")
project.pull("development") # pull the latest code from git
project.run("main", arguments={'data': data_url}) # run the workflow "main"
```

project\_setup.py example:

```
def setup(project):
    train_function = project.set_function(
        "src/trainer.py",
        name="mpi-training",
        kind="mpijob",
        image="mlrun/mlrun",
    )
    # Set the number of replicas for the training from the project parameter
    train_function.spec.replicas = project.spec.params.get("num_replicas", 1)
    return project
```

#### Parameters

- **name** -- project name
- **context** -- project local directory path (default value = "./")
- **url** -- name (in DB) or git or tar.gz or .zip sources archive path e.g.:  
git://github.com/mlrun/demo-xgb-project.git http://mysite/archived-project.zip

- **secrets** -- key:secret dict or SecretsStore used to download sources
- **init\_git** -- if True, will execute *git init* on the context dir
- **subpath** -- project subpath (within the archive/context)
- **clone** -- if True, always clone (delete any existing content)
- **user\_project** -- add the current username to the project name (for db:// prefixes)
- **from\_template** -- path to project YAML file that will be used as from\_template (for new projects)
- **save** -- whether to save the created project in the DB
- **parameters** -- key/value pairs to add to the project.spec.params

**Returns**

project object

```
mlrun.projects.load_project(context: str = './', url: str | None = None, name: str | None = None, secrets: dict | None = None, init_git: bool = False, subpath: str | None = None, clone: bool = False, user_project: bool = False, save: bool = True, sync_functions: bool = False, parameters: dict | None = None) → MlrunProject
```

Load an MLRun project from git or tar or dir

MLRun looks for a project.yaml file with project definition and objects in the project root path and use it to initialize the project, in addition it runs the project\_setup.py file (if it exists) for further customization.

Usage example:

```
# Load the project and run the 'main' workflow.
# When using git as the url source the context directory must be an empty or
# non-existent folder as the git repo will be cloned there
project = load_project("./demo_proj", "git://github.com/mlrun/project-demo.git")
project.run("main", arguments={'data': data_url})
```

project\_setup.py example:

```
def setup(project):
    train_function = project.set_function(
        "src/trainer.py",
        name="mpi-training",
        kind="mpijob",
        image="mlrun/mlrun",
    )
    # Set the number of replicas for the training from the project parameter
    train_function.spec.replicas = project.spec.params.get("num_replicas", 1)
    return project
```

**Parameters**

- **context** -- project local directory path (default value = "./")
- **url** -- name (in DB) or git or tar.gz or .zip sources archive path e.g.:  
git://github.com/mlrun/demo-xgb-project.git      http://mysite/archived-project.zip  
<project-name> The git project should include the project yaml file. If the project yaml file is in a sub-directory, must specify the sub-directory.
- **name** -- project name
- **secrets** -- key:secret dict or SecretsStore used to download sources

- **init\_git** -- if True, will git init the context dir
- **subpath** -- project subpath (within the archive)
- **clone** -- if True, always clone (delete any existing content)
- **user\_project** -- add the current username to the project name (for db:// prefixes)
- **save** -- whether to save the created project and artifact in the DB
- **sync\_functions** -- sync the project's functions into the project object (will be saved to the DB if save=True)
- **parameters** -- key/value pairs to add to the project.spec.params

#### Returns

project object

`mlrun.projects.new_project(name, context: str = './', init_git: bool = False, user_project: bool = False, remote: str | None = None, from_template: str | None = None, secrets: dict | None = None, description: str | None = None, subpath: str | None = None, save: bool = True, overwrite: bool = False, parameters: dict | None = None) → MLrunProject`

Create a new MLRun project, optionally load it from a yaml/zip/git template

A new project is created and returned, you can customize the project by placing a project\_setup.py file in the project root dir, it will be executed upon project creation or loading.

example:

```
# create a project with local and hub functions, a workflow, and an artifact
project = mlrun.new_project("myproj", "./", init_git=True, description="my new
↪project")
project.set_function('prep_data.py', 'prep-data', image='mlrun/mlrun', handler=
↪'prep_data')
project.set_function('hub://auto-trainer', 'train')
project.set_artifact('data', Artifact(target_path=data_url))
project.set_workflow('main', "./myflow.py")
project.save()

# run the "main" workflow (watch=True to wait for run completion)
project.run("main", watch=True)
```

example (load from template):

```
# create a new project from a zip template (can also use yaml/git templates)
# initialize a local git, and register the git remote path
project = mlrun.new_project("myproj", "./", init_git=True,
                           remote="git://github.com/mlrun/project-demo.git",
                           from_template="http://mysite/proj.zip")
project.run("main", watch=True)
```

example using project\_setup.py to init the project objects:

```
def setup(project):
    project.set_function('prep_data.py', 'prep-data', image='mlrun/mlrun', handler=
↪'prep_data')
    project.set_function('hub://auto-trainer', 'train')
    project.set_artifact('data', Artifact(target_path=data_url))
```

(continues on next page)

(continued from previous page)

```
project.set_workflow('main', "./myflow.py")
return project
```

**Parameters**

- **name** -- project name
- **context** -- project local directory path (default value = ".")
- **init\_git** -- if True, will git init the context dir
- **user\_project** -- add the current username to the provided project name (making it unique per user)
- **remote** -- remote Git url
- **from\_template** -- path to project YAML/zip file that will be used as a template
- **secrets** -- key:secret dict or SecretsStore used to download sources
- **description** -- text describing the project
- **subpath** -- project subpath (relative to the context dir)
- **save** -- whether to save the created project in the DB
- **overwrite** -- overwrite project using 'cascade' deletion strategy (deletes project resources) if project with name exists
- **parameters** -- key/value pairs to add to the project.spec.params

**Returns**

project object

```
mlrun.projects.run_function(function: str | BaseRuntime, handler: str | None = None, name: str = "", params: dict | None = None, hyperparams: dict | None = None, hyper_param_options: HyperParamOptions | None = None, inputs: dict | None = None, outputs: List[str] | None = None, workdir: str = "", labels: dict | None = None, base_task: RunTemplate | None = None, watch: bool = True, local: bool | None = None, verbose: bool | None = None, selector: str | None = None, project_object=None, auto_build: bool | None = None, schedule: str | ScheduleCronTrigger | None = None, artifact_path: str | None = None, notifications: List[Notification] | None = None, returns: List[str | Dict[str, str]] | None = None, builder_env: list | None = None) → RunObject | ContainerOp
```

Run a local or remote task as part of a local/kubeflow pipeline

run\_function() allow you to execute a function locally, on a remote cluster, or as part of an automated workflow function can be specified as an object or by name (str), when the function is specified by name it is looked up in the current project eliminating the need to redefine/edit functions.

when functions run as part of a workflow/pipeline (project.run()) some attributes can be set at the run level, e.g. local=True will run all the functions locally, setting artifact\_path will direct all outputs to the same path. project runs provide additional notifications/reporting and exception handling. inside a Kubeflow pipeline (KFP) run\_function() generates KFP "ContainerOps" which are used to form a DAG some behavior may differ between regular runs and deferred KFP runs.

example (use with function object):

```
LABELS = "is_error"
MODEL_CLASS = "sklearn.ensemble.RandomForestClassifier"
DATA_PATH = "s3://bigdata/data.parquet"
```

(continues on next page)

(continued from previous page)

```
function = mlrun.import_function("hub://auto-trainer")
run1 = run_function(function, params={"label_columns": LABELS, "model_class": MODEL_
↳CLASS},
                    inputs={"dataset": DATA_PATH})
```

example (use with project):

```
# create a project with two functions (local and from hub)
project = mlrun.new_project(project_name, "./proj")
project.set_function("mycode.py", "myfunc", image="mlrun/mlrun")
project.set_function("hub://auto-trainer", "train")

# run functions (refer to them by name)
run1 = run_function("myfunc", params={"x": 7})
run2 = run_function("train", params={"label_columns": LABELS, "model_class": MODEL_
↳CLASS},
                    inputs={"dataset": run1.outputs["data"]})
```

example (use in pipeline):

```
@dsl.pipeline(name="test pipeline", description="test")
def my_pipe(url=""):
    run1 = run_function("loaddata", params={"url": url}, outputs=["data"])
    run2 = run_function("train", params={"label_columns": LABELS, "model_class":
↳MODEL_CLASS},
                        inputs={"dataset": run1.outputs["data"]})

project.run(workflow_handler=my_pipe, arguments={"param1": 7})
```

### Parameters

- **function** -- name of the function (in the project) or function object
- **handler** -- name of the function handler
- **name** -- execution name
- **params** -- input parameters (dict)
- **hyperparams** -- hyper parameters
- **selector** -- selection criteria for hyper params e.g. "max.accuracy"
- **hyper\_param\_options** -- hyper param options (selector, early stop, strategy, ..) see: [HyperParamOptions](#)
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from *mlrun.DataItem* to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key> : <type\_hint>".
- **outputs** -- list of outputs which can pass in the workflow
- **workdir** -- default input artifacts path
- **labels** -- labels to tag the job/run with ({key:val, ..})
- **base\_task** -- task object to use as base
- **watch** -- watch/follow run log, True by default

- **local** -- run the function locally vs on the runtime/cluster
- **verbose** -- add verbose prints/logs
- **project\_object** -- override the project object to use, will default to the project set in the runtime context.
- **auto\_build** -- when set to True and the function require build it will be built on the first function run, use only if you do not plan on changing the build config between runs
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron>
- **artifact\_path** -- path to store artifacts, when running in a workflow this will be set automatically
- **notifications** -- list of notifications to push when the run is completed
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in *mlrun.ArtifactType*. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".
- **builder\_env** -- env vars dict for source archive config/credentials e.g. `builder_env={"GIT_TOKEN": token}`

**Returns**

MLRun RunObject or KubeFlow containerOp

## 18.13 mlrun.run

```
class mlrun.run.RunStatuses
```

```
    Bases: object
```

```
    static all()
```

```
    error = 'Error'
```

```
    failed = 'Failed'
```

```
    running = 'Running'
```

```
    skipped = 'Skipped'
```

```
    static stable_statuses()
```

```
    succeeded = 'Succeeded'
```

```
    static transient_statuses()
```

```
mlrun.run.code_to_function(name: str = "", project: str = "", tag: str = "", filename: str = "", handler: str = "",
                           kind: str = "", image: str | None = None, code_output: str = "", embed_code: bool
                           = True, description: str = "", requirements: str | List[str] | None = None,
                           categories: List[str] | None = None, labels: Dict[str, str] | None = None,
                           with_doc: bool = True, ignored_tags=None, requirements_file: str = "") →
                           MpiRuntimeV1Alpha1 | MpiRuntimeV1 | RemoteRuntime | ServingRuntime |
                           DaskCluster | KubejobRuntime | LocalRuntime | Spark3Runtime |
                           RemoteSparkRuntime | DatabricksRuntime
```

Convenience function to insert code and configure an mlrun runtime.

Easiest way to construct a runtime type object. Provides the most often used configuration options for all runtimes as parameters.

Instantiated runtimes are considered 'functions' in mlrun, but they are anything from nuclio functions to generic kubernetes pods to spark jobs. Functions are meant to be focused, and as such limited in scope and size. Typically, a function can be expressed in a single python module with added support from custom docker images and commands for the environment. The returned runtime object can be further configured if more customization is required.

One of the most important parameters is 'kind'. This is what is used to specify the chosen runtimes. The options are:

- **local**: execute a local python or shell script
- **job**: insert the code into a Kubernetes pod and execute it
- **nuclio**: insert the code into a real-time serverless nuclio function
- **serving**: insert code into orchestrated nuclio function(s) forming a DAG
- **dask**: run the specified python code / script as Dask Distributed job
- **mpijob**: run distributed Horovod jobs over the MPI job operator
- **spark**: run distributed Spark job using Spark Kubernetes Operator
- **remote-spark**: run distributed Spark job on remote Spark service

Learn more about {Kinds of function (runtimes)}([../concepts/functions-overview.html](https://mlrun.org/docs/latest/concepts/functions-overview.html)).

#### Parameters

- **name** -- function name, typically best to use hyphen-case
- **project** -- project used to namespace the function, defaults to 'default'
- **tag** -- function tag to track multiple versions of the same function, defaults to 'latest'
- **filename** -- path to .py/.ipynb file, defaults to current jupyter notebook
- **handler** -- The default function handler to call for the job or nuclio function, in batch functions (job, mpijob, ..) the handler can also be specified in the `.run()` command, when not specified the entire file will be executed (as main). for nuclio functions the handler is in the form of module:function, defaults to 'main:handler'
- **kind** -- function runtime type string - nuclio, job, etc. (see docstring for all options)
- **image** -- base docker image to use for building the function container, defaults to None
- **code\_output** -- specify '.' to generate python module from the current jupyter notebook
- **embed\_code** -- indicates whether or not to inject the code directly into the function runtime spec, defaults to True
- **description** -- short function description, defaults to ""
- **requirements** -- list of python packages or pip requirements file path, defaults to None
- **requirements** -- a list of python packages
- **requirements\_file** -- path to a python requirements file

- **categories** -- list of categories for mlrun Function Hub, defaults to None
- **labels** -- immutable name/value pairs to tag the function with useful metadata, defaults to None
- **with\_doc** -- indicates whether to document the function parameters, defaults to True
- **ignored\_tags** -- notebook cells to ignore when converting notebooks to py code (separated by ';')

**Returns**

pre-configured function object from a mlrun runtime class

example:

```
import mlrun

# create job function object from notebook code and add doc/metadata
fn = mlrun.code_to_function("file_utils", kind="job",
                           handler="open_archive", image="mlrun/mlrun",
                           description = "this function opens a zip archive into a
↳local/mounted folder",
                           categories = ["fileutils"],
                           labels = {"author": "me"})
```

example:

```
import mlrun
from pathlib import Path

# create file
Path("mover.py").touch()

# create nuclio function object from python module call mover.py
fn = mlrun.code_to_function("nuclio-mover", kind="nuclio",
                           filename="mover.py", image="python:3.7",
                           description = "this function moves files from one
↳system to another",
                           requirements = ["pandas"],
                           labels = {"author": "me"})
```

`mlrun.run.download_object(url, target, secrets=None)`

download mlrun dataitem (from path/url to target path)

`mlrun.run.function_to_module(code="", workdir=None, secrets=None, silent=False)`

Load code, notebook or mlrun function as .py module this function can import a local/remote py file or notebook or load an mlrun function object as a module, you can use this from your code, notebook, or another function (for common libs)

Note: the function may have package requirements which must be satisfied

example:

```
mod = mlrun.function_to_module('./examples/training.py')
task = mlrun.new_task(inputs={'infile.txt': '../examples/infile.txt'})
context = mlrun.get_or_create_ctx('myfunc', spec=task)
mod.my_job(context, p1=1, p2='x')
print(context.to_yaml())
```

(continues on next page)

(continued from previous page)

```

fn = mlrun.import_function('hub://open-archive')
mod = mlrun.function_to_module(fn)
data = mlrun.run.get_dataitem("https://fpsignals-public.s3.amazonaws.com/catsndogs.
→tar.gz")
context = mlrun.get_or_create_ctx('myfunc')
mod.open_archive(context, archive_url=data)
print(context.to_yaml())

```

**Parameters**

- **code** -- path/url to function (.py or .ipynb or .yaml) OR function object
- **workdir** -- code workdir
- **secrets** -- secrets needed to access the URL (e.g.s3, v3io, ..)
- **silent** -- do not raise on errors

**Returns**

python module

`mlrun.run.get_dataitem(url, secrets=None, db=None) → DataItem`

get mlrun dataitem object (from path/url)

`mlrun.run.get_object(url, secrets=None, size=None, offset=0, db=None)`

get mlrun dataitem body (from path/url)

`mlrun.run.get_or_create_ctx(name: str, event=None, spec=None, with_env: bool = True, rundb: str = "", project: str = "", upload_artifacts=False, labels: dict | None = None)`

called from within the user program to obtain a run context

the run context is an interface for receiving parameters, data and logging run results, the run context is read from the event, spec, or environment (in that order), user can also work without a context (local defaults mode)

all results are automatically stored in the "rundb" or artifact store, the path to the rundb can be specified in the call or obtained from env.

**Parameters**

- **name** -- run name (will be overridden by context)
- **event** -- function (nuclio Event object)
- **spec** -- dictionary holding run spec
- **with\_env** -- look for context in environment vars, default True
- **rundb** -- path/url to the metadata and artifact database
- **project** -- project to initiate the context in (by default mlrun.mlctx.default\_project)
- **upload\_artifacts** -- when using local context (not as part of a job/run), upload artifacts to the system default artifact path location
- **labels** -- dict of the context labels

**Returns**

execution context

Examples:

```

# load MLRUN runtime context (will be set by the runtime framework e.g. KubeFlow)
context = get_or_create_ctx('train')

# get parameters from the runtime context (or use defaults)
p1 = context.get_param('p1', 1)
p2 = context.get_param('p2', 'a-string')

# access input metadata, values, files, and secrets (passwords)
print(f'Run: {context.name} (uid={context.uid})')
print(f'Params: p1={p1}, p2={p2}')
print(f'accesskey = {context.get_secret("ACCESS_KEY")}')
input_str = context.get_input('infile.txt').get()
print(f'file: {input_str}')

# RUN some useful code e.g. ML training, data prep, etc.

# log scalar result values (job result metrics)
context.log_result('accuracy', p1 * 2)
context.log_result('loss', p1 * 3)
context.set_label('framework', 'sklearn')

# log various types of artifacts (file, web page, table), will be versioned and
↪ visible in the UI
context.log_artifact('model.txt', body=b'abc is 123', labels={'framework': 'xgboost'
↪ })
context.log_artifact('results.html', body=b'<b> Some HTML <b>', viewer='web-app')

```

`mlrun.run.get_pipeline(run_id, namespace=None, format_: str | PipelinesFormat =  
PipelinesFormat.summary, project: str | None = None, remote: bool = True)`

Get Pipeline status

#### Parameters

- **run\_id** -- id of pipelines run
- **namespace** -- k8s namespace if not default
- **format** -- Format of the results. Possible values are: - **summary** (default value) - Return summary of the object data. - **full** - Return full pipeline object.
- **project** -- the project of the pipeline run
- **remote** -- read kfp data from mlrun service (default=True)

#### Returns

kfp run dict

`mlrun.run.import_function(url="", secrets=None, db="", project=None, new_name=None)`

Create function object from DB or local/remote YAML file

Functions can be imported from function repositories (mlrun Function Hub (formerly Marketplace) or local db), or be read from a remote URL (http(s), s3, git, v3io, ..) containing the function YAML

special URLs:

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| function hub:   | hub://[ <b>{source}</b> ]/ <b>{name}</b> [: <b>{tag}</b> ]    |
| local mlrun db: | db://{ <b>project-name</b> }/ <b>{name}</b> [: <b>{tag}</b> ] |

examples:

```
function = mlrun.import_function("hub://auto-trainer")
function = mlrun.import_function("./func.yaml")
function = mlrun.import_function("https://raw.githubusercontent.com/org/repo/func.
↪yaml")
```

### Parameters

- **url** -- path/url to Function Hub, db or function YAML file
- **secrets** -- optional, credentials dict for DB or URL (s3, v3io, ...)
- **db** -- optional, mlrun api/db path
- **project** -- optional, target project for the function
- **new\_name** -- optional, override the imported function name

### Returns

function object

```
mlrun.run.import_function_to_dict(url, secrets=None)
```

Load function spec from local/remote YAML file

```
mlrun.run.list_pipelines(full=False, page_token="", page_size=None, sort_by="", filter_="",
                        namespace=None, project='*', format_: PipelinesFormat =
                        PipelinesFormat.metadata_only) → Tuple[int, int | None, List[dict]]
```

List pipelines

### Parameters

- **full** -- Deprecated, use *format\_* instead. if True will set *format\_* to full, otherwise *format\_* will be used
- **page\_token** -- A page token to request the next page of results. The token is acquired from the nextPageToken field of the response from the previous call or can be omitted when fetching the first page.
- **page\_size** -- The number of pipelines to be listed per page. If there are more pipelines than this number, the response message will contain a nextPageToken field you can use to fetch the next page.
- **sort\_by** -- Can be format of "field\_name", "field\_name asc" or "field\_name desc" (Example, "name asc" or "id desc"). Ascending by default.
- **filter** -- A url-encoded, JSON-serialized Filter protocol buffer, see: [filter.proto](https://github.com/kubeflow/pipelines/blob/master/backend/api/filter.proto).
- **namespace** -- Kubernetes namespace if other than default
- **project** -- Can be used to retrieve only specific project pipelines. "\*" for all projects. Note that filtering by project can't be used together with pagination, sorting, or custom filter.
- **format** -- Control what will be returned (full/metadata\_only/name\_only)

```
mlrun.run.load_func_code(command="", workdir=None, secrets=None, name='name')
```

```
mlrun.run.new_function(name: str = "", project: str = "", tag: str = "", kind: str = "", command: str = "", image: str
= "", args: list | None = None, runtime=None, mode=None, handler: str | None =
None, source: str | None = None, requirements: str | List[str] | None = None,
kfp=None, requirements_file: str = "")
```

Create a new ML function from base properties

Example:

```
# define a container based function (the `training.py` must exist in the container_
↪workdir)
f = new_function(command='training.py -x {x}', image='myrepo/image:latest', kind=
↪'job')
f.run(params={"x": 5})

# define a container based function which reads its source from a git archive
f = new_function(command='training.py -x {x}', image='myrepo/image:latest', kind=
↪'job',
                source='git://github.com/mlrun/something.git')
f.run(params={"x": 5})

# define a local handler function (execute a local function handler)
f = new_function().run(task, handler=myfunction)
```

### Parameters

- **name** -- function name
- **project** -- function project (none for 'default')
- **tag** -- function version tag (none for 'latest')
- **kind** -- runtime type (local, job, nuclio, spark, mpijob, dask, ..)
- **command** -- command/url + args (e.g.: training.py --verbose)
- **image** -- container image (start with '.' for default registry)
- **args** -- command line arguments (override the ones in command)
- **runtime** -- runtime (job, nuclio, spark, dask ..) object/dict store runtime specific details and preferences
- **mode** -- runtime mode: \* pass - will run the command as is in the container (not wrapped by mlrun), the command can use params substitutions like {xparam} and will be replaced with the value of the xparam param if a command is not specified, then image endpoint shall be used.
- **handler** -- The default function handler to call for the job or nuclio function, in batch functions (job, mpijob, ..) the handler can also be specified in the `.run()` command, when not specified the entire file will be executed (as main). for nuclio functions the handler is in the form of module:function, defaults to "main:handler"
- **source** -- valid absolute path or URL to git, zip, or tar file, e.g. `git://github.com/mlrun/something.git`, `http://some/url/file.zip` note path source must exist on the image or exist locally when run is local (it is recommended to use 'function.spec.workdir' when source is a filepath instead)
- **requirements** -- a list of python packages, defaults to None
- **requirements\_file** -- path to a python requirements file
- **kfp** -- reserved, flag indicating running within kubeflow pipeline

### Returns

function object

```
mlrun.run.wait_for_pipeline_completion(run_id, timeout=3600, expected_statuses: List[str] | None =
                                     None, namespace=None, remote=True, project: str | None =
                                     None)
```

Wait for Pipeline status, timeout in sec

#### Parameters

- **run\_id** -- id of pipelines run
- **timeout** -- wait timeout in sec
- **expected\_statuses** -- list of expected statuses, one of [ Succeeded | Failed | Skipped | Error ], by default [ Succeeded ]
- **namespace** -- k8s namespace if not default
- **remote** -- read kfp data from mlrun service (default=True)
- **project** -- the project of the pipeline

#### Returns

kfp run dict

```
mlrun.run.wait_for_runs_completion(runs: list | ValuesView, sleep=3, timeout=0, silent=False)
```

wait for multiple runs to complete

Note: need to use `watch=False` in `.run()` so the run will not wait for completion

example:

```
# run two training functions in parallel and wait for the results
inputs = {'dataset': cleaned_data}
run1 = train.run(name='train_lr', inputs=inputs, watch=False,
                 params={'model_pkg_class': 'sklearn.linear_model.LogisticRegression',
                        'label_column': 'label'})
run2 = train.run(name='train_lr', inputs=inputs, watch=False,
                 params={'model_pkg_class': 'sklearn.ensemble.RandomForestClassifier',
                        'label_column': 'label'})
completed = wait_for_runs_completion([run1, run2])
```

#### Parameters

- **runs** -- list of run objects (the returned values of function.run())
- **sleep** -- time to sleep between checks (in seconds)
- **timeout** -- maximum time to wait in seconds (0 for unlimited)
- **silent** -- set to True for silent exit on timeout

#### Returns

list of completed runs

## 18.14 mlrun.runtimes

```
class mlrun.runtimes.BaseRuntime(metadata=None, spec=None)
```

Bases: `ModelObj`

```
as_step(runspec: RunObject | None = None, handler=None, name: str = "", project: str = "", params: dict | None = None, hyperparams=None, selector="", hyper_param_options: HyperParamOptions | None = None, inputs: dict | None = None, outputs: dict | None = None, workdir: str = "", artifact_path: str = "", image: str = "", labels: dict | None = None, use_db=True, verbose=None, scrape_metrics=False, returns: List[str | Dict[str, str]] | None = None, auto_build: bool = False)
```

Run a local or remote task.

### Parameters

- **runspec** -- run template object or dict (see `RunTemplate`)
- **handler** -- name of the function handler
- **name** -- execution name
- **project** -- project name
- **params** -- input parameters (dict)
- **hyperparams** -- hyper parameters
- **selector** -- selection criteria for hyper params
- **hyper\_param\_options** -- hyper param options (selector, early stop, strategy, ..) see: [HyperParamOptions](#)
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from `mlrun.DataItem` to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key> : <type\_hint>".
- **outputs** -- list of outputs which can pass in the workflow
- **artifact\_path** -- default artifact output path (replace `out_path`)
- **workdir** -- default input artifacts path
- **image** -- container image to use
- **labels** -- labels to tag the job/run with ({key:val, ..})
- **use\_db** -- save function spec in the db (vs the workflow file)
- **verbose** -- add verbose prints/logs
- **scrape\_metrics** -- whether to add the `mlrun/scrape-metrics` label to this run's resources
- **returns** -- List of configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A configuration may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in `mlrun.ArtifactType`. If no artifact type is specified, the object's default artifact type will be used.

- A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".

- **auto\_build** -- when set to True and the function require build it will be built on the first function run, use only if you dont plan on changing the build config between runs

**Returns**

KubeFlow containerOp

**clean\_build\_params()****doc()****export**(*target=""*, *format='yaml'*, *secrets=None*, *strip=True*)

save function spec to a local/remote path (default to ./function.yaml)

**Parameters**

- **target** -- target path/url
- **format** -- *.yaml* (default) or *.json*
- **secrets** -- optional secrets dict/object for target path (e.g. s3)
- **strip** -- strip status data

**Returns**

self

**full\_image\_path**(*image=None*, *client\_version: str | None = None*, *client\_python\_version: str | None = None*)**generate\_runtime\_k8s\_env**(*runobj: RunObject | None = None*) → List[Dict]Prepares a runtime environment as it's expected by `kubernetes.models.V1Container`**Parameters****runobj** -- Run context object (RunObject) with run metadata and status**Returns**

List of dicts with the structure {"name": "var\_name", "value": "var\_value"}

**is\_deployed()****is\_model\_monitoring\_function()****kind** = 'base'**property metadata:** BaseMetadata**prepare\_image\_for\_deploy()**

if a function has a 'spec.image' it is considered to be deployed, but because we allow the user to set 'spec.image' for usability purposes, we need to check whether this is a built image or it requires to be built on top.

**requires\_build()** → bool

```
run(runspec: RunTemplate | RunObject | dict | None = None, handler: str | Callable | None = None, name: str | None = "", project: str | None = "", params: dict | None = None, inputs: Dict[str, str] | None = None, out_path: str | None = "", workdir: str | None = "", artifact_path: str | None = "", watch: bool | None = True, schedule: str | ScheduleCronTrigger | None = None, hyperparams: Dict[str, list] | None = None, hyper_param_options: HyperParamOptions | None = None, verbose: bool | None = None, scrape_metrics: bool | None = None, local: bool | None = False, local_code_path: str | None = None, auto_build: bool | None = None, param_file_secrets: Dict[str, str] | None = None, notifications: List[Notification] | None = None, returns: List[str | Dict[str, str]] | None = None, state_thresholds: Dict[str, int] | None = None, **launcher_kwargs) → RunObject
```

Run a local or remote task.

#### Parameters

- **runspec** -- The run spec to generate the [RunObject](#) from. Can be [RunTemplate](#) | [RunObject](#) | dict.
- **handler** -- Pointer or name of a function handler.
- **name** -- Execution name.
- **project** -- Project name.
- **params** -- Input parameters (dict).
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from *mlrun.DataItem* to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key>: <type\_hint>".
- **out\_path** -- Default artifact output path.
- **artifact\_path** -- Default artifact output path (will replace out\_path).
- **workdir** -- Default input artifacts path.
- **watch** -- Watch/follow run log.
- **schedule** -- [ScheduleCronTrigger](#) class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron>
- **hyperparams** -- Dict of param name and list of values to be enumerated. The default strategy is grid search and uses e.g. {"p1": [1,2,3]}. (Can be specified as a JSON file) For list, lists must be of equal length, e.g. {"p1": [1], "p2": [2]}. (Can be specified as JSON file or as a CSV file listing the parameter values per iteration.) You can specify strategy of type grid, list, random, and other options in the hyper\_param\_options parameter.
- **hyper\_param\_options** -- Dict or [HyperParamOptions](#) struct of hyperparameter options.
- **verbose** -- Add verbose prints/logs.
- **scrape\_metrics** -- Whether to add the *mlrun/scrape-metrics* label to this run's resources.
- **local** -- Run the function locally vs on the runtime/cluster.
- **local\_code\_path** -- Path of the code for local runs & debug.
- **auto\_build** -- When set to True and the function require build it will be built on the first function run, use only if you don't plan on changing the build config between runs.

- **param\_file\_secrets** -- Dictionary of secrets to be used only for accessing the hyper-param parameter file. These secrets are only used locally and will not be stored anywhere
- **notifications** -- List of notifications to push when the run is completed
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in *mlrun.ArtifactType*. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".
- **state\_thresholds** -- Dictionary of states to time thresholds. The state will be matched against the k8s resource's status. The threshold should be a time string that conforms to *timelength* python package standards and is at least 1 minute (-1 for infinite). If the phase is active for longer than the threshold, the run will be aborted. See *mlconf.function.spec.state\_thresholds* for the state options and default values.

#### Returns

Run context object (*RunObject*) with run metadata, results and status

**save**(tag="", versioned=False, refresh=False) → str

**set\_categories**(categories: List[str])

**set\_db\_connection**(conn)

**set\_label**(key, value)

**property spec:** *FunctionSpec*

**property status:** *FunctionStatus*

**store\_run**(runobj: *RunObject*)

**to\_dict**(fields=None, exclude=None, strip=False)

convert the object to a python dictionary

#### Parameters

- **fields** -- list of fields to include in the dict
- **exclude** -- list of fields to exclude from the dict

**try\_auto\_mount\_based\_on\_config**()

**property uri**

**validate\_and\_enrich\_service\_account**(allowed\_service\_account, default\_service\_account)

**with\_code**(*from\_file=""*, *body=None*, *with\_doc=True*)

Update the function code This function eliminates the need to build container images every time we edit the code

**Parameters**

- **from\_file** -- blank for current notebook, or path to .py/.ipynb file
- **body** -- will use the body as the function code
- **with\_doc** -- update the document of the function parameters

**Returns**

function object

**with\_commands**(*commands: List[str]*, *overwrite: bool = False*, *prepare\_image\_for\_deploy: bool = True*)

add commands to build spec.

**Parameters**

- **commands** -- list of commands to run during build
- **overwrite** -- overwrite existing commands
- **prepare\_image\_for\_deploy** -- prepare the image/base\_image spec for deployment

**Returns**

function object

**with\_requirements**(*requirements: List[str] | None = None*, *overwrite: bool = False*,  
*prepare\_image\_for\_deploy: bool = True*, *requirements\_file: str = ""*)

add package requirements from file or list to build spec.

**Parameters**

- **requirements** -- a list of python packages
- **requirements\_file** -- a local python requirements file path
- **overwrite** -- overwrite existing requirements
- **prepare\_image\_for\_deploy** -- prepare the image/base\_image spec for deployment

**Returns**

function object

**class** mlrun.runtimes.**DaskCluster**(*spec=None*, *metadata=None*)

Bases: [KubejobRuntime](#)

**property** client

**close**(*running=True*)

**cluster**()

**deploy**(*watch=True*, *with\_mlrun=None*, *skip\_deployed=False*, *is\_kfp=False*, *mlrun\_version\_specifier=None*,  
*builder\_env: dict | None = None*, *show\_on\_failure: bool = False*, *force\_build: bool = False*)

deploy function, build container with dependencies

**Parameters**

- **watch** -- wait for the deploy to complete (and print build logs)
- **with\_mlrun** -- add the current mlrun package to the container build

- **skip\_deployed** -- skip the build if we already have an image for the function
- **is\_kfp** -- deploy as part of a kfp pipeline
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`
- **show\_on\_failure** -- show logs only in case of build failure
- **force\_build** -- force building the image, even when no changes were made

:return True if the function is ready (deployed)

**get\_status()**

**property initialized**

**is\_deployed()**

check if the function is deployed (has a valid container)

**kind = 'dask'**

**run**(*runspec: RunTemplate | RunObject | dict | None = None, handler: str | Callable | None = None, name: str | None = "", project: str | None = "", params: dict | None = None, inputs: Dict[str, str] | None = None, out\_path: str | None = "", workdir: str | None = "", artifact\_path: str | None = "", watch: bool | None = True, schedule: str | ScheduleCronTrigger | None = None, hyperparams: Dict[str, list] | None = None, hyper\_param\_options: HyperParamOptions | None = None, verbose: bool | None = None, scrape\_metrics: bool | None = None, local: bool | None = False, local\_code\_path: str | None = None, auto\_build: bool | None = None, param\_file\_secrets: Dict[str, str] | None = None, notifications: List[Notification] | None = None, returns: List[str | Dict[str, str]] | None = None, state\_thresholds: Dict[str, int] | None = None, \*\*launcher\_kwargs*) → *RunObject*

Run a local or remote task.

#### Parameters

- **runspec** -- The run spec to generate the RunObject from. Can be RunTemplate | RunObject | dict.
- **handler** -- Pointer or name of a function handler.
- **name** -- Execution name.
- **project** -- Project name.
- **params** -- Input parameters (dict).
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from *mlrun.DataItem* to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key>: <type\_hint>".
- **out\_path** -- Default artifact output path.
- **artifact\_path** -- Default artifact output path (will replace out\_path).
- **workdir** -- Default input artifacts path.
- **watch** -- Watch/follow run log.
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor),

see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron>

- **hyperparams** -- Dict of param name and list of values to be enumerated. The default strategy is grid search and uses e.g. {"p1": [1,2,3]}. (Can be specified as a JSON file) For list, lists must be of equal length, e.g. {"p1": [1], "p2": [2]}. (Can be specified as JSON file or as a CSV file listing the parameter values per iteration.) You can specify strategy of type grid, list, random, and other options in the hyper\_param\_options parameter.
- **hyper\_param\_options** -- Dict or *HyperParamOptions* struct of hyperparameter options.
- **verbose** -- Add verbose prints/logs.
- **scrape\_metrics** -- Whether to add the *mlrun/scrape-metrics* label to this run's resources.
- **local** -- Run the function locally vs on the runtime/cluster.
- **local\_code\_path** -- Path of the code for local runs & debug.
- **auto\_build** -- When set to True and the function require build it will be built on the first function run, use only if you don't plan on changing the build config between runs.
- **param\_file\_secrets** -- Dictionary of secrets to be used only for accessing the hyper-param parameter file. These secrets are only used locally and will not be stored anywhere
- **notifications** -- List of notifications to push when the run is completed
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in *mlrun.ArtifactType*. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".
- **state\_thresholds** -- Dictionary of states to time thresholds. The state will be matched against the k8s resource's status. The threshold should be a time string that conforms to *timelength* python package standards and is at least 1 minute (-1 for infinite). If the phase is active for longer than the threshold, the run will be aborted. See *mlconf.function.spec.state\_thresholds* for the state options and default values.

### Returns

Run context object (RunObject) with run metadata, results and status

**set\_state\_thresholds**(*state\_thresholds*: Dict[str, str], *patch*: bool = True)

Set the threshold for a specific state of the runtime. The threshold is the amount of time that the runtime will wait before aborting the run if the job is in the matching state. The threshold time string must conform to *timelength* python package standards and be at least 1 minute (e.g. 1000s, 1 hour 30m, 1h etc. or -1 for infinite). If the threshold is not set for a state, the default threshold will be used.

**Parameters**

- **state\_thresholds** -- A dictionary of state to threshold. The supported states are:
  - `pending_scheduled` - The pod/crd is scheduled on a node but not yet running
  - `pending_not_scheduled` - The pod/crd is not yet scheduled on a node
  - `executing` - The pod/crd started and is running
  - `image_pull_backoff` - The pod/crd is in image pull backoff
 See `mlrun.mlconf.function.spec.state_thresholds` for the default thresholds.
- **patch** -- Whether to merge the given thresholds with the existing thresholds (True, default) or override them (False)

**property spec:** `DaskSpec`

**property status:** `DaskStatus`

**with\_limits**(*mem=None, cpu=None, gpus=None, gpu\_type='nvidia.com/gpu', patch: bool = False*)

Set pod cpu/memory/gpu limits (max values)

**Parameters**

- **mem** -- set limit for memory e.g. '500M', '2G', etc.
- **cpu** -- set limit for cpu e.g. '0.5', '2', etc.
- **gpus** -- set limit for gpu
- **gpu\_type** -- set gpu type e.g. "nvidia.com/gpu"
- **patch** -- by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`

**with\_requests**(*mem=None, cpu=None, patch: bool = False*)

Set requested (desired) pod cpu/memory resources

**Parameters**

- **mem** -- set request for memory e.g. '200M', '1G', etc.
- **cpu** -- set request for cpu e.g. '0.1', '1', etc.
- **patch** -- by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`

**with\_scheduler\_limits**(*mem: str | None = None, cpu: str | None = None, gpus: int | None = None, gpu\_type: str = 'nvidia.com/gpu', patch: bool = False*)

set scheduler pod resources limits by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`.

**with\_scheduler\_requests**(*mem: str | None = None, cpu: str | None = None, patch: bool = False*)

set scheduler pod resources requests by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`.

**with\_worker\_limits**(*mem: str | None = None, cpu: str | None = None, gpus: int | None = None, gpu\_type: str = 'nvidia.com/gpu', patch: bool = False*)

set worker pod resources limits by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`.

**with\_worker\_requests**(*mem: str | None = None, cpu: str | None = None, patch: bool = False*)

set worker pod resources requests by default it overrides the whole requests section, if you wish to patch specific resources use *patch=True*.

**class** mlrun.runtimes.**DatabricksRuntime**(*spec=None, metadata=None*)

Bases: [KubejobRuntime](#)

**get\_internal\_parameters**(*runobj: RunObject*)

Return the internal function parameters + code.

**kind** = 'databricks'

**run**(*runspec: RunTemplate | RunObject | dict | None = None, handler: str | Callable | None = None, name: str | None = "", project: str | None = "", params: dict | None = None, inputs: Dict[str, str] | None = None, out\_path: str | None = "", workdir: str | None = "", artifact\_path: str | None = "", watch: bool | None = True, schedule: str | ScheduleCronTrigger | None = None, hyperparams: Dict[str, list] | None = None, hyper\_param\_options: HyperParamOptions | None = None, verbose: bool | None = None, scrape\_metrics: bool | None = None, local: bool | None = False, local\_code\_path: str | None = None, auto\_build: bool | None = None, param\_file\_secrets: Dict[str, str] | None = None, notifications: List[Notification] | None = None, returns: List[str | Dict[str, str]] | None = None, state\_thresholds: Dict[str, int] | None = None, \*\*launcher\_kwargs*) → [RunObject](#)

Run a local or remote task.

#### Parameters

- **runspec** -- The run spec to generate the RunObject from. Can be RunTemplate | RunObject | dict.
- **handler** -- Pointer or name of a function handler.
- **name** -- Execution name.
- **project** -- Project name.
- **params** -- Input parameters (dict).
- **inputs** -- Input objects to pass to the handler. Type hints can be given so the input will be parsed during runtime from *mlrun.DataItem* to the given type hint. The type hint can be given in the key field of the dictionary after a colon, e.g: "<key>: <type\_hint>".
- **out\_path** -- Default artifact output path.
- **artifact\_path** -- Default artifact output path (will replace out\_path).
- **workdir** -- Default input artifacts path.
- **watch** -- Watch/follow run log.
- **schedule** -- ScheduleCronTrigger class instance or a standard crontab expression string (which will be converted to the class using its *from\_crontab* constructor), see this link for help: <https://apscheduler.readthedocs.io/en/3.x/modules/triggers/cron.html#module-apscheduler.triggers.cron>
- **hyperparams** -- Dict of param name and list of values to be enumerated. The default strategy is grid search and uses e.g. {"p1": [1,2,3]}. (Can be specified as a JSON file) For list, lists must be of equal length, e.g. {"p1": [1], "p2": [2]}. (Can be specified as JSON file or as a CSV file listing the parameter values per iteration.) You can specify strategy of type grid, list, random, and other options in the hyper\_param\_options parameter.

- **hyper\_param\_options** -- Dict or [HyperParamOptions](#) struct of hyperparameter options.
- **verbose** -- Add verbose prints/logs.
- **scrape\_metrics** -- Whether to add the *mlrun/scrape-metrics* label to this run's resources.
- **local** -- Run the function locally vs on the runtime/cluster.
- **local\_code\_path** -- Path of the code for local runs & debug.
- **auto\_build** -- When set to True and the function require build it will be built on the first function run, use only if you don't plan on changing the build config between runs.
- **param\_file\_secrets** -- Dictionary of secrets to be used only for accessing the hyper-param parameter file. These secrets are only used locally and will not be stored anywhere
- **notifications** -- List of notifications to push when the run is completed
- **returns** -- List of log hints - configurations for how to log the returning values from the handler's run (as artifacts or results). The list's length must be equal to the amount of returning objects. A log hint may be given as:
  - A string of the key to use to log the returning value as result or as an artifact. To specify The artifact type, it is possible to pass a string in the following structure: "<key> : <type>". Available artifact types can be seen in *mlrun.ArtifactType*. If no artifact type is specified, the object's default artifact type will be used.
  - A dictionary of configurations to use when logging. Further info per object type and artifact type can be given there. The artifact key must appear in the dictionary as "key": "the\_key".
- **state\_thresholds** -- Dictionary of states to time thresholds. The state will be matched against the k8s resource's status. The threshold should be a time string that conforms to *timelength* python package standards and is at least 1 minute (-1 for infinite). If the phase is active for longer than the threshold, the run will be aborted. See *mlconf.function.spec.state\_thresholds* for the state options and default values.

### Returns

Run context object (*RunObject*) with run metadata, results and status

**property spec:** *DatabricksSpec*

**class** *mlrun.runtimes.HandlerRuntime*(*metadata=None, spec=None*)

Bases: *BaseRuntime*, *ParallelRunner*

**kind** = 'handler'

**class** *mlrun.runtimes.KubeResource*(*spec=None, metadata=None*)

Bases: *BaseRuntime*

A parent class for runtimes that generate k8s resources when executing.

**apply**(*modify*)

Apply a modifier to the runtime which is used to change the runtimes k8s object's spec. Modifiers can be either KFP modifiers or MLRun modifiers (which are compatible with KFP). All modifiers accept a

*kfp.dsl.ContainerOp* object, apply some changes on its spec and return it so modifiers can be chained one after the other.

**Parameters**

**modify** -- a modifier runnable object

**Returns**

the runtime (self) after the modifications

**get\_default\_priority\_class\_name()**

**get\_env**(name, default=None)

Get the pod environment variable for the given name, if not found return the default. If it's a scalar value, will return it, if the value is from source, return the k8s struct (V1EnvVarSource)

**is\_env\_exists**(name)

Check whether there is an environment variable define for the given key

**kind** = 'job'

**list\_valid\_priority\_class\_names()**

**set\_env**(name, value=None, value\_from=None)

set pod environment var from value

**set\_env\_from\_secret**(name, secret=None, secret\_key=None)

set pod environment var from secret

**set\_envs**(env\_vars: dict | None = None, file\_path: str | None = None)

set pod environment var from key/value dict or .env file

**Parameters**

- **env\_vars** -- dict with env key/values
- **file\_path** -- .env file with key=value lines

**set\_image\_pull\_configuration**(image\_pull\_policy: str | None = None, image\_pull\_secret\_name: str | None = None)

Configure the image pull parameters for the runtime.

**Parameters**

- **image\_pull\_policy** -- The policy to use when pulling. One of *IfNotPresent*, *Always* or *Never*
- **image\_pull\_secret\_name** -- Name of a k8s secret containing image repository's authentication credentials

**set\_state\_thresholds**(state\_thresholds: Dict[str, str], patch: bool = True)

Set the threshold for a specific state of the runtime. The threshold is the amount of time that the runtime will wait before aborting the run if the job is in the matching state. The threshold time string must conform to `timelength` python package standards and be at least 1 minute (e.g. 1000s, 1 hour 30m, 1h etc. or -1 for infinite). If the threshold is not set for a state, the default threshold will be used.

**Parameters**

- **state\_thresholds** -- A dictionary of state to threshold. The supported states are:
  - `pending_scheduled` - The pod/crd is scheduled on a node but not yet running
  - `pending_not_scheduled` - The pod/crd is not yet scheduled on a node
  - `executing` - The pod/crd started and is running

- `image_pull_backoff` - The pod/crd is in image pull backoff

See `mlrun.mlconf.function.spec.state_thresholds` for the default thresholds.

- **patch** -- Whether to merge the given thresholds with the existing thresholds (True, default) or override them (False)

**property spec:** `KubeResourceSpec`

**to\_dict**(*fields=None, exclude=None, strip=False*)

convert the object to a python dictionary

**Parameters**

- **fields** -- list of fields to include in the dict
- **exclude** -- list of fields to exclude from the dict

**try\_auto\_mount\_based\_on\_config**(*override\_params=None*)

**validate\_and\_enrich\_service\_account**(*allowed\_service\_accounts, default\_service\_account*)

**with\_annotations**(*annotations: dict*)

set a key/value annotations in the metadata of the pod

**with\_limits**(*mem: str | None = None, cpu: str | None = None, gpus: int | None = None, gpu\_type: str = 'nvidia.com/gpu', patch: bool = False*)

Set pod cpu/memory/gpu limits (max values)

**Parameters**

- **mem** -- set limit for memory e.g. '500M', '2G', etc.
- **cpu** -- set limit for cpu e.g. '0.5', '2', etc.
- **gpus** -- set limit for gpu
- **gpu\_type** -- set gpu type e.g. "nvidia.com/gpu"
- **patch** -- by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`

**with\_node\_selection**(*node\_name: str | None = None, node\_selector: Dict[str, str] | None = None, affinity: V1Affinity | None = None, tolerations: List[V1Toleration] | None = None*)

Enables to control on which k8s node the job will run

**Parameters**

- **node\_name** -- The name of the k8s node
- **node\_selector** -- Label selector, only nodes with matching labels will be eligible to be picked
- **affinity** -- Expands the types of constraints you can express - see <https://kubernetes.io/docs/concepts/scheduling-eviction/assign-pod-node/#affinity-and-anti-affinity> for details
- **tolerations** -- Tolerations are applied to pods, and allow (but do not require) the pods to schedule onto nodes with matching taints - see <https://kubernetes.io/docs/concepts/scheduling-eviction/taint-and-toleration> for details

**with\_preemption\_mode**(*mode: PreemptionModes | str*)

Preemption mode controls whether pods can be scheduled on preemptible nodes. Tolerations, node selector, and affinity are populated on preemptible nodes corresponding to the function spec.

The supported modes are:

- **allow** - The function can be scheduled on preemptible nodes
- **constrain** - The function can only run on preemptible nodes
- **prevent** - The function cannot be scheduled on preemptible nodes
- **none** - No preemptible configuration will be applied on the function

The default preemption mode is configurable in `mlrun.mlconf.function_defaults.preemption_mode`, by default it's set to **prevent**

#### Parameters

**mode** -- allow | constrain | prevent | none defined in `PreemptionModes`

**with\_priority\_class**(*name: str | None = None*)

Enables to control the priority of the pod. If not passed - will default to `mlrun.mlconf.default_function_priority_class_name`

#### Parameters

**name** -- The name of the priority class

**with\_requests**(*mem: str | None = None, cpu: str | None = None, patch: bool = False*)

Set requested (desired) pod cpu/memory resources

#### Parameters

- **mem** -- set request for memory e.g. '200M', '1G', etc.
- **cpu** -- set request for cpu e.g. '0.1', '1', etc.
- **patch** -- by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`

**with\_security\_context**(*security\_context: V1SecurityContext*)

Set security context for the pod. For Iguazio we handle security context internally - see `mlrun.common.schemas.function.SecurityContextEnrichmentModes`

Example:

```
from kubernetes import client as k8s_client

security_context = k8s_client.V1SecurityContext(
    run_as_user=1000,
    run_as_group=3000,
)

function.with_security_context(security_context)
```

More info: <https://kubernetes.io/docs/tasks/configure-pod-container/security-context/#set-the-security-context-for-a-pod>

#### Parameters

**security\_context** -- The security context for the pod

**class** `mlrun.runtimes.KubejobRuntime`(*spec=None, metadata=None*)

Bases: `KubeResource`

**build\_config**(*image="", base\_image=None, commands: list | None = None, secret=None, source=None, extra=None, load\_source\_on\_run=None, with\_mlrun=None, auto\_build=None, requirements=None, overwrite=False, prepare\_image\_for\_deploy=True, requirements\_file=None, builder\_env=None, extra\_args=None*)

specify builder configuration for the deploy operation

#### Parameters

- **image** -- target image name/path
- **base\_image** -- base image name/path

- **commands** -- list of docker build (RUN) commands e.g. ['pip install pandas']
- **secret** -- k8s secret for accessing the docker registry
- **source** -- source git/tar archive to load code from in to the context/workdir e.g. git://github.com/mlrun/something.git#development
- **extra** -- extra Dockerfile lines
- **load\_source\_on\_run** -- load the archive code into the container at runtime vs at build time
- **with\_mlrun** -- add the current mlrun package to the container build
- **auto\_build** -- when set to True and the function require build it will be built on the first function run, use only if you dont plan on changing the build config between runs
- **requirements** -- a list of packages to install
- **requirements\_file** -- requirements file to install
- **overwrite** -- overwrite existing build configuration (currently applies to requirements and commands) \* False: the new params are merged with the existing \* True: the existing params are replaced by the new ones
- **prepare\_image\_for\_deploy** -- prepare the image/base\_image spec for deployment
- **extra\_args** -- A string containing additional builder arguments in the format of command-line options, e.g. extra\_args="--skip-tls-verify --build-arg A=val"
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. builder\_env={"GIT\_TOKEN": token}

**deploy**(*watch=True, with\_mlrun=None, skip\_deployed=False, is\_kfp=False, mlrun\_version\_specifier=None, builder\_env: dict | None = None, show\_on\_failure: bool = False, force\_build: bool = False*) → bool

deploy function, build container with dependencies

#### Parameters

- **watch** -- wait for the deploy to complete (and print build logs)
- **with\_mlrun** -- add the current mlrun package to the container build
- **skip\_deployed** -- skip the build if we already have an image for the function
- **is\_kfp** -- deploy as part of a kfp pipeline
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. builder\_env={"GIT\_TOKEN": token}
- **show\_on\_failure** -- show logs only in case of build failure
- **force\_build** -- set True for force building the image, even when no changes were made

#### Returns

True if the function is ready (deployed)

**deploy\_step**(*image=None, base\_image=None, commands: list | None = None, secret\_name="", with\_mlrun=True, skip\_deployed=False*)

**is\_deployed()**

check if the function is deployed (has a valid container)

**kind = 'job'**

**with\_source\_archive**(*source*, *workdir=None*, *handler=None*, *pull\_at\_runtime=True*, *target\_dir=None*)

load the code from git/tar/zip archive at runtime or build

**Parameters**

- **source** -- valid absolute path or URL to git, zip, or tar file, e.g. `git://github.com/mlrun/something.git` `http://some/url/file.zip` note path source must exist on the image or exist locally when run is local (it is recommended to use 'workdir' when source is a filepath instead)
- **handler** -- default function handler
- **workdir** -- working dir relative to the archive root (e.g. './subdir') or absolute to the image root
- **pull\_at\_runtime** -- load the archive into the container at job runtime vs on build/deploy
- **target\_dir** -- target dir on runtime pod or repo clone / archive extraction

**class** mlrun.runtimes.**LocalRuntime**(*metadata=None*, *spec=None*)

Bases: [BaseRuntime](#), [ParallelRunner](#)

**is\_deployed()**

**kind = 'local'**

**to\_job**(*image=""*)

**with\_source\_archive**(*source*, *workdir=None*, *handler=None*, *target\_dir=None*)

load the code from git/tar/zip archive at runtime or build

**Parameters**

- **source** -- valid path to git, zip, or tar file, e.g. `git://github.com/mlrun/something.git` `http://some/url/file.zip`
- **handler** -- default function handler
- **workdir** -- working dir relative to the archive root (e.g. './subdir') or absolute
- **target\_dir** -- local target dir for repo clone (by default its <current-dir>/code)

**class** mlrun.runtimes.**RemoteRuntime**(*spec=None*, *metadata=None*)

Bases: [KubeResource](#)

**add\_trigger**(*name*, *spec*)

add a nuclio trigger object/dict

**Parameters**

- **name** -- trigger name
- **spec** -- trigger object or dict

**add\_v3io\_stream\_trigger**(*stream\_path*, *name='stream'*, *group='serving'*, *seek\_to='earliest'*, *shards=1*, *extra\_attributes=None*, *ack\_window\_size=None*, *\*\*kwargs*)

add v3io stream trigger to the function

**Parameters**

- **stream\_path** -- v3io stream path (e.g. 'v3io:///projects/myproj/stream1')
- **name** -- trigger name
- **group** -- consumer group
- **seek\_to** -- start seek from: "earliest", "latest", "time", "sequence"
- **shards** -- number of shards (used to set number of replicas)
- **extra\_attributes** -- key/value dict with extra trigger attributes
- **ack\_window\_size** -- stream ack window size (the consumer group will be updated with the event id - ack\_window\_size, on failure the events in the window will be retransmitted)
- **kwargs** -- extra V3IOStreamTrigger class attributes

**deploy**(*project=""*, *tag=""*, *verbose=False*, *auth\_info: AuthInfo | None = None*, *builder\_env: dict | None = None*, *force\_build: bool = False*)

Deploy the nuclio function to the cluster

#### Parameters

- **project** -- project name
- **tag** -- function tag
- **verbose** -- set True for verbose logging
- **auth\_info** -- service AuthInfo
- **builder\_env** -- env vars dict for source archive config/credentials e.g. `builder_env={"GIT_TOKEN": token}`
- **force\_build** -- set True for force building the image

**deploy\_step**(*project=""*, *models=None*, *env=None*, *tag=None*, *verbose=None*, *use\_function\_from\_db=None*)

return as a KubeFlow pipeline step (ContainerOp), recommended to use `mlrun.deploy_function()` instead

#### Parameters

- **project** -- project name, defaults to function project
- **models** -- model name and paths
- **env** -- dict of environment variables
- **tag** -- version tag
- **verbose** -- verbose output
- **use\_function\_from\_db** -- use the function from the DB instead of the local function object

**disable\_default\_http\_trigger**(*\*\*kwargs*)

**enable\_default\_http\_trigger**(*\*\*kwargs*)

**from\_image**(*image*)

**get\_url**(*force\_external\_address: bool = False*, *auth\_info: AuthInfo | None = None*)

This method returns function's url.

#### Parameters

- **force\_external\_address** -- use the external ingress URL

- **auth\_info** -- service AuthInfo

**Returns**

returns function's url

**invoke**(*path: str, body: str | bytes | dict | None = None, method: str | None = None, headers: dict | None = None, dashboard: str = "", force\_external\_address: bool = False, auth\_info: AuthInfo | None = None, mock: bool | None = None, \*\*http\_client\_kwargs*)

Invoke the remote (live) function and return the results

example:

```
function.invoke("/api", body={"inputs": x})
```

**Parameters**

- **path** -- request sub path (e.g. /images)
- **body** -- request body (str, bytes or a dict for json requests)
- **method** -- HTTP method (GET, PUT, ..)
- **headers** -- key/value dict with http headers
- **dashboard** -- nuclio dashboard address (deprecated)
- **force\_external\_address** -- use the external ingress URL
- **auth\_info** -- service AuthInfo
- **mock** -- use mock server vs a real Nuclio function (for local simulations)
- **http\_client\_kwargs** -- allow the user to pass any parameter supported in requests.request method see this link for more information: <https://requests.readthedocs.io/en/latest/api/#requests.request>

**kind** = 'remote'

**set\_config**(*key, value*)

**set\_state\_thresholds**(*state\_thresholds: Dict[str, int], patch: bool = True*)

Set the threshold for a specific state of the runtime. The threshold is the amount of time that the runtime will wait before aborting the run if the job is in the matching state. The threshold time string must conform to timelength python package standards and be at least 1 minute (e.g. 1000s, 1 hour 30m, 1h etc. or -1 for infinite). If the threshold is not set for a state, the default threshold will be used.

**Parameters**

- **state\_thresholds** -- A dictionary of state to threshold. The supported states are:
  - **pending\_scheduled** - The pod/crd is scheduled on a node but not yet running
  - **pending\_not\_scheduled** - The pod/crd is not yet scheduled on a node
  - **executing** - The pod/crd started and is running
  - **image\_pull\_backoff** - The pod/crd is in image pull backoffSee `mlrun.mlconf.function.spec.state_thresholds` for the default thresholds.
- **patch** -- Whether to merge the given thresholds with the existing thresholds (True, default) or override them (False)

**property spec:** **NuclioSpec**

**property status:** NuclioStatus

**with\_annotations**(*annotations: dict*)

set a key/value annotations for function

**with\_http**(*workers: int | None = 8, port: int | None = None, host: str | None = None, paths: List[str] | None = None, canary: float | None = None, secret: str | None = None, worker\_timeout: int | None = None, gateway\_timeout: int | None = None, trigger\_name: str | None = None, annotations: Mapping[str, str] | None = None, extra\_attributes: Mapping[str, str] | None = None*)

update/add nuclio HTTP trigger settings

Note: gateway timeout is the maximum request time before an error is returned, while the worker timeout if the max time a request will wait for until it will start processing, gateway\_timeout must be greater than the worker\_timeout.

#### Parameters

- **workers** -- number of worker processes (default=8). set 0 to use Nuclio's default workers count
- **port** -- TCP port to listen on. by default, nuclio will choose a random port as long as the function service is NodePort. if the function service is ClusterIP, the port is ignored.
- **host** -- Ingress hostname
- **paths** -- list of Ingress sub paths
- **canary** -- k8s ingress canary (% traffic value between 0 and 100)
- **secret** -- k8s secret name for SSL certificate
- **worker\_timeout** -- worker wait timeout in sec (how long a message should wait in the worker queue before an error is returned)
- **gateway\_timeout** -- nginx ingress timeout in sec (request timeout, when will the gateway return an error)
- **trigger\_name** -- alternative nuclio trigger name
- **annotations** -- key/value dict of ingress annotations
- **extra\_attributes** -- key/value dict of extra nuclio trigger attributes

#### Returns

function object (self)

**with\_node\_selection**(*\*\*kwargs*)

Enables to control on which k8s node the job will run

#### Parameters

- **node\_name** -- The name of the k8s node
- **node\_selector** -- Label selector, only nodes with matching labels will be eligible to be picked
- **affinity** -- Expands the types of constraints you can express - see <https://kubernetes.io/docs/concepts/scheduling-eviction/assign-pod-node/#affinity-and-anti-affinity> for details
- **tolerations** -- Tolerations are applied to pods, and allow (but do not require) the pods to schedule onto nodes with matching taints - see <https://kubernetes.io/docs/concepts/scheduling-eviction/taint-and-toleration> for details

**with\_preemption\_mode(\*\*kwargs)**

Preemption mode controls whether pods can be scheduled on preemptible nodes. Tolerations, node selector, and affinity are populated on preemptible nodes corresponding to the function spec.

The supported modes are:

- **allow** - The function can be scheduled on preemptible nodes
- **constrain** - The function can only run on preemptible nodes
- **prevent** - The function cannot be scheduled on preemptible nodes
- **none** - No preemptible configuration will be applied on the function

The default preemption mode is configurable in `mlrun.mlconf.function_defaults.preemption_mode`, by default it's set to **prevent**

**Parameters**

**mode** -- allow | constrain | prevent | none defined in `PreemptionModes`

**with\_priority\_class(\*\*kwargs)**

Enables to control the priority of the pod. If not passed - will default to `mlrun.mlconf.default_function_priority_class_name`

**Parameters**

**name** -- The name of the priority class

**with\_service\_type(service\_type: str, add\_templated\_ingress\_host\_mode: str | None = None)**

Enables to control the service type of the pod and the addition of templated ingress host

**Parameters**

- **service\_type** -- service type (ClusterIP, NodePort), defaults to `mlrun.mlconf.httpdb.nuclio.service_type`
- **add\_templated\_ingress\_host\_mode** -- add templated ingress host mode (never, always, onClusterIP), see `mlrun.mlconf.httpdb.nuclio.add_templated_ingress_host_mode` for the default and more information

**with\_source\_archive(source, workdir=None, handler=None, runtime="")**

Load nuclio function from remote source

Note: remote source may require credentials, those can be stored in the project secrets or passed in the `function.deploy()` using the `builder_env` dict, see the required credentials per source:

- `v3io` - "V3IO\_ACCESS\_KEY".
- `git` - "GIT\_USERNAME", "GIT\_PASSWORD".
- `AWS S3` - "AWS\_ACCESS\_KEY\_ID", "AWS\_SECRET\_ACCESS\_KEY" or "AWS\_SESSION\_TOKEN".

**Parameters**

- **source** -- a full path to the nuclio function source (code entry) to load the function from
- **handler** -- a path to the function's handler, including path inside archive/git repo
- **workdir** -- working dir relative to the archive root (e.g. 'subdir')
- **runtime** -- (optional) the runtime of the function (defaults to `mlrun.mlconf.default_nuclio_runtime`)

**Examples**

`git:`

```
fn.with_source_archive("git://github.com/org/repo#my-branch",
    handler="main:handler",
    workdir="path/inside/repo")
```

s3:

```
fn.spec.nuclio_runtime = "golang"
fn.with_source_archive("s3://my-bucket/path/in/bucket/my-
    functions-archive",
    handler="my_func:Handler",
    workdir="path/inside/functions/archive",
    runtime="golang")
```

**with\_v3io**(local="", remote="")

Add v3io volume to the function

#### Parameters

- **local** -- local path (mount path inside the function container)
- **remote** -- v3io path

**class** mlrun.runtimes.**RemoteSparkRuntime**(spec=None, metadata=None)

Bases: [KubejobRuntime](#)

**default\_image** = '.remote-spark-default-image'

**deploy**(watch=True, with\_mlrun=None, skip\_deployed=False, is\_kfp=False, mlrun\_version\_specifier=None, builder\_env: dict | None = None, show\_on\_failure: bool = False, force\_build: bool = False)

deploy function, build container with dependencies

#### Parameters

- **watch** -- wait for the deploy to complete (and print build logs)
- **with\_mlrun** -- add the current mlrun package to the container build
- **skip\_deployed** -- skip the build if we already have an image for the function
- **is\_kfp** -- deploy as part of a kfp pipeline
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. builder\_env={"GIT\_TOKEN": token}
- **show\_on\_failure** -- show logs only in case of build failure
- **force\_build** -- force building the image, even when no changes were made

:return True if the function is ready (deployed)

**classmethod** **deploy\_default\_image**()

**is\_deployed**()

check if the function is deployed (has a valid container)

**kind** = 'remote-spark'

**property spec**: RemoteSparkSpec

**with\_security\_context**(*security\_context: VISecurityContext*)

With security context is not supported for spark runtime. Driver / Executor processes run with uid / gid 1000 as long as security context is not defined. If in the future we want to support setting security context it will work only from spark version 3.2 onwards.

**with\_spark\_service**(*spark\_service, provider='iguazio'*)

Attach spark service to function

**class** mlrun.runtimes.**ServingRuntime**(*spec=None, metadata=None*)

Bases: [RemoteRuntime](#)

MLRun Serving Runtime

**add\_child\_function**(*name, url=None, image=None, requirements=None, kind=None*)

in a multi-function pipeline add child function

example:

```
fn.add_child_function('enrich', './enrich.ipynb', 'mlrun/mlrun')
```

#### Parameters

- **name** -- child function name
- **url** -- function/code url, support .py, .ipynb, .yaml extensions
- **image** -- base docker image for the function
- **requirements** -- py package requirements file path OR list of packages
- **kind** -- mlrun function/runtime kind

:return function object

**add\_model**(*key: str, model\_path: str | None = None, class\_name: str | None = None, model\_url: str | None = None, handler: str | None = None, router\_step: str | None = None, child\_function: str | None = None, \*\*class\_args*)

add ml model and/or route to the function.

Example, create a function (from the notebook), add a model class, and deploy:

```
fn = code_to_function(kind='serving')
fn.add_model('boost', model_path, model_class='MyClass', my_arg=5)
fn.deploy()
```

only works with router topology, for nested topologies (model under router under flow) need to add router to flow and use router.add\_route()

#### Parameters

- **key** -- model api key (or name:version), will determine the relative url/path
- **model\_path** -- path to mlrun model artifact or model directory file/object path
- **class\_name** -- V2 Model python class name or a model class instance (can also module.submodule.class and it will be imported automatically)
- **model\_url** -- url of a remote model serving endpoint (cannot be used with model\_path)
- **handler** -- for advanced users!, override default class handler name (do\_event)
- **router\_step** -- router step name (to determine which router we add the model to in graphs with multiple router steps)

- **child\_function** -- child function name, when the model runs in a child function
- **class\_args** -- extra kwargs to pass to the model serving class `__init__` (can be read in the model using `.get_param(key)` method)

**deploy**(*project=""*, *tag=""*, *verbose=False*, *auth\_info: AuthInfo | None = None*, *builder\_env: dict | None = None*, *force\_build: bool = False*)

deploy model serving function to a local/remote cluster

#### Parameters

- **project** -- optional, override function specified project name
- **tag** -- specify unique function tag (a different function service is created for every tag)
- **verbose** -- verbose logging
- **auth\_info** -- The auth info to use to communicate with the Nuclio dashboard, required only when providing dashboard
- **builder\_env** -- env vars dict for source archive config/credentials e.g. `builder_env={"GIT_TOKEN": token}`
- **force\_build** -- set True for force building the image

**kind** = 'serving'

**plot**(*filename=None*, *format=None*, *source=None*, *\*\*kw*)

plot/save graph using graphviz

example:

```
serving_fn = mlrun.new_function("serving", image="mlrun/mlrun", kind="serving")
serving_fn.add_model('my-classifier', model_path=model_path,
                    class_name='mlrun.frameworks.sklearn.SklearnModelServer')
serving_fn.plot(rankdir="LR")
```

#### Parameters

- **filename** -- target filepath for the image (None for the notebook)
- **format** -- The output format used for rendering ('pdf', 'png', etc.)
- **source** -- source step to add to the graph
- **kw** -- kwargs passed to graphviz, e.g. `rankdir="LR"` (see: <https://graphviz.org/doc/info/attrs.html>)

#### Returns

graphviz graph object

**remove\_states**(*keys: list*)

remove one, multiple, or all states/models from the spec (blank list for all)

**set\_topology**(*topology=None*, *class\_name=None*, *engine=None*, *exist\_ok=False*, *\*\*class\_args*) → `RootFlowStep | RouterStep`

set the serving graph topology (router/flow) and root class or params

examples:

```
# simple model router topology
graph = fn.set_topology("router")
fn.add_model(name, class_name="ClassifierModel", model_path=model_uri)

# async flow topology
graph = fn.set_topology("flow", engine="async")
graph.to("MyClass").to(name="to_json", handler="json.dumps").respond()
```

topology options are:

```
router - root router + multiple child route states/models
        route is usually determined by the path (route key/name)
        can specify special router class and router arguments

flow   - workflow (DAG) with a chain of states
        flow support "sync" and "async" engines, branches are not allowed in
        ↳ sync mode
        when using async mode calling state.respond() will mark the state as
        ↳ the
        one which generates the (REST) call response
```

#### Parameters

- **topology** --
  - graph topology, router or flow
- **class\_name** --
  - optional for router, router class name/path or router object
- **engine** --
  - optional for flow, sync or async engine (default to async)
- **exist\_ok** --
  - allow overriding existing topology
- **class\_args** --
  - optional, router/flow class init args

:return graph object (fn.spec.graph)

**set\_tracking**(*stream\_path: str | None = None, batch: int | None = None, sample: int | None = None, stream\_args: dict | None = None, tracking\_policy: TrackingPolicy | dict | None = None*)

**apply on your serving function to monitor a deployed model, including real-time dashboards to detect drift**  
and analyze performance.

#### Parameters

- **stream\_path** -- Path/url of the tracking stream e.g. v3io:///users/mike/mystream  
you can use the "dummy://" path for test/simulation.
- **batch** -- Micro batch size (send micro batches of N records at a time).
- **sample** -- Sample size (send only one of N records).
- **stream\_args** -- Stream initialization parameters, e.g. shards, retention\_in\_hours, ..

- **tracking\_policy** -- Tracking policy object or a dictionary that will be converted into a tracking policy object. By using TrackingPolicy, the user can apply his model monitoring requirements, such as setting the scheduling policy of the model monitoring batch job or changing the image of the model monitoring stream.

example:

```
# initialize a new serving function
serving_fn = mlrun.import_function("hub://v2-model-server",
    ↪new_name="serving")
# apply model monitoring and set monitoring batch job to run
    ↪every 3 hours
tracking_policy = {'default_batch_intervals': "0 */3 * * *"}
serving_fn.set_tracking(tracking_policy=tracking_policy)
```

property spec: **ServingSpec**

**to\_mock\_server**(namespace=None, current\_function='\*', track\_models=False, workdir=None, \*\*kwargs)  
→ *GraphServer*

create mock server object for local testing/emulation

#### Parameters

- **namespace** -- one or list of namespaces/modules to search the steps classes/functions in
- **log\_level** -- log level (error | info | debug)
- **current\_function** -- specify if you want to simulate a child function, \* for all functions
- **track\_models** -- allow model tracking (disabled by default in the mock server)
- **workdir** -- working directory to locate the source code (if not the current one)

**with\_secrets**(kind, source)

register a secrets source (file, env or dict)

read secrets from a source provider to be used in workflows, example:

```
task.with_secrets('file', 'file.txt')
task.with_secrets('inline', {'key': 'val'})
task.with_secrets('env', 'ENV1,ENV2')
task.with_secrets('vault', ['secret1', 'secret2'...])

# If using an empty secrets list [] then all accessible secrets will be
    ↪available.
task.with_secrets('vault', [])

# To use with Azure key vault, a k8s secret must be created with the following
    ↪keys:
# kubectl -n <namespace> create secret generic azure-key-vault-secret \
#     --from-literal=tenant_id=<service principal tenant ID> \
#     --from-literal=client_id=<service principal client ID> \
#     --from-literal=secret=<service principal secret key>

task.with_secrets('azure_vault', {
    'name': 'my-vault-name',
```

(continues on next page)

(continued from previous page)

```
'k8s_secret': 'azure-key-vault-secret',
# An empty secrets list may be passed ('secrets': []) to access all vault
→ secrets.
'secrets': ['secret1', 'secret2'...]
})
```

**Parameters**

- **kind** -- secret type (file, inline, env)
- **source** -- secret data or link (see example)

**Returns**

The Runtime (function) object

```
class mlrun.runtimes.Spark3Runtime(spec=None, metadata=None)
```

Bases: [KubejobRuntime](#)

```
apiVersion = 'sparkoperator.k8s.io/v1beta2'
```

```
code_path = '/etc/config/mlrun'
```

```
code_script = 'spark-function-code.py'
```

```
default_mlrun_image = '.spark-job-default-image'
```

```
deploy(watch=True, with_mlrun=True, skip_deployed=False, is_kfp=False, mlrun_version_specifier=None,
        builder_env: dict | None = None, show_on_failure: bool = False, force_build: bool = False)
```

deploy function, build container with dependencies

**Parameters**

- **watch** -- wait for the deploy to complete (and print build logs)
- **with\_mlrun** -- add the current mlrun package to the container build
- **skip\_deployed** -- skip the build if we already have an image for the function
- **is\_kfp** -- deploy as part of a kfp pipeline
- **mlrun\_version\_specifier** -- which mlrun package version to include (if not current)
- **builder\_env** -- Kaniko builder pod env vars dict (for config/credentials) e.g. `builder_env={"GIT_TOKEN": token}`
- **show\_on\_failure** -- show logs only in case of build failure
- **force\_build** -- set True for force building the image, even when no changes were made

**Returns**

True if the function is ready (deployed)

```
classmethod deploy_default_image(with_gpu=False)
```

```
disable_monitoring()
```

```
gpu_suffix = '-cuda'
```

```
gpus(gpus, gpu_type='nvidia.com/gpu')
```

```
group = 'sparkoperator.k8s.io'
```

```
is_deployed()
```

check if the function is deployed (has a valid container)

```
kind = 'spark'
```

```
plural = 'sparkapplications'
```

```
property spec: Spark3JobSpec
```

```
version = 'v1beta2'
```

```
with_cores(executor_cores: int | None = None, driver_cores: int | None = None)
```

Allows to configure `spark.executor.cores` and `spark.driver.cores` parameters. The values must be integers greater than or equal to 1. If a parameter is not specified, it defaults to 1.

Spark operator has multiple options to control the number of cores available to the executor and driver. The `.coreLimit` and `.coreRequest` parameters can be set for both executor and driver, but they only control the k8s properties of the pods created to run the driver/executor. Spark itself uses the `spec.[executor|driver].cores` parameter to set the parallelism of tasks and cores assigned to each task within the pod. This function sets the `.cores` parameters for the job executed.

See <https://github.com/GoogleCloudPlatform/spark-on-k8s-operator/issues/581> for a discussion about those parameters and their meaning in Spark operator.

#### Parameters

- **executor\_cores** -- Number of cores to use for executor (`spark.executor.cores`)
- **driver\_cores** -- Number of cores to use for driver (`spark.driver.cores`)

```
with_driver_host_path_volume(host_path: str, mount_path: str, type: str = "", volume_name: str = 'host-path-volume')
```

Add a host path volume and mounts it to the driver pod More info: <https://kubernetes.io/docs/concepts/storage/volumes#hostpath>

#### Parameters

- **host\_path** -- Path of the directory on the host. If the path is a symlink, it follows the link to the real path
- **mount\_path** -- Path within the container at which the volume should be mounted. Must not contain ':'
- **type** -- Type for HostPath Volume Defaults to ""
- **volume\_name** -- Volume's name. Must be a DNS\_LABEL and unique within the pod

```
with_driver_limits(cpu: str | None = None, gpus: int | None = None, gpu_type: str = 'nvidia.com/gpu', patch: bool = False)
```

set driver pod cpu limits by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`.

```
with_driver_node_selection(node_name: str | None = None, node_selector: Dict[str, str] | None = None, affinity: V1Affinity | None = None, tolerations: List[V1Toleration] | None = None)
```

Enables control of which k8s node the spark executor will run on.

#### Parameters

- **node\_name** -- The name of the k8s node

- **node\_selector** -- Label selector, only nodes with matching labels are eligible to be picked
- **affinity** -- Expands the types of constraints you can express - see <https://kubernetes.io/docs/concepts/scheduling-eviction/assign-pod-node/#affinity-and-anti-affinity> for details
- **tolerations** -- Tolerations are applied to pods, and allow (but do not require) the pods to schedule onto nodes with matching taints - see <https://kubernetes.io/docs/concepts/scheduling-eviction/taint-and-toleration> for details

**with\_driver\_preemption\_mode**(*mode: PreemptionModes | str*)

Preemption mode controls whether the spark driver can be scheduled on preemptible nodes. Tolerations, node selector, and affinity are populated on preemptible nodes corresponding to the function spec.

The supported modes are:

- **allow** - The function can be scheduled on preemptible nodes
- **constrain** - The function can only run on preemptible nodes
- **prevent** - The function cannot be scheduled on preemptible nodes
- **none** - No preemptible configuration will be applied on the function

The default preemption mode is configurable in `mlrun.mlconf.function_defaults.preemption_mode`. By default it's set to **prevent**

**Parameters**

**mode** -- allow | constrain | prevent | none defined in `PreemptionModes`

**with\_driver\_requests**(*mem: str | None = None, cpu: str | None = None, patch: bool = False*)

set driver pod required cpu/memory/gpu resources by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`.

**with\_dynamic\_allocation**(*min\_executors=None, max\_executors=None, initial\_executors=None*)

Allows to configure spark's dynamic allocation

**Parameters**

- **min\_executors** -- Min. number of executors
- **max\_executors** -- Max. number of executors
- **initial\_executors** -- Initial number of executors

**with\_executor\_host\_path\_volume**(*host\_path: str, mount\_path: str, type: str = "host-path-volume", volume\_name: str = "host-path-volume"*)

Add an host path volume and mount it to the executor pod/s More info: <https://kubernetes.io/docs/concepts/storage/volumes#hostpath>

**Parameters**

- **host\_path** -- Path of the directory on the host. If the path is a symlink, it follows the link to the real path
- **mount\_path** -- Path within the container at which the volume should be mounted. Must not contain '.'
- **type** -- Type for HostPath Volume Defaults to ""
- **volume\_name** -- Volume's name. Must be a DNS\_LABEL and unique within the pod

**with\_executor\_limits**(*cpu: str | None = None, gpus: int | None = None, gpu\_type: str = 'nvidia.com/gpu', patch: bool = False*)

set executor pod limits by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`.

**with\_executor\_node\_selection**(*node\_name: str | None = None, node\_selector: Dict[str, str] | None = None, affinity: V1Affinity | None = None, tolerations: List[V1Toleration] | None = None*)

Enables control of which k8s node the spark executor will run on.

#### Parameters

- **node\_name** -- The name of the k8s node
- **node\_selector** -- Label selector, only nodes with matching labels are eligible to be picked
- **affinity** -- Expands the types of constraints you can express - see <https://kubernetes.io/docs/concepts/scheduling-eviction/assign-pod-node/#affinity-and-anti-affinity> for details
- **tolerations** -- Tolerations are applied to pods, and allow (but do not require) the pods to schedule onto nodes with matching taints - see <https://kubernetes.io/docs/concepts/scheduling-eviction/taint-and-toleration> for details

**with\_executor\_preemption\_mode**(*mode: PreemptionModes | str*)

Preemption mode controls whether the spark executor can be scheduled on preemptible nodes. Tolerations, node selector, and affinity are populated on preemptible nodes corresponding to the function spec.

The supported modes are:

- **allow** - The function can be scheduled on preemptible nodes
- **constrain** - The function can only run on preemptible nodes
- **prevent** - The function cannot be scheduled on preemptible nodes
- **none** - No preemptible configuration will be applied on the function

The default preemption mode is configurable in `mlrun.mlconf.function_defaults.preemption_mode`, by default it's set to **prevent**

#### Parameters

**mode** -- allow | constrain | prevent | none defined in `PreemptionModes`

**with\_executor\_requests**(*mem: str | None = None, cpu: str | None = None, patch: bool = False*)

set executor pod required cpu/memory/gpu resources by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`.

**with\_igz\_spark**(*mount\_v3io\_to\_executor=True*)

Configures the pods (driver and executors) to have V3IO access (via file system and via Hadoop).

#### Parameters

**mount\_v3io\_to\_executor** -- When False, limits the file system mount to driver pod only. Default is True.

**with\_limits**(*mem=None, cpu=None, gpus=None, gpu\_type='nvidia.com/gpu', patch: bool = False*)

Set pod cpu/memory/gpu limits (max values)

#### Parameters

- **mem** -- set limit for memory e.g. '500M', '2G', etc.
- **cpu** -- set limit for cpu e.g. '0.5', '2', etc.
- **gpus** -- set limit for gpu
- **gpu\_type** -- set gpu type e.g. "nvidia.com/gpu"
- **patch** -- by default it overrides the whole limits section, if you wish to patch specific resources use `patch=True`

**with\_node\_selection**(*node\_name: str | None = None, node\_selector: Dict[str, str] | None = None, affinity: VIAffinity | None = None, tolerations: List[VIToleration] | None = None*)

Enables to control on which k8s node the job will run

**Parameters**

- **node\_name** -- The name of the k8s node
- **node\_selector** -- Label selector, only nodes with matching labels will be eligible to be picked
- **affinity** -- Expands the types of constraints you can express - see <https://kubernetes.io/docs/concepts/scheduling-eviction/assign-pod-node/#affinity-and-anti-affinity> for details
- **tolerations** -- Tolerations are applied to pods, and allow (but do not require) the pods to schedule onto nodes with matching taints - see <https://kubernetes.io/docs/concepts/scheduling-eviction/taint-and-toleration> for details

**with\_preemption\_mode**(*mode: PreemptionModes | str*)

Use `with_driver_preemption_mode` / `with_executor_preemption_mode` to setup `preemption_mode` for spark operator

**with\_requests**(*mem=None, cpu=None, patch: bool = False*)

Set requested (desired) pod cpu/memory resources

**Parameters**

- **mem** -- set request for memory e.g. '200M', '1G', etc.
- **cpu** -- set request for cpu e.g. '0.1', '1', etc.
- **patch** -- by default it overrides the whole requests section, if you wish to patch specific resources use `patch=True`

**with\_restart\_policy**(*restart\_type='OnFailure', retries=0, retry\_interval=10, submission\_retries=3, submission\_retry\_interval=20*)

set restart policy `restart_type=OnFailure/Never/Always`

**with\_security\_context**(*security\_context: VLSecurityContext*)

With security context is not supported for spark runtime. Driver / Executor processes run with uid / gid 1000 as long as security context is not defined. If in the future we want to support setting security context it will work only from spark version 3.2 onwards.

**with\_source\_archive**(*source, workdir=None, handler=None, pull\_at\_runtime=True, target\_dir=None*)

load the code from git/tar/zip archive at runtime or build

**Parameters**

- **source** -- valid path to git, zip, or tar file, e.g. `git://github.com/mlrun/something.git` `http://some/url/file.zip`
- **handler** -- default function handler
- **workdir** -- working dir relative to the archive root (e.g. './subdir') or absolute to the image root
- **pull\_at\_runtime** -- not supported for spark runtime, must be False
- **target\_dir** -- target dir on runtime pod for repo clone / archive extraction

## 18.15 mlrun.serving

**class** mlrun.serving.states.**BaseStep**(name: str | None = None, after: list | None = None, shape: str | None = None)

**error\_handler**(name: str | None = None, class\_name=None, handler=None, before=None, function=None, full\_event: bool | None = None, input\_path: str | None = None, result\_path: str | None = None, \*\*class\_args)

set error handler on a step or the entire graph (to be executed on failure/raise)

When setting the error\_handler on the graph object, the graph completes after the error handler execution.

### Example

in the below example, an 'error\_catcher' step is set as the error\_handler of the 'raise' step: in case of error/raise in 'raise' step, the handle\_error will be run. after that, the 'echo' step will be run. graph = function.set\_topology('flow', engine='async') graph.to(name='raise', handler='raising\_step') .error\_handler(name='error\_catcher', handler='handle\_error', full\_event=True, before='echo') graph.add\_step(name="echo", handler='echo', after="raise").respond()

#### Parameters

- **name** -- unique name (and path) for the error handler step, default is class name
- **class\_name** -- class name or step object to build the step from the error handler step is derived from task step (ie no router/queue functionally)
- **handler** -- class/function handler to invoke on run/event
- **before** -- string or list of next step(s) names that will run after this step. the *before* param must not specify upstream steps as it will cause a loop. if *before* is not specified, the graph will complete after the error handler execution.
- **function** -- function this step should run in
- **full\_event** -- this step accepts the full event (not just the body)
- **input\_path** -- selects the key/path in the event to use as input to the step this requires that the event body will behave like a dict, for example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means the step will receive 7 as input
- **result\_path** -- selects the key/path in the event to write the results to this requires that the event body will behave like a dict, for example: event: {"x": 5}, result\_path="y" means the output of the step will be written to event["y"] resulting in {"x": 5, "y": <result>}
- **class\_args** -- class init arguments

**to**(class\_name: str | [StepToDict](#) | None = None, name: str | None = None, handler: str | None = None, graph\_shape: str | None = None, function: str | None = None, full\_event: bool | None = None, input\_path: str | None = None, result\_path: str | None = None, \*\*class\_args)

add a step right after this step and return the new step

### Example

a 4-step pipeline ending with a stream: `graph.to('URLDownloader') .to('ToParagraphs')  
.to(name='to_json', handler='json.dumps') .to('>>', 'to_v3io', path=stream_path)`

#### Parameters

- **class\_name** -- class name or step object to build the step from for router steps the class name should start with '\*' for queue/stream step the class should be '>>' or '\$queue'
- **name** -- unique name (and path) for the child step, default is class name
- **handler** -- class/function handler to invoke on run/event
- **graph\_shape** -- graphviz shape name
- **function** -- function this step should run in
- **full\_event** -- this step accepts the full event (not just body)
- **input\_path** -- selects the key/path in the event to use as input to the step this requires that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means the step will receive 7 as input
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="y" means the output of the step will be written to event["y"] resulting in {"x": 5, "y": <result>}
- **class\_args** -- class init arguments

```
class mlrun.serving.ErrorStep(class_name: str | type | None = None, class_args: dict | None = None,  
                             handler: str | None = None, name: str | None = None, after: list | None =  
                             None, full_event: bool | None = None, function: str | None = None,  
                             responder: bool | None = None, input_path: str | None = None, result_path:  
                             str | None = None)
```

Bases: [TaskStep](#)

error execution step, runs a class or handler

**kind** = 'error\_step'

```
class mlrun.serving.GraphContext(level='info', logger=None, server=None, nuclio_context=None)
```

Bases: object

Graph context object

```
get_param(key: str, default=None)
```

```
get_remote_endpoint(name, external=True)
```

return the remote nuclio/serving function http(s) endpoint given its name

#### Parameters

- **name** -- the function name/uri in the form [project/]function-name[:tag]
- **external** -- return the external url (returns the external url by default)

```
get_secret(key: str)
```

**property project**

current project name (for the current function)

**push\_error**(*event, message, source=None, \*\*kwargs*)

**property server**

```
class mlrun.serving.GraphServer(graph=None, parameters=None, load_mode=None, function_uri=None,
                                verbose=False, version=None, functions=None, graph_initializer=None,
                                error_stream=None, track_models=None, tracking_policy=None,
                                secret_sources=None, default_content_type=None)
```

Bases: `ModelObj`

**property graph:** `RootFlowStep` | `RouterStep`

**init\_object**(*namespace*)

**init\_states**(*context, namespace, resource\_cache: ResourceCache | None = None, logger=None, is\_mock=False*)

for internal use, initialize all steps (recursively)

**kind** = `'server'`

**run**(*event, context=None, get\_body=False, extra\_args=None*)

**set\_current\_function**(*function*)

set which child function this server is currently running on

**set\_error\_stream**(*error\_stream*)

set/initialize the error notification stream

**test**(*path: str = '/', body: str | bytes | dict | None = None, method: str = '', headers: str | None = None, content\_type: str | None = None, silent: bool = False, get\_body: bool = True, event\_id: str | None = None, trigger: MockTrigger | None = None, offset=None, time=None*)

invoke a test event into the server to simulate/test server behavior

example:

```
server = create_graph_server()
server.add_model("my", class_name=MyModelClass, model_path="{path}", z=100)
print(server.test("my/infer", testdata))
```

#### Parameters

- **path** -- api path, e.g. (`{router.url_prefix}/{model-name}/..`) path
- **body** -- message body (dict or json str/bytes)
- **method** -- optional, GET, POST, ..
- **headers** -- optional, request headers, ..
- **content\_type** -- optional, http mime type
- **silent** -- don't raise on error responses (when not 20X)
- **get\_body** -- return the body as py object (vs serialize response into json)
- **event\_id** -- specify the unique event ID (by default a random value will be generated)
- **trigger** -- nuclio trigger info or `mlrun.serving.server.MockTrigger` class (holds kind and name)
- **offset** -- trigger offset (for streams)

- **time** -- event time Datetime or str, default to now()

**wait\_for\_completion()**

wait for async operation to complete

```
class mlrun.serving.QueueStep(name: str | None = None, path: str | None = None, after: list | None = None,
                             shards: int | None = None, retention_in_hours: int | None = None,
                             trigger_args: dict | None = None, **options)
```

Bases: [BaseStep](#)

queue step, implement an async queue or represent a stream

**property** **async\_object**

**default\_shape** = 'cds'

```
init_object(context, namespace, mode='sync', reset=False, **extra_kwargs)
```

init the step class

**kind** = 'queue'

```
run(event, *args, **kwargs)
```

```
class mlrun.serving.RouterStep(class_name: str | type | None = None, class_args: dict | None = None,
                               handler: str | None = None, routes: list | None = None, name: str | None =
                               None, function: str | None = None, input_path: str | None = None,
                               result_path: str | None = None)
```

Bases: [TaskStep](#)

router step, implement routing logic for running child routes

```
add_route(key, route=None, class_name=None, handler=None, function=None, **class_args)
```

add child route step or class to the router

**Parameters**

- **key** -- unique name (and route path) for the child step
- **route** -- child step object (Task, ..)
- **class\_name** -- class name to build the route step from (when route is not provided)
- **class\_args** -- class init arguments
- **handler** -- class handler to invoke on run/event
- **function** -- function this step should run in

```
clear_children(routes: list)
```

clear child steps (routes)

**default\_shape** = 'doubleoctagon'

```
get_children()
```

get child steps (routes)

```
init_object(context, namespace, mode='sync', reset=False, **extra_kwargs)
```

init the step class

**kind** = 'router'

**plot**(filename=None, format=None, source=None, \*\*kw)

plot/save graph using graphviz

**Parameters**

- **filename** -- target filepath for the image (None for the notebook)
- **format** -- The output format used for rendering ('pdf', 'png', etc.)
- **source** -- source step to add to the graph
- **kw** -- kwargs passed to graphviz, e.g. rankdir="LR" (see: <https://graphviz.org/doc/info/attrs.html>)

**Returns**

graphviz graph object

**property routes**

child routes/steps, traffic is routed to routes based on router logic

**class** mlrun.serving.TaskStep(class\_name: str | type | None = None, class\_args: dict | None = None, handler: str | None = None, name: str | None = None, after: list | None = None, full\_event: bool | None = None, function: str | None = None, responder: bool | None = None, input\_path: str | None = None, result\_path: str | None = None)

Bases: [BaseStep](#)

task execution step, runs a class or handler

**property async\_object**

return the sync or async (storey) class instance

**clear\_object()**

**get\_full\_class\_args**(namespace, class\_object, \*\*extra\_kwargs)

**get\_step\_class\_object**(namespace)

**init\_object**(context, namespace, mode='sync', reset=False, \*\*extra\_kwargs)

init the step class

**kind** = 'task'

**respond()**

mark this step as the responder.

step output will be returned as the flow result, no other step can follow

**run**(event, \*args, \*\*kwargs)

run this step, in async flows the run is done through storey

**class** mlrun.serving.V2ModelServer(context=None, name: str | None = None, model\_path: str | None = None, model=None, protocol=None, input\_path: str | None = None, result\_path: str | None = None, \*\*kwargs)

Bases: [StepToDict](#)

base model serving class (v2), using similar API to KFServing v2 and Triton

base model serving class (v2), using similar API to KFServing v2 and Triton

The class is initialized automatically by the model server and can run locally as part of a nuclio serverless function, or as part of a real-time pipeline default model url is: /v2/models/<model>[/versions/<ver>]/operation

**You need to implement two mandatory methods:**

`load()` - download the model file(s) and load the model into memory  
`predict()` - accept request payload and return prediction/inference results

you can override additional methods : `preprocess`, `validate`, `postprocess`, `explain` you can add custom api endpoint by adding method `op_xx(event)`, will be invoked by calling the `<model-url>/xx` (operation = xx)

model server classes are subclassed (subclass implements the `load()` and `predict()` methods) the subclass can be added to a serving graph or to a model router

defining a sub class:

```
class MyClass(V2ModelServer):
    def load(self):
        # load and initialize the model and/or other elements
        model_file, extra_data = self.get_model(suffix='.pkl')
        self.model = load(open(model_file, "rb"))

    def predict(self, request):
        events = np.array(request['inputs'])
        dmatrix = xgb.DMatrix(events)
        result: xgb.DMatrix = self.model.predict(dmatrix)
        return {"outputs": result.tolist()}
```

usage example:

```
# adding a model to a serving graph using the subclass MyClass
# MyClass will be initialized with the name "my", the model_path, and an arg called
↪ my_param
graph = fn.set_topology("router")
fn.add_model("my", class_name="MyClass", model_path="<model-uri>", my_param=5)
```

**Parameters**

- **context** -- for internal use (passed in init)
- **name** -- step name
- **model\_path** -- model file/dir or artifact path
- **model** -- model object (for local testing)
- **protocol** -- serving API protocol (default "v2")
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, `input_path="data.b"` means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , `result_path="resp"` means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **kwargs** -- extra arguments (can be accessed using `self.get_param(key)`)

**do\_event**(*event*, \*args, \*\*kwargs)

main model event handler method

**explain**(*request: Dict*) → Dict

model explain operation

**get\_model(suffix="")**

get the model file(s) and metadata from model store

the method returns a path to the model file and the extra data (dict of dataitem objects) it also loads the model metadata into the self.model\_spec attribute, allowing direct access to all the model metadata attributes.

get\_model is usually used in the model .load() method to init the model .. rubric:: Examples

```
def load(self):
    model_file, extra_data = self.get_model(suffix='.pkl')
    self.model = load(open(model_file, "rb"))
    categories = extra_data['categories'].as_df()
```

**Parameters**

**suffix** (*str*) -- optional, model file suffix (when the model\_path is a directory)

**Returns**

- *str* -- (local) model file
- *dict* -- extra dataitems dictionary

**get\_param(key: str, default=None)**

get param by key (specified in the model or the function)

**load()**

model loading function, see also .get\_model() method

**logged\_results(request: dict, response: dict, op: str)**

hook for controlling which results are tracked by the model monitoring

this hook allows controlling which input/output data is logged by the model monitoring allow filtering out columns or adding custom values, can also be used to monitor derived metrics for example in image classification calculate and track the RGB values vs the image bitmap

the request["inputs"] holds a list of input values/arrays, the response["outputs"] holds a list of corresponding output values/arrays (the schema of the input/output fields is stored in the model object), this method should return lists of alternative inputs and outputs which will be monitored

**Parameters**

- **request** -- predict/explain request, see model serving docs for details
- **response** -- result from the model predict/explain (after postprocess())
- **op** -- operation (predict/infer or explain)

**Returns**

the input and output lists to track

**post\_init(mode='sync')**

sync/async model loading, for internal use

**postprocess(request: Dict) → Dict**

postprocess, before returning response

**predict(request: Dict) → Dict**

model prediction operation

**preprocess(request: Dict, operation) → Dict**

preprocess the event body before validate and action

**set\_metric**(name: str, value)

set real time metric (for model monitoring)

**validate**(request, operation)

validate the event body (after preprocess)

```
class mlrun.serving.VotingEnsemble(context=None, name: str | None = None, routes=None, protocol: str |
    None = None, url_prefix: str | None = None, health_prefix: str | None
    = None, vote_type: str | None = None, weights: Dict[str, float] | None
    = None, executor_type: ParallelRunnerModes | str =
    ParallelRunnerModes.thread, format_response_with_col_name_flag:
    bool = False, prediction_col_name: str = 'prediction', **kwargs)
```

Bases: ParallelRun

Voting Ensemble

The *VotingEnsemble* class enables you to apply prediction logic on top of the different added models.

You can use it by calling:

- **<prefix>/<model>/[versions/<ver>]/operation**  
Sends the event to the specific <model>/[versions/<ver>]
- **<prefix>/operation**  
Sends the event to all models and applies *vote(self, event)*

The *VotingEnsemble* applies the following logic: Incoming Event -> Router Preprocessing -> Send to model/s -> Apply all model/s logic (Preprocessing -> Prediction -> Postprocessing) -> Router Voting logic -> Router Postprocessing -> Response

This enables you to do the general preprocessing and postprocessing steps once on the router level, with only model-specific adjustments at the model level.

When enabling model tracking via *set\_tracking()* the ensemble logic predictions will appear with model name as the given *VotingEnsemble* name or "VotingEnsemble" by default.

Example:

```
# Define a serving function
# Note: You can point the function to a file containing you own Router or
↳ Classifier Model class
# this basic class supports sklearn based models (with '<model>.predict()' api)
fn = mlrun.code_to_function(name='ensemble',
                           kind='serving',
                           filename='model-server.py'
                           image='mlrun/mlrun')

# Set the router class
# You can set your own classes by simply changing the 'class_name'
fn.set_topology(class_name='mlrun.serving.routers.VotingEnsemble')

# Add models
fn.add_model(<model_name>, <model_path>, <model_class_name>)
fn.add_model(<model_name>, <model_path>, <model_class_name>)
```

How to extend the *VotingEnsemble*:

The *VotingEnsemble* applies its logic using the *logic(predictions)* function. The *logic()* function receives an array of (# samples, # predictors) which you can then use to apply whatever logic you may need.

If we use this *VotingEnsemble* as an example, the *logic()* function tries to figure out whether you are trying to do a **classification** or a **regression** prediction by the prediction type or by the given *vote\_type* parameter. Then we

apply the appropriate *max\_vote()* or *mean\_vote()* which calculates the actual prediction result and returns it as the VotingEnsemble's prediction.

#### Parameters

- **context** -- for internal use (passed in init)
- **name** -- step name
- **routes** -- for internal use (routes passed in init)
- **protocol** -- serving API protocol (default "v2")
- **url\_prefix** -- url prefix for the router (default /v2/models)
- **health\_prefix** -- health api url prefix (default /v2/health)
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="resp" means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **vote\_type** -- Voting type to be used (from *VotingTypes*). by default will try to self-deduct upon the first event: - float prediction type: regression - int prediction type: classification
- (**{<model\_name>" (weights A dictionary) -- <model\_weight>}**) that specified each model weight, if there is a model that didn't appear in the dictionary his weight will be count as a zero. None means that all the models have the same weight.
- **executor\_type** -- Parallelism mechanism, out of *ParallelRunnerModes*, by default *threads*
- **format\_response\_with\_col\_name\_flag** --  
 If this flag is True the model's responses output format is  
 {id: <id>, model\_name: <name>, outputs: {..., prediction: [<predictions>], ...}}  
 Else  
 {id: <id>, model\_name: <name>, outputs: [<predictions>]}
- **prediction\_col\_name** -- The dict key for the predictions column in the model's responses output. Example: If the model returns {id: <id>, model\_name: <name>, outputs: {..., prediction: [<predictions>], ...}} the prediction\_col\_name should be *prediction*. by default, *prediction*
- **kwargs** -- extra arguments

**do\_event**(event, \*args, \*\*kwargs)

Handles incoming requests.

#### Parameters

**event** (*nuclio.Event*) -- Incoming request as a nuclio.Event.

#### Returns

Event response after running the requested logic

#### Return type

Response

**extract\_results\_from\_response**(*response*)

Extracts the prediction from the model response. This function is used to allow multiple model return types. and allow for easy extension to the user's ensemble and models best practices.

**Parameters**

**response** (*Union[List, Dict]*) -- The model response's *output* field.

**Returns**

The model's predictions

**Return type**

List

**logic**(*predictions: List[List[int | float]], weights: List[float]*)

Returns the final prediction of all the models after applying the desire logic

**Parameters**

- **predictions** -- The predictions from all models, per event
- **weights** -- models weights in the prediction order

**Returns**

List of the resulting voted predictions

**post\_init**(*mode='sync'*)**validate**(*request: dict, method: str*)

Validate the event body (after preprocessing)

**Parameters**

- **request** -- Event body.
- **method** -- Event method.

**Returns**

The given Event body (request).

**Raises**

**Exception** -- If validation failed.

**mlrun.serving.create\_graph\_server**(*parameters={}, load\_mode=None, graph=None, verbose=False, current\_function=None, \*\*kwargs*) → *GraphServer*

create graph server host/emulator for local or test runs

Usage example:

```
server = create_graph_server(graph=RouterStep(), parameters={})
server.init(None, globals())
server.graph.add_route("my", class_name=MyModelClass, model_path="{path}", z=100)
print(server.test("/v2/models/my/infer", testdata))
```

**class mlrun.serving.remote.BatchHttpRequests**(*url: str | None = None, subpath: str | None = None, method: str | None = None, headers: dict | None = None, url\_expression: str | None = None, body\_expression: str | None = None, return\_json: bool = True, input\_path: str | None = None, result\_path: str | None = None, retries=None, backoff\_factor=None, timeout=None, \*\*kwargs*)

class for calling remote endpoints in parallel

class for calling remote endpoints in parallel

sync and async graph step implementation for request/resp to remote service (class shortcut = "\$remote") url can be an http(s) url (e.g. "https://myservice/path") or an mlrun function uri ([project/]name). alternatively the url\_expression can be specified to build the url from the event (e.g. "event['url']").

example pipeline:

```
function = mlrun.new_function("myfunc", kind="serving")
flow = function.set_topology("flow", engine="async")
flow.to(
    BatchHttpRequests(
        url_expression="event['url']",
        body_expression="event['data']",
        method="POST",
        input_path="req",
        result_path="resp",
    )
).respond()

server = function.to_mock_server()
# request contains a list of elements, each with url and data
request = [{"url": f"{base_url}/{i}", "data": i} for i in range(2)]
resp = server.test(body={"req": request})
```

#### Parameters

- **url** -- http(s) url or function [project/]name to call
- **subpath** -- path (which follows the url)
- **method** -- HTTP method (GET, POST, ..), default to POST
- **headers** -- dictionary with http header values
- **url\_expression** -- an expression for getting the url from the event, e.g. "event['url']"
- **body\_expression** -- an expression for getting the request body from the event, e.g. "event['data']"
- **return\_json** -- indicate the returned value is json, and convert it to a py object
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="resp" means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **retries** -- number of retries (in exponential backoff)
- **backoff\_factor** -- A backoff factor in seconds to apply between attempts after the second try
- **timeout** -- How long to wait for the server to send data before giving up, float in seconds

```
__init__(url: str | None = None, subpath: str | None = None, method: str | None = None, headers: dict |
None = None, url_expression: str | None = None, body_expression: str | None = None,
return_json: bool = True, input_path: str | None = None, result_path: str | None = None,
retries=None, backoff_factor=None, timeout=None, **kwargs)
```

class for calling remote endpoints in parallel

sync and async graph step implementation for request/resp to remote service (class shortcut = "\$remote") url can be an http(s) url (e.g. "https://myservice/path") or an mlrun function uri ([project/]name). alternatively the url\_expression can be specified to build the url from the event (e.g. "event['url']").

example pipeline:

```
function = mlrun.new_function("myfunc", kind="serving")
flow = function.set_topology("flow", engine="async")
flow.to(
    BatchHttpRequests(
        url_expression="event['url']",
        body_expression="event['data']",
        method="POST",
        input_path="req",
        result_path="resp",
    )
).respond()

server = function.to_mock_server()
# request contains a list of elements, each with url and data
request = [{"url": f"{base_url}/{i}", "data": i} for i in range(2)]
resp = server.test(body={"req": request})
```

#### Parameters

- **url** -- http(s) url or function [project/]name to call
- **subpath** -- path (which follows the url)
- **method** -- HTTP method (GET, POST, ..), default to POST
- **headers** -- dictionary with http header values
- **url\_expression** -- an expression for getting the url from the event, e.g. "event['url']"
- **body\_expression** -- an expression for getting the request body from the event, e.g. "event['data']"
- **return\_json** -- indicate the returned value is json, and convert it to a py object
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="resp" means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **retries** -- number of retries (in exponential backoff)
- **backoff\_factor** -- A backoff factor in seconds to apply between attempts after the second try
- **timeout** -- How long to wait for the server to send data before giving up, float in seconds

```
class mlrun.serving.remote.RemoteStep(url: str, subpath: str | None = None, method: str | None = None,
                                     headers: dict | None = None, url_expression: str | None = None,
                                     body_expression: str | None = None, return_json: bool = True,
                                     input_path: str | None = None, result_path: str | None = None,
                                     max_in_flight=None, retries=None, backoff_factor=None,
                                     timeout=None, **kwargs)
```

class for calling remote endpoints

class for calling remote endpoints

sync and async graph step implementation for request/resp to remote service (class shortcut = "\$remote") url can be an http(s) url (e.g. "https://myservice/path") or an mlrun function uri ([project/]name). alternatively the url\_expression can be specified to build the url from the event (e.g. "event['url']").

example pipeline:

```
flow = function.set_topology("flow", engine="async")
flow.to(name="step1", handler="func1")
    .to(RemoteStep(name="remote_echo", url="https://myservice/path", method="POST"))
    .to(name="laststep", handler="func2").respond()
```

### Parameters

- **url** -- http(s) url or function [project/]name to call
- **subpath** -- path (which follows the url), use *\$path* to use the event.path
- **method** -- HTTP method (GET, POST, ..), default to POST
- **headers** -- dictionary with http header values
- **url\_expression** -- an expression for getting the url from the event, e.g. "event['url']"
- **body\_expression** -- an expression for getting the request body from the event, e.g. "event['data']"
- **return\_json** -- indicate the returned value is json, and convert it to a py object
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="resp" means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **retries** -- number of retries (in exponential backoff)
- **backoff\_factor** -- A backoff factor in seconds to apply between attempts after the second try
- **timeout** -- How long to wait for the server to send data before giving up, float in seconds

```
__init__(url: str, subpath: str | None = None, method: str | None = None, headers: dict | None = None,
         url_expression: str | None = None, body_expression: str | None = None, return_json: bool = True,
         input_path: str | None = None, result_path: str | None = None, max_in_flight=None, retries=None,
         backoff_factor=None, timeout=None, **kwargs)
```

class for calling remote endpoints

sync and async graph step implementation for request/resp to remote service (class shortcut = "\$remote") url can be an http(s) url (e.g. "https://myservice/path") or an mlrun function uri ([project/]name). alternatively the url\_expression can be specified to build the url from the event (e.g. "event['url']").

example pipeline:

```
flow = function.set_topology("flow", engine="async")
flow.to(name="step1", handler="func1")
    .to(RemoteStep(name="remote_echo", url="https://myservice/path", method=
→ "POST"))
    .to(name="laststep", handler="func2").respond()
```

### Parameters

- **url** -- http(s) url or function [project/]name to call
- **subpath** -- path (which follows the url), use *\$path* to use the event.path
- **method** -- HTTP method (GET, POST, ..), default to POST
- **headers** -- dictionary with http header values
- **url\_expression** -- an expression for getting the url from the event, e.g. "event['url']"
- **body\_expression** -- an expression for getting the request body from the event, e.g. "event['data']"
- **return\_json** -- indicate the returned value is json, and convert it to a py object
- **input\_path** -- when specified selects the key/path in the event to use as body this require that the event body will behave like a dict, example: event: {"data": {"a": 5, "b": 7}}, input\_path="data.b" means request body will be 7
- **result\_path** -- selects the key/path in the event to write the results to this require that the event body will behave like a dict, example: event: {"x": 5} , result\_path="resp" means the returned response will be written to event["y"] resulting in {"x": 5, "resp": <result>}
- **retries** -- number of retries (in exponential backoff)
- **backoff\_factor** -- A backoff factor in seconds to apply between attempts after the second try
- **timeout** -- How long to wait for the server to send data before giving up, float in seconds

### class mlrun.serving.utils.StepToDict

auto serialization of graph steps to a python dictionary

**to\_dict**(fields=None, exclude=None)

convert the step object to a python dictionary

## 18.16 storey.transformations - Graph transformations

Graph transformations are contained in the `storey.transformations` module. For convenience, they can also be imported directly from the `storey` package. Note that the transformation functions are actually encapsulated in classes, so that they can be referenced by name of class from graph step definitions.

```
class storey.transformations.AggregateByKey(aggregates: ~typing.List[~storey.dtypes.FieldAggregator] |
~typing.List[~typing.Dict[str, object]], table:
~storey.table.Table | str, key_field: str | ~typing.List[str] |
~typing.Callable[[~storey.dtypes.Event], object] | None =
None, time_field: str |
~typing.Callable[[~storey.dtypes.Event], object] | None =
None, emit_policy: ~storey.dtypes.EmitPolicy |
~typing.Dict[str, object] = <storey.dtypes.EmitEveryEvent
object>, augmentation_fn:
~typing.Callable[[~storey.dtypes.Event, ~typing.Dict[str,
object]], ~storey.dtypes.Event] | None = None, enrich_with:
~typing.List[str] | None = None, aliases: ~typing.Dict[str,
str] | None = None, use_windows_from_schema: bool =
False, time_format: str | None = None, **kwargs)
```

Aggregates the data into the table object provided for later persistence, and outputs an event enriched with the requested aggregation features. Persistence is done via the `NoSqlTarget` step and based on the Cache object persistence settings.

### Parameters

- **aggregates** -- List of aggregates to apply for each event. accepts either list of Field-Aggregators or a dictionary describing FieldAggregators.
- **table** -- A Table object or name for persistence of aggregations. If a table name is provided, it will be looked up in the context object passed in kwargs.
- **key\_field** -- Key field to aggregate by, accepts either a string representing the key field or a key extracting function. Defaults to the key in the event's metadata. (Optional)
- **time\_field** -- Time field to aggregate by, accepts either a string representing the time field or a time extracting function. Defaults to the processing time in the event's metadata. (Optional)
- **emit\_policy** -- Policy indicating when the data will be emitted. Defaults to `EmitEveryEvent`
- **augmentation\_fn** -- Function that augments the features into the event's body. Defaults to updating a dict. (Optional)
- **enrich\_with** -- List of attributes names from the associated storage object to be fetched and added to every event. (Optional)
- **aliases** -- Dictionary specifying aliases for enriched or aggregate columns, of the format `{'col_name': 'new_col_name'}`. (Optional)
- **time\_format** -- If the value of the time field is of type string, this format will be used to parse it, as defined in `datetime.strptime()`. By default, parsing will follow ISO-8601.

```
class storey.transformations.Assert(**kwargs)
```

Exposes an API for testing the flow between steps.

```
class storey.transformations.Batch(max_events: int | None = None, flush_after_seconds: int | float | None
= None, key_field: str | Callable[[Event], str] | None = None,
**kwargs)
```

Batches events into lists of up to `max_events` events. Each emitted list contained `max_events` events, unless `flush_after_seconds` seconds have passed since the first event in the batch was received, at which the batch is emitted with potentially fewer than `max_events` event.

#### Parameters

- **max\_events** -- Maximum number of events per emitted batch. Set to `None` to emit all events in one batch on flow termination.
- **flush\_after\_seconds** -- Maximum number of seconds to wait before a batch is emitted.
- **key** -- The key by which events are grouped. By default (`None`), events are not grouped. Other options may be: Set a '\$key' to group events by the `Event.key` property. set a 'str' key to group events by `Event.body[str]`. set a `Callable[Any, Any]` to group events by a custom key extractor.

**class** `storey.transformations.Choice`(*choice\_array*, *default=None*, *\*\*kwargs*)

Redirects each input element into at most one of multiple downstreams.

#### Parameters

- **choice\_array** (*tuple of (Flow, Function (Event=>boolean))*) -- a list of (downstream, condition) tuples, where downstream is a step and condition is a function. The first condition in the list to evaluate as true for an input element causes that element to be redirected to that downstream step.
- **default** (*Flow*) -- a default step for events that did not match any condition in `choice_array`. If not set, elements that don't match any condition will be discarded.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (`Choice`).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return `Event` objects (when `True`), or only the payload (when `False`). Defaults to `False`.

**class** `storey.transformations.Extend`(*fn*, *long\_running=None*, *\*\*kwargs*)

Adds fields to each incoming event.

#### Parameters

- **fn** (*Function (Event=>Dict)*) -- Function to transform each event to a dictionary. The fields in the returned dictionary are then added to the original event.
- **long\_running** (*boolean*) -- Whether `fn` is a long-running function. Long-running functions are run in an executor to avoid blocking other concurrent processing. Default is `False`.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (`Extend`).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return `Event` objects (when `True`), or only the payload (when `False`). Defaults to `False`.

**class** `storey.transformations.Filter`(*fn*, *long\_running=None*, *\*\*kwargs*)

Filters events based on a user-provided function.

#### Parameters

- **fn** (*Function (Event=>boolean)*) -- Function to decide whether to keep each event.
- **long\_running** (*boolean*) -- Whether `fn` is a long-running function. Long-running functions are run in an executor to avoid blocking other concurrent processing. Default is `False`.

- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (Filter).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return Event objects (when True), or only the payload (when False). Defaults to False.

**class** storey.transformations.FlatMap(*fn, long\_running=None, \*\*kwargs*)

Maps, or transforms, each incoming event into any number of events.

#### Parameters

- **fn** (*Function (Event=>list of Event)*) -- Function to transform each event to a list of events.
- **long\_running** (*boolean*) -- Whether fn is a long-running function. Long-running functions are run in an executor to avoid blocking other concurrent processing. Default is False.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (FlatMap).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return Event objects (when True), or only the payload (when False). Defaults to False.

storey.transformations.Flatten(*\*\*kwargs*)

Flatten is equivalent to FlatMap(lambda x: x).

**class** storey.transformations.ForEach(*fn, long\_running=None, \*\*kwargs*)

Applies given function on each event in the stream, passes original event downstream.

**class** storey.transformations.JoinWithTable(*table: Table | str, key\_extractor: str | Callable[[Event], str], attributes: List[str] | None = None, inner\_join: bool = False, join\_function: Callable[[Any, Dict[str, object]], Any] | None = None, \*\*kwargs*)

Joins each event with data from the given table.

#### Parameters

- **table** -- A Table object or name to join with. If a table name is provided, it will be looked up in the context.
- **key\_extractor** -- Key's column name or a function for extracting the key, for table access from an event.
- **attributes** -- A comma-separated list of attributes to be queried for. Defaults to all attributes.
- **inner\_join** -- Whether to drop events when the table does not have a matching entry (join\_function won't be called in such a case). Defaults to False.
- **join\_function** -- Joins the original event with relevant data received from the storage. Event is dropped when this function returns None. Defaults to assume the event's body is a dict-like object and updating it.
- **name** -- Name of this step, as it should appear in logs. Defaults to class name (JoinWithTable).
- **full\_event** -- Whether user functions should receive and/or return Event objects (when True), or only the payload (when False). Defaults to False.
- **context** -- Context object that holds global configurations and secrets.

```
class storey.transformations.Map(fn, long_running=None, **kwargs)
```

Maps, or transforms, incoming events using a user-provided function.

**Parameters**

- **fn** (*Function (Event=>Event)*) -- Function to apply to each event
- **long\_running** (*boolean*) -- Whether fn is a long-running function. Long-running functions are run in an executor to avoid blocking other concurrent processing. Default is False.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (Map).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return Event objects (when True), or only the payload (when False). Defaults to False.

```
class storey.transformations.MapClass(long_running=None, **kwargs)
```

Similar to Map, but instead of a function argument, this class should be extended and its do() method overridden.

```
class storey.transformations.MapWithState(initial_state, fn, group_by_key=False, **kwargs)
```

Maps, or transforms, incoming events using a stateful user-provided function, and an initial state, which may be a database table.

**Parameters**

- **initial\_state** (*dictionary or Table if group\_by\_key is True. Any object otherwise.*) -- Initial state for the computation. If group\_by\_key is True, this must be a dictionary or a Table object.
- **fn** (*Function ((Event, state)=>(Event, state))*) -- A function to run on each event and the current state. Must yield an event and an updated state.
- **group\_by\_key** (*boolean*) -- Whether the state is computed by key. Optional. Default to False.
- **full\_event** (*boolean*) -- Whether fn will receive and return an Event object or only the body (payload). Optional. Defaults to False (body only).

```
class storey.transformations.Partition(predicate: Callable[[Any], bool], **kwargs)
```

Partitions events by calling a predicate function on each event. Each processed event results in a *Partitioned* namedtuple of (left=Optional[Event], right=Optional[Event]).

For a given event, if the predicate function results in *True*, the event is assigned to *left*. Otherwise, the event is assigned to *right*.

**Parameters**

**predicate** -- A predicate function that results in a boolean.

```
class storey.transformations.ReifyMetadata(mapping: Iterable[str], **kwargs)
```

Inserts event metadata into the event body.

**Parameters**

- **mapping** -- Dictionary from event attribute name to entry key in the event body (which must be a dictionary). Alternatively, an iterable of names may be provided, and these will be used as both attribute name and entry key.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (ReifyMetadata).

```
class storey.transformations.SampleWindow(window_size: int, emit_period: EmitPeriod =  
  EmitPeriod.FIRST, emit_before_termination: bool = False,  
  key: str | Callable[[Event], str] | None = None, **kwargs)
```

Emits a single event in a window of *window\_size* events, in accordance with *emit\_period* and *emit\_before\_termination*.

#### Parameters

- **window\_size** -- The size of the window we want to sample a single event from.
- **emit\_period** -- What event should this step emit for each *window\_size* (default: EmitPeriod.First). Available options: 1.1) EmitPeriod.FIRST - will emit the first event in a window *window\_size* events. 1.2) EmitPeriod.LAST - will emit the last event in a window of *window\_size* events.
- **emit\_before\_termination** -- On termination signal, should the step emit the last event it seen (default: False). Available options: 2.1) True - The last event seen will be emitted downstream. 2.2) False - The last event seen will NOT be emitted downstream.
- **key** -- The key by which events are sampled. By default (None), events are not sampled by key. Other options may be: Set to '\$key' to sample events by the Event.key property. set to 'str' key to sample events by Event.body[str]. set a Callable[[Event], str] to sample events by a custom key extractor.

**class** storey.transformations.**SendToHttp**(*request\_builder*, *join\_from\_response*, *\*\*kwargs*)

Joins each event with data from any HTTP source. Used for event augmentation.

#### Parameters

- **request\_builder** (*Function (Event=>HttpRequest)*) -- Creates an HTTP request from the event. This request is then sent to its destination.
- **join\_from\_response** (*Function ((Event, HttpResponse)=>Event)*) -- Joins the original event with the HTTP response into a new event.
- **name** (*string*) -- Name of this step, as it should appear in logs. Defaults to class name (SendToHttp).
- **full\_event** (*boolean*) -- Whether user functions should receive and/or return Event objects (when True), or only the payload (when False). Defaults to False.

**class** storey.transformations.**ToDataFrame**(*index: str | None = None*, *columns: List[str] | None = None*, *\*\*kwargs*)

Create pandas data frame from events. Can appear in the middle of the flow, as opposed to ReduceToDataFrame

#### Parameters

- **index** -- Name of the column to be used as index. Optional. If not set, DataFrame will be range indexed.
- **columns** -- List of column names to be passed as-is to the DataFrame constructor. Optional.

for additional params, see documentation of `storey.flow.Flow`

See also the [index of all functions and classes](#).



## COMMAND-LINE INTERFACE

- *CLI commands*
- *Building and running a function from a Git Repository*
- *Using a sources archive*

### 19.1 CLI commands

Use the following commands of the MLRun command-line interface (CLI) — `mlrun` — to build and run MLRun functions:

- *build*
- *clean*
- *config*
- *get*
- *logs*
- *project*
- *run*
- *version*
- *watch-stream*

Each command supports many flags, some of which are listed in their relevant sections. To view all the flags of a command, run `mlrun <command name> --help`.

### 19.1.1 build

Use the `build` CLI command to build all the function dependencies from the function specification into a function container (Docker image).

Usage: `mlrun build [OPTIONS] FUNC_URL`

Example: `mlrun build myfunc.yaml`

| Flag                                  | Description                                                                                                                                                                                                    |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--name</code><br>TEXT           | Function name                                                                                                                                                                                                  |
| <code>--project</code><br>TEXT        | Project name                                                                                                                                                                                                   |
| <code>--tag</code> TEXT               | Function tag                                                                                                                                                                                                   |
| <code>-i, --image</code><br>TEXT      | Target image path                                                                                                                                                                                              |
| <code>-s, --source</code><br>TEXT     | Path/URL of the function source code. A PY file, or if <code>-a/--archive</code> is specified, a directory to archive. (Default: <code>'./'</code> )                                                           |
| <code>-b, --base-image</code><br>TEXT | Base Docker image                                                                                                                                                                                              |
| <code>-c, --command</code><br>TEXT    | Build commands; for example, <code>'-c pip install pandas'</code>                                                                                                                                              |
| <code>--secret-name</code><br>TEXT    | Name of a container-registry secret                                                                                                                                                                            |
| <code>-a, --archive</code><br>TEXT    | Path/URL of a target function-sources archive directory: as part of the build, the function sources (see <code>-s/--source</code> ) are archived into a TAR file and then extracted into the archive directory |
| <code>--silent</code>                 | Do not show build logs                                                                                                                                                                                         |
| <code>--with-mlrun</code>             | Add the MLRun package ("mlrun")                                                                                                                                                                                |
| <code>--db</code> TEXT                | Save the run results to path or DB url                                                                                                                                                                         |
| <code>-r, --runtime</code><br>TEXT    | Function spec dict, for pipeline usage                                                                                                                                                                         |
| <code>--kfp</code>                    | Running inside Kubeflow Pipelines, do not use                                                                                                                                                                  |
| <code>--skip</code>                   | Skip if already deployed                                                                                                                                                                                       |
| <code>--env-file</code><br>TEXT       | Path to <code>.env</code> file to load config/variables from                                                                                                                                                   |
| <code>--ensure-project</code>         | Ensure the project exists, if not, create project                                                                                                                                                              |

**Note:** For information about using the `-a|--archive` option to create a function-sources archive, see *Using a Sources Archive* later in this tutorial.

### 19.1.2 clean

Use the `clean` CLI command to clean runtime resources. When run without any flags, it cleans the resources for all runs of all runtimes.

Usage: `mlrun clean [OPTIONS] [KIND] [id]`

Examples:

- Clean resources for all runs of all runtimes: `mlrun clean`
- Clean resources for all runs of a specific kind (e.g. job): `mlrun clean job`
- Clean resources for specific job (by uid): `mlrun clean mpijob 15d04c19c2194c0a8efb26ea3017254b`

| Flag                | Description                                                                                                                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--kind</code> | Clean resources for all runs of a specific kind (e.g. job).                                                                                                                                                                                                         |
| <code>--id</code>   | Delete the resources of the mlrun object with this identifier. For most function runtimes, runtime resources are per run, and the identifier is the run's UID. For DASK runtime, the runtime resources are per function, and the identifier is the function's name. |

| Options                                  | Description                                                                                                                                         |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--api TEXT</code>                  | URL of the mlrun-api service.                                                                                                                       |
| <code>-ls, --label-selector TEXT</code>  | Delete only the runtime resources matching the label selector.                                                                                      |
| <code>-f, --force</code>                 | Delete the runtime resource even if they're not in terminal state or if the grace period didn't pass.                                               |
| <code>-gp, --grace-period INTEGER</code> | Grace period, in seconds, given to the runtime resource before they are actually removed, counted from the moment they moved to the terminal state. |

### 19.1.3 config

Use the `config` CLI command to show the mlrun client environment configuration, such as location of artifacts and api.

Example: `mlrun config`

| Flag                                  | Description                                                  |
|---------------------------------------|--------------------------------------------------------------|
| <code>--command TEXT</code>           | get (default), set or clear                                  |
| <code>--env-file TEXT</code>          | Path to the mlrun .env file (defaults to '~/mlrun.env')      |
| <code>-a, --api TEXT</code>           | API service url                                              |
| <code>-p, --artifact-path TEXT</code> | Default artifacts path                                       |
| <code>-u, --username TEXT</code>      | Username (for remote access)                                 |
| <code>-k, --access-key TEXT</code>    | Access key (for remote access)                               |
| <code>-e, --env-vars TEXT</code>      | Additional env vars, e.g. <code>-e AWS_ACCESS_KEY_ID=</code> |

### 19.1.4 get

Use the `get` CLI command to list one or more objects per kind/class.

Usage: `get pods | runs | artifacts | func [name]`

Examples:

- `mlrun get runs --project getting-started-admin`
- `mlrun get pods --project getting-started-admin`
- `mlrun get artifacts --project getting-started-admin`
- `mlrun get func prep-data --project getting-started-admin`

| Flag                              | Description                                                           |
|-----------------------------------|-----------------------------------------------------------------------|
| <code>--kind TEXT</code>          | resource type to list/get: run, runtime, workflow, artifact, function |
| <code>--name TEXT</code>          | Name of object to return                                              |
| <code>-s, --selector TEXT</code>  | Label selector                                                        |
| <code>-n, --namespace TEXT</code> | Kubernetes namespace                                                  |
| <code>--uid TEXT</code>           | Object ID                                                             |
| <code>--project TEXT</code>       | Project name to return                                                |
| <code>-t, --tag TEXT</code>       | Artifact/function tag of object to return                             |
| <code>--db TEXT</code>            | db path/url of object to return                                       |

### 19.1.5 logs

Use the `logs` CLI command to get or watch task logs.

Usage: `logs [OPTIONS] uid`

Example: `mlrun logs ba409c0cb4904d60aa8f8d1c05b40a75 --project getting-started-admin`

| Flag                            | Description                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--uid TEXT</code>         | UID of the run to get logs for                                                                                                                                                                                                                                                                       |
| <code>-p, --project TEXT</code> | Project name                                                                                                                                                                                                                                                                                         |
| <code>--offset TEXT</code>      | Retrieve partial log, get up to size bytes starting at the offset from beginning of log                                                                                                                                                                                                              |
| <code>--db TEXT</code>          | API service url                                                                                                                                                                                                                                                                                      |
| <code>-w, --watch</code>        | Retrieve logs of a running process, and watch the progress of the execution until it completes. Prints out the logs and continues to periodically poll for, and print, new logs as long as the state of the runtime that generates this log is either <code>pending</code> or <code>running</code> . |

## 19.1.6 project

Use the `project` CLI command to load and/or run a project.

Usage: `mlrun project [OPTIONS] [CONTEXT]`

Example: `mlrun project -r workflow.py .`

| Flag                                   | Description                                                                                                                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-n, --context TEXT</code>        | Project context path                                                                                                                                                                        |
| <code>-n, --name TEXT</code>           | Project name                                                                                                                                                                                |
| <code>-u, --url TEXT</code>            | Remote git or archive url of the project                                                                                                                                                    |
| <code>-r, --run TEXT</code>            | Run workflow name of .py file                                                                                                                                                               |
| <code>-a, --arguments TEXT</code>      | Kubeflow pipeline arguments name and value tuples (with -r flag), e.g. <code>-a x=6</code>                                                                                                  |
| <code>-p, --artifact-path TEXT</code>  | Target path/url for workflow artifacts. The string <code>{{workflow.uid}}</code> is replaced by workflow id                                                                                 |
| <code>-x, --param TEXT</code>          | mlrun project parameter name and value tuples, e.g. <code>-p x=37 -p y='text'</code>                                                                                                        |
| <code>-s, --secrets TEXT</code>        | Secrets file= or env=ENV_KEY1,...                                                                                                                                                           |
| <code>--namespace TEXT</code>          | k8s namespace                                                                                                                                                                               |
| <code>--db TEXT</code>                 | API service url                                                                                                                                                                             |
| <code>--init-git</code>                | For new projects init git the context dir                                                                                                                                                   |
| <code>-c, --clone</code>               | Force override/clone into the context dir                                                                                                                                                   |
| <code>--sync</code>                    | Sync functions into db                                                                                                                                                                      |
| <code>-w, --watch</code>               | Wait for pipeline completion (with -r flag)                                                                                                                                                 |
| <code>-d, --dirty</code>               | Allow run with uncommitted git changes                                                                                                                                                      |
| <code>--git-repo TEXT</code>           | git repo (org/repo) for git comments                                                                                                                                                        |
| <code>--git-issue IN-TEGER</code>      | git issue number for git comments                                                                                                                                                           |
| <code>--handler TEXT</code>            | Workflow function handler name                                                                                                                                                              |
| <code>--engine TEXT</code>             | Workflow engine (kfp/local)                                                                                                                                                                 |
| <code>--local</code>                   | Try to run workflow functions locally                                                                                                                                                       |
| <code>--timeout IN-TEGER</code>        | Timeout in seconds to wait for pipeline completion (used when watch=True)                                                                                                                   |
| <code>--env-file TEXT</code>           | Path to .env file to load config/variables from                                                                                                                                             |
| <code>--save/--no-save</code>          | Create and save the project if not exist (default to save)                                                                                                                                  |
| <code>--schedule TEXT</code>           | To create a schedule, define a standard crontab expression string. To use the pre-defined workflow's schedule: <code>set --schedule 'true'</code> . <a href="#">See cron details.</a>       |
| <code>--save-secrets TEXT</code>       | Store the project secrets as k8s secrets                                                                                                                                                    |
| <code>-nt, --notifications TEXT</code> | To have a notification for the run set notification file destination define: <code>file=notification.json</code> or a 'dictionary configuration e.g <code>'{"slack":{"webhook":""}}'</code> |

## 19.1.7 run

Use the run CLI command to execute a task and inject parameters by using a local or remote function.

Usage: mlrun [OPTIONS] URL [ARGS]...

Examples:

- `mlrun run -f db://getting-started-admin/prep-data --project getting-started-admin`
- `mlrun run -f myfunc.yaml -w -p p1=3`

| Flag                                     | Description                                                                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-p, --param TEXT</code>            | Parameter name and value tuples; for example, <code>-p x=37 -p y='text'</code>                                                               |
| <code>-i, --inputs TEXT</code>           | Input artifact; for example, <code>-i infile.txt=s3://mybucket/infile.txt</code>                                                             |
| <code>-o, --outputs TEXT</code>          | Output artifact/result for kfp                                                                                                               |
| <code>--in-path TEXT</code>              | Base directory path/URL for storing input artifacts                                                                                          |
| <code>--out-path TEXT</code>             | Base directory path/URL for storing output artifacts                                                                                         |
| <code>-s, --secrets TEXT</code>          | Secrets, either as <code>file=&lt;filename&gt;</code> or <code>env=&lt;ENVAR&gt;</code> , ...; for example, <code>-s file=secrets.txt</code> |
| <code>--uid TEXT</code>                  | Unique run ID                                                                                                                                |
| <code>--name TEXT</code>                 | Run name                                                                                                                                     |
| <code>--workflow TEXT</code>             | Workflow name/id                                                                                                                             |
| <code>--project TEXT</code>              | Project name or ID                                                                                                                           |
| <code>--db TEXT</code>                   | Save run results to DB url                                                                                                                   |
| <code>--runtime TEXT</code>              | Function spec dict, for pipeline usage                                                                                                       |
| <code>--kfp</code>                       | Running inside Kubeflow Pipelines, do not use                                                                                                |
| <code>-h, --hyperparam TEXT</code>       | Hyper parameters (will expand to multiple tasks) e.g. <code>--hyperparam p2=[1,2,3]</code>                                                   |
| <code>--param-file TEXT</code>           | Path to csv table of execution (hyper) params                                                                                                |
| <code>--selector TEXT</code>             | How to select the best result from a list, e.g. <code>max.accuracy</code>                                                                    |
| <code>--hyper-param-strategy TEXT</code> | Hyperparam tuning strategy list, grid, random                                                                                                |
| <code>--hyper-param-options TEXT</code>  | Hyperparam options json string                                                                                                               |
| <code>-f, --func-url TEXT</code>         | Path/URL of a YAML function-configuration file, or <code>db:///[:tag]</code> for a DB function object                                        |
| <code>--task TEXT</code>                 | Path/URL of a YAML task-configuration file                                                                                                   |
| <code>--handler TEXT</code>              | Invoke the function handler inside the code file                                                                                             |
| <code>--mode TEXT</code>                 | Special run mode ('pass' for using the command as is)                                                                                        |
| <code>--schedule TEXT</code>             | Cron schedule                                                                                                                                |
| <code>--from-env</code>                  | Read the spec from the env var                                                                                                               |
| <code>--dump</code>                      | Dump run results as YAML                                                                                                                     |
| <code>--image TEXT</code>                | Container image                                                                                                                              |
| <code>--kind TEXT</code>                 | Serverless runtime kind                                                                                                                      |
| <code>--source TEXT</code>               | Source code archive/git                                                                                                                      |
| <code>--local</code>                     | Run the task locally (ignore runtime)                                                                                                        |
| <code>--auto-mount</code>                | Add volume mount to job using auto mount option                                                                                              |
| <code>--workdir TEXT</code>              | Run working directory                                                                                                                        |
| <code>--origin-file TEXT</code>          | For internal use                                                                                                                             |
| <code>--label TEXT</code>                | Run labels (key=val)                                                                                                                         |
| <code>-w, --watch</code>                 | Watch/tail run log                                                                                                                           |
| <code>--verbose</code>                   | Verbose log                                                                                                                                  |
| <code>--scrape-metrics</code>            | Whether to add the <code>mlrun/scrape-metrics</code> label to this run's resources                                                           |
| <code>--env-file TEXT</code>             | Path to .env file to load config/variables from                                                                                              |
| <code>--auto-build</code>                | When set, the function image will be built prior to run if needed                                                                            |
| <code>--ensure-project</code>            | Ensure the project exists, if not, create project                                                                                            |
| <code>--returns TEXT</code>              | Logging configurations for the handler's returning values                                                                                    |

### 19.1.8 version

Use the `version` CLI command to get the mlrun server version.

### 19.1.9 watch-stream

Use the `watch-stream` CLI command to watch a v3io stream and print data at a recurring interval.

Usage: `mlrun watch-stream [OPTIONS] URL`

Examples:

- `mlrun watch-stream v3io:///users/my-test-stream`
- `mlrun watch-stream v3io:///users/my-test-stream -s 1`
- `mlrun watch-stream v3io:///users/my-test-stream -s 1 -s 2`
- `mlrun watch-stream v3io:///users/my-test-stream -s 1 -s 2 --seek EARLIEST`

| Flag                                 | Description                                                |
|--------------------------------------|------------------------------------------------------------|
| <code>-s, --shard-ids INTEGER</code> | Shard id to listen on (can be multiple).                   |
| <code>--seek TEXT</code>             | Where to start/seek (EARLIEST or LATEST)                   |
| <code>-i, --interval INTEGER</code>  | Interval in seconds. Default = 3                           |
| <code>-j, --is-json</code>           | Indicates that the payload is json (will be deserialized). |

## 19.2 Building and running a function from a Git repository

To build and run a function from a Git repository, start out by adding a YAML function-configuration file in your local environment. This file should describe the function and define its specification. For example, create a **myfunc.yaml** file with the following content in your working directory:

```
kind: job
metadata:
  name: remote-demo1
  project: ''
spec:
  command: 'examples/training.py'
  args: []
  image: .mlrun/func-default-remote-demo-ps-latest
  image_pull_policy: Always
  build:
    base_image: mlrun/mlrun:1.6.2
    source: git://github.com/mlrun/mlrun
```

Then, run the following CLI command and pass the path to your local function-configuration file as an argument to build the function's container image according to the configured requirements. For example, the following command builds the function using the **myfunc.yaml** file from the current directory:

```
mlrun build myfunc.yaml
```

When the build completes, you can use the `run` CLI command to run the function. Set the `-f` option to the path to the local function-configuration file, and pass the relevant parameters. For example:

```
mlrun run -f myfunc.yaml -w -p p1=3
```

You can also try the following function-configuration example, which is based on the MLRun CI demo:

```
kind: job
metadata:
  name: remote-git-test
  project: default
  tag: latest
spec:
  command: 'myfunc.py'
  args: []
  image_pull_policy: Always
  build:
    commands: []
    base_image: mlrun/mlrun:1.6.2
    source: git://github.com/mlrun/ci-demo.git
```

## 19.3 Using a sources archive

The `-a|--archive` option of the CLI `build` command enables you to define a remote object path for storing TAR archive files with all the required code dependencies. The remote location can be, for example, in an AWS S3 bucket or in a data container in an Iguazio MLOps Platform ("platform") cluster. Alternatively, you can also set the archive path by using the `MLRUN_DEFAULT_ARCHIVE` environment variable. When an archive path is provided, the remote builder archives the configured function sources (see the `-s|--source` `build` option) into a TAR archive file, and then extracts (untars) all of the archive files (i.e., the function sources) into the configured archive location.

To use the archive option, first create a local function-configuration file. For example, you can create a **function.yaml** file in your working directory with the following content; the specification describes the environment to use, defines a Python base image, adds several packages, and defines **examples/training.py** as the application to execute on `run` commands:

```
kind: job
metadata:
  name: remote-demo4
  project: ''
spec:
  command: 'examples/training.py'
  args: []
  image_pull_policy: Always
  build:
    commands: []
    base_image: mlrun/mlrun:1.6.2
```

Next, run the following MLRun CLI command to build the function; replace the `<...>` placeholders to match your configuration:

```
mlrun build <function-configuration file path> -a <archive path/URL> [-s <function-  
↪sources path/URL>]
```

For example, the following command uses the **function.yaml** configuration file (**.**), relies on the default function-sources path (**./**), and sets the target archive path to **v3io:///users/\$V3IO\_USERNAME/tars**. So, for a user named "admin", for example, the function sources from the local working directory will be archived and then extracted into an **admin/tars** directory in the "users" data container of the configured platform cluster (which is accessed via the **v3io** data mount):

```
mlrun build . -a v3io:///users/$V3IO_USERNAME/tars
```

**Note:**

- **.** is a shorthand for a **function.yaml** configuration file in the local working directory.
- The **-a|--archive** option is used to instruct MLRun to create an archive file from the function-code sources at the location specified by the **-s|--sources** option; the default sources location is the current directory (**./**).

After the function build completes, you can run the function with some parameters. For example:

```
mlrun run -f . -w -p p1=3
```



## GLOSSARY

### 20.1 MLRun terms

| MLRun terms        | Description                                                                                                                                                                                                                                                                               |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Feature set        | A group of features that are ingested together and stored in logical group. See <a href="#">Feature sets</a> .                                                                                                                                                                            |
| Feature vector     | A combination of multiple features originating from different feature sets. See <a href="#">Creating and using feature vectors</a> .                                                                                                                                                      |
| HTTPRun hub        | API for wrapper to the internal DB in MLRun. See <a href="#">HTTPRunDB</a> .<br>Used in code to reference the <a href="#">MLRun function hub</a> .                                                                                                                                        |
| MLRun function     | An abstraction over the code, extra packages, runtime configuration and desired resources which allow execution in a local environment and on various serverless engines on top of K8s. See <a href="#">MLRun serverless functions</a> and <a href="#">Creating and using functions</a> . |
| MLRun Function Hub | A collection of pre-built MLRun functions available for usage. See <a href="#">MLRun function hub</a> .                                                                                                                                                                                   |
| MLRun project      | A logical container for all the work on a particular activity/application that include functions, workflow, artifacts, secrets, and more, and can be assigned to a specific group of users. See <a href="#">Projects</a> .                                                                |
| mlpijob            | One of the MLRun batch runtimes that runs distributed jobs and Horovod over the MPI job operator, used mainly for deep learning jobs. See <a href="#">MLRun MPIJob</a> and <a href="#">Horovod runtime</a> .                                                                              |
| Nuclio function    | Subtype of MLRun function that uses the Nuclio runtime for any generic real-time function. See <a href="#">Nuclio real-time functions</a> and <a href="#">Nuclio documentation</a> .                                                                                                      |
| Serving function   | Subtype of MLRun function that uses the Nuclio runtime specifically for serving ML models or real-time pipelines. See <a href="#">Real-time serving pipelines (graphs)</a> and <a href="#">Model serving pipelines</a> .                                                                  |
| storey             | Asynchronous streaming library for real time event processing and feature extraction. Used in Iguazio's feature store and real-time pipelines. See <a href="#">storey.transformations - Graph transformations</a> .                                                                       |

## 20.2 Iguazio (V3IO) terms

| Name                 | Description                                                                                          |
|----------------------|------------------------------------------------------------------------------------------------------|
| Consumer group       | Set of consumers that cooperate to consume data from some topics.                                    |
| Key Value (KV) store | Type of storage where data is stored by a specific key, allows for real-time lookups.                |
| V3IO                 | Iguazio real-time data layer, supports several formats including KV, Block, File, Streams, and more. |
| V3IO shard           | Uniquely identified data sets within a V3IO stream. Similar to a Kafka partition.                    |
| V3IO stream          | Streaming mechanism part of Iguazio's V3IO data layer. Similar to a Kafka stream.                    |

## 20.3 Standard ML terms

| Name                | Description                                                                                                                                                                                                                                                                 |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Artifact            | A versioned output of a data processing or model training jobs, can be used as input for other jobs or pipelines in the project. There are various types of artifacts (file, model, dataset, chart, etc.) that incorporate useful metadata. See <a href="#">Artifacts</a> . |
| DAG                 | Directed acyclic graph, used to describe workflows/pipelines.                                                                                                                                                                                                               |
| Feature engineering | Apply domain knowledge and statistical techniques to raw data to extract more information out of data and improve performance of machine. learning models                                                                                                                   |
| EDA                 | Exploratory data analysis. Used by data scientists to understand dataset via cleaning, visualization, and statistical tests.                                                                                                                                                |
| ML pipeline         | Pipeline of operations for machine learning. It can include loading data, feature engineering, feature selection, model training, hyperparameter tuning, model validation, and model deployment.                                                                            |
| Feature             | Data field/vector definition and metadata (name, type, stats, etc.). A dataset is a collection of features.                                                                                                                                                                 |
| MLOps               | Set of practices that reliably and efficiently deploys and maintains machine learning models in production. Combination of Machine Learning and DevOps.                                                                                                                     |
| Dataframe           | Tabular representation of data, often using tools such as Pandas, Spark, or Dask.                                                                                                                                                                                           |

## 20.4 ML libraries / tools

| Name               | Description                                                                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dask               | Flexible library for parallel computing in Python. Often used for data engineering, data science, and machine learning.                                                                                   |
| Keras              | An open-source software library that provides a Python interface for artificial neural networks. Keras acts as an interface for the TensorFlow library.                                                   |
| Kube-Flow pipeline | Platform for building and deploying portable, scalable machine learning (ML) workflows based on Docker containers.                                                                                        |
| PyTorch            | An open source machine learning framework based on the Torch library, used for applications such as computer vision and natural language. processing                                                      |
| Sklearn            | Open source machine learning Python library. Used for modelling, pipelines, data transformations, feature engineering, and more.                                                                          |
| Spark              | Open source parallel processing framework for running large-scale data analytics applications across clustered computers. Often used for data engineering, data science, and machine learning.            |
| Tensor-Flow        | A Google developed open-source software library for machine learning and deep learning.                                                                                                                   |
| Tensor-Board       | TensorFlow's visualization toolkit, used for tracking metrics like loss and accuracy, visualizing the model graph, viewing histograms of weights, biases, or other tensors as they change over time, etc. |
| XGBoost            | Optimized distributed gradient boosting library designed to be highly efficient, flexible and portable. Implements machine learning algorithms under the Gradient Boosting framework.                     |

*[Back to top](#)*



## CHANGE LOG

- [v1.6.2](#) | [v1.6.1](#) | [v1.6.0](#)
- [v1.5.2](#) | [v1.5.1](#) | [v1.5.0](#)
- [v1.4.1](#) | [v1.4.0](#)
- [v1.3.4](#) | [v1.3.3](#) | [v1.3.2](#) | [v1.3.1](#) | [v1.3.0](#)
- [v1.2.3](#) | [v1.2.2](#) | [v1.2.1](#) | [v1.2.0](#)
- [v1.1.3](#) | [v1.1.2](#) | [v1.1.1](#) | [v1.1.0](#)
- [v1.0.6](#) | [v1.0.5](#) | [v1.0.4](#) | [v1.0.3](#) | [v1.0.2](#) | [v1.0.0](#)
- *Open issues*
- *Limitations*
- *Deprecations and removed code*

### 21.1 v1.6.2 (29 March 2024)

#### 21.1.1 Closed issues

| ID            | Description                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------|
| ML-5808       | Fix selecting the project-owner user.                                                                       |
| ML-5907       | "Invite New Members" now returns the full list of users when there are 100+ users in system.                |
| ML-5749, 6037 | After the user removes ownership of the currently displayed project, the UI redirects to the Projects page. |
| ML-5977       | The 'Members' tab in Project settings is now shown for groups with admin privileges.                        |

### 21.2 v1.6.1 (29 February 2024)

#### 21.2.1 Closed issue

| ID      | Description                                           |
|---------|-------------------------------------------------------|
| ML-5799 | The artifact db_key is not overwritten after upgrade. |

## 21.3 v1.6.0 (22 February 2024)

### 21.3.1 Data store

| ID      | Description                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3618 | Integrate MLflow: seamlessly integrate and transfer logs from MLflow to MLRun. Tech Preview. See <a href="#">MLflow tracker tutorial</a> .           |
| ML-4343 | Datastore profiles (for managing datastore credentials) now support Azure, DBFS, GCS, Kafka, and S3. See <a href="#">Using data store profiles</a> . |

### 21.3.2 Feature store

| ID      | Description                                                                                                                                                      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-4622 | Feature set and feature vector APIs are now class methods. See examples in <a href="#">Feature sets</a> and <a href="#">Creating and using feature vectors</a> . |
| ML-5109 | You can set <code>min_replicas</code> and <code>max_replicas</code> for <code>KafkaSource</code> . See <a href="#">Consumer function configuration</a> .         |

### 21.3.3 Model monitoring

| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-4620 | New Grafana Model Monitoring Applications dashboard that includes charts and KPIs that are relevant to a specific monitoring application (under a specific model endpoint). The graphs are: Draft status by category, Average drift value result, Latest result, Application summary, Result value by time, Drift detection history. See <a href="#">Model Monitoring Applications dashboard</a> . |

### 21.3.4 Runtimes

| ID           | Description                                                                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3379,4997 | New <code>state_thresholds</code> used to identify pod status and abort a run. See <a href="#">Preventing stuck pods</a> and <a href="#">set_state_thresholds()</a> . |
| ML-3728      | Labels added to pods that are running as part of KFP to facilitate monitoring. <a href="#">View in Git</a> .                                                          |
| ML-4032      | You can now disable the automatic HTTP trigger creation in Nuclio and MLRun. See <a href="#">Serving/Nuclio triggers</a> .                                            |
| ML-4182      | Support for notifications on remote pipelines. See <a href="#">Configuring Notifications For Pipelines</a> .                                                          |
| ML-4623      | You can now <a href="#">Log a Databricks response as an artifact</a> .                                                                                                |

## 21.3.5 UI

| ID      | Description                                                                                                                                                                 |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1855 | New <b>Train Model</b> wizard.                                                                                                                                              |
| ML-2336 | You can now delete Jobs in the UI (and not just from the SDK).                                                                                                              |
| ML-4506 | You can now delete artifacts, models, and datasets in the UI (and not just from the SDK).                                                                                   |
| ML-4667 | <b>Project monitoring</b> is now the default project view. The previous default page is now named <b>Quick actions</b> , and is the second tab in the <b>Projects</b> page. |
| ML-4916 | You can now add a tag when registering an artifact in the Register Artifact, Register Dataset, and Register Model dialogs.                                                  |

## 21.3.6 Infrastructure

| ID      | Description                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------------------|
| ML-3921 | The Docker image for installation of mlrun was modified, resulting in better compatibility with external packages. |
| ML-5193 | Support for Pandas 2.0.                                                                                            |

## 21.3.7 Documentation

| ID               | Description                                                                                                                                                   |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3663          | New: How to build a docker image externally using a dockerfile and then use it. See <a href="#">Building a docker image using a dockerfile and using it</a> . |
| ML-4048          | New: Creating and using a custom function hub. See <a href="#">Private function hub</a> .                                                                     |
| ML-5260          | New: <a href="#">Load code at runtime using a non-default source</a> .                                                                                        |
| ML-5602, ML-5680 | Improved feature store documentation including sources and targets, and partitioning. See <a href="#">Sources and targets</a> .                               |
| NA               | New: <a href="#">MLRun project bootstrapping with project_setup.py</a> .                                                                                      |
| NA               | Improved serving function example, and new example of a serving function with Git integration. See <a href="#">Function of type serving</a> .                 |

## 21.3.8 Breaking Changes

| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-4741 | The default <code>target_dir</code> path of <code>with_source_archive</code> is now <code>/home/mlrun_code</code> . It was previously <code>/tmp</code> , which could be randomly deleted. If you are running a Spark job, and cloning the git repo, with <code>mlrun &lt;1.6.0</code> , run <code>sj.with_source_archive(source=project.source, pull_at_runtime=False)</code> , then run: <code>sj.spec.image_pull_policy = "Always", sj.spec.build.commands = ["mkdir -p /mlrun"], sj.with_source_archive(source=project.source, pull_at_runtime=False, target_dir="/mlrun")</code> |



## 21.3.9 Closed issues

| ID      | Description                                                                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1373 | Incorrect service names do not result in stuck pods during ContainerCreating.                                                                                |
| ML-1835 | The index record is not duplicated in the datasets metadata.                                                                                                 |
| ML-3714 | Runs that complete successfully do not show errors in KubeFlow.                                                                                              |
| ML-3856 | Documentation: Add how to update a feature set with appending ingestion (and not create a new FS on every ingest). See <a href="#">Ingest data locally</a> . |
| ML-4093 | Documentation: Improved description of <a href="#">handlers</a> and <a href="#">Functions</a> .                                                              |
| ML-4370 | Hyper-param and single runs no longer generate artifacts with the same name.                                                                                 |
| ML-4563 | Local jobs can now be aborted in the UI.                                                                                                                     |
| ML-4613 | UI: Fixed the map type hint in the Batch Inference Parameters.                                                                                               |
| ML-4642 | The UI no longer gets stuck when there is a high number of query results.                                                                                    |
| ML-4678 | When tagging a specific version of a model using the SDK, it does not clear the tags from the rest of the versions.                                          |
| ML-4690 | Enabling the Spark event log (sj.spec.spark_conf["spark.eventLog.enabled"] = True) no longer causes the job to fail.                                         |
| ML-4920 | Documentation: improve description of <code>log_artifact</code> . See <a href="#">Artifacts</a> and <a href="#">log_artifact()</a> .                         |
| ML-4608 | The artifact <code>db_key</code> is now forwarded when registering an artifact.                                                                              |
| ML-4617 | Fixed error message when using a feature vector as an input to a job without first calling <code>get_offline_features</code> on the vector.                  |
| ML-4714 | Logs are not truncated in the MLRun UI logs page for jobs that have a high number of logs or run for over day.                                               |
| ML-4922 | Preview and Metadata tabs now indicate when there are more columns that are not displayed.                                                                   |
| ML-4967 | The <b>Deploy</b> button in the <b>Project &gt; Models</b> page now creates a new endpoint/serving function.                                                 |
| ML-4992 | Fixed starting a spark job from source archive (using <code>with_source_archive()</code> ).                                                                  |
| ML-5001 | The <b>Monitoring workflows</b> page now states that it includes only workflows that have already been run.                                                  |
| ML-5042 | After creating and deleting a project, a new project cannot be created in the same folder with the same context.                                             |
| ML-5048 | UI Edit function dialog: When selecting <b>Use an existing image</b> and pressing <b>Deploy</b> , the existing image is used, as expected.                   |
| ML-5078 | <code>project.create_remote()</code> is no longer dependant on setting <code>init_git=True</code> on project creation.                                       |
| ML-5089 | When trying to delete a running job, an error opens that a running job cannot be deleted and it needs to be aborted first.                                   |
| ML-5091 | Monitoring does not recreate a deleted run.                                                                                                                  |
| ML-5146 | Resolved OOM issues by reducing the memory footprint when monitoring runs.                                                                                   |
| ML-5481 | You can now use <code>build_image</code> using the project source. See the example in <a href="#">build_image</a> .                                          |

## 21.4 v1.5.2 (30 November 2023)

### 21.4.1 Closed issues

| ID      | Description                                                                       |
|---------|-----------------------------------------------------------------------------------|
| ML-4960 | Fixed browser caching so the <b>Members</b> tab is always presented for projects. |

## 21.5 v1.5.1 (2 November 2023)

### 21.5.1 Closed issues

| ID           | Description                                                                                             |
|--------------|---------------------------------------------------------------------------------------------------------|
| ML-3480      | Add details about <code>label_feature</code> parameter. See <a href="#">Creating a feature vector</a> . |
| ML-4839/4844 | Running <code>project.build_image</code> now always reads the <code>requirements.txt</code> file.       |
| ML-4860      | Fixed creating and running functions with no parameters from the UI.                                    |
| ML-4872      | Fixed synchronizing functions from project yaml.                                                        |

## 21.6 v1.5.0 (23 October 2023)

### 21.6.1 Data store

| ID      | Description                                                                                                                             |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------|
| ML-2296 | Add ability to manage Redis datastore credentials with datastore profiles. See <a href="#">Using data store profiles, view in Git</a> . |
| ML-3500 | Support for dbfs data store (Databricks file system). See <a href="#">Databricks file system, view in Git</a> .                         |

### 21.6.2 Feature store

| ID      | Description                                                                                                                                                                                     |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3784 | Support for feature vector-defined feature-set relations and join-type (per-join). Tech Preview. See <a href="#">Feature vector with different entities and complex joins and view in Git</a> . |

### 21.6.3 Infrastructure

| ID      | Description                                                                                                                                                                                                                     |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3370 | Accessing the MLRun hub is now available through a service API. This will enable implementing better function version selection and combining hub functions from different sources. Tech Preview. <a href="#">View in Git</a> . |
| ML-3644 | Support for self-signed docker registries. See <a href="#">Using self-signed registry</a> and <a href="#">view in Git</a> .                                                                                                     |
| ML-4132 | The <code>invoke</code> function can now receive any parameter supported in the <code>requests.request</code> method. See <a href="#">invoke</a> and <a href="#">view in Git</a> .                                              |
| NA      | From v1.5, clients must be running Python 3.9.                                                                                                                                                                                  |

### 21.6.4 Runtimes

| ID      | Description                                                                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3501 | Support for running Spark jobs on Databricks cluster. See <a href="#">databricks</a> . <a href="#">View in Git</a> .                                                              |
| ML-3854 | Support for webhook notification. See <a href="#">webhook</a> in <a href="#">Notification Kinds</a> and <a href="#">view in Git</a> .                                             |
| ML-4059 | Support for adding env vars or secrets to the docker build during runtime. See <a href="#">Extra arguments</a> , <a href="#">build_config()</a> and <a href="#">view in Git</a> . |

### 21.6.5 UI

| ID      | Description                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------|
| ML-2811 | New Batch Inference wizard. Tech Preview.                                                           |
| ML-2815 | New Batch Run wizard that replaces the previous New job page.                                       |
| ML-3584 | The Model Endpoints page now displays the Function Tag.                                             |
| ML-4066 | The Online types list of the Target Store now includes Redis.                                       |
| ML-4167 | The Projects page now supports downloading the .yaml file. Tech Preview.                            |
| ML-4571 | The Model Endpoints page now displays the drift threshold and the drift actual value.               |
| ML-4756 | The Recents list in Jobs and Workflows (Projects pane) now displays a maximum of the last 48 hours. |
| ML-4511 | You can now change the image and add new requirements (such as xgboost) in the Batch Infer wizard.  |

## 21.6.6 Documentation

| ID      | Description                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------|
| ML-3763 | Add description of configuring number of workers per GPU. See updated <a href="#">Number of workers/GPUs</a> .        |
| ML-4420 | Add configuration of memory in Spark Operator. See <a href="#">Spark Operator runtime</a> .                           |
| ML-2380 | Add details of V3IO and Spark runtime. See <a href="#">Spark Operator runtime</a> and <a href="#">Spark3Runtime</a> . |

## 21.6.7 Breaking changes

| ID      | Description                                                                                                                                                                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3823 | The default format of <code>list projects</code> returns project names only. You can either get names or projects ( <code>name_only</code> ) and do a <code>get</code> only on the specific project you want (preferable), or get the full list ( <code>full</code> ). <a href="#">View in Git</a> . |
| ML-4171 | The Redis target implementation changed. Features-sets that use Redis as online targets must be recreated. <a href="#">View in Git</a> .                                                                                                                                                             |
| ML-4366 | The MLRun images <code>mlrun/ml-models</code> and <code>mlrun/ml-models-gpu</code> were deprecated and removed. The new image <code>mlrun/mlrun-gpu</code> is added. Additional dependencies must be installed on an as-need basis. See <a href="#">MLRun images</a> .                               |

## 21.6.8 Deprecations

See *Deprecations and removed code*.

## 21.6.9 Closed issues

| ID      | Description                                                                          |
|---------|--------------------------------------------------------------------------------------|
| ML-1584 | Can now run <code>code_to_function</code> when filename contains special characters. |
| ML-2199 | Spark operator job does not fail with default requests args.                         |
| ML-2380 | Spark runtime sustains naive user actions.                                           |
| ML-4188 | Projects are deleted simultaneously in the backend and the UI.                       |
| ML-4212 | Pipeline filters that have no results now show the labels.                           |
| ML-4214 | Scheduled workflows with "-" in the name are no longer truncated.                    |
| ML-4232 | User attempts to create a consumer group with "-" now throws an error.               |
| ML-4316 | Fixed: <code>list_runs</code> fails with <code>Read timed out</code> .               |
| ML-4323 | Fixed: pipeline step failed with "Read timed out.: get log"                          |
| ML-4391 | Consumer group UI now shows complete details.                                        |
| ML-4501 | Fixed: UI shows error after deleting a function, then viewing a related job.         |
| ML-4533 | UI: ML functions can now be created with upper-case letters.                         |

## 21.7 v1.4.1 (8 August 2023)

### 21.7.1 Closed issues

| ID      | Description                                            |
|---------|--------------------------------------------------------|
| ML-4303 | Archive out-of-sync leader projects.                   |
| ML-4232 | Consumer group names cannot include the character "-". |

## 21.8 v1.4.0 (23 July 2023)

### 21.8.1 New and updated features

#### Functions

| ID      | Description                                                                                                                                                                  |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3474 | New sub-package in MLRun for packing returning outputs, logging them to MLRun and unpacking inputs, parsing data items to their required type. <a href="#">View in Git</a> . |

#### Notifications

| ID    | Description                                                                                                       |
|-------|-------------------------------------------------------------------------------------------------------------------|
| ML-21 | Supports job notifications. See full details in <a href="#">Notifications</a> , and <a href="#">View in Git</a> . |

#### Projects

| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3375 | Two new APIs in the MlrunProject object, used to build an image directly through project API, without creating a function and building an image for it: <code>build_config</code> configures the default build for a given project; <code>build_image</code> builds a docker image based on the project configuration. See <a href="#">MlrunProject</a> , <a href="#">Image build configuration</a> , <a href="#">build_image</a> , and <a href="#">View in Git</a> . |
| ML-4084 | New API to run a setup script to enrich a project, when loading the project. <a href="#">View in Git</a>                                                                                                                                                                                                                                                                                                                                                              |

## Serving

| ID      | Description                                                                                                                                                                                                                                                                                       |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3654 | Updates to <code>error_handler</code> : Exceptions are applied to either a graph or a step. In the case of a graph, the graph stops upon an error. In the case of a step, the graph can either stop or complete upon an error. See <a href="#">Error handling</a> . <a href="#">View in Git</a> . |

## UI

| ID      | Description                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1248 | The engine type now displays in the <b>Feature Set Overview</b> tab.                                                                                                 |
| ML-2083 | The <b>Run on spot</b> value now displays in the <b>Jobs Overview</b> tab.                                                                                           |
| ML-3176 | The new <b>Passthrough</b> button in the Create Feature Set enables <a href="#">creating a feature set without ingesting its data</a> , previously supported by SDK. |
| ML-3549 | The new <b>Resource monitoring</b> button in the <b>Jobs Details</b> view opens the <b>Grafana</b> dashboard.                                                        |
| ML-3551 | Nested workflows ( <code>ParallelFor</code> ) now fully display in UI.                                                                                               |
| ML-2922 | The <b>Artifacts</b> , <b>Datasets</b> and <b>Models</b> pages have an improved filter. Enhanced look and feel in tables.                                            |

## Documentation

| ID      | Description                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3548 | Passing parameters between steps using the <code>outputs</code> parameter is now described in <a href="#">Write a pipeline</a> .                       |
| ML-3763 | The relationship between GPUs and remote functions is now explained in <a href="#">Number of GPUs</a> and <a href="#">Example of Nuclio function</a> . |

### New documentation pages

- [Using a Git repo as a function hub](#)
- [CI/CD automation with Git](#)

## 21.8.2 Breaking changes

| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3733 | <code>mlrun.get_run_db().list_model_endpoints()</code> returns <code>list</code> . Previously, it returned <code>mlrun.api.schemas.model_endpoints.ModelEndpointList</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| ML-3773 | The aggregation mechanism on Redis databases has improved, but the history of the aggregation (from before the upgrade) is lost, as if there were 0 events during that period.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ML-4053 | Pre-v1.4.0: When logging artifacts during a runtime (regular artifacts, not models ( <code>ModelArtifact</code> via <code>context.log_model</code> ) or datasets ( <code>DatasetArtifact</code> via <code>context.log_dataset</code> )), they were strings in the <code>RunObject</code> outputs property. The strings were the target path to the file logged in the artifact. From v1.4.0, they are the store path of the artifact, and not the target path. (They now appear the same as the store paths for logging models and datasets.) This is breaking behavior only if you use the output of the run object as a parameter to another runtime and not as an input. <a href="#">View in Git</a> . |

```
# Set 2 functions:
func1 = project.set_function(...)
func2 = project.set_function(...)

# Run the first function:
run1 = func1.run(...)
# In the function `func1` we logged a model "my_model" and an artifact "my_artifact"
run1.outputs
{
  "my_model": "store://...",
  "my_artifact": "store://...", # Instead of target path: "/User/.../data.csv"
}

# The function `func2` expects a `DataItem` for the logged artifact so passing it through
↳ inputs will work as `DataItem` can work with store paths:
run2 = func2.run(..., inputs={"artifact": run1.outputs["my_artifact"]})

# But passing it through a parameter won't work as the string value is now a store path
↳ and not a target path:
run2 = func2.run(..., params={"artifact": run1.outputs["my_artifact"]})
```

## 21.8.3 Deprecations and future deprecations

See *Deprecations and removed code*.

## 21.8.4 Closed issues

| ID      | Description                                                                                                                                                                                                                           |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1787 | Optimized distribution of load between chief and workers so that heavy loads do not cause restart of kubelet. <a href="#">View in Git.</a>                                                                                            |
| ML-2773 | Reduced memory footprint for feature vector that joins data from multiple feature sets. <a href="#">View in Git.</a>                                                                                                                  |
| ML-3166 | New error message when <code>load_project</code> uses an invalid URL source. <a href="#">View in Git.</a>                                                                                                                             |
| ML-3420 | Fix artifacts corruption due to overflowing size. <a href="#">View in Git.</a>                                                                                                                                                        |
| ML-3443 | Spark ingestion engine now supports more than 2 keys in online target. Tech Preview. <a href="#">View in Git.</a>                                                                                                                     |
| ML-3470 | Changes in secrets are now recorded in the audit log of the platform. <a href="#">View in Git.</a>                                                                                                                                    |
| ML-3508 | Improved description of <code>list_runs</code> . See <a href="#">list_runs</a> <a href="#">View in Git.</a>                                                                                                                           |
| ML-3621 | <code>clear_context()</code> now does not delete content if the path is relative; and if a subpath exists, only the sub dir is deleted/cleared. <a href="#">View in Git.</a>                                                          |
| ML-3631 | MLRun now successfully pulls the source code from gitlab with a personal access token. <a href="#">View in Git.</a>                                                                                                                   |
| ML-3633 | Fix parsing of date fields when importing a context from dict. <a href="#">View in Git.</a>                                                                                                                                           |
| ML-3652 | V3IO_API is now inferred from the DBPATH. <a href="#">View in Git.</a>                                                                                                                                                                |
| ML-3703 | <code>project.set_secrets()</code> now throws a <code>file not found</code> exception if the file does not exist. <a href="#">View in Git.</a>                                                                                        |
| ML-3713 | Users can now use pipeline parameters in the spec of jobs created within the workflow py file without causing run failure. <a href="#">View in Git.</a>                                                                               |
| ML-3761 | <code>**kwargs</code> now forward as expected in MLRun jobs and hyper params. <a href="#">View in Git.</a>                                                                                                                            |
| ML-3782 | The (incorrect) naming of features causes error when getting the feature vector from the online feature service. The fix is an additional restriction in feature names. See <a href="#">Aggregations</a> <a href="#">View in Git.</a> |
| ML-3806 | Mismatch errors now printed when ingesting from Kafka into offline target. In case of errors (due to type mismatch) no errors are printed. <a href="#">View in Git.</a>                                                               |
| ML-3847 | <code>add_code_metadata</code> now prints error messages when working with git <a href="#">View in Git.</a>                                                                                                                           |
| ML-3900 | Improved error message when ingesting into a feature set (online target) and no features found on retrieval. <a href="#">View in Git.</a>                                                                                             |
| ML-4129 | Errors from BigQuerySource are now forwarded to MLRun. <a href="#">View in Git.</a>                                                                                                                                                   |

## 21.9 v1.3.4 (23 August 2023)

### 21.9.1 Closed issues

| ID      | Description                                                                    |
|---------|--------------------------------------------------------------------------------|
| ML-4409 | Importing a project.yaml now does not overwrite the artifacts with older tags. |

## 21.10 v1.3.3 (7 Jun 2023)

### 21.10.1 Closed issues

| ID      | Description                                                                                    |
|---------|------------------------------------------------------------------------------------------------|
| ML-3940 | MLRun does not initiate log collection for runs in aborted state. <a href="#">View in Git.</a> |

## 21.11 v1.3.2 (4 Jun 2023)

### 21.11.1 Closed issues

| ID      | Description                                                                                 |
|---------|---------------------------------------------------------------------------------------------|
| ML-3896 | Fixed: MLRun API failed to get pod logs. <a href="#">View in Git.</a>                       |
| ML-3865 | kubectl now returns logs as expected. <a href="#">View in Git.</a>                          |
| ML-3917 | Reduced number of logs. <a href="#">View in Git.</a>                                        |
| ML-3934 | Logs are no longer collected for run pods in an unknown state. <a href="#">View in Git.</a> |

## 21.12 v1.3.1 (18 May 2023)

### 21.12.1 Closed issues

| ID      | Description                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------|
| ML-3764 | Fixed the scikit-learn to 1.2 in the tutorial 02-model-training. (Previously pointed to 1.0.) <a href="#">View in Git.</a> |
| ML-3794 | Fixed a Mask detection demo notebook (3-automatic-pipeline.ipynb). <a href="#">View in Git.</a>                            |
| ML-3819 | Reduce overly-verbose logs on the backend side. <a href="#">View in Git.</a> <a href="#">View in Git.</a>                  |
| ML-3823 | Optimized /projects endpoint to work faster. <a href="#">View in Git.</a>                                                  |

## 21.12.2 Documentation

New sections describing [Git best practices](#) and an example [Nuclio function](#).

## 21.13 v1.3.0 (22 March 2023)

### 21.13.1 Client/server matrix, prerequisites, and installing

The MLRun server is now based on Python 3.9. It's recommended to move the client to Python 3.9 as well.

MLRun v1.3.0 maintains support for mlrun base images that are based on python 3.7. To differentiate between the images, the images based on python 3.7 have the suffix: `-py37`. The correct version is automatically chosen for the built-in MLRun images according to the Python version of the MLRun client (for example, a 3.7 Jupyter gets the `-py37` images).

MLRun v1.3.x maintains support for mlrun base images that are based on a python 3.7 environment. To differentiate between the images, the images based on python 3.7 have the suffix: `-py37`. The correct version is automatically chosen for the built-in MLRun images according to the Python version of the MLRun client (for example, a 3.7 Jupyter gets the `-py37` images).

For a Python 3.9 environment see [Set up a Python 3.9 client environment](#).

### Set up a Python 3.7 client environment (Iguazio versions up to and including v3.5.2)

---

#### Note

There is a known bug with nbformat on the Jupyter version in Iguazio up to and including v3.5.2, which requires upgrading nbformat to 5.7.0. When using an older nbformat, some Jupyter Notebooks do not open.

---

To install on a **Python 3.7** environment (and optionally upgrade to python 3.9 environment):

1. Configure the Jupyter service with the env variable `JUPYTER_PREFER_ENV_PATH=false`.
2. Within the Jupyter service, open a terminal and update conda and pip to have an up-to-date pip resolver.

```
$CONDA_HOME/bin/conda install -y conda=23.1.0
$CONDA_HOME/bin/conda install -y 'pip>=22.0'
$CONDA_HOME/bin/conda install -y nbformat=5.7.0
```

3. If you want to upgrade to a Python 3.9 environment, create a new conda env and activate it:

```
conda create -n python39 python=3.9 ipykernel -y
conda activate python39
```

4. Install mlrun:

```
./align_mlrun.sh
```

## 21.13.2 New and updated features

### Feature store

| ID      | Description                                                                                                                                                                                                                                                                               |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-2592 | Offline data can be registered as feature sets (Tech Preview). See <a href="#">Create a feature set without ingesting its data</a> .                                                                                                                                                      |
| ML-2610 | Supports SQLSource for batch ingestion (Tech Preview). See <a href="#">SQL data source</a> .                                                                                                                                                                                              |
| ML-2610 | Supports SQLTarget for storey engine (Tech Preview). (Spark is not yet supported.) See <a href="#">SQL target store</a> .                                                                                                                                                                 |
| ML-2709 | The Spark engine now supports the steps: MapValues, Imputer, OneHotEncoder, DropFeatures; and supports extracting the time parts from the date in the DateExtractor step. See <a href="#">Data transformations</a> .                                                                      |
| ML-2802 | get_offline_features supports Spark Operator and Remote Spark.                                                                                                                                                                                                                            |
| ML-2957 | The username and password for the RedisNoSqlTarget are now configured using secrets, as <prefix>REDIS_USER <prefix>REDIS_PASSWORD where <prefix> is the optional RedisNoSqlTarget credentials_prefix parameter. See <a href="#">Redis target store</a> .                                  |
| ML-3008 | Supports Spark using Redis as an online KV target, which caused a <i>breaking change</i> .                                                                                                                                                                                                |
| ML-3373 | Supports creating a feature vector over several feature sets with different entities. (Outer joins are Tech Preview.) See <a href="#">Using an offline feature vector</a> . This API will change in a future release, moving the relationship from the feature set to the feature vector. |

### Logging data

| ID      | Description                                                                                                                                                                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-2845 | Logging data using hints. You can now pass data into MLRun and log it using log hints, instead of the decorator. This is the initial change in MLRun to simplify wrapping usable code into MLRun without having to modify it. Future releases will continue this paradigm shift. See <a href="#">more details</a> . |

### Projects

| ID      | Description                                                                                                                                                                     |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3048 | When defining a new project from scratch, there is now a default context directory: ". / ". This is the directory from which the MLRun client runs, unless otherwise specified. |


Serving graphs

| ID      | Description                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1167 | Add support for graphs that split and merge (DAG), including a list of steps for the <code>after</code> argument in the <code>add_step()</code> method. See <a href="#">Graph that splits and rejoins</a> . |
| ML-2507 | Supports configuring of consumer group name for steps following <code>QueueSteps</code> . See <a href="#">Queue (streaming)</a> .                                                                           |

Storey

| ID      | Description                                                                                                                                                                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-2502 | The event time in storey events is now taken from the <code>timestamp_key</code> . If the <code>timestamp_key</code> is not defined for the event, then the time is taken from the processing-time metadata. <a href="#">View in Git</a> , and in <a href="#">Storey git</a> . |

UI
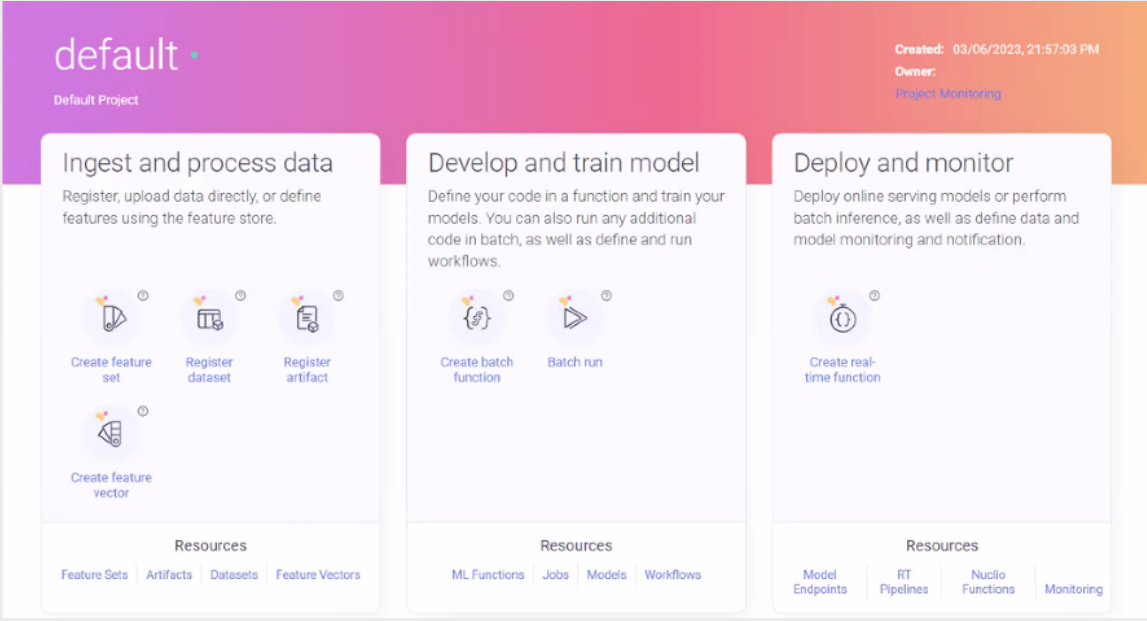
| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-1186 | <p>The new <b>Projects</b> home page provides easy and intuitive access to the full project lifecycle in three phases, with links to the relevant wizards under each phase heading: ingesting and processing data, developing and training a model, deploying and monitoring the project.</p>  <p>The screenshot shows the 'default' project page. At the top, it says 'default' and 'Default Project'. On the right, it shows 'Created: 03/06/2023, 21:57:03 PM' and 'Owner: Project Monitoring'. The main content is divided into three columns:</p> <ul style="list-style-type: none"><li><b>Ingest and process data</b>: Register, upload data directly, or define features using the feature store. Actions: Create feature set, Register dataset, Register artifact, Create feature vector. Resources: Feature Sets, Artifacts, Datasets, Feature Vectors.</li><li><b>Develop and train model</b>: Define your code in a function and train your models. You can also run any additional code in batch, as well as define and run workflows. Actions: Create batch function, Batch run. Resources: ML Functions, Jobs, Models, Workflows.</li><li><b>Deploy and monitor</b>: Deploy online serving models or perform batch inference, as well as define data and model monitoring and notification. Action: Create real-time function. Resources: Model Endpoints, RT Pipelines, Nuclio Functions, Monitoring.</li></ul> |

NA UI change log in GitHub

## APIs

| ID      | Description                                                                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-3104 | These APIs now only return reasons in kwargs: <code>log_and_raise</code> , <code>generic_error_handler</code> , <code>http_status_error_handler</code> .                                                             |
| ML-3204 | New API <code>set_image_pull_configuration</code> that modifies <code>func.spec.image_pull_secret</code> and <code>func.spec.image_pull_policy</code> , instead of directly accessing these values through the spec. |

## Documentation

Improvements to [Set up your environment](#).

## Infrastructure improvements

| ID      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-2609 | MLRun server is based on Python 3.9.                                                                                                                                                                                                                                                                                                                                                                                                        |
| ML-2732 | The new log collection service improves the performance and reduces heavy IO operations from the API container. The new MLRun log collector service is a gRPC server, which runs as sidecar in the mlrun-api pod (chief and worker). The service is responsible for collecting logs from run pods, writing to persisted files, and reading them on request. The new service is transparent to the end-user: there are no UI or API changes. |

### 21.13.3 Breaking changes

- The behavior of ingest with aggregation changed in v1.3.0 (storey, spark, pandas engines). Now, when you ingest a "timestamp" column, it returns `<class 'pandas._libs.tslibs.timestamps.Timestamp'>`. Previously, it returned `<class 'str'>`
- Any target data that was saved using Redis as an online target with storey engine (RedisNoSql target, introduced in 1.2.1) is not accessible after upgrading to v1.3. (Data ingested subsequent to the upgrade is unaffected.)

### 21.13.4 Deprecated and removed APIs

Starting with v1.3.0, and continuing in subsequent releases, obsolete functions are getting removed from the code. See [Deprecations and removed code](#).

## 21.13.5 Closed issues

| ID             | Description                                                                                                                                                                                                                                                                                                                                     |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-2421        | Artifacts logged via SDK with "/" in the name can now be viewed in the UI. <a href="#">View in Git</a> .                                                                                                                                                                                                                                        |
| ML-2534        | Jobs and Workflows pages now display the tag of the executed job (as defined in the API). <a href="#">View in Git</a> .                                                                                                                                                                                                                         |
| ML-2810        | Fixed the Dask Worker Memory Limit Argument. <a href="#">View in Git</a> .                                                                                                                                                                                                                                                                      |
| ML-2896        | <code>add_aggregation</code> over Spark fails with <code>AttributeError</code> for <code>sqr</code> and <code>stdvar</code> . <a href="#">View in Git</a> .                                                                                                                                                                                     |
| ML-3104        | Add support for project default image. <a href="#">View in Git</a> .                                                                                                                                                                                                                                                                            |
| ML-3119        | Fix: MPI job run status resolution considering all workers. <a href="#">View in Git</a> .                                                                                                                                                                                                                                                       |
| ML-3283        | <code>project.list_models()</code> did not function as expected for tags and labels. The <code>list_artifacts</code> method now accept a dictionary, and docstrings were added for <code>httpdb</code> and for <code>MLRunProject</code> methods: both <code>list_artifacts</code> and <code>list_models</code> . <a href="#">View in Git</a> . |
| ML-3286        | Fix: Project page displayed an empty list after an upgrade <a href="#">View in Git</a> .                                                                                                                                                                                                                                                        |
| ML-3316        | Users with developer and data permissions can now add members to projects they created. (Previously appeared successful in the UI but users were not added). <a href="#">View in Git</a> .                                                                                                                                                      |
| ML-3365 / 3349 | Fix: UI Projects' metrics show N/A for all projects when ml-pipeline is down. <a href="#">View in Git</a> .                                                                                                                                                                                                                                     |
| ML-3378        | Aggregation over a fixed-window that starts at or near the epoch now functions as expected. <a href="#">View in Git</a> .                                                                                                                                                                                                                       |
| ML-3380        | Documentation: added details on <a href="#">aggregation in windows</a> .                                                                                                                                                                                                                                                                        |
| ML-3389        | Hyperparams run does not present artifacts iteration when selector is not defined. <a href="#">View in Git</a> .                                                                                                                                                                                                                                |
| ML-3424        | Documentation: new matrix of which engines support which <a href="#">sources/targets</a> . <a href="#">View in Git</a> .                                                                                                                                                                                                                        |
| ML-3505        | Removed the upperbound on the <code>google-cloud-bigquery</code> requirement.                                                                                                                                                                                                                                                                   |
| ML-3575        | <code>project.run_function()</code> now uses the argument <code>artifact_path</code> (previously used the project's configured <code>artifact_path</code> instead). <a href="#">View in Git</a> .                                                                                                                                               |
| ML-3403        | Error on Spark ingestion with offline target without defined path (error: <code>NoneType</code> object has no attribute <code>startswith</code> ). Fix: default path defined. <a href="#">View in Git</a> .                                                                                                                                     |
| ML-3446        | Fix: Failed MLRun Nuclio deploy needs better error messages. <a href="#">View in Git</a> .                                                                                                                                                                                                                                                      |
| ML-3482        | Fixed model-monitoring incompatibility issue with mlrun client running v1.1.x and a server running v1.2.x. <a href="#">View in Git</a> .                                                                                                                                                                                                        |

## 21.14 v1.2.3 (15 May 2023)

### 21.14.1 Closed issues

| ID      | Description                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------|
| ML-3287 | UI now resets the cache upon MLRun upgrades, and the Projects page displays correctly. <a href="#">View in Git.</a> |
| ML-3801 | Optimized /projects endpoint to work faster <a href="#">View in Git.</a>                                            |
| ML-3819 | Reduce overly-verbose logs on the backend side. <a href="#">View in Git.</a>                                        |

## 21.15 v1.2.2 (8 May 2023)

### 21.15.1 Closed issues

| ID               | Description                                                                     |
|------------------|---------------------------------------------------------------------------------|
| ML-3797, ML-3798 | Fixed presenting and serving large-sized projects. <a href="#">View in Git.</a> |

## 21.16 v1.2.1 (8 January 2023)

### 21.16.1 New and updated features

#### Feature store

- Supports ingesting Avro-encoded Kafka records. [View in Git.](#)

#### Third party integrations

- Supports Confluent Kafka as a feature store data-source (Tech Preview). See [Confluent Kafka data source.](#)

### 21.16.2 Closed issues

- Fix: the **Projects|Jobs|Monitor Workflows** view is now accurate when filtering for > 1 hour. [View in Git.](#)
- The Kubernetes **Pods** tab in **Monitor Workflows** now shows the complete pod details. [View in Git.](#)
- Update the tooltips in **Projects|Jobs|Schedule** to explain that day 0 (for cron jobs) is Monday, and not Sunday. [View in Git.](#)
- Fix UI crash when selecting **All** in the **Tag** dropdown list of the **Projects|Feature Store|Feature Vectors** tab. [View in Git.](#)
- Fix: now updates `next_run_time` when skipping scheduling due to concurrent runs. [View in Git.](#)

- When creating a project, the error `NotImplementedError` was updated to explain that MLRun does not have a DB to connect to. [View in Git](#).
- When previewing a **DirArtifact** in the UI, it now returns the requested directory. Previously it was returning the directory list from the root of the container. [View in Git](#).
- Load source at runtime or build time now fully supports .zip files, which were not fully supported previously.

### 21.16.3 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.17 v1.2.0 (1 December 2022)

### 21.17.1 New and updated features

#### Artifacts

- Support for artifact tagging:
  - SDK: Add `tag_artifacts` and `delete_artifacts_tags` that can be used to modify existing artifacts tags and have more than one version for an artifact.
  - UI: You can add and edit artifact tags in the UI.
  - API: Introduce new endpoints in `/projects/<project>/tags`.

#### Auth

- Support S3 profile and assume-role when using `fsspec`.
- Support GitHub fine grained tokens.

#### Documentation

- Restructured, and added new content.

#### Feature store

- Support Redis as an online feature set for storey engine only. (See [Redis target store](#).)
- Fully supports ingesting with pandas engine, now equivalent to ingestion with storey engine (TechPreview):
  - Support `DataFrame` with multi-index.
  - Support mlrun steps when using pandas engine: `OneHotEncoder`, `DateExtractor`, `MapValue`, `Imputer` and `FeatureValidation`.
- Add new step: `DropFeature` for pandas and storey engines. (TechPreview)
- Add param query for `get_offline_feature` for filtering the output.

## Frameworks

- Add `HuggingFaceModelServer` to `mlrun.frameworks` at `mlrun.frameworks.huggingface` to serve HuggingFace models.

## Functions

- Add `function.with_annotations({"framework":"tensorflow"})` to user-created functions.
- Add `overwrite_build_params` to `project.build_function()` so the user can choose whether or not to keep the build params that were used in previous function builds.
- `deploy_function` has a new option of mock deployment that allows running the function locally.

## Installation

- New option to install `google-cloud` requirements using `mlrun[google-cloud]`: when installing MLRun for integration with GCP clients, only compatible packages are installed.

## Models

- The Labels in the **Models > Overview** tab can be edited.

## Internal

- Refactor artifacts endpoints to follow the MLRun convention of `/projects/<project>/artifacts/...` (The previous API will be deprecated in a future release.)
- Add `/api/_internal/memory-reports/` endpoints for memory related metrics to better understand the memory consumption of the API.
- Improve the HTTP retry mechanism.
- Support a new lightweight mechanism for KFP pods to pull the run state they triggered. Default behavior is legacy, which pulls the logs of the run to figure out the run state. The new behavior can be enabled using a feature flag configured in the API.

### 21.17.2 Breaking changes

- Feature store: Ingestion using pandas now takes the dataframe and creates indices out of the entity column (and removes it as a column in this df). This could cause breakage for existing custom steps when using a pandas engine.

### 21.17.3 Closed issues

- Support logging artifacts larger than 5GB to V3IO. [View in Git](#).
- Limit KFP to kfp~=1.8.0, <1.8.14 due to non-backwards changes done in 1.8.14 for ParallelFor, which isn't compatible with the MLRun managed KFP server (1.8.1). [View in Git](#).
- Add `artifact_path` enrichment from project `artifact_path`. Previously, the parameter wasn't applied to project runs when defining `project.artifact_path`. [View in Git](#).
- Align timeouts for requests that are getting re-routed from worker to chief (for projects/background related endpoints). [View in Git](#).
- Fix legacy artifacts load when loading a project. Fixed corner cases when legacy artifacts were saved to yaml and loaded back into the system using `load_project()`. [View in Git](#).
- Fix artifact latest tag enrichment to happen also when user defined a specific tag. [View in Git](#).
- Fix zip source extraction during function build. [View in Git](#).
- Fix Docker compose deployment so Nuclio is configured properly with a platformConfig file that sets proper mounts and network configuration for Nuclio functions, meaning that they run in the same network as MLRun. [View in Git](#).
- Workaround for background tasks getting cancelled prematurely, due to the current FastAPI version that has a bug in the starlette package it uses. The bug caused the task to get cancelled if the client's HTTP connection was closed before the task was done. [View in Git](#).
- Fix run fails after deploying function without defined image. [View in Git](#).
- Fix scheduled jobs failed on GKE with resource quota error. [View in Git](#).
- Can now delete a model via tag. [View in Git](#).

### 21.17.4 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.18 v1.1.3 (28 December 2022)

### 21.18.1 Closed issues

- The CLI supports overwriting the schedule when creating scheduling workflow. [View in Git](#).
- Slack now notifies when a project fails in `load_and_run()`. [View in Git](#).
- Timeout is executed properly when running a pipeline in CLI. [View in Git](#).
- Uvicorn Keep Alive Timeout (`http_connection_timeout_keep_alive`) is now configurable, with default=11. This maintains API-client connections. [View in Git](#).

## 21.18.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.19 v1.1.2 (20 November 2022)

### 21.19.1 New and updated features

#### V3IO

- v3io-py bumped to 0.5.19.
- v3io-fs bumped to 0.1.15.

## 21.19.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.20 v1.1.1 (18 October 2022)

### 21.20.1 New and updated features

#### API

- Supports workflow scheduling.

#### UI

- Projects: Supports editing model labels.

## 21.20.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.21 v1.1.0 (6 September 2022)

### 21.21.1 New and updated features

#### API

- MLRun scalability: Workers are used to handle the connection to the MLRun database and can be increased to improve handling of high workloads against the MLRun DB. You can configure the number of workers for an MLRun service, which is applied to the service's user-created pods. The default is 2.
  - v1.1.0 cannot run on top of 3.0.x.
  - For Iguazio versions prior to v3.5.0, the number of workers is set to 1 by default. To change this number, contact support (helm-chart change required).
  - Multi-instance is not supported for MLrun running on SQLite.
- Supports pipeline scheduling.

#### Documentation

- Added Azure and S3 examples to *Ingest features with Spark*.

#### Feature store

- Supports S3, Azure, GCS targets when using Spark as an engine for the feature store.
- Snowflake as datasource has a connector ID: `iguazio_platform`.
- You can add a time-based filter condition when running `get_offline_feature` with a given vector.

#### Storey

- MLRun can write to parquet with flexible schema per batch for ParquetTarget: useful for inconsistent or unknown schema.

#### UI

- The **Projects** home page now has three tiles, Data, Jobs and Workflows, Deployment, that guide you through key capabilities of Iguazio, and provide quick access to common tasks.
- The **Projects|Jobs|Monitor Jobs** tab now displays the Spark UI URL.
- The information of the Drift Analysis tab is now displayed in the Model Overview.
- If there is an error, the error messages are now displayed in the **Projects|Jobs|Monitor** jobs tab.

## Workflows

- The steps in **Workflows** are color-coded to identify their status: blue=running; green=completed; red=error.

### 21.21.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.22 v1.0.6 (16 August 2022)

### 21.22.1 Closed issues

- Import from mlrun fails with "ImportError: cannot import name dataclass\_transform". Workaround for previous releases: `Install pip install pydantic==1.9.2 after align_mlrun.sh`.
- MLRun FeatureSet was not enriching with security context when running from the UI. [View in Git](#).
- MLRun Accesskey presents as cleartext in the mlrun yaml, when the mlrun function is created by feature set request from the UI. [View in Git](#).

### 21.22.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.23 v1.0.5 (11 August 2022)

### 21.23.1 Closed issues

- MLRun: remove root permissions. [View in Git](#).
- Users running a pipeline via CLI `project run (watch=true)` can now set the timeout (previously was 1 hour). [View in Git](#).
- MLRun: Supports pushing images to ECR. [View in Git](#).

### 21.23.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.24 v1.0.4 (13 June 2022)

### 21.24.1 New and updated features

- Bump storey to 1.0.6.
- Add typing-extensions explicitly.
- Add vulnerability check to CI and fix vulnerabilities.

### 21.24.2 Closed issues

- Limit Azure transitive dependency to avoid new bug. [View in Git](#).
- Fix GPU image to have new signing keys. [View in Git](#).
- Spark: Allow mounting v3io on driver but not executors. [View in Git](#).
- Tests: Send only string headers to align to new requests limitation. [View in Git](#).

### 21.24.3 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.25 v1.0.3 (7 June 2022)

### 21.25.1 New and updated features

- Jupyter Image: Relax `artifact_path` settings and add README notebook. [View in Git](#).
- Images: Fix security vulnerabilities. [View in Git](#).

### 21.25.2 Closed issues

- API: Fix projects leader to sync enrichment to followers. [View in Git](#).
- Projects: Fixes and usability improvements for working with archives. [View in Git](#).

### 21.25.3 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.26 v1.0.2 (19 May 2022)

### 21.26.1 New and updated features

- Runtimes: Add java options to Spark job parameters. [View in Git](#).
- Spark: Allow setting executor and driver core parameter in Spark operator. [View in Git](#).
- API: Block unauthorized paths on files endpoints. [View in Git](#).
- Documentation: New quick start guide and updated docker install section. [View in Git](#).

### 21.26.2 Closed issues

- Frameworks: Fix to logging the target columns in favor of model monitoring. [View in Git](#).
- Projects: Fix/support archives with project run/build/deploy methods. [View in Git](#).
- Runtimes: Fix jobs stuck in non-terminal state after node drain/pre-emption. [View in Git](#).
- Requirements: Fix ImportError on ingest to Azure. [View in Git](#).

### 21.26.3 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.27 v1.0.0 (22 April 2022)

### 21.27.1 New and updated features

#### Feature store

- Supports snowflake as a datasource for the feature store.

#### Graph

- A new tab under **Projects**[**Models**] named **Real-time pipelines** displays the real time pipeline graph, with a drill-down to view the steps and their details. [Tech Preview]

#### Projects

- Setting owner and members are in a dedicated **Project Settings** section.
- The **Project Monitoring** report has a new tile named **Consumer groups (v3io streams)** that shows the total number of consumer groups, with drill-down capabilities for more details.

## Resource management

- Supports preemptible nodes.
- Supports configuring CPU, GPU, and memory default limits for user jobs.

## UI

- Supports configuring pod priority.
- Enhanced masking of sensitive data.
- The dataset tab is now in the **Projects** main menu (was previously under the Feature store).

### 21.27.2 See more

- [MLRun change log in GitHub](#)
- [UI change log in GitHub](#)

## 21.28 Open issues

| ID              | Description                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------------------|
| ML-76           | In rare cases (after changing the HEAD git commit of the project between different log_artifact calls) artifacts s |
| ML-2052         | mlrun service default limits are not applied to the wait-container on pipeline jobs.                               |
| ML-2030         | Need a way to move artifacts from test to production Spark.                                                        |
| ML-2201         | No error message is raised when an MPI job is created but pods cannot be scheduled.                                |
| ML-2223         | Cannot deploy a function when notebook names contain "." (ModuleNotFoundError)                                     |
| ML-2407         | Kafka ingestion service on an empty feature set returns an error.                                                  |
| ML-2489         | Cannot pickle a class inside an mlrun function.                                                                    |
| 2621            | Running a workflow whose project has <code>init_git=True</code> , results in Project error                         |
| ML-3081         | The Monitor Workflows page does not present logs from the correct (Nuclio) deployment.                             |
| ML-3294         | Dask coredump during project deletion.                                                                             |
| ML-3315         | Spark ingestion does not support nested aggregations.                                                              |
| ML-3386         | Documentation is missing full details on the feature store sources and targets.                                    |
| ML-3143/ML-3432 | Cannot delete a remote function from the DB (neither with SDK nor UI).                                             |
| ML-3445         | <code>project.deploy_function</code> operation might get stuck when running v1.3.0 demos on an Iguazio platform ru |
| NA              | The feature store does not support schema evolution and does not have schema enforcement.                          |
| ML-3521         | Cannot schedule a workflow without a remote source.                                                                |
| ML-3526         | Aggregation column order is not always respected (storey engine).                                                  |
| ML-3626         | The "Save and ingest" option is disabled for a scheduled feature set.                                              |
| ML-3627         | The feature store allows ingestion of string type for the timestamp key resulting in errors when trying to query t |
| ML-3636         | <code>get_online_feature_service</code> from Redis target returns truncated values.                                |
| ML-3640         | When running a remote function/workflow, the <code>context</code> global parameter is not automatically injected.  |
| ML-3646         | MapValues step on Spark ingest: keys of non-string type change to string type, sometime causing failures in gra    |
| ML-3680         | The function spec does not get updated after running a workflow.                                                   |
| ML-3804         | A serving step with no class does not inherit parameters from the function spec.                                   |
| ML-4107         | On scheduled ingestion (storey and pandas engines) from CSV source, ingests all of the source on each schedul      |
| ML-4153         | When creating a passthrough feature-set in the UI, with no online target, the feature-set yaml includes a parquet  |
| ML-4166         | Project yaml file that is very large cannot be stored.                                                             |

| ID      | Description                                                                                                                                    |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------|
| ML-4186 | on <code>get_offline_features</code> ('local'/pandas engine) with passthrough, a source parquet column of type BOOL                            |
| ML-4442 | After a model is deployed without applying monitoring ( <code>set_tracking()</code> was not set on the serving function)                       |
| ML-4582 | Custom packagers cannot be added to projects created previous to v1.4.0                                                                        |
| ML-4585 | The <code>mlrun/mlrun</code> image does not support <code>mpijob</code> .                                                                      |
| ML-4655 | Timestamp entities are allowed for feature store, but format is inconsistent.                                                                  |
| NL-4685 | When using columns with type "float" as feature set entities, they are saved inconsistently to key-value stores by                             |
| ML-4698 | Parameters that are passed to a workflow are limited to 10000 chars.                                                                           |
| ML-4725 | ML functions show as if they are in the "Creating" status, although they were created and used.                                                |
| ML-4740 | When running function <code>batch_inference_v2</code> from the SDK, the <code>ingest()</code> function accepts 3 parameters as                 |
| ML-4758 | In rare cases, deleting a heavy project is unsuccessful and results in a timeout error message while the project n                             |
| ML-4769 | After deleting a project, data is still present in the Artifacts and Executions of pipelines UI.                                               |
| ML-4810 | Cannot rerun a job when the "mlrun/client_version" label has "+" in its value.                                                                 |
| ML-4821 | In some cases, deleting a very big project fails with a timeout due to the time required to delete the project reso                            |
| ML-4846 | With Docker Compose the <code>V3IO_ACCESS_KEY</code> is required for Parquet target.                                                           |
| ML-4857 | Local runs can be aborted in the UI, though the actual execution continues.                                                                    |
| ML-4858 | After aborting a job/run from the UI, the logs are empty.                                                                                      |
| NL-4881 | Kubeflow pipelines parallelism parameter in <code>dsl.ParallelFor()</code> does not work (external dependency).                                |
| ML-4934 | Modifying the parameters of a serving-function (for example changing <code>default_batch_intervals</code> ) that is co                         |
| ML-4942 | The Dask dashboard requires the relevant node ports to be open.                                                                                |
| ML-4956 | A function created by SDK is initially in the "initialized" state in the UI and needs to be deployed before running                            |
| ML-5079 | Cannot update git remote with <code>project.create_remote()</code>                                                                             |
| ML-5204 | The <b>Projects&gt;Settings</b> does not validate label names. Errors are generated from the back end.                                         |
| ML-5573 | The default value of feature-set <code>ingest()</code> <code>infer_options</code> is "all" (which includes Preview) and as a result, during in |
| ML-5732 | When using an MLRun client previous to v1.6.0, the workflow step status might show completed when it is act                                    |
| ML-6048 | UI: An admin user cannot change its role in the project.                                                                                       |
| ML-6045 | UI: If a user-filter has a large number of matches, it may not display all the matching users.                                                 |
| ML-6051 | UI: After an admin user deletes itself from a project, the user stays in the Projects Members page even though i                               |

## 21.29 Limitations

| ID      | Description                                                                                                                                                                                                                                                                          | Workaround                                                                                                                                                                                                                                               | Opened in |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| ML-1278 | Users do not automatically have access rights to the project data of the projects they are members of.                                                                                                                                                                               | Assign the user access permission for the project folder.                                                                                                                                                                                                | v0.8.0    |
| ML-2014 | Model deployment returns ResourceNotFoundException (Nuclio error that Service is invalid.)                                                                                                                                                                                           | Verify that all <code>metadata.labels</code> values are 63 characters or less. See the <a href="#">Kubernetes limitation</a> .                                                                                                                           | v1.0.0    |
| ML-3206 | When <code>get_or_create_project</code> is called, and there is a <code>project.yaml</code> in the dir, no new project is created (even if the project name is new). The existing <code>project.yaml</code> is loaded instead.                                                       | v1.2.1                                                                                                                                                                                                                                                   |           |
| ML-3520 | MLRun does not decompress large Kubeflow pipelines.                                                                                                                                                                                                                                  | NA                                                                                                                                                                                                                                                       | v1.3.0    |
| ML-3731 | When trying to identify a failed step in a workflow with <code>mlrun.get_run_db().list_pipelines('project-name')</code> , the returned error is <code>None</code> .                                                                                                                  | To see the error, use <code>mlrun.db.get_pipelines()</code> instead.                                                                                                                                                                                     |           |
| ML-3743 | Setting AWS credentials as project secret cause a build failure on EKS configured with ECR.                                                                                                                                                                                          | When using an ECR as the external container registry, make sure that the project secrets <code>AWS_ACCESS_KEY_ID</code> and <code>AWS_SECRET_ACCESS_KEY</code> have read/write access to ECR, as described in the <a href="#">platform documentation</a> |           |
| ML-4386 | Notifications of local runs aren't persisted.                                                                                                                                                                                                                                        | NA                                                                                                                                                                                                                                                       | v1.5.0    |
| ML-4767 | When using <code>mlrun-gpu</code> image, use PyTorch versions up to and including than 2.0.1, but not higher.                                                                                                                                                                        | You can build your own images with newer CUDA for a later release of PyTorch.                                                                                                                                                                            | v1.5.0    |
| ML-4855 | MLRun supports TensorFlow up to 2.13.1.                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                          |           |
| ML-4907 | MLRun Client does not support Win OS.                                                                                                                                                                                                                                                | Use WSL instead.                                                                                                                                                                                                                                         | v1.3.0    |
| ML-5274 | PySpark 3.2.x cannot always read parquet files written by pyarrow 13 or above. MLRun ingest might fail when <code>ingest()</code> is called with <code>engine="spark"</code> and a <code>ParquetSource</code> that points to parquet files that were written by pyarrow 13 or above. | Call <code>df.to_parquet()</code> with <code>version="2.4"</code> so that parquet files are backwards compatible.                                                                                                                                        | v1.6.0    |
| ML-5669 | When using <code>mlrun.mlrun</code> image, use PyTorch versions up to and including than 2.0.1, but not higher. See <a href="#">MLRun runtime images</a>                                                                                                                             | You can build your own images with newer CUDA for a later release of PyTorch.                                                                                                                                                                            | v1.6.0    |
| ML-5732 | When using an MLRun client previous to v1.6.0, the workflow step status might show completed when it is actually aborted.                                                                                                                                                            | Upgrade the client to v1.6.0 or higher.                                                                                                                                                                                                                  | v1.6.0    |

## 21.30 Deprecations and removed code

| In     | ID      | Description                                                                                                                                                                                                                        |
|--------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| v1.6.0 | ML-5137 | The Create/edit function pane is removed from the UI.                                                                                                                                                                              |
| v1.5.0 | ML-4010 | Unused artifact types: BokehArtifact, ChartArtifact                                                                                                                                                                                |
| v1.5.0 | ML-4075 | Python 3.7                                                                                                                                                                                                                         |
| v1.5.0 | ML-4366 | MLRun images <code>mlrun/ml-models</code> and <code>mlrun/ml-models-gpu</code>                                                                                                                                                     |
| v1.5.0 | ML-3605 | Model Monitoring: Most of the charts and KPIs in Grafana are now based on the data store target instead of the MLRun API. It is recommended to update the model monitoring dashboards since the old dashboards won't be supported. |
| v1.0.0 | NA      | MLRun / Nuclio does not support python 3.6.                                                                                                                                                                                        |

## 21.30.1 Deprecated APIs

| Will be re-move | Dep- re-cater | API                                                                                                                                                                                                                                                                            | Use instead                                                                              |
|-----------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| v1.8.0          | v1.6.0        | HTTPDB: last parameter of <code>list_runs</code>                                                                                                                                                                                                                               | NA. Was not used.                                                                        |
| v1.8.0          | v1.6.0        | Feature store: <code>get_offline_features</code>                                                                                                                                                                                                                               | <code>FeatureVector.get_offline_features()</code>                                        |
| v1.8.0          | v1.6.0        | Feature store: <code>get_online_feature_service</code>                                                                                                                                                                                                                         | <code>FeatureVector.get_online_feature_service()</code>                                  |
| v1.8.0          | v1.6.0        | Feature store: <code>preview</code>                                                                                                                                                                                                                                            | <code>FeatureSet.preview()</code>                                                        |
| v1.8.0          | v1.6.0        | Feature store: <code>deploy_ingestion_service_v2</code>                                                                                                                                                                                                                        | <code>FeatureSet.deploy_ingestion_service()</code>                                       |
| v1.8.0          | v1.6.0        | Feature store: <code>ingest</code>                                                                                                                                                                                                                                             | <code>FeatureSet.ingest()</code>                                                         |
| v1.8.0          | v1.6.0        | Artifacts: uid parameter of <code>store_artifact</code>                                                                                                                                                                                                                        | tree parameter of <code>store_artifact</code> (artifact uid is generated in the backend) |
| v1.8.0          | v1.6.0        | Runtimes: <code>with_requirements</code> — requirements param as a requirements file                                                                                                                                                                                           | <code>requirements_file</code> param                                                     |
| v1.6.2          | v1.6.0        | dashboard parameter of the <code>RemoteRuntime</code> invoke                                                                                                                                                                                                                   | NA. The parameter is ignored.                                                            |
| v1.7.0          | v1.5.0        | <code>skip_deployed</code> parameter of <code>MLrunProject.build_image</code>                                                                                                                                                                                                  | NA. The parameter is ignored.                                                            |
| v1.7.0          | v1.5.0        | <code>/files</code> and <code>/filestat</code>                                                                                                                                                                                                                                 | <code>/projects/{project}/filestat</code>                                                |
| v1.7.0          | v1.3.0        | LegacyArtifact and all legacy artifact types that inherit from it (LegacyArtifact, LegacyDirArtifact, LegacyLinkArtifact, LegacyPlotArtifact, LegacyChartArtifact, LegacyTableArtifact, LegacyModelArtifact, LegacyDatasetArtifact, LegacyPlotlyArtifact, LegacyBokehArtifact) | Artifact or other artifact classes that inherit from it                                  |

## 21.30.2 Removed APIs

| Version | API                                                                                                                                            |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------|
| v1.6.0  | dashboard parameter of <code>project.deploy_function</code> , <code>RemoteRuntime.deploy</code> , <code>RemoteRuntime.get_nuclio_deploy</code> |
| v1.6.0  | <code>MLRunProject.clear_context()</code>                                                                                                      |
| v1.6.0  | MLRunProject object legacy parameters                                                                                                          |
| v1.6.0  | <code>BaseRuntime.with_commands</code> and <code>KubejobRuntime.build_config</code> <code>verify_base_image</code> param                       |
| v1.6.0  | <code>run_local</code>                                                                                                                         |
| v1.6.0  | CSVSource's <code>time_fields</code> parameter                                                                                                 |
| v1.6.0  | Feature-set <code>set_targets()</code> , <code>default_final_state</code>                                                                      |
| v1.6.0  | <code>new_pipe_meta</code>                                                                                                                     |
| v1.6.0  | <code>ttl</code> param from pipeline                                                                                                           |

| Version | API                                                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| v1.6.0  | objects methods from artifacts list                                                                                                                      |
| v1.5.0  | user_project- and project-related parameters of <code>set_environment</code> . (Global-related parameters are not deprecated.)                           |
| v1.5.0  | <code>KubeResource.gpus</code>                                                                                                                           |
| v1.5.0  | Dask <code>gpus</code>                                                                                                                                   |
| v1.5.0  | <code>ExecutorTypes</code>                                                                                                                               |
| v1.5.0  | Spark runtime <code>gpus</code>                                                                                                                          |
| v1.5.0  | <code>mount_v3io_legacy</code> ( <code>mount_v3io</code> no longer calls it)                                                                             |
| v1.5.0  | <code>mount_v3io_extended</code>                                                                                                                         |
| v1.5.0  | <code>init_functions</code> in pipelines                                                                                                                 |
| v1.5.0  | The entire <code>mlrun/mlutils</code> library                                                                                                            |
| v1.5.0  | <code>run_pipeline</code>                                                                                                                                |
| v1.3.0  | <code>project.functions</code>                                                                                                                           |
| v1.3.0  | <code>project.artifacts</code>                                                                                                                           |
| v1.3.0  | <code>project.func()</code>                                                                                                                              |
| v1.3.0  | <code>project.create_vault_secrets()</code>                                                                                                              |
| v1.3.0  | <code>project.get_vault_secret()</code>                                                                                                                  |
| v1.3.0  | <code>MlrunProjectLegacy</code> class                                                                                                                    |
| v1.3.0  | Feature-store: usage of state in graph. For example: <code>add_writer_state</code> , and the <code>after_state</code> parameter in <code>_init_me</code> |
| v1.3.0  | <code>mount_path</code> parameter in <code>mount_v3io()</code>                                                                                           |
| v1.3.0  | <code>NewTask</code>                                                                                                                                     |
| v1.3.0  | Dask <code>with_limits</code>                                                                                                                            |
| v1.3.0  | Dask <code>with_requests</code>                                                                                                                          |

### 21.30.3 Removed CLIs

| Version | CLI                                                                              |
|---------|----------------------------------------------------------------------------------|
| v1.6.0  | <code>deploy --dashboard</code> ( <code>nuclio/deploy</code> )                   |
| v1.6.0  | <code>project --overwrite-schedule</code>                                        |
| v1.5.0  | <code>--ensure-project</code> flag of the <code>mlrun project</code> CLI command |



## PYTHON MODULE INDEX

### m

- `mlrun`, 506
- `mlrun.artifacts`, 511
- `mlrun.config`, 512
- `mlrun.datastore`, 514
- `mlrun.datastore.datastore_profile`, 523
- `mlrun.execution`, 549
- `mlrun.feature_store`, 557
- `mlrun.feature_store.steps`, 579
- `mlrun.frameworks.auto_mlrun.auto_mlrun`, 491
- `mlrun.frameworks.lgbm`, 504
- `mlrun.frameworks.pytorch`, 496
- `mlrun.frameworks.sklearn`, 500
- `mlrun.frameworks.tf_keras`, 495
- `mlrun.frameworks.xgboost`, 502
- `mlrun.model`, 585
- `mlrun.package.errors`, 604
- `mlrun.package.packagers.numpy_packagers`, 671
- `mlrun.package.packagers.pandas_packagers`, 693
- `mlrun.package.packagers.python_standard_library_packagers`, 604
- `mlrun.platforms`, 706
- `mlrun.projects`, 709
- `mlrun.run`, 736
- `mlrun.runtimes`, 744
- `mlrun.serving`, 774
- `mlrun.serving.remote`, 782

### S

- `storey.transformations`, 787



## Symbols

`__init__()` (`mlrun.feature_store.steps.DateExtractor` method), 580  
`__init__()` (`mlrun.feature_store.steps.DropFeatures` method), 581  
`__init__()` (`mlrun.feature_store.steps.FeaturesetValidator` method), 581  
`__init__()` (`mlrun.feature_store.steps.Imputer` method), 582  
`__init__()` (`mlrun.feature_store.steps.MapValues` method), 582  
`__init__()` (`mlrun.feature_store.steps.OneHotEncoder` method), 583  
`__init__()` (`mlrun.feature_store.steps.SetEventMetadata` method), 584  
`__init__()` (`mlrun.package.packager.Packager` method), 593  
`__init__()` (`mlrun.package.packagers.default_packager.DefaultPackager` method), 598  
`__init__()` (`mlrun.package.packagers.numpy_packagers.NumpyNDArrayDictPackager` method), 672  
`__init__()` (`mlrun.package.packagers.numpy_packagers.NumpyNDArrayListPackager` method), 677  
`__init__()` (`mlrun.package.packagers.numpy_packagers.NumpyNDArrayPackager` method), 682  
`__init__()` (`mlrun.package.packagers.numpy_packagers.NumpyNumberPackager` method), 688  
`__init__()` (`mlrun.package.packagers.numpy_packagers.NumpySupportedFormatPackager` method), 692  
`__init__()` (`mlrun.package.packagers.pandas_packagers.PandasDataFramePackager` method), 694  
`__init__()` (`mlrun.package.packagers.pandas_packagers.PandasSeriesPackager` method), 700  
`__init__()` (`mlrun.package.packagers.pandas_packagers.PandasSupportedFormatPackager` method), 705  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 606  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 611  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 616  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 621  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 626  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 631  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 636  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 641  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 646  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 651  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 656  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 661  
`__init__()` (`mlrun.package.packagers.python_standard_library_packagers.PythonStandardLibraryPackager` method), 667  
`__init__()` (`mlrun.package.packagers_manager.PackagersManager` method), 602  
`__init__()` (`mlrun.serving.remote.BatchHttpRequests` method), 783  
`__init__()` (`mlrun.serving.remote.RemoteStep` method), 785  
`do_pandas()` (`mlrun.feature_store.steps.MLRunStep` method), 578  
`do_spark()` (`mlrun.feature_store.steps.MLRunStep` method), 578  
`do_storey()` (`mlrun.feature_store.steps.MLRunStep` method), 578  
`add_aggregation()` (`mlrun.feature_store.FeatureSet` method), 558  
`add_child_function()` (`mlrun.runtimes.ServingRuntime` method), 764  
`add_custom_packager()` (`mlrun.projects.MlrunProject` method), 709  
`add_custom_packager()` (`mlrun.projects.ProjectSpec` method), 709

method), 729

add\_entity() (mlrun.feature\_store.FeatureSet method), 559

add\_feature() (mlrun.feature\_store.FeatureSet method), 559

add\_future\_clearing\_path() (ml-run.package.packager.Packager method), 593

add\_future\_clearing\_path() (ml-run.package.packagers.default\_packager.DefaultPackager method), 598

add\_future\_clearing\_path() (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayDataPackager method), 672

add\_future\_clearing\_path() (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayListPackager method), 677

add\_future\_clearing\_path() (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayTrigger method), 682

add\_future\_clearing\_path() (ml-run.package.packagers.numpy\_packagers.NumPyNumberParameterPackager method), 688

add\_future\_clearing\_path() (ml-run.package.packagers.pandas\_packagers.PandasDataFrameMethodPackager method), 695

add\_future\_clearing\_path() (ml-run.package.packagers.pandas\_packagers.PandasSeriesMethodPackager method), 700

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.BashRunner method), 606

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.AggregateByKey(Packager method), 611

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.BytesPackager method), 616

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.ApiVersionDict(Packager method), 621

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.Apply(Packager method), 626

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.ApplyMLRun(Packager method), 631

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.ApplyMLRun(Packager method), 636

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.ApplyMLRun(Packager method), 641

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.None method), 646

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.Path method), 651

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.SetPath method), 656

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.StrPath method), 661

add\_future\_clearing\_path() (ml-run.package.packagers.python\_standard\_library\_packagers.Tuple method), 667

add\_model() (mlrun.runtimes.ServingRuntime method), 754

add\_nuclio\_trigger() (mlrun.datastore.HttpSource method), 519

add\_nuclio\_trigger() (mlrun.datastore.KafkaSource method), 519

add\_nuclio\_trigger() (mlrun.datastore.StreamSource method), 522

add\_route() (mlrun.serving.RouterStep method), 776

add\_trigger() (mlrun.runtimes.RemoteRuntime method), 758

add\_v3io\_stream\_trigger() (ml-run.runtimes.RemoteRuntime method), 758

add\_writer\_step() (mlrun.datastore.CSVTarget method), 516

add\_writer\_step() (mlrun.datastore.ParquetTarget method), 522

add\_writer\_step() (mlrun.datastore.StreamTarget method), 522

AggregateByKey(Packager method), 611

all() (mlrun.run.RunStatuses static method), 736

annotations (mlrun.execution.MLClientCtx property), 539

api\_call() (mlrun.db.httpdb.HTTPRunDB method), 524

api\_versions(Packager attribute), 768

apply() (mlrun.feature\_store.RunConfig method), 570

apply(Packager method), 626

apply\_mlrun() (in module mlrun.frameworks.lgbm), 504

apply\_mlrun() (in module mlrun.frameworks.sklearn), 500

apply\_mlrun() (in module mlrun.frameworks.tf\_keras), 495

apply\_mlrun() (in module mlrun.frameworks.xgboost), 502

apply\_mlrun() (in module mlrun.frameworks.auto\_mlrun.auto\_mlrun.AutoMLRun static method), 491

artifact() (mlrun.model.RunObject method), 586

- [artifact\\_path](#) (*mlrun.projects.MlrunProject* property), 709  
[artifact\\_subpath\(\)](#) (*mlrun.execution.MLClientCtx* method), 549  
[artifact\\_url](#) (*mlrun.datastore.DataItem* property), 517  
[artifacts](#) (*mlrun.execution.MLClientCtx* property), 550  
[artifacts](#) (*mlrun.package.packagers\_manager.PackagersManager* attribute), 601  
[artifacts](#) (*mlrun.projects.ProjectSpec* property), 729  
[ArtifactType](#) (class in *mlrun*), 506  
[as\\_df\(\)](#) (*mlrun.datastore.CSVTarget* method), 516  
[as\\_df\(\)](#) (*mlrun.datastore.DataItem* method), 517  
[as\\_df\(\)](#) (*mlrun.datastore.ParquetTarget* method), 521  
[as\\_df\(\)](#) (*mlrun.datastore.StreamTarget* method), 523  
[as\\_step\(\)](#) (*mlrun.runtimes.BaseRuntime* method), 744  
[Assert](#) (class in *storey.transformations*), 787  
[async\\_object](#) (*mlrun.serving.QueueStep* property), 776  
[async\\_object](#) (*mlrun.serving.TaskStep* property), 777  
[auto\\_mount\(\)](#) (in module *mlrun.platforms*), 706  
[AutoMLRun](#) (class in *ml-run.frameworks.auto\_mlrun.auto\_mlrun*), 491
- ## B
- [BaseRuntime](#) (class in *mlrun.runtimes*), 744  
[BaseStep](#) (class in *mlrun.serving.states*), 773  
[Batch](#) (class in *storey.transformations*), 787  
[BatchHttpRequests](#) (class in *mlrun.serving.remote*), 782  
[BigQuerySource](#) (class in *mlrun.datastore*), 514  
[BoolPackager](#) (class in *ml-run.package.packagers.python\_standard\_library\_packagers*), 605  
[build](#) (*mlrun.projects.ProjectSpec* property), 729  
[build\\_config\(\)](#) (*mlrun.projects.MlrunProject* method), 709  
[build\\_config\(\)](#) (*mlrun.runtimes.KubejobRuntime* method), 756  
[build\\_function\(\)](#) (in module *mlrun.projects*), 730  
[build\\_function\(\)](#) (*mlrun.projects.MlrunProject* method), 710  
[build\\_image\(\)](#) (*mlrun.projects.MlrunProject* method), 710  
[BytearrayPackager](#) (class in *ml-run.package.packagers.python\_standard\_library\_packagers*), 609  
[BytesPackager](#) (class in *ml-run.package.packagers.python\_standard\_library\_packagers*), 615
- ## C
- [Choice](#) (class in *storey.transformations*), 788  
[clean\\_build\\_params\(\)](#) (*mlrun.runtimes.BaseRuntime* method), 745  
[clear\\_children\(\)](#) (*mlrun.serving.RouterStep* method), 776  
[clear\\_object\(\)](#) (*mlrun.serving.TaskStep* method), 777  
[clear\\_packagers\\_outputs\(\)](#) (*ml-run.package.packagers\_manager.PackagersManager* method), 602  
[Client](#) (*mlrun.runtimes.DaskCluster* property), 748  
[close\(\)](#) (*mlrun.feature\_store.OnlineVectorService* method), 569  
[close\(\)](#) (*mlrun.runtimes.DaskCluster* method), 748  
[cluster\(\)](#) (*mlrun.runtimes.DaskCluster* method), 748  
[code\\_path](#) (*mlrun.runtimes.Spark3Runtime* attribute), 768  
[code\\_script](#) (*mlrun.runtimes.Spark3Runtime* attribute), 768  
[code\\_to\\_function\(\)](#) (in module *mlrun*), 506  
[code\\_to\\_function\(\)](#) (in module *mlrun.run*), 736  
[collect\\_packagers\(\)](#) (*ml-run.package.packagers\_manager.PackagersManager* method), 602  
[commit\(\)](#) (*mlrun.execution.MLClientCtx* method), 550  
[Config](#) (class in *mlrun.config*), 512  
[connect\(\)](#) (*mlrun.db.httpdb.HTTPRunDB* method), 525  
[context](#) (*mlrun.projects.MlrunProject* property), 711  
[copy\(\)](#) (*mlrun.feature\_store.RunConfig* method), 570  
[create\\_feature\\_set\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 525  
[create\\_feature\\_vector\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 525  
[create\\_graph\\_server\(\)](#) (in module *mlrun.serving*), 782  
[create\\_hub\\_source\(\)](#) (*mlrun.db.httpdb.HTTPRunDB* method), 525  
[create\\_model\\_endpoint\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 526  
[create\\_model\\_monitoring\\_controller\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 526  
[create\\_model\\_monitoring\\_function\(\)](#) (*ml-run.projects.MlrunProject* method), 711  
[create\\_project\(\)](#) (*mlrun.db.httpdb.HTTPRunDB* method), 527  
[create\\_project\\_secrets\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 527  
[create\\_remote\(\)](#) (*mlrun.projects.MlrunProject* method), 712  
[create\\_schedule\(\)](#) (*mlrun.db.httpdb.HTTPRunDB* method), 527  
[create\\_user\\_secrets\(\)](#) (*ml-run.db.httpdb.HTTPRunDB* method), 528  
[CSV](#) (*mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat* attribute), 691  
[CSV](#) (*mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat* attribute), 691

*attribute*), 705

CSVSource (*class in mlrun.datastore*), 515

CSVTarget (*class in mlrun.datastore*), 516

CurrentOpenWindow (*mlrun.feature\_store.FixedWindowType attribute*), 568

## D

**DaskCluster** (*class in mlrun.runtimes*), 748  
**DatabricksFileBugFixed** (*class in mlrun.datastore*), 518  
**DatabricksFileSystemDisableCache** (*class in mlrun.datastore*), 519  
**DatabricksRuntime** (*class in mlrun.runtimes*), 752  
**DataItem** (*class in mlrun.datastore*), 516  
**DataSource** (*class in mlrun.model*), 585  
**DataTarget** (*class in mlrun.model*), 585  
**DataTargetBase** (*class in mlrun.model*), 585  
**DateExtractor** (*class in mlrun.feature\_store.steps*), 579  
**dbpath** (*mlrun.config.Config property*), 512  
**decode\_base64\_config\_and\_load\_to\_object()** (*mlrun.config.Config static method*), 512  
**default\_image** (*mlrun.projects.MlrunProject property*), 712  
**default\_image** (*mlrun.runtimes.RemoteSparkRuntime attribute*), 763  
**default\_mlrun\_image** (*mlrun.runtimes.Spark3Runtime attribute*), 768  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.default\_packager.Default attribute*), 597  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.numpy\_packagers.Numpy attribute*), 671  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.numpy\_packagers.Numpy attribute*), 676  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.numpy\_packagers.Numpy attribute*), 681  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.numpy\_packagers.Numpy attribute*), 687  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.pandas\_packagers.Pandas attribute*), 694  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.pandas\_packagers.Pandas attribute*), 699  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.python\_standard\_library attribute*), 605  
**DEFAULT\_PACKING\_ARTIFACT\_TYPE** (*mlrun.package.packagers.python\_standard\_library attribute*), 605

attribute), 610

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Bytes attribute), 615

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Dict attribute), 620

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Float attribute), 625

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.FrozenSet attribute), 630

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Int attribute), 635

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.List attribute), 640

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.None attribute), 645

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Path attribute), 650

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Set attribute), 655

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Str attribute), 660

DEFAULT\_PACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.python\_standard\_library\_packagers.Tuple attribute), 666

default\_shape (mlrun.serving.QueueStep attribute), 779

default\_shape (mlrun.serving.RouterStep attribute), 776

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.default\_packager.DefaultPackager attribute), 597

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayDictPackager attribute), 672

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayListPackager attribute), 677

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.numpy\_packagers.NumPyNDArrayPackager attribute), 681

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-run.package.packagers.numpy\_packagers.NumPyNumberPackager attribute), 687

DEFAULT\_UNPACKING\_ARTIFACT\_TYPE (ml-

|                                                                                                                          |                                                                          |
|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| run.package.packagers.pandas_packagers.PandasPackager (class in ml-run.package.packagers), 694                           | delete_artifacts_tags() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.pandas_packagers.PandasPackager attribute), 699                | delete_datastore_profile() (ml-run.db.httpdb.HTTPRunDB method), 529      |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 605 | delete_datastore_profile() (ml-run.feature_store.FeatureSet method), 712 |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 610 | delete_feature_set() (ml-run.db.httpdb.HTTPRunDB method), 529            |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 615 | delete_feature_vector() (in module ml-run.feature_store), 571            |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 620 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 625 | delete_feature_vector() (in module ml-run.feature_store), 571            |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 630 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 635 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 640 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 645 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 650 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 655 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 660 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DEFAULT_UNPACKING_ARTIFACT_TYPE (ml-run.package.packagers.python_standard_library_packagers.MlrunProject attribute), 666 | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| DefaultPackager (class in ml-run.package.packagers.default_packager), 595                                                | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| del_artifact() (mlrun.db.httpdb.HTTPRunDB method), 528                                                                   | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| del_artifacts() (mlrun.db.httpdb.HTTPRunDB method), 528                                                                  | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| del_run() (mlrun.db.httpdb.HTTPRunDB method), 528                                                                        | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |
| del_runs() (mlrun.db.httpdb.HTTPRunDB method), 529                                                                       | delete_feature_vector() (ml-run.db.httpdb.HTTPRunDB method), 529         |

deploy\_monitoring\_batch\_job() (mlrun.db.httpdb.HTTPRunDB method), 531  
 deploy\_step() (mlrun.runtimes.KubejobRuntime method), 757  
 deploy\_step() (mlrun.runtimes.RemoteRuntime method), 759  
 description (mlrun.projects.MlrunProject property), 712  
 DictPackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 620  
 disable\_default\_http\_trigger() (mlrun.runtimes.RemoteRuntime method), 759  
 disable\_model\_monitoring() (mlrun.projects.MlrunProject method), 712  
 disable\_monitoring() (mlrun.runtimes.Spark3Runtime method), 768  
 do() (mlrun.feature\_store.steps.MLRunStep method), 578  
 do\_event() (mlrun.serving.V2ModelServer method), 778  
 do\_event() (mlrun.serving.VotingEnsemble method), 781  
 doc() (mlrun.runtimes.BaseRuntime method), 745  
 download() (mlrun.datastore.DataItem method), 517  
 download\_object() (in module mlrun.run), 738  
 DropFeatures (class in mlrun.feature\_store.steps), 580  
 dump\_yaml() (mlrun.config.Config method), 512

## E

enable\_default\_http\_trigger() (mlrun.runtimes.RemoteRuntime method), 759  
 enable\_model\_monitoring() (mlrun.projects.MlrunProject method), 712  
 end\_time (mlrun.datastore.ParquetSource property), 520  
 Entity (class in mlrun.feature\_store), 557  
 error (mlrun.model.RunObject property), 586  
 error (mlrun.run.RunStatuses attribute), 736  
 error\_handler() (mlrun.serving.states.BaseStep method), 773  
 ErrorStep (class in mlrun.serving), 774  
 evaluate() (in module mlrun.frameworks.pytorch), 496  
 explain() (mlrun.serving.V2ModelServer method), 778  
 export() (mlrun.projects.MlrunProject method), 713  
 export() (mlrun.runtimes.BaseRuntime method), 745  
 Extend (class in storey.transformations), 788  
 extract\_relation\_keys() (mlrun.feature\_store.FeatureSet method), 560  
 extract\_results\_from\_response() (mlrun.serving.VotingEnsemble method), 781  
 extract\_type\_hints\_from\_inputs() (mlrun.model.RunSpec method), 587

## F

failed (mlrun.run.RunStatuses attribute), 736  
 FEATHER (mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat attribute), 705  
 Feature (class in mlrun.feature\_store), 557  
 FeatureSet (class in mlrun.feature\_store), 558  
 FeatureSetProducer (class in mlrun.model), 585  
 FeatureSetSpec (class in mlrun.feature\_store.feature\_set), 577  
 FeatureSetStatus (class in mlrun.feature\_store.feature\_set), 578  
 FeaturesetValidator (class in mlrun.feature\_store.steps), 581  
 FeatureVector (class in mlrun.feature\_store), 564  
 Filter (class in storey.transformations), 788  
 FixedWindowType (class in mlrun.feature\_store), 568  
 FlatMap (class in storey.transformations), 789  
 Flatten() (in module storey.transformations), 789  
 FloatPackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 625  
 ForEach (class in storey.transformations), 789  
 framework\_to\_apply\_mlrun() (in module mlrun.frameworks.auto\_mlrun.auto\_mlrun), 494  
 framework\_to\_model\_handler() (in module mlrun.frameworks.auto\_mlrun.auto\_mlrun), 494  
 from\_dict() (mlrun.config.Config class method), 512  
 from\_dict() (mlrun.execution.MLClientCtx class method), 550  
 from\_dict() (mlrun.model.DataTargetBase class method), 585  
 from\_image() (mlrun.runtimes.RemoteRuntime method), 759  
 FrozensetPackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 629  
 full\_image\_path() (mlrun.runtimes.BaseRuntime method), 745  
 fullname (mlrun.feature\_store.FeatureSet property), 561  
 function (mlrun.feature\_store.RunConfig property), 570  
 function\_status() (mlrun.db.httpdb.HTTPRunDB method), 531  
 function\_to\_module() (in module mlrun.run), 738  
 functions (mlrun.projects.ProjectSpec property), 729  
 future\_clearing\_path\_list (mlrun.package.packager.Packager attribute), 592  
 future\_clearing\_path\_list (mlrun.package.packagers.default\_packager.DefaultPackager attribute), 597  
 future\_clearing\_path\_list (mlrun.package.packagers.numpy\_packagers.NumPyNDArrayPackager attribute), 597

attribute), 682  
 future\_clearing\_path\_list (ml- get() (mlrun.feature\_store.OnlineVectorService method), 569  
 run.package.packagers.numpy\_packagers.NumPyNumberPackager (ml-  
 attribute), 687  
 future\_clearing\_path\_list (ml- run.package.packagers.numpy\_packagers.NumPySupportedForm  
 class method), 692  
 run.package.packagers.pandas\_packagers.PandasDataFileFormat (ml-  
 attribute), 694  
 run.package.packagers.pandas\_packagers.PandasSupportedForm  
 class method), 705  
 run.package.packagers.pandas\_packagers.PandasSetBackpath\_prefix() (ml-  
 attribute), 699  
 run.db.httpdb.HTTPRunDB static method),  
 future\_clearing\_path\_list (ml- 531  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager (mlrun.projects.MlrunProject  
 attribute), 605  
 method), 713  
 future\_clearing\_path\_list (ml- get\_artifact\_type() (mlrun.datastore.DataItem  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 610  
 get\_artifact\_uri() (mlrun.projects.MlrunProject  
 method), 713  
 future\_clearing\_path\_list (ml- get\_base\_api\_url() (mlrun.db.httpdb.HTTPRunDB  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 615  
 method), 531  
 future\_clearing\_path\_list (ml- get\_build\_args() (mlrun.config.Config static method),  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 615  
 method), 512  
 future\_clearing\_path\_list (ml- get\_build\_dir\_status() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 625  
 run.db.httpdb.HTTPRunDB method), 531  
 future\_clearing\_path\_list (ml- get\_cached\_artifact() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 630  
 firecracker.MlClientCtx method), 550  
 get\_child\_context() (mlrun.execution.MLClientCtx  
 method), 550  
 future\_clearing\_path\_list (ml- get\_child\_context() (mlrun.serving.RouterStep method),  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 635  
 method), 776  
 future\_clearing\_path\_list (ml- get\_code\_path() (mlrun.projects.ProjectSpec  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 640  
 method), 713  
 future\_clearing\_path\_list (ml- get\_custom\_packagers() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 645  
 method), 522  
 future\_clearing\_path\_list (ml- get\_data\_item\_local\_path() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 650  
 method), 593  
 future\_clearing\_path\_list (ml- get\_data\_item\_local\_path() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 655  
 method), 598  
 future\_clearing\_path\_list (ml- get\_data\_item\_local\_path() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 660  
 method), 672  
 future\_clearing\_path\_list (ml- get\_data\_item\_local\_path() (ml-  
 run.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager  
 attribute), 666  
 method), 677  
 get\_data\_item\_local\_path() (ml-  
 run.package.packagers.numpy\_packagers.NumPyNDArrayPackag  
 method), 683  
 generate\_runtime\_k8s\_env() (ml- get\_data\_item\_local\_path() (ml-  
 run.runtimes.BaseRuntime method), 745  
 get() (mlrun.datastore.DataItem method), 517  
 run.package.packagers.numpy\_packagers.NumPyNumberPackager

method), 688

get\_data\_item\_local\_path() (ml-  
run.package.packagers.pandas\_packagers.PandasDataFramePackager  
method), 695

get\_data\_item\_local\_path() (ml-  
run.package.packagers.pandas\_packagers.PandasSeriesPackager  
method), 700

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.BasePackager  
method), 606

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.ByteArrayPackager  
method), 611

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.DefaultPackager  
method), 616

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.DictPackager  
method), 621

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.FixedSizePackager  
method), 626

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.FractionalPackager  
method), 631

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.IntegerPackager  
method), 636

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.ListPackager  
method), 641

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.NanoPackager  
method), 646

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.PathPackager  
method), 651

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.SetPackager  
method), 656

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.StringPackager  
method), 661

get\_data\_item\_local\_path() (ml-  
run.package.packagers.python\_standard\_library\_packagers.TuplePackager  
method), 667

get\_dataitem() (in module mlrun.run), 739

get\_dataitem() (mlrun.execution.MLClientCtx  
method), 550

get\_datastore\_profile() (ml-  
run.db.httpdb.HTTPRunDB method), 532

get\_datastore\_profile() (ml-  
run.projects.MlrunProject method), 713

get\_default\_function\_node\_selector() (ml-  
run.config.Config method), 512

get\_default\_function\_pod\_requirement\_resources() (ml-  
run.config.Config static method), 512

get\_default\_function\_pod\_resources() (ml-  
run.config.Config method), 512

get\_default\_function\_security\_context() (mlrun.config.Config method), 512

get\_default\_hub\_source() (mlrun.config.Config  
method), 512

get\_default\_packing\_artifact\_type() (ml-  
run.package.packager.Packager method),

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.default\_packager.DefaultPackager  
method), 609

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.numpy\_packagers.NumPyNDArrayDictPackager  
method), 632

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.numpy\_packagers.NumPyNDArrayListPackager  
method), 637

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.numpy\_packagers.NumPyNDArrayPackager  
method), 642

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.numpy\_packagers.NumPyNumberPackager  
method), 648

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.pandas\_packagers.PandasDataFramePackager  
method), 655

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.pandas\_packagers.PandasSeriesPackager  
method), 660

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.BooleanPackager  
method), 651

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.ByteArrayPackager  
method), 656

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.BytesPackager  
method), 661

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.DictPackager  
method), 667

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.FloatPackager  
method), 672

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.FrozenSetPackager  
method), 677

get\_default\_packing\_artifact\_type() (ml-  
run.package.packagers.python\_standard\_library\_packagers.IntPackager  
method), 682

`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.DictPackager`  
`run.package.packagers.python_standard_library_packagers.DictPackager`  
`method`), 642 `get_default_unpacking_artifact_type()` (ml-  
`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.FloatPackager`  
`run.package.packagers.python_standard_library_packagers.FloatPackager`  
`method`), 646 `get_default_unpacking_artifact_type()` (ml-  
`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.FrozenDictPackager`  
`run.package.packagers.python_standard_library_packagers.FrozenDictPackager`  
`method`), 652 `get_default_unpacking_artifact_type()` (ml-  
`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.IntegerPackager`  
`run.package.packagers.python_standard_library_packagers.IntegerPackager`  
`method`), 657 `get_default_unpacking_artifact_type()` (ml-  
`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.ListPackager`  
`run.package.packagers.python_standard_library_packagers.ListPackager`  
`method`), 662 `get_default_unpacking_artifact_type()` (ml-  
`get_default_packing_artifact_type()` (ml- `run.package.packagers.python_standard_library_packagers.NonePackager`  
`run.package.packagers.python_standard_library_packagers.NonePackager`  
`method`), 668 `get_default_unpacking_artifact_type()` (ml-  
`get_default_priority_class_name()` (ml- `run.package.packagers.python_standard_library_packagers.PathPackager`  
`run.runtimes.KubeResource` `method`), 754 `method`), 652  
`get_default_unpacking_artifact_type()` (ml- `run.package.packager.Packager` `method`), `run.package.packagers.python_standard_library_packagers.SetPackager`  
594 `method`), 657  
`get_default_unpacking_artifact_type()` (ml- `get_default_unpacking_artifact_type()` (ml-  
`run.package.packagers.default_packager.DefaultPackager` `run.package.packagers.python_standard_library_packagers.StringPackager`  
`method`), 599 `method`), 662  
`get_default_unpacking_artifact_type()` (ml- `get_default_unpacking_artifact_type()` (ml-  
`run.package.packagers.numpy_packagers.NumPyNDArrayDictPackager` `run.package.packagers.python_standard_library_packagers.TuplePackager`  
`method`), 673 `method`), 668  
`get_default_unpacking_artifact_type()` (ml- `get_env()` (mlrun.runtimes.KubeResource `method`), 754  
`run.package.packagers.numpy_packagers.NumPyNDArrayFeatureAliases()` (ml-  
`method`), 678 `run.feature_store.FeatureVector` `method`),  
`get_default_unpacking_artifact_type()` (ml- 565  
`run.package.packagers.numpy_packagers.NumPyNDArrayFeatureSet()` (in module mlrun.feature\_store),  
`method`), 683 572  
`get_default_unpacking_artifact_type()` (ml- `get_feature_set()` (mlrun.db.httpdb.HTTPRunDB  
`run.package.packagers.numpy_packagers.NumPyNumberPackager` `method`), 532  
`method`), 689 `get_feature_set_relations()` (ml-  
`get_default_unpacking_artifact_type()` (ml- `run.feature_store.FeatureVector` `method`),  
`run.package.packagers.pandas_packagers.PandasDataFramePackager`  
`method`), 695 `get_feature_vector()` (in module ml-  
`get_default_unpacking_artifact_type()` (ml- `run.feature_store`), 573  
`run.package.packagers.pandas_packagers.PandasFeatureVector()` (ml-  
`method`), 701 `run.db.httpdb.HTTPRunDB` `method`), 532  
`get_default_unpacking_artifact_type()` (ml- `get_format_handler()` (ml-  
`run.package.packagers.python_standard_library_packagers.DictPackager` `run.package.packagers.numpy_packagers.NumPySupportedFormatPackager`  
`method`), 607 `class` `method`), 692  
`get_default_unpacking_artifact_type()` (ml- `get_format_handler()` (ml-  
`run.package.packagers.python_standard_library_packagers.FloatPackager` `run.package.packagers.pandas_packagers.PandasSupportedFormatPackager`  
`method`), 612 `class` `method`), 706  
`get_default_unpacking_artifact_type()` (ml- `get_framework_by_class_name()` (in module ml-  
`run.package.packagers.python_standard_library_packagers.IntegerPackager` `run.frameworks.auto_mlrun.auto_mlrun`), 494  
`method`), 617 `get_framework_by_instance()` (in module ml-  
`get_default_unpacking_artifact_type()` (ml- `run.frameworks.auto_mlrun.auto_mlrun`),

494  
get\_full\_class\_args() (mlrun.serving.TaskStep method), 777  
get\_function() (mlrun.db.httpdb.HTTPRunDB method), 532  
get\_function() (mlrun.projects.MlrunProject method), 713  
get\_function\_names() (mlrun.projects.MlrunProject method), 714  
get\_function\_objects() (mlrun.projects.MlrunProject method), 714  
get\_hub\_asset() (mlrun.db.httpdb.HTTPRunDB method), 532  
get\_hub\_catalog() (mlrun.db.httpdb.HTTPRunDB method), 532  
get\_hub\_item() (mlrun.db.httpdb.HTTPRunDB method), 533  
get\_hub\_source() (mlrun.db.httpdb.HTTPRunDB method), 533  
get\_input() (mlrun.execution.MLClientCtx method), 551  
get\_internal\_parameters() (mlrun.runtimes.DatabricksRuntime method), 752  
get\_item\_absolute\_path() (mlrun.projects.MlrunProject method), 714  
get\_log() (mlrun.db.httpdb.HTTPRunDB method), 533  
get\_log\_size() (mlrun.db.httpdb.HTTPRunDB method), 533  
get\_meta() (mlrun.execution.MLClientCtx method), 551  
get\_model() (in module mlrun.artifacts), 511  
get\_model() (mlrun.serving.V2ModelServer method), 778  
get\_model\_endpoint() (mlrun.db.httpdb.HTTPRunDB method), 534  
get\_model\_monitoring\_file\_target\_path() (mlrun.config.Config method), 512  
get\_multi\_array\_formats() (mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat class method), 692  
get\_object() (in module mlrun.run), 739  
get\_offline\_features() (in module mlrun.feature\_store), 573  
get\_offline\_features() (mlrun.feature\_store.FeatureVector method), 565  
get\_online\_feature\_service() (in module mlrun.feature\_store), 574  
get\_online\_feature\_service() (mlrun.feature\_store.FeatureVector method), 566  
get\_or\_create\_ctx() (in module mlrun.run), 739  
get\_or\_create\_project() (in module mlrun.projects), 731  
get\_param() (mlrun.execution.MLClientCtx method), 551  
get\_param() (mlrun.projects.MlrunProject method), 714  
get\_param() (mlrun.serving.GraphContext method), 774  
get\_param() (mlrun.serving.V2ModelServer method), 779  
get\_parsed\_igz\_version() (mlrun.config.Config static method), 513  
get\_pipeline() (in module mlrun.run), 740  
get\_pipeline() (mlrun.db.httpdb.HTTPRunDB method), 534  
get\_preemptible\_node\_selector() (mlrun.config.Config method), 513  
get\_preemptible\_tolerations() (mlrun.config.Config method), 513  
get\_project() (mlrun.db.httpdb.HTTPRunDB method), 534  
get\_project\_background\_task() (mlrun.db.httpdb.HTTPRunDB method), 534  
get\_project\_object() (mlrun.execution.MLClientCtx method), 551  
get\_project\_param() (mlrun.execution.MLClientCtx method), 551  
get\_remote\_endpoint() (mlrun.serving.GraphContext method), 774  
get\_run\_status() (mlrun.projects.MlrunProject method), 714  
get\_s3\_storage\_options() (mlrun.config.Config method), 513  
get\_schedule() (mlrun.db.httpdb.HTTPRunDB method), 534  
get\_secret() (mlrun.execution.MLClientCtx method), 551  
get\_secret() (mlrun.projects.MlrunProject method), 714  
get\_secret() (mlrun.serving.GraphContext method), 774  
get\_secret\_or\_env() (in module mlrun), 507  
get\_security\_context\_enrichment\_group\_id() (mlrun.config.Config static method), 513  
get\_single\_array\_formats() (mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat class method), 692  
get\_spark\_options() (mlrun.datastore.CSVSource method), 515  
get\_spark\_options() (mlrun.datastore.CSVTarget method), 516  
get\_spark\_options() (mlrun.datastore.NoSqlTarget method), 520  
get\_spark\_options() (mlrun.datastore.ParquetSource method), 520

`get_spark_options()` (*mlrun.datastore.ParquetTarget* method), 522  
`get_stats_table()` (*mlrun.feature\_store.FeatureSet* method), 561  
`get_stats_table()` (*mlrun.feature\_store.FeatureVector* method), 567  
`get_status()` (*mlrun.runtimes.DaskCluster* method), 749  
`get_step_class_object()` (*mlrun.serving.TaskStep* method), 777  
`get_storage_auto_mount_params()` (*mlrun.config.Config* static method), 513  
`get_store_resource()` (in module *mlrun.datastore*), 523  
`get_store_resource()` (*mlrun.execution.MLClientCtx* method), 551  
`get_store_resource()` (*mlrun.projects.MlrunProject* method), 714  
`get_stream_pusher()` (in module *mlrun.datastore*), 523  
`get_supported_artifact_types()` (*mlrun.package.packager.Packager* method), 594  
`get_supported_artifact_types()` (*mlrun.package.packagers.default\_packager.DefaultPackager* method), 599  
`get_supported_artifact_types()` (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayDataPackager* method), 673  
`get_supported_artifact_types()` (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayListPackager* method), 678  
`get_supported_artifact_types()` (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayObjectPackager* method), 683  
`get_supported_artifact_types()` (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayObjectPackager* method), 689  
`get_supported_artifact_types()` (*mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager* method), 695  
`get_supported_artifact_types()` (*mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager* method), 701  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager* method), 607  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager* method), 612  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.PythonStandardLibraryPackager* method), 617  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.DictPackager* method), 622  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.FloatPackager* method), 627  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.FrozenDictPackager* method), 632  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.IntegerPackager* method), 637  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 642  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.NonePackager* method), 647  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.PathPackager* method), 652  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.SetPackager* method), 657  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.StringPackager* method), 662  
`get_supported_artifact_types()` (*mlrun.package.packagers.python\_standard\_library\_packagers.TuplePackager* method), 668  
`get_table_object()` (*mlrun.datastore.NoSqlTarget* method), 520  
`get_target_path()` (*mlrun.feature\_store.FeatureSet* method), 561  
`get_target_path()` (*mlrun.feature\_store.FeatureVector* method), 568  
`get_target_path()` (*mlrun.runtimes.RemoteRuntime* method), 759  
`get_v3io_access_key()` (*mlrun.config.Config* method), 513  
`get_valid_function_priority_class_names()` (*mlrun.config.Config* static method), 513  
`get_version()` (in module *mlrun*), 508  
`get_workflow_id()` (*mlrun.db.httpdb.HTTPRunDB* method), 535  
`gpu_count()` (*mlrun.runtimes.Spark3Runtime* attribute), 768  
`gpus()` (*mlrun.runtimes.Spark3Runtime* method), 768  
`graph_engine_by_name()` (*mlrun.serving.GraphServer* property), 775  
`graph` (*mlrun.serving.GraphServer* property), 775  
`GraphContext` (class in *mlrun.serving*), 774  
`GraphServer` (class in *mlrun.serving*), 775  
`group` (*mlrun.runtimes.Spark3Runtime* attribute), 768

GZ (*mlrun.package.packagers.numpy\_packagers.NumPySupporter* attribute), 691

## H

H5 (*mlrun.package.packagers.pandas\_packagers.PandasSupporter* attribute), 705

handler() (in module *mlrun*), 508

HandlerRuntime (class in *mlrun.runtimes*), 753

has\_valid\_source() (*mlrun.feature\_store.FeatureSet* method), 561

HTML (*mlrun.package.packagers.pandas\_packagers.PandasSupporter* attribute), 705

HTTPRunDB (class in *mlrun.db.httptdb*), 523

HttpSource (class in *mlrun.datastore*), 519

HyperParamOptions (class in *mlrun.model*), 585

## I

import\_artifact() (*mlrun.projects.MlrunProject* method), 714

import\_function() (in module *mlrun*), 509

import\_function() (in module *mlrun.run*), 740

import\_function\_to\_dict() (in module *mlrun.run*), 741

Imputer (class in *mlrun.feature\_store.steps*), 581

in\_path (*mlrun.execution.MLClientCtx* property), 552

ingest() (in module *mlrun.feature\_store*), 575

ingest() (*mlrun.feature\_store.FeatureSet* method), 561

init\_object() (*mlrun.serving.GraphServer* method), 775

init\_object() (*mlrun.serving.QueueStep* method), 776

init\_object() (*mlrun.serving.RouterStep* method), 776

init\_object() (*mlrun.serving.TaskStep* method), 777

init\_states() (*mlrun.serving.GraphServer* method), 775

initialize() (*mlrun.feature\_store.OnlineVectorService* method), 569

initialized (*mlrun.runtimes.DaskCluster* property), 749

inputs (*mlrun.execution.MLClientCtx* property), 552

inputs (*mlrun.model.RunSpec* property), 587

inputs\_type\_hints (*mlrun.model.RunSpec* property), 587

IntPackager (class in *mlrun.package.packagers.python\_standard\_library\_packagers*), 635

invoke() (*mlrun.runtimes.RemoteRuntime* method), 760

invoke\_schedule() (*mlrun.db.httptdb.HTTPRunDB* method), 535

is\_api\_running\_on\_k8s() (*mlrun.config.Config* method), 513

is\_ce\_mode() (*mlrun.config.Config* method), 513

is\_connectable\_to\_df() (*mlrun.feature\_store.FeatureSet* method), 562

is\_deployed() (*mlrun.runtimes.BaseRuntime* method), 745

is\_deployed() (*mlrun.runtimes.DaskCluster* method), 749

is\_deployed() (*mlrun.runtimes.KubejobRuntime* method), 757

is\_deployed() (*mlrun.runtimes.LocalRuntime* method), 758

is\_deployed() (*mlrun.runtimes.RemoteSparkRuntime* method), 763

is\_deployed() (*mlrun.runtimes.Spark3Runtime* method), 769

is\_env\_exists() (*mlrun.runtimes.KubeResource* method), 754

is\_explicit\_ack() (*mlrun.config.Config* method), 513

is\_iterator() (*mlrun.datastore.BigQuerySource* method), 515

is\_iterator() (*mlrun.datastore.CSVSource* method), 515

is\_logging\_worker() (*mlrun.execution.MLClientCtx* method), 552

is\_model\_monitoring\_function() (*mlrun.runtimes.BaseRuntime* method), 745

is\_nuclio\_detected() (*mlrun.config.Config* method), 513

is\_offline (*mlrun.datastore.CSVTarget* attribute), 516

is\_offline (*mlrun.datastore.ParquetTarget* attribute), 522

is\_online (*mlrun.datastore.StreamTarget* attribute), 523

is\_packable() (*mlrun.package.packager.Packager* method), 594

is\_packable() (*mlrun.package.packagers.default\_packager.DefaultPackager* method), 599

is\_packable() (*mlrun.package.packagers.numpy\_packagers.NumPyNDA* method), 673

is\_packable() (*mlrun.package.packagers.numpy\_packagers.NumPyNDA* method), 678

is\_packable() (*mlrun.package.packagers.numpy\_packagers.NumPyNDA* method), 683

is\_packable() (*mlrun.package.packagers.numpy\_packagers.NumPyNuml* method), 689

is\_packable() (*mlrun.package.packagers.pandas\_packagers.PandasData* method), 695

is\_packable() (*mlrun.package.packagers.pandas\_packagers.PandasSerie* method), 701

is\_packable() (*mlrun.package.packagers.python\_standard\_library\_pack* method), 607

is\_packable() (*mlrun.package.packagers.python\_standard\_library\_pack* method), 612

is\_packable() (*mlrun.package.packagers.python\_standard\_library\_pack* method), 617

is\_packable() (*mlrun.package.packagers.python\_standard\_library\_pack* method), 622

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.FrozensetPackager` method), 627

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.BytesPackager` method), 632

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.IntPackager` method), 637

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.ListPackager` method), 642

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.NonePackager` method), 647

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.DictPathPackager` method), 652

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.FloatSetPackager` method), 657

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.StrPackager` method), 662

`is_packable()` (`mllrun.package.packagers.python_standard_library_package.TuplePackager` method), 668

`is_pip_ca_configured()` (`mllrun.config.Config static method`), 513

`is_preemption_nodes_configured()` (`mllrun.config.Config method`), 513

`is_running_as_api()` (in module `mllrun.config`), 514

`is_running_on_iguazio()` (`mllrun.config.Config static method`), 513

`is_single_file()` (`mllrun.datastore.CSVTarget method`), 516

`is_single_file()` (`mllrun.datastore.ParquetTarget method`), 522

`is_table()` (`mllrun.datastore.StreamTarget attribute`), 523

`is_unpackable()` (`mllrun.package.packager.Packager method`), 594

`is_unpackable()` (`mllrun.package.packagers.default_packager.DefaultPackager method`), 599

`is_unpackable()` (`mllrun.package.packagers.numpy_packagers.NumPyNDArrayDataPackager method`), 673

`is_unpackable()` (`mllrun.package.packagers.numpy_packagers.NumPyNDArrayListPackager method`), 678

`is_unpackable()` (`mllrun.package.packagers.numpy_packagers.NumPyNDArraySeriesPackager method`), 684

`is_unpackable()` (`mllrun.package.packagers.numpy_packagers.NumPyNDArrayTablePackager method`), 689

`is_unpackable()` (`mllrun.package.packagers.pandas_packagers.PandasDataFramePackager method`), 696

`is_unpackable()` (`mllrun.package.packagers.pandas_packagers.PandasSeriesPackager method`), 701

`is_unpackable()` (`mllrun.package.packagers.pandas_packagers.PandasTablePackager method`), 705

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.BoolPackager method`), 607

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.BytesPackager method`), 617

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.DictPathPackager method`), 622

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.FloatSetPackager method`), 627

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.IntPackager method`), 632

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.ListPackager method`), 637

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.NonePackager method`), 642

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.DictPathPackager method`), 647

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.StrPackager method`), 652

`is_unpackable()` (`mllrun.package.packagers.python_standard_library_package.TuplePackager method`), 657

`iteration` (`mllrun.execution.MLClientCtx property`), 515

## J

`join_and_returns()` (`mllrun.model.RunSpec static method`), 587

`JoinWithTable` (class in `storey.transformations`), 789

`JSONEncoder` (`mllrun.package.packagers.pandas_packagers.PandasSupportedFormatters attribute`), 705

## K

`kafka_source` (class in `mllrun.datastore`), 519

`key` (`mllrun.datastore.DataItem property`), 517

`kind` (`mllrun.datastore.BigQuerySource attribute`), 515

`kind` (`mllrun.datastore.CSVSource attribute`), 515

`kind` (`mllrun.datastore.CSVTarget attribute`), 516

- `kind (mlrun.datastore.DataItem property)`, 518
  - `kind (mlrun.datastore.HttpSource attribute)`, 519
  - `kind (mlrun.datastore.KafkaSource attribute)`, 520
  - `kind (mlrun.datastore.NoSqlTarget attribute)`, 520
  - `kind (mlrun.datastore.ParquetSource attribute)`, 520
  - `kind (mlrun.datastore.ParquetTarget attribute)`, 522
  - `kind (mlrun.datastore.StreamSource attribute)`, 522
  - `kind (mlrun.datastore.StreamTarget attribute)`, 523
  - `kind (mlrun.db.httpdb.HTTPRunDB attribute)`, 535
  - `kind (mlrun.execution.MLClientCtx attribute)`, 552
  - `kind (mlrun.feature_store.Entity attribute)`, 557
  - `kind (mlrun.feature_store.FeatureSet attribute)`, 562
  - `kind (mlrun.feature_store.FeatureVector attribute)`, 568
  - `kind (mlrun.projects.MlrunProject attribute)`, 714
  - `kind (mlrun.runtimes.BaseRuntime attribute)`, 745
  - `kind (mlrun.runtimes.DaskCluster attribute)`, 749
  - `kind (mlrun.runtimes.DatabricksRuntime attribute)`, 752
  - `kind (mlrun.runtimes.HandlerRuntime attribute)`, 753
  - `kind (mlrun.runtimes.KubejobRuntime attribute)`, 758
  - `kind (mlrun.runtimes.KubeResource attribute)`, 754
  - `kind (mlrun.runtimes.LocalRuntime attribute)`, 758
  - `kind (mlrun.runtimes.RemoteRuntime attribute)`, 760
  - `kind (mlrun.runtimes.RemoteSparkRuntime attribute)`, 763
  - `kind (mlrun.runtimes.ServingRuntime attribute)`, 765
  - `kind (mlrun.runtimes.Spark3Runtime attribute)`, 769
  - `kind (mlrun.serving.ErrorStep attribute)`, 774
  - `kind (mlrun.serving.GraphServer attribute)`, 775
  - `kind (mlrun.serving.QueueStep attribute)`, 776
  - `kind (mlrun.serving.RouterStep attribute)`, 776
  - `kind (mlrun.serving.TaskStep attribute)`, 777
  - `KubejobRuntime (class in mlrun.runtimes)`, 756
  - `KubeResource (class in mlrun.runtimes)`, 753
  - `kubernetes (mlrun.common.schemas.secret.SecretProvider attribute)`, 549
- L**
- `labels (mlrun.execution.MLClientCtx property)`, 552
  - `LastClosedWindow (mlrun.feature_store.FixedWindowType attribute)`, 568
  - `link_analysis() (mlrun.feature_store.FeatureSet method)`, 562
  - `link_analysis() (mlrun.feature_store.FeatureVector method)`, 568
  - `link_packages() (mlrun.package.packagers_manager.PackagersManager method)`, 603
  - `list_api_gateways() (mlrun.db.httpdb.HTTPRunDB method)`, 535
  - `list_artifact_tags() (mlrun.db.httpdb.HTTPRunDB method)`, 535
  - `list_artifacts() (mlrun.db.httpdb.HTTPRunDB method)`, 535
  - `list_artifacts() (mlrun.projects.MlrunProject method)`, 715
  - `list_datastore_profiles() (mlrun.db.httpdb.HTTPRunDB method)`, 536
  - `list_datastore_profiles() (mlrun.projects.MlrunProject method)`, 715
  - `list_entities() (mlrun.db.httpdb.HTTPRunDB method)`, 536
  - `list_feature_sets() (mlrun.db.httpdb.HTTPRunDB method)`, 536
  - `list_feature_vectors() (mlrun.db.httpdb.HTTPRunDB method)`, 537
  - `list_features() (mlrun.db.httpdb.HTTPRunDB method)`, 537
  - `list_functions() (mlrun.db.httpdb.HTTPRunDB method)`, 538
  - `list_functions() (mlrun.projects.MlrunProject method)`, 715
  - `list_hub_sources() (mlrun.db.httpdb.HTTPRunDB method)`, 538
  - `list_model_endpoints() (mlrun.db.httpdb.HTTPRunDB method)`, 538
  - `list_model_monitoring_functions() (mlrun.projects.MlrunProject method)`, 716
  - `list_models() (mlrun.projects.MlrunProject method)`, 716
  - `list_pipelines() (in module mlrun.run)`, 741
  - `list_pipelines() (mlrun.db.httpdb.HTTPRunDB method)`, 539
  - `list_project_background_tasks() (mlrun.db.httpdb.HTTPRunDB method)`, 539
  - `list_project_secret_keys() (mlrun.db.httpdb.HTTPRunDB method)`, 540
  - `list_project_secrets() (mlrun.db.httpdb.HTTPRunDB method)`, 540
  - `list_projects() (mlrun.db.httpdb.HTTPRunDB method)`, 540
  - `list_runs() (mlrun.db.httpdb.HTTPRunDB method)`, 541
  - `list_runs() (mlrun.projects.MlrunProject method)`, 716
  - `list_runtime_resources() (mlrun.db.httpdb.HTTPRunDB method)`, 542
  - `list_schedules() (mlrun.db.httpdb.HTTPRunDB method)`, 542
  - `list_valid_priority_class_names() (mlrun.runtimes.KubeResource method)`, 754
  - `listdir() (mlrun.datastore.DataItem method)`, 518
  - `ListPackager (class in mlrun.package.packagers.python_standard_library_packagers)`, 639
  - `load() (mlrun.serving.V2ModelServer method)`, 779
  - `load_func_code() (in module mlrun.run)`, 741
  - `load_model() (mlrun.frameworks.auto_mlrun.auto_mlrun.AutoMLRun`

*static method*), 492  
 load\_project() (in module *mlrun.projects*), 732  
 load\_project() (*mlrun.db.httpdb.HTTPRunDB* method), 542  
 local() (*mlrun.datastore.DataItem* method), 518  
 LocalRuntime (class in *mlrun.runtimes*), 758  
 log\_artifact() (*mlrun.execution.MLClientCtx* method), 552  
 log\_artifact() (*mlrun.projects.MlrunProject* method), 717  
 log\_dataset() (*mlrun.execution.MLClientCtx* method), 553  
 log\_dataset() (*mlrun.projects.MlrunProject* method), 718  
 log\_iteration\_results() (*mlrun.execution.MLClientCtx* method), 554  
 log\_level (*mlrun.execution.MLClientCtx* property), 554  
 log\_model() (*mlrun.execution.MLClientCtx* method), 554  
 log\_model() (*mlrun.projects.MlrunProject* method), 719  
 log\_result() (*mlrun.execution.MLClientCtx* method), 555  
 log\_results() (*mlrun.execution.MLClientCtx* method), 555  
 logged\_results() (*mlrun.serving.V2ModelServer* method), 779  
 logger (*mlrun.execution.MLClientCtx* property), 555  
 logic() (*mlrun.serving.VotingEnsemble* method), 782  
 logs() (*mlrun.model.RunObject* method), 586  
 ls() (*mlrun.datastore.DataItem* method), 518

## M

Map (class in *storey.transformations*), 789  
 MapClass (class in *storey.transformations*), 790  
 MapValues (class in *mlrun.feature\_store.steps*), 582  
 MapWithState (class in *storey.transformations*), 790  
 mark\_as\_best() (*mlrun.execution.MLClientCtx* method), 555  
 match\_format() (*mlrun.package.packagers.numpy\_packagers.NumpySupportedFormat* class method), 692  
 match\_format() (*mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat* class method), 706  
 meta (*mlrun.datastore.DataItem* property), 518  
 metadata (*mlrun.feature\_store.FeatureSet* property), 562  
 metadata (*mlrun.feature\_store.FeatureVector* property), 568  
 metadata (*mlrun.projects.MlrunProject* property), 720  
 metadata (*mlrun.runtimes.BaseRuntime* property), 745  
 MLClientCtx (class in *mlrun.execution*), 549  
 mlrun  
   module, 506  
 mlrun.artifacts  
   module, 511  
 mlrun.config  
   module, 512  
 mlrun.datastore  
   module, 514  
 mlrun.datastore.datastore\_profile  
   module, 523  
 mlrun.execution  
   module, 549  
 mlrun.feature\_store  
   module, 557  
 mlrun.feature\_store.steps  
   module, 579  
 mlrun.frameworks.auto\_mlrun.auto\_mlrun  
   module, 491  
 mlrun.frameworks.lgbm  
   module, 504  
 mlrun.frameworks.pytorch  
   module, 496  
 mlrun.frameworks.sklearn  
   module, 500  
 mlrun.frameworks.tf\_keras  
   module, 495  
 mlrun.frameworks.xgboost  
   module, 502  
 mlrun.model  
   module, 585  
 mlrun.package.errors  
   module, 604  
 mlrun.package.packagers.numpy\_packagers  
   module, 671  
 mlrun.package.packagers.pandas\_packagers  
   module, 693  
 mlrun.package.packagers.python\_standard\_library\_packagers  
   module, 604  
 mlrun.platforms  
   module, 706  
 mlrun.projects  
   module, 709  
 mlrun.run  
   module, 736  
 mlrun.runtimes  
   module, 744  
 mlrun.serving  
   module, 774  
 mlrun.serving.remote  
   module, 782  
 MlrunProject (class in *mlrun.projects*), 709  
 MLRunStep (class in *mlrun.feature\_store.steps*), 578  
 module  
   mlrun, 506  
   mlrun.artifacts, 511  
   mlrun.config, 512  
   mlrun.datastore, 514

mlrun.datastore.datastore\_profile, 523  
 mlrun.execution, 549  
 mlrun.feature\_store, 557  
 mlrun.feature\_store.steps, 579  
 mlrun.frameworks.auto\_mlrun.auto\_mlrun, 491  
 mlrun.frameworks.lgbm, 504  
 mlrun.frameworks.pytorch, 496  
 mlrun.frameworks.sklearn, 500  
 mlrun.frameworks.tf\_keras, 495  
 mlrun.frameworks.xgboost, 502  
 mlrun.model, 585  
 mlrun.package.errors, 604  
 mlrun.package.packagers.numpy\_packagers, 671  
 mlrun.package.packagers.pandas\_packagers, 693  
 mlrun.package.packagers.python\_standard\_library\_packagers, 604  
 mlrun.platforms, 706  
 mlrun.projects, 709  
 mlrun.run, 736  
 mlrun.runtimes, 744  
 mlrun.serving, 774  
 mlrun.serving.remote, 782  
 storey.transformations, 787  
 mount\_configmap() (in module mlrun.platforms), 706  
 mount\_hostpath() (in module mlrun.platforms), 706  
 mount\_pvc() (in module mlrun.platforms), 706  
 mount\_s3() (in module mlrun.platforms), 707  
 mount\_secret() (in module mlrun.platforms), 707  
 mount\_v3io() (in module mlrun.platforms), 707  
 mountdir (mlrun.projects.MlrunProject property), 720  
 mountdir (mlrun.projects.ProjectSpec property), 729

## N

name (mlrun.projects.MlrunProject property), 720  
 name (mlrun.projects.ProjectMetadata property), 728  
 new\_function() (in module mlrun.run), 741  
 new\_project() (in module mlrun.projects), 733  
 new\_task() (in module mlrun.model), 589  
 NonePackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 645  
 NoSqlTarget (class in mlrun.datastore), 520  
 Notification (class in mlrun.model), 586  
 notifiers (mlrun.projects.MlrunProject property), 720  
 NPY (mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat attribute), 691  
 NPZ (mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat attribute), 691  
 NumPyNDArrayDictPackager (class in mlrun.package.packagers.numpy\_packagers), 671  
 NumPyNDArrayListPackager (class in mlrun.package.packagers.numpy\_packagers), 676  
 NumPyNDArrayPackager (class in mlrun.package.packagers.numpy\_packagers), 681  
 NumPyNumberPackager (class in mlrun.package.packagers.numpy\_packagers), 686  
 NumPySupportedFormat (class in mlrun.package.packagers.numpy\_packagers), 691

## O

OfflineVectorResponse (class in mlrun.feature\_store), 568  
 OneHotEncoder (class in mlrun.feature\_store.steps), 583  
 OnlineService (class in mlrun.feature\_store), 569  
 open() (mlrun.datastore.DataItem method), 518  
 ORC (mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat attribute), 705  
 out\_path (mlrun.execution.MLClientCtx property), 555  
 output() (mlrun.model.RunObject method), 586  
 outputs (mlrun.model.RunObject property), 586  
 outputs (mlrun.model.RunSpec property), 587

## P

pack() (mlrun.package.packager.Packager method), 594  
 pack() (mlrun.package.packagers.default\_packager.DefaultPackager method), 599  
 pack() (mlrun.package.packagers.numpy\_packagers.NumPyNDArrayDictPackager method), 674  
 pack() (mlrun.package.packagers.numpy\_packagers.NumPyNDArrayListPackager method), 679  
 pack() (mlrun.package.packagers.numpy\_packagers.NumPyNDArrayPackager method), 684  
 pack() (mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager method), 689  
 pack() (mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager method), 696  
 pack() (mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager method), 701  
 pack() (mlrun.package.packagers.python\_standard\_library\_packagers.BooleanPackager method), 607  
 pack() (mlrun.package.packagers.python\_standard\_library\_packagers.BytesPackager method), 612  
 pack() (mlrun.package.packagers.python\_standard\_library\_packagers.BytesPackager method), 618  
 pack() (mlrun.package.packagers.python\_standard\_library\_packagers.DictPackager method), 623  
 pack() (mlrun.package.packagers.python\_standard\_library\_packagers.FloatPackager method), 627



`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.ByteArrayPackager (ml-  
 method), 613  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.BytesPackager  
 method), 618  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.DictPackager (ml-  
 method), 623  
 attribute), 635  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.FloatPackager (ml-  
 method), 628  
 run.package.packagers.python\_standard\_library\_packagers.ListPackager  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.FrozensetPackager  
 method), 633  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.IntPackager (ml-  
 method), 638  
 attribute), 645  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager (ml-  
 method), 643  
 run.package.packagers.python\_standard\_library\_packagers.PathPackager  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.NonePackager  
 method), 648  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.SetPackager (ml-  
 method), 653  
 attribute), 655  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.SetPackager (ml-  
 method), 658  
 run.package.packagers.python\_standard\_library\_packagers.StrPackager  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.StrPackager  
 method), 663  
 PACK\_SUBCLASSES  
`pack_result()` (mlrun.package.packagers.python\_standard\_library\_packagers.TuplePackager (ml-  
 method), 669  
 attribute), 666  
 PACK\_SUBCLASSES  
 (ml- PACKABLE\_OBJECT\_TYPE (ml-  
 run.package.packagers.default\_packager.DefaultPackager run.package.packager.Packager attribute),  
 attribute), 597  
 PACK\_SUBCLASSES  
 (ml- PACKABLE\_OBJECT\_TYPE (ml-  
 run.package.packagers.numpy\_packagers.NumPyNDArrayPackager run.package.packagers.default\_packager.DefaultPackager  
 attribute), 682  
 attribute), 597  
 PACK\_SUBCLASSES  
 (ml- PACKABLE\_OBJECT\_TYPE (ml-  
 run.package.packagers.numpy\_packagers.NumPyNumberPackager run.package.packagers.numpy\_packagers.NumPyNDArrayDictPackager  
 attribute), 687  
 attribute), 672  
 PACK\_SUBCLASSES  
 (ml- PACKABLE\_OBJECT\_TYPE (ml-  
 run.package.packagers.pandas\_packagers.PandasDataFramePackager run.package.packagers.numpy\_packagers.NumPyNDArrayListPackager  
 attribute), 694  
 attribute), 677  
 PACK\_SUBCLASSES  
 (ml- Packager (class in mlrun.package.packager), 591  
 run.package.packagers.pandas\_packagers.PandasSeriesManager (class in ml-  
 attribute), 699  
 run.package.packagers\_manager), 601  
 PACK\_SUBCLASSES  
 (ml- PandasDataFramePackager (class in ml-  
 run.package.packagers.python\_standard\_library\_packagers.DictPackager run.package.packagers.pandas\_packagers),  
 attribute), 605  
 attribute), 693  
 PACK\_SUBCLASSES  
 (ml- PandasSeriesPackager (class in ml-  
 run.package.packagers.python\_standard\_library\_packagers.DictPackager run.package.packagers.pandas\_packagers),  
 attribute), 610  
 attribute), 698  
 PACK\_SUBCLASSES  
 (ml- PandasSupportedFormat (class in ml-  
 run.package.packagers.python\_standard\_library\_packagers.DictPackager run.package.packagers.pandas\_packagers),  
 attribute), 615  
 attribute), 704  
 PACK\_SUBCLASSES  
 (ml- parameters (mlrun.execution.MLClientCtx property),  
 run.package.packagers.python\_standard\_library\_packagers.DictPackager  
 attribute), 620  
 params (mlrun.projects.MlrunProject property), 720  
 PACK\_SUBCLASSES  
 (ml- PARQUET (mlrun.package.packagers.pandas\_packagers.PandasSupportedFormatPackager  
 run.package.packagers.python\_standard\_library\_packagers.DictPackager  
 attribute), 625  
 ParquetSource (class in mlrun.datastore), 520

ParquetTarget (class in mlrun.datastore), 521  
 parse\_features() (mlrun.feature\_store.FeatureVector method), 568  
 Partition (class in storey.transformations), 790  
 patch\_feature\_set() (mlrun.db.httpdb.HTTPRunDB method), 543  
 patch\_feature\_vector() (mlrun.db.httpdb.HTTPRunDB method), 543  
 patch\_model\_endpoint() (mlrun.db.httpdb.HTTPRunDB method), 543  
 patch\_project() (mlrun.db.httpdb.HTTPRunDB method), 544  
 PathPackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 649  
 plot() (mlrun.feature\_store.FeatureSet method), 562  
 plot() (mlrun.runtimes.ServingRuntime method), 765  
 plot() (mlrun.serving.RouterStep method), 776  
 plural (mlrun.runtimes.Spark3Runtime attribute), 769  
 post\_init() (mlrun.serving.V2ModelServer method), 779  
 post\_init() (mlrun.serving.VotingEnsemble method), 782  
 postprocess() (mlrun.serving.V2ModelServer method), 779  
 pprint() (in module mlrun.platforms), 708  
 predict() (mlrun.serving.V2ModelServer method), 779  
 prepare\_image\_for\_deploy() (mlrun.runtimes.BaseRuntime method), 745  
 prepare\_spark\_df() (mlrun.datastore.CSVTarget method), 516  
 prepare\_spark\_df() (mlrun.datastore.NoSqlTarget method), 520  
 prepare\_spark\_df() (mlrun.datastore.ParquetTarget method), 522  
 preprocess() (mlrun.serving.V2ModelServer method), 779  
 preview() (in module mlrun.feature\_store), 576  
 preview() (mlrun.feature\_store.FeatureSet method), 563  
 PRIORITY (mlrun.package.packager.Packager attribute), 592  
 priority (mlrun.package.packager.Packager attribute), 593  
 PRIORITY (mlrun.package.packagers.default\_packager.DefaultPackager attribute), 597  
 priority (mlrun.package.packagers.default\_packager.DefaultPackager attribute), 598  
 PRIORITY (mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager attribute), 682  
 priority (mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager attribute), 682  
 PRIORITY (mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager attribute), 687  
 priority (mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager attribute), 687  
 PRIORITY (mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager attribute), 694  
 priority (mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager attribute), 694  
 PRIORITY (mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager attribute), 699  
 priority (mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager attribute), 699  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 605  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 605  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 610  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 610  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 615  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 615  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 620  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 620  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 625  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 625  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 630  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 630  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 635  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 635  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 640  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 640  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 645  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 645  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 650  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 650  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 655  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 655  
 PRIORITY (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 655  
 priority (mlrun.package.packagers.python\_standard\_library\_packagers.LazyPackager attribute), 655

PRIORITY (*mlrun.package.packagers.python\_standard\_library* attribute), 660  
 priority (*mlrun.package.packagers.python\_standard\_library* attribute), 660  
 PRIORITY (*mlrun.package.packagers.python\_standard\_library* attribute), 666  
 priority (*mlrun.package.packagers.python\_standard\_library* attribute), 666  
 project (*mlrun.execution.MLClientCtx* property), 555  
 project (*mlrun.serving.GraphContext* property), 774  
 ProjectMetadata (class in *mlrun.projects*), 728  
 ProjectSpec (class in *mlrun.projects*), 729  
 ProjectStatus (class in *mlrun.projects*), 730  
 protocol (*mlrun.datastore.DatabricksFileSystemDisableCache* attribute), 519  
 pull() (*mlrun.projects.MlrunProject* method), 720  
 purge\_targets() (*mlrun.feature\_store.FeatureSet* method), 563  
 push() (*mlrun.projects.MlrunProject* method), 720  
 push\_error() (*mlrun.serving.GraphContext* method), 774  
 put() (*mlrun.datastore.DataItem* method), 518

## Q

QueueStep (class in *mlrun.serving*), 776

## R

read\_artifact() (*mlrun.db.httpdb.HTTPRunDB* method), 544  
 read\_env() (in module *mlrun.config*), 514  
 read\_run() (*mlrun.db.httpdb.HTTPRunDB* method), 544  
 refresh() (*mlrun.model.RunObject* method), 586  
 register\_artifacts() (*mlrun.projects.MlrunProject* method), 721  
 register\_datastore\_profile() (*mlrun.projects.MlrunProject* method), 721  
 register\_temporary\_client\_datastore\_profile() (in module *mlrun.datastore.datastore\_profile*), 523  
 ReifyMetadata (class in *storey.transformations*), 790  
 reload() (*mlrun.config.Config* static method), 513  
 reload() (*mlrun.feature\_store.FeatureSet* method), 563  
 reload() (*mlrun.feature\_store.FeatureVector* method), 568  
 reload() (*mlrun.projects.MlrunProject* method), 721  
 remote\_builder() (*mlrun.db.httpdb.HTTPRunDB* method), 544  
 RemoteRuntime (class in *mlrun.runtimes*), 758  
 RemoteSparkRuntime (class in *mlrun.runtimes*), 763  
 RemoteStep (class in *mlrun.serving.remote*), 784  
 remove\_artifact() (*mlrun.projects.ProjectSpec* method), 729  
 remove\_custom\_package() (*mlrun.projects.MlrunProject* method), 721  
 remove\_custom\_package() (*mlrun.projects.ProjectSpec* method), 729  
 remove\_function() (*mlrun.projects.MlrunProject* method), 721  
 remove\_function() (*mlrun.projects.ProjectSpec* method), 729  
 remove\_local() (*mlrun.datastore.DataItem* method), 518  
 remove\_model\_monitoring\_function() (*mlrun.projects.MlrunProject* method), 721  
 remove\_states() (*mlrun.runtimes.ServingRuntime* method), 765  
 remove\_workflow() (*mlrun.projects.ProjectSpec* method), 729  
 requires\_build() (*mlrun.runtimes.BaseRuntime* method), 745  
 resolve\_chief\_api\_url() (*mlrun.config.Config* method), 513  
 resolve\_kfp\_url() (*mlrun.config.Config* method), 513  
 resolve\_runs\_monitoring\_missing\_runtime\_resources\_debounce() (*mlrun.config.Config* method), 513  
 resolve\_ui\_url() (*mlrun.config.Config* static method), 513  
 respond() (*mlrun.serving.TaskStep* method), 777  
 results (*mlrun.execution.MLClientCtx* property), 556  
 results (*mlrun.package.packagers\_manager.PackagersManager* attribute), 602  
 RETRIABLE\_POST\_PATHS (*mlrun.db.httpdb.HTTPRunDB* attribute), 524  
 returns (*mlrun.model.RunSpec* property), 587  
 root\_marker (*mlrun.datastore.DatabricksFileSystemDisableCache* attribute), 519  
 RouterStep (class in *mlrun.serving*), 776  
 routes (*mlrun.serving.RouterStep* property), 777  
 run() (*mlrun.projects.MlrunProject* method), 721  
 run() (*mlrun.runtimes.BaseRuntime* method), 745  
 run() (*mlrun.runtimes.DaskCluster* method), 749  
 run() (*mlrun.runtimes.DatabricksRuntime* method), 752  
 run() (*mlrun.serving.GraphServer* method), 775  
 run() (*mlrun.serving.QueueStep* method), 776  
 run() (*mlrun.serving.TaskStep* method), 777  
 run\_function() (in module *mlrun.projects*), 734  
 run\_function() (*mlrun.projects.MlrunProject* method), 722  
 RunConfig (class in *mlrun.feature\_store*), 569  
 RunMetadata (class in *mlrun.model*), 586  
 running (*mlrun.run.RunStatuses* attribute), 736  
 RunObject (class in *mlrun.model*), 586  
 RunSpec (class in *mlrun.model*), 587  
 RunStatus (class in *mlrun.model*), 588  
 RunStatuses (class in *mlrun.run*), 736  
 RunTemplate (class in *mlrun.model*), 588

## S

- SampleWindow (class in storey.transformations), 790
- save() (mlrun.feature\_store.FeatureSet method), 563
- save() (mlrun.feature\_store.FeatureVector method), 568
- save() (mlrun.projects.MlrunProject method), 723
- save() (mlrun.runtimes.BaseRuntime method), 747
- save\_to\_db() (mlrun.projects.MlrunProject method), 724
- save\_workflow() (mlrun.projects.MlrunProject method), 724
- SecretProviderName (class in mlrun.common.schemas.secret), 549
- SendToHttp (class in storey.transformations), 791
- server (mlrun.serving.GraphContext property), 775
- ServingRuntime (class in mlrun.runtimes), 764
- set\_annotation() (mlrun.execution.MLClientCtx method), 556
- set\_artifact() (mlrun.projects.MlrunProject method), 724
- set\_artifact() (mlrun.projects.ProjectSpec method), 729
- set\_categories() (mlrun.runtimes.BaseRuntime method), 747
- set\_config() (mlrun.runtimes.RemoteRuntime method), 760
- set\_current\_function() (mlrun.serving.GraphServer method), 775
- set\_db\_connection() (mlrun.runtimes.BaseRuntime method), 747
- set\_default\_image() (mlrun.projects.MlrunProject method), 724
- set\_env() (mlrun.runtimes.KubeResource method), 754
- set\_env\_from\_secret() (mlrun.runtimes.KubeResource method), 754
- set\_env\_variables() (in module mlrun.platforms), 708
- set\_environment() (in module mlrun), 510
- set\_envs() (mlrun.runtimes.KubeResource method), 754
- set\_error\_stream() (mlrun.serving.GraphServer method), 775
- set\_function() (mlrun.projects.MlrunProject method), 724
- set\_function() (mlrun.projects.ProjectSpec method), 729
- set\_hostname() (mlrun.execution.MLClientCtx method), 556
- set\_image\_pull\_configuration() (mlrun.runtimes.KubeResource method), 754
- set\_label() (mlrun.execution.MLClientCtx method), 556
- set\_label() (mlrun.model.RunTemplate method), 588
- set\_label() (mlrun.runtimes.BaseRuntime method), 747
- set\_logger\_stream() (mlrun.execution.MLClientCtx method), 556
- set\_metric() (mlrun.serving.V2ModelServer method), 779
- set\_model\_monitoring\_credentials() (mlrun.projects.MlrunProject method), 725
- set\_model\_monitoring\_function() (mlrun.projects.MlrunProject method), 726
- set\_run\_notifications() (mlrun.db.httpdb.HTTPRunDB method), 545
- set\_schedule\_notifications() (mlrun.db.httpdb.HTTPRunDB method), 545
- set\_secrets() (mlrun.projects.MlrunProject method), 726
- set\_source() (mlrun.projects.MlrunProject method), 727
- set\_state() (mlrun.execution.MLClientCtx method), 556
- set\_state\_thresholds() (mlrun.runtimes.DaskCluster method), 750
- set\_state\_thresholds() (mlrun.runtimes.KubeResource method), 754
- set\_state\_thresholds() (mlrun.runtimes.RemoteRuntime method), 760
- set\_targets() (mlrun.feature\_store.FeatureSet method), 563
- set\_topology() (mlrun.runtimes.ServingRuntime method), 765
- set\_tracking() (mlrun.runtimes.ServingRuntime method), 766
- set\_workflow() (mlrun.projects.MlrunProject method), 727
- set\_workflow() (mlrun.projects.ProjectSpec method), 729
- SetEventMetadata (class in mlrun.feature\_store.steps), 583
- SetPackager (class in mlrun.package.packagers.python\_standard\_library\_packagers), 655
- setup() (mlrun.projects.MlrunProject method), 727
- show() (mlrun.datastore.DataItem method), 518
- show() (mlrun.model.RunObject method), 586
- skipped (mlrun.run.RunStatuses attribute), 736
- sleep() (in module mlrun.platforms), 708
- source (mlrun.projects.MlrunProject property), 728
- source (mlrun.projects.ProjectSpec property), 730
- Spark3Runtime (class in mlrun.runtimes), 768
- spec (mlrun.feature\_store.FeatureSet property), 563
- spec (mlrun.feature\_store.FeatureVector property), 568
- spec (mlrun.projects.MlrunProject property), 728
- spec (mlrun.runtimes.BaseRuntime property), 747
- spec (mlrun.runtimes.DaskCluster property), 751
- spec (mlrun.runtimes.DatabricksRuntime property), 753
- spec (mlrun.runtimes.KubeResource property), 755

- spec (*mlrun.runtimes.RemoteRuntime* property), 760
  - spec (*mlrun.runtimes.RemoteSparkRuntime* property), 763
  - spec (*mlrun.runtimes.ServingRuntime* property), 767
  - spec (*mlrun.runtimes.Spark3Runtime* property), 769
  - stable\_statuses() (*mlrun.run.RunStatuses* static method), 736
  - start\_function() (*mlrun.db.httpdb.HTTPRunDB* method), 545
  - start\_time (*mlrun.datastore.ParquetSource* property), 521
  - stat() (*mlrun.datastore.DataItem* method), 518
  - state (*mlrun.execution.MLClientCtx* property), 556
  - state() (*mlrun.model.RunObject* method), 586
  - status (*mlrun.feature\_store.FeatureSet* property), 563
  - status (*mlrun.feature\_store.FeatureVector* property), 568
  - status (*mlrun.feature\_store.OfflineVectorResponse* property), 568
  - status (*mlrun.feature\_store.OnlineVectorService* property), 569
  - status (*mlrun.projects.MlrunProject* property), 728
  - status (*mlrun.runtimes.BaseRuntime* property), 747
  - status (*mlrun.runtimes.DaskCluster* property), 751
  - status (*mlrun.runtimes.RemoteRuntime* property), 760
  - StepToDict (class in *mlrun.serving.utils*), 786
  - store (*mlrun.datastore.DataItem* property), 518
  - store\_artifact() (*mlrun.db.httpdb.HTTPRunDB* method), 545
  - store\_datastore\_profile() (*mlrun.db.httpdb.HTTPRunDB* method), 545
  - store\_feature\_set() (*mlrun.db.httpdb.HTTPRunDB* method), 545
  - store\_feature\_vector() (*mlrun.db.httpdb.HTTPRunDB* method), 546
  - store\_function() (*mlrun.db.httpdb.HTTPRunDB* method), 546
  - store\_hub\_source() (*mlrun.db.httpdb.HTTPRunDB* method), 546
  - store\_log() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - store\_project() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - store\_run() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - store\_run() (*mlrun.execution.MLClientCtx* method), 556
  - store\_run() (*mlrun.runtimes.BaseRuntime* method), 747
  - store\_run\_notifications() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - storey.transformations module, 787
  - StreamSource (class in *mlrun.datastore*), 522
  - StreamTarget (class in *mlrun.datastore*), 522
  - StrPackager (class in *mlrun.package.packagers.python\_standard\_library\_packagers*), 660
  - submit\_job() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - submit\_pipeline() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - submit\_workflow() (*mlrun.db.httpdb.HTTPRunDB* method), 547
  - succeeded (*mlrun.run.RunStatuses* attribute), 736
  - suffix (*mlrun.datastore.CSVTarget* attribute), 516
  - suffix (*mlrun.datastore.DataItem* property), 518
  - support\_append (*mlrun.datastore.ParquetTarget* attribute), 522
  - support\_append (*mlrun.datastore.StreamTarget* attribute), 523
  - support\_dask (*mlrun.datastore.ParquetTarget* attribute), 522
  - support\_spark (*mlrun.datastore.BigQuerySource* attribute), 515
  - support\_spark (*mlrun.datastore.CSVSource* attribute), 515
  - support\_spark (*mlrun.datastore.CSVTarget* attribute), 516
  - support\_spark (*mlrun.datastore.NoSqlTarget* attribute), 520
  - support\_spark (*mlrun.datastore.ParquetSource* attribute), 521
  - support\_spark (*mlrun.datastore.ParquetTarget* attribute), 522
  - support\_spark (*mlrun.datastore.StreamTarget* attribute), 523
  - support\_storey (*mlrun.datastore.BigQuerySource* attribute), 515
  - support\_storey (*mlrun.datastore.CSVSource* attribute), 515
  - support\_storey (*mlrun.datastore.CSVTarget* attribute), 516
  - support\_storey (*mlrun.datastore.ParquetSource* attribute), 521
  - support\_storey (*mlrun.datastore.ParquetTarget* attribute), 522
  - support\_storey (*mlrun.datastore.StreamTarget* attribute), 523
  - sync\_functions() (*mlrun.projects.MlrunProject* method), 728
- ## T
- tag (*mlrun.execution.MLClientCtx* property), 556
  - tag\_artifacts() (*mlrun.db.httpdb.HTTPRunDB* method), 548
  - tag\_objects() (*mlrun.db.httpdb.HTTPRunDB* method), 548

- TargetPathObject (class in *mlrun.model*), 589
- TaskStep (class in *mlrun.serving*), 777
- test() (*mlrun.serving.GraphServer* method), 775
- to() (*mlrun.serving.states.BaseStep* method), 773
- to\_csv() (*mlrun.feature\_store.OfflineVectorResponse* method), 568
- to\_dataframe() (*mlrun.datastore.BigQuerySource* method), 515
- to\_dataframe() (*mlrun.datastore.CSVSource* method), 516
- to\_dataframe() (*mlrun.datastore.KafkaSource* method), 520
- to\_dataframe() (*mlrun.datastore.ParquetSource* method), 521
- to\_dataframe() (*mlrun.feature\_store.FeatureSet* method), 563
- to\_dataframe() (*mlrun.feature\_store.FeatureVector* method), 568
- to\_dataframe() (*mlrun.feature\_store.OfflineVectorResponse* method), 568
- to\_dict() (*mlrun.config.Config* method), 514
- to\_dict() (*mlrun.execution.MLClientCtx* method), 556
- to\_dict() (*mlrun.model.RunSpec* method), 587
- to\_dict() (*mlrun.runtimes.BaseRuntime* method), 747
- to\_dict() (*mlrun.runtimes.KubeResource* method), 755
- to\_dict() (*mlrun.serving.utils.StepToDict* method), 786
- to\_function() (*mlrun.feature\_store.RunConfig* method), 570
- to\_job() (*mlrun.runtimes.LocalRuntime* method), 758
- to\_json() (*mlrun.execution.MLClientCtx* method), 556
- to\_json() (*mlrun.model.RunObject* method), 586
- to\_mock\_server() (*mlrun.runtimes.ServingRuntime* method), 767
- to\_parquet() (*mlrun.feature\_store.OfflineVectorResponse* method), 568
- to\_qbk\_fixed\_window\_type() (*mlrun.feature\_store.FixedWindowType* method), 568
- to\_spark\_df() (*mlrun.datastore.BigQuerySource* method), 515
- to\_spark\_df() (*mlrun.datastore.CSVSource* method), 516
- to\_spark\_df() (*mlrun.datastore.KafkaSource* method), 520
- to\_step() (*mlrun.datastore.CSVSource* method), 516
- to\_step() (*mlrun.datastore.ParquetSource* method), 521
- to\_yaml() (*mlrun.execution.MLClientCtx* method), 556
- ToDataFrame (class in *storey.transformations*), 791
- train() (in module *mlrun.frameworks.pytorch*), 498
- transient\_statuses() (*mlrun.run.RunStatuses* static method), 736
- trigger\_migrations() (*mlrun.db.httpdb.HTTPRunDB* method), 548
- try\_auto\_mount\_based\_on\_config() (*mlrun.runtimes.BaseRuntime* method), 747
- try\_auto\_mount\_based\_on\_config() (*mlrun.runtimes.KubeResource* method), 755
- TuplePackager (class in *mlrun.package.packagers.python\_standard\_library\_packagers*), 665
- TXT (*mlrun.package.packagers.numpy\_packagers.NumPySupportedFormat* attribute), 691
- ## U
- ui\_url (*mlrun.model.RunObject* property), 586
- uid (*mlrun.execution.MLClientCtx* property), 556
- uid() (*mlrun.model.RunObject* method), 586
- unpack() (*mlrun.package.packager.Packager* method), 595
- unpack() (*mlrun.package.packagers.default\_packager.DefaultPackager* method), 600
- unpack() (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayDict* method), 675
- unpack() (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayList* method), 680
- unpack() (*mlrun.package.packagers.numpy\_packagers.NumPyNDArrayPair* method), 685
- unpack() (*mlrun.package.packagers.numpy\_packagers.NumPyNumberPackager* method), 690
- unpack() (*mlrun.package.packagers.pandas\_packagers.PandasDataFramePackager* method), 697
- unpack() (*mlrun.package.packagers.pandas\_packagers.PandasSeriesPackager* method), 703
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 608
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 613
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 618
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 623
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 628
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 633
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 638
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 643
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 648
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 653
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 658
- unpack() (*mlrun.package.packagers.python\_standard\_library\_packagers.ListPackager* method), 663

`unpack()` (`mlrun.package.packagers.python_standard_library_packagers.TuplePackager`  
`method`), 669      `unpack_object()` (ml-  
`unpack()` (`mlrun.package.packagers_manager.PackagersManager` `run.package.packagers.pandas_packagers.PandasSeriesPackager`  
`method`), 603      `method`), 703  
`unpack_dataset()` (ml- `unpack_object()` (ml-  
`run.package.packagers.numpy_packagers.NumPyNDArrayPackager` `run.package.packagers.python_standard_library_packagers.Boo`  
`method`), 685      `method`), 608  
`unpack_dataset()` (ml- `unpack_object()` (ml-  
`run.package.packagers.pandas_packagers.PandasDataFramePackager` `run.package.packagers.python_standard_library_packagers.Bytes`  
`method`), 697      `method`), 614  
`unpack_dataset()` (ml- `unpack_object()` (ml-  
`run.package.packagers.pandas_packagers.PandasSeriesPackager` `run.package.packagers.python_standard_library_packagers.Bytes`  
`method`), 703      `method`), 619  
`unpack_file()` (`mlrun.package.packagers.numpy_packagers.NumPyNDArrayPackager` `unpack_object()` (ml-  
`method`), 675      `run.package.packagers.python_standard_library_packagers.Dict`  
`unpack_file()` (`mlrun.package.packagers.numpy_packagers.NumPyNDArrayPackager`  
`method`), 680      `unpack_object()` (ml-  
`unpack_file()` (`mlrun.package.packagers.numpy_packagers.NumPyNDArrayPackager` `run.package.packagers.python_standard_library_packagers.Float`  
`method`), 685      `method`), 628  
`unpack_file()` (`mlrun.package.packagers.pandas_packagers.PandasDataFramePackager` `unpack_object()` (ml-  
`method`), 698      `run.package.packagers.python_standard_library_packagers.Froze`  
`unpack_file()` (`mlrun.package.packagers.pandas_packagers.PandasSeriesPackager`  
`method`), 703      `unpack_object()` (ml-  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.BytesPackager` `run.package.packagers.python_standard_library_packagers.IntP`  
`method`), 614      `method`), 638  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.BytesPackager` (ml-  
`method`), 619      `run.package.packagers.python_standard_library_packagers.ListP`  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.DictPackager`  
`method`), 624      `unpack_object()` (ml-  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.FreezePackager` `run.package.packagers.python_standard_library_packagers.None`  
`method`), 634      `method`), 648  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.ListPackager` (ml-  
`method`), 644      `run.package.packagers.python_standard_library_packagers.Path`  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.SetPackager`  
`method`), 659      `unpack_object()` (ml-  
`unpack_file()` (`mlrun.package.packagers.python_standard_library_packagers.TuplePackager` `run.package.packagers.python_standard_library_packagers.SetP`  
`method`), 670      `method`), 659  
`unpack_object()` (ml- `unpack_object()` (ml-  
`run.package.packagers.default_packager.DefaultPackager` `run.package.packagers.python_standard_library_packagers.StrP`  
`method`), 600      `method`), 664  
`unpack_object()` (ml- `unpack_object()` (ml-  
`run.package.packagers.numpy_packagers.NumPyNDArrayPackager` `run.package.packagers.python_standard_library_packagers.Tuple`  
`method`), 675      `method`), 670  
`unpack_object()` (ml- `unpack_path()` (`mlrun.package.packagers.python_standard_library_pack`  
`run.package.packagers.numpy_packagers.NumPyNDArrayListPackager` 664  
`method`), 680      `unpack_path()` (`mlrun.package.packagers.python_standard_library_pack`  
`unpack_object()` (ml- `method`), 664  
`run.package.packagers.numpy_packagers.NumPyNDArrayPackager` `update_artifact()` (`mlrun.execution.MLClientCtx`  
`method`), 686      `method`), 556  
`unpack_object()` (ml- `unpack_object()` (ml-  
`run.package.packagers.numpy_packagers.NumPyNDArrayPackager` `update_artifact()` (`mlrun.execution.MLClientCtx`  
`method`), 690      `method`), 557  
`unpack_object()` (ml- `update_model()` (in module `mlrun.artifacts`), 511  
`run.package.packagers.pandas_packagers.PandasDataFramePackager` `update_model()` (`mlrun.db.httpdb.HTTPRunDB` method),

548  
 update\_schedule() (mlrun.db.httpdb.HTTPRunDB method), 548  
 update\_targets\_for\_ingest() (mlrun.feature\_store.FeatureSet method), 564  
 upload() (mlrun.datastore.DataItem method), 518  
 uri (mlrun.feature\_store.FeatureSet property), 564  
 uri (mlrun.feature\_store.FeatureVector property), 568  
 uri (mlrun.runtimes.BaseRuntime property), 747  
 url (mlrun.datastore.DataItem property), 518  
 use\_nuclio\_mock() (mlrun.config.Config method), 514

## V

V2ModelServer (class in mlrun.serving), 777  
 v3io\_cred() (in module mlrun.platforms), 708  
 validate() (mlrun.serving.V2ModelServer method), 780  
 validate() (mlrun.serving.VotingEnsemble method), 782  
 validate\_and\_enrich\_service\_account() (mlrun.runtimes.BaseRuntime method), 747  
 validate\_and\_enrich\_service\_account() (mlrun.runtimes.KubeResource method), 755  
 validate\_notification\_uniqueness() (mlrun.model.Notification static method), 586  
 validate\_project\_labels() (mlrun.projects.ProjectMetadata static method), 728  
 validate\_project\_name() (mlrun.projects.ProjectMetadata static method), 729  
 validate\_steps() (mlrun.feature\_store.FeatureSet method), 564  
 validator (mlrun.feature\_store.Feature property), 558  
 vault (mlrun.common.schemas.secret.SecretProviderName attribute), 549  
 verify\_authorization() (mlrun.db.httpdb.HTTPRunDB method), 549  
 verify\_security\_context\_enrichment\_mode\_is\_allowed() (mlrun.config.Config method), 514  
 version (mlrun.config.Config property), 514  
 version (mlrun.runtimes.Spark3Runtime attribute), 769  
 VolumeMount (in module mlrun.platforms), 706  
 VotingEnsemble (class in mlrun.serving), 780

## W

wait\_for\_completion() (mlrun.model.RunObject method), 586  
 wait\_for\_completion() (mlrun.serving.GraphServer method), 776  
 wait\_for\_pipeline\_completion() (in module mlrun.run), 742  
 wait\_for\_runs\_completion() (in module mlrun.run), 743

watch\_log() (mlrun.db.httpdb.HTTPRunDB method), 549  
 watch\_stream() (in module mlrun.platforms), 708  
 with\_annotations() (mlrun.runtimes.KubeResource method), 755  
 with\_annotations() (mlrun.runtimes.RemoteRuntime method), 761  
 with\_code() (mlrun.runtimes.BaseRuntime method), 747  
 with\_commands() (mlrun.runtimes.BaseRuntime method), 748  
 with\_cores() (mlrun.runtimes.Spark3Runtime method), 769  
 with\_driver\_host\_path\_volume() (mlrun.runtimes.Spark3Runtime method), 769  
 with\_driver\_limits() (mlrun.runtimes.Spark3Runtime method), 769  
 with\_driver\_node\_selection() (mlrun.runtimes.Spark3Runtime method), 769  
 with\_driver\_preemption\_mode() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_driver\_requests() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_dynamic\_allocation() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_executor\_host\_path\_volume() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_executor\_limits() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_executor\_node\_selection() (mlrun.runtimes.Spark3Runtime method), 770  
 with\_executor\_preemption\_mode() (mlrun.runtimes.Spark3Runtime method), 771  
 with\_executor\_requests() (mlrun.runtimes.Spark3Runtime method), 771  
 with\_http() (mlrun.runtimes.RemoteRuntime method), 761  
 with\_hyper\_params() (mlrun.model.RunTemplate method), 588  
 with\_igz\_spark() (mlrun.runtimes.Spark3Runtime method), 771  
 with\_input() (mlrun.model.RunTemplate method), 588  
 with\_limits() (mlrun.runtimes.DaskCluster method), 751  
 with\_limits() (mlrun.runtimes.KubeResource method), 755  
 with\_limits() (mlrun.runtimes.Spark3Runtime method), 771  
 with\_node\_selection() (mlrun.runtimes.KubeResource method), 755  
 with\_node\_selection() (mlrun.runtimes.RemoteRuntime method), 761  
 with\_node\_selection() (mlrun.runtimes.Spark3Runtime method), 771

`with_param_file()` (*mlrun.model.RunTemplate method*), 588

`with_params()` (*mlrun.model.RunTemplate method*), 588

`with_preemption_mode()` (*ml-run.runtimes.KubeResource method*), 755

`with_preemption_mode()` (*ml-run.runtimes.RemoteRuntime method*), 761

`with_preemption_mode()` (*ml-run.runtimes.Spark3Runtime method*), 772

`with_priority_class()` (*ml-run.runtimes.KubeResource method*), 756

`with_priority_class()` (*ml-run.runtimes.RemoteRuntime method*), 762

`with_requests()` (*mlrun.runtimes.DaskCluster method*), 751

`with_requests()` (*mlrun.runtimes.KubeResource method*), 756

`with_requests()` (*mlrun.runtimes.Spark3Runtime method*), 772

`with_requirements()` (*mlrun.runtimes.BaseRuntime method*), 748

`with_restart_policy()` (*ml-run.runtimes.Spark3Runtime method*), 772

`with_scheduler_limits()` (*ml-run.runtimes.DaskCluster method*), 751

`with_scheduler_requests()` (*ml-run.runtimes.DaskCluster method*), 751

`with_secret()` (*mlrun.feature\_store.RunConfig method*), 570

`with_secrets()` (*mlrun.model.RunTemplate method*), 588

`with_secrets()` (*mlrun.projects.MlrunProject method*), 728

`with_secrets()` (*mlrun.runtimes.ServingRuntime method*), 767

`with_security_context()` (*ml-run.runtimes.KubeResource method*), 756

`with_security_context()` (*ml-run.runtimes.RemoteSparkRuntime method*), 763

`with_security_context()` (*ml-run.runtimes.Spark3Runtime method*), 772

`with_service_type()` (*ml-run.runtimes.RemoteRuntime method*), 762

`with_source_archive()` (*ml-run.runtimes.KubejobRuntime method*), 758

`with_source_archive()` (*ml-run.runtimes.LocalRuntime method*), 758

`with_source_archive()` (*ml-run.runtimes.RemoteRuntime method*), 762

`with_source_archive()` (*ml-run.runtimes.Spark3Runtime method*), 772

`with_spark_service()` (*ml-run.runtimes.RemoteSparkRuntime method*), 764

`with_v3io()` (*mlrun.runtimes.RemoteRuntime method*), 763

`with_worker_limits()` (*mlrun.runtimes.DaskCluster method*), 751

`with_worker_requests()` (*ml-run.runtimes.DaskCluster method*), 751

`workflows` (*mlrun.projects.MlrunProject property*), 728

`workflows` (*mlrun.projects.ProjectSpec property*), 730

`writer_step_name` (*mlrun.datastore.NoSqlTarget attribute*), 520

## X

`XLSX` (*mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat attribute*), 705

`XML` (*mlrun.package.packagers.pandas\_packagers.PandasSupportedFormat attribute*), 705